

XZ20360

Z2

Description

Z-Power series is designed for high current operation and high flux output applications.

Z-Power LED's thermal management perform exceeds other power LED solutions.

It incorporates state of the art SMD design and Thermal emission material.

Z Power LED is ideal light sources for general Illumination applications, custom designed solutions, automotive large LCD backlights



Features

- Super high Flux output and high Luminance
- Designed for high current operation
- Low thermal resistance
- SMT solderbility
- Lead Free product
- RoHS compliant

Applications

- Mobile phone flash
- Automotive interior/ exterior lighting
- Automotive signal lighting
- Automotive forward lighting
- General Torch
- Architectural lighting
- LCD TV / Monitor Backlight
- Projector light source
- Traffic signals
- Task lighting
- Decorative / Pathway lighting
- Remote / Solar powered lighting
- Household appliances

1

Rev. 02

October. 2010

^{*}The appearance and specifications of the product may be changed for improvement without notice.



Full Code of Z-Power LED Series

Full code form : $X_1 X_2 X_3 X_4 X_5 X_6 X_7 - X_8 X_9 - X_{10} X_{11} X_{12} X_{13} X_{14}$

1. Part Number

- X₁: Color
- X₂: New Z-Power LED 'Z'
- X₃: New Z-Power LED series number
- X₄: LENS type
- X₅: Chip quantity (or Power Dissipation)
- X₆: Package outline size
- -X₇: Type of PCB


2. Internal Number

- X₈
- X_o

3. Code Labeling

- X₁₀: Luminous flux (or Radiant flux for royal blue)
- $X_{11} X_{12} X_{13}$: Dominant wavelength (or x,y coordinates rank code)
- X_{1 4}: Forward voltage

4. Sticker Diagram on Reel & Aluminum Vinyl Bag



For more information about binning and labeling, refer to the Application Note -1

Rev. UZ

October, 2010

www.ZLED.com





Outline Dimension

[Front VIEW]

[Front VIEW]

[In the second of the second o

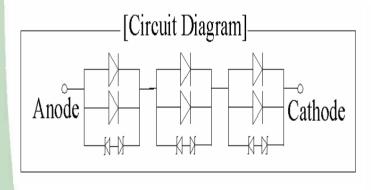



Notes:

- 1. All dimensions are in millimeters. (tolerance : ± 0.2)
- 2. Scale: none
- 3. Thermal pad (slug) is isolated.

3

Rev. 02

October. 2010

^{*}The appearance and specifications of the product may be changed for improvement without notice.



Characteristics for Z-Power LED

1. Pure White (WZ20360)

1-1 Electro-Optical characteristics at I_F =350mA, T_A =25°C

Parameter	Symbol		Unit		
rai ailletei		Min	Тур	Max	Offic
Luminous Flux ^[1]	Φ _V ^[2]	200	270	340	lm
Correlated Color Temperature [3]	CCT	-	6300	-	K
CRI	R_a	-	68	-	-
Forward Voltage ^[4]	V_{F}	9.5	10.0	11.0	V
View Angle	2⊝ ½	120		deg.	
Thermal resistance ^[5]	$R\theta_{J-B}$	7.0		°C /W	
Thermal resistance [6]	$R\theta_{J-C}$	3.8		°C /W	

1-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Forward Current	I _F	400	mA
Power Dissipation	P_d	4.4	W
Junction Temperature	Tj	125	°C
Operating Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
ESD Sensitivity [7]	-	±10,000V HBM	-

*Notes:

- [1] SSC maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [4] A tolerance of ±0.06V on forward voltage measurements
- [5], [6] $R\theta_{J-B}$ is measured with a SSC metal core pcb.(25 °C \leq T $_{J} \leq$ 110 °C) $R\theta_{J-C}$ is measured with only emitter.(25 °C \leq T $_{J} \leq$ 110 °C) Break voltage of Metal PCB is 6.5kVAC
- [7] It is included the zener chip to protect the product from ESD.

-----Caution-----

1. Please do not drive at rated current more than 5 sec. without proper heat sink.

Rev. UZ

October. 2010



Characteristics for Z-Power LED

2. Warm White (NZ20360)

2-1 Electro-Optical characteristics at I_F =350mA, T_A =25°C

Parameter	Symbol		Unit		
rai ailletei		Min	Тур	Max	Unit
Luminous Flux ^[1]	Φ _V ^[2]	177	210	240	lm
Correlated Color Temperature [3]	CCT	-	3000	-	K
CRI	R_a	-	80	-	-
Forward Voltage ^[4]	V_{F}	9.5	10.0	11.0	V
View Angle	2⊝ ½	120		deg.	
Thermal resistance ^[5]	$R\theta_{J-B}$	7.0		°C /W	
Thermal resistance [6]	$R\theta_{ extsf{J-C}}$	3.8		°C /W	

2-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Forward Current	l _F	400	mA
Power Dissipation	P_d	4.4	W
Junction Temperature	Tj	125	°C
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
ESD Sensitivity [7]	-	±10,000V HBM	-

*Notes:

- [1] SSC maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [4] A tolerance of ±0.06V on forward voltage measurements
- [5], [6] $R\theta_{J-B}$ is measured with a SSC metal core pcb.(25 °C \leq T $_{J} \leq$ 110 °C) $R\theta_{J-C}$ is measured with only emitter.(25 °C \leq T $_{J} \leq$ 110 °C) Break voltage of Metal PCB is 6.5kVAC
- [7] It is included the zener chip to protect the product from ESD.

Caution	

1. Please do not drive at rated current more than 5 sec. without proper heat sink

Rev. 02

October. 2010

www.ZLED.com



Characteristics for Z-Power LED

3. Natural White (SZ20360)

3-1 Electro-Optical characteristics at I_F =350mA, T_A =25°C

Parameter	Symbol	Value			Unit
Parameter		Min	Тур	Max	Unit
Luminous Flux ^[1]	Φ _V ^[2]	177	230	260	lm
Correlated Color Temperature [5]	ССТ	-	4000	-	K
CRI	R_a	-	80	-	-
Forward Voltage ^[3]	V_{F}	9.5	10.0	11.0	V
View Angle	2⊝ ½	120		deg.	
Thermal resistance ^[5]	$R\theta_{J-B}$	7.0		°C /W	
Thermal resistance ^[6]	$R\theta_{J-C}$	3.8		°C /W	

3-2 Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Forward Current	I _F	400	mA
Power Dissipation	P_d	4.4	W
Junction Temperature	Tj	125	°C
Operating Temperature	T_{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-40 ~ +100	°C
ESD Sensitivity [7]	-	±10,000V HBM	-

*Notes:

- [1] SSC maintains a tolerance of $\pm 10\%$ on flux and power measurements.
- [2] Φ_V is the total luminous flux output as measured with an integrated sphere.
- [3] Correlated Color Temperature is derived from the CIE 1931 Chromaticity diagram. CCT $\pm 5\%$ tester tolerance
- [4] A tolerance of $\pm 0.06V$ on forward voltage measurements
- [5], [6] $R\theta_{J-B}$ is measured with a SSC metal core pcb.(25 °C \leq T $_{J} \leq$ 110 °C) $R\theta_{J-C}$ is measured with only emitter.(25 °C \leq T $_{J} \leq$ 110 °C) Break voltage of Metal PCB is 6.5kVAC
- [7] It is included the zener chip to protect the product from ESD.

-----Caution-----


1. Please do not drive at rated current more than 5 sec. without proper heat sink

Rev. UZ

October. 2010

Color Spectrum, T_A=25°C

1. Pure White

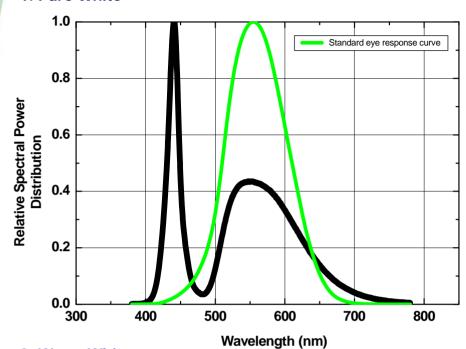

2. Warm White


7

Rev. 02

October. 2010



3. Natural White

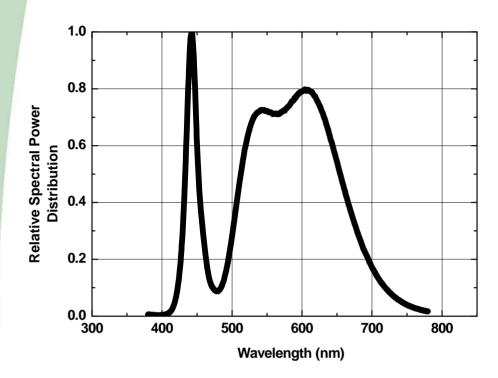


8

Rev. 02


October. 2010

Junction Temperature Characteristics

1. Relative Light Output vs. Junction Temperature at I_F=350mA

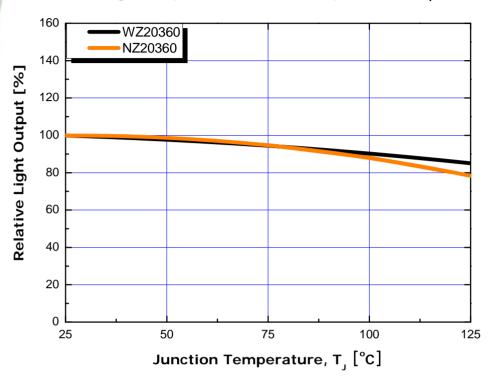

2. Forward Voltage Shift vs. Junction Temperature at I_F =350mA

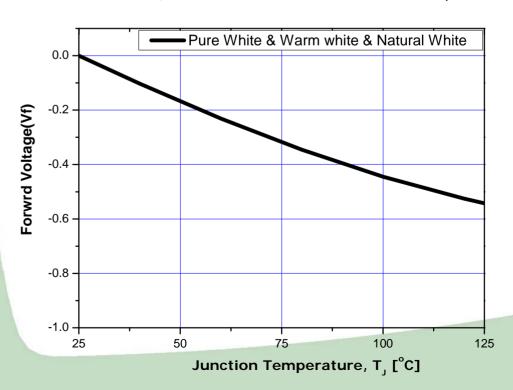


Rev. 02

October. 2010




Forward Current Characteristics

1. Forward Voltage vs. Forward Current , T_A=25 °c

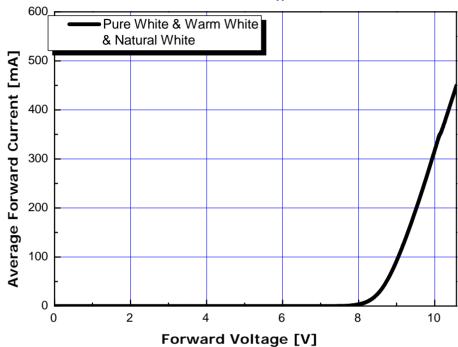

2. Forward Current vs. Normalized Relative Luminous Flux, $T_A=25$ °c

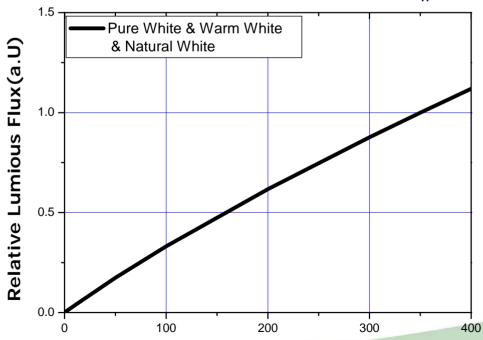


Forward Current [mA]

October, 2010

Ambient Temperature vs Allowable Forward Current


1-1. Pure White, Warm White, Natural White (T_{max} = 125 °C, @350mA)

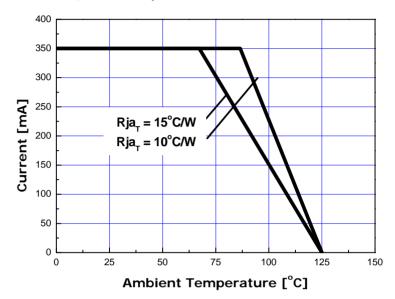

11


Rev. 02

October. 2010



Typical Dome Type Radiation pattern


1. Pure White, Warm White, Natura White

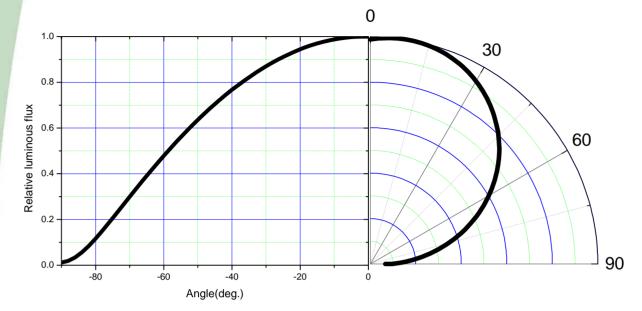

Rev. 02

October. 2010

3. Reflow Soldering Conditions / Profile

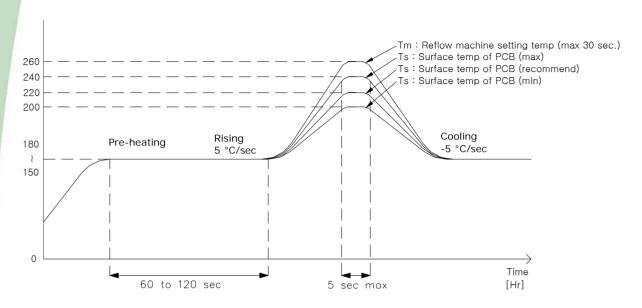

4. Hand Soldering conditions

Lead : Not more than 3 seconds @MAX280℃

Slug: Use a thermal-adhesives

* Caution


- 1. Reflow soldering should not be done more than one time.
- 2. Repairing should not be done after the LEDs have been soldered. When repairing is unavoidable, suitable tools have to be used.
- 3. Die slug is to be soldered.
- 4. When soldering, do not put stress on the LEDs during heating.
- 5. After soldering, do not warp the circuit board.
- 6. Recommend to use a convection type reflow machine with 7 ~ 8 zones.

Rev. 02

October. 2010



Emitter Type Reel Packaging

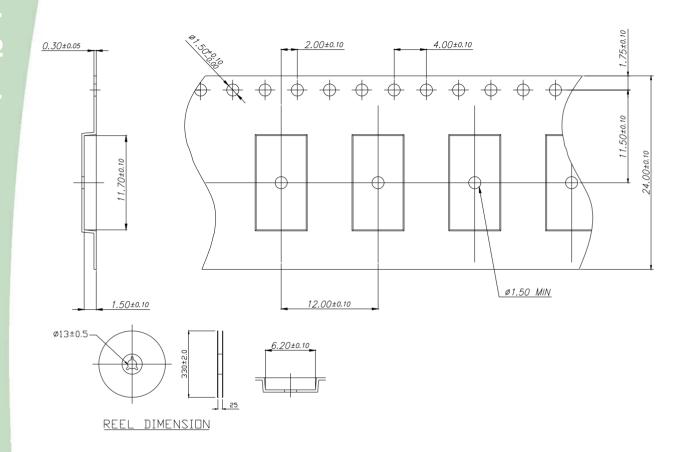

Note:

- 1. The number of loaded products in the reel is 500ea
- 2. All dimensions are in millimeters (tolerance : ± 0.2)
- 3. Scale none

Rev. 02


October, 2010

www.ZLED.com


^{*}The appearance and specifications of the product may be changed for improvement without notice.



Packaging Structure

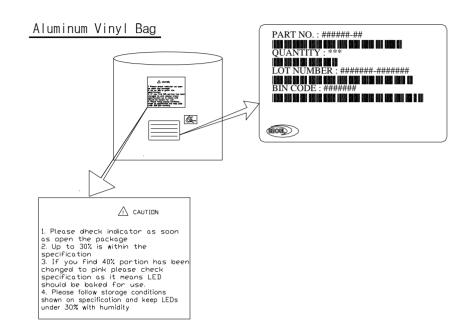

Outer Box

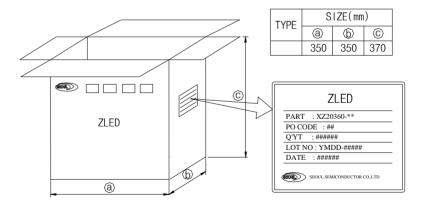

Note:

- 1. 6~10 reels are loaded in box
- 2. Scale none
- 3. For more information about binning and labeling, refer to the Application Note 1

Rev. UZ

October, 2010

www.ZLED.com



precaution for use

Storage

To avoid the moisture penetration, we recommend storing Z Power LEDs in a dry box (or desiccator) with a desiccant. The recommended storage conditions are Temperature 5 to 30 degrees Centigrade. Humidity 50% maximum.

Precaution after opening packaging
 However LED is correspond SMD, when LED be soldered dip, interfacial separation may affect
 the light transmission efficiency, causing the light intensity to drop.

 Attention in followed.

- a. Soldering should be done right after opening the package(within 24Hrs).
- b. Keeping of a fraction
 - Sealing
 - Temperature : $5 \sim 40^{\circ}C$ Humidity : less than 30%
- c. If the package has been opened more than 1week or the color of desiccant changes, components should be dried for 10-12hr at $60\pm5^{\circ}\text{C}$
- Any mechanical force or any excess vibration shall not be accepted to apply during cooling process to normal temp. after soldering.
- · Please avoid rapid cooling after soldering.
- Components should not be mounted on warped direction of PCB.
- Anti radioactive ray design is not considered for the products listed here in.
- Gallium arsenide is used in some of the products listed in this publication. These products are
 dangerous if they are burned or shredded in the process of disposal. It is also dangerous to
 drink the liquid or inhale the gas generated by such products when chemically disposed.
- This device should not be used in any type of fluid such as water, oil, organic solvent and etc.

 When washing is required, IPA(Isopropyl Alcohol) should be used.
- When the LEDs are illuminating, operating current should be decided after considering the package maximum temperature.
- LEDs must be stored to maintain a clean atmosphere. If the LEDs are stored for 3 months or
 more after being shipped from SSC, a sealed container with a nitrogen atmosphere should be used
 for storage.
- The appearance and specifications of the product may be modified for improvement without notice.
- · Long time exposure of sunlight or occasional UV exposure will cause lens discoloration.
- · Attaching LEDs, don't use adhesives to generate organic vapor.

Rev. UZ

October. 2010

www.ZLED.com

Handling of Silicone Resin LEDs

(1) During processing, mechanical stress on the surface should be minimized as much as possible. Sharp objects of all types should not be used to pierce the sealing compound.



(2) In general, LEDs should only be handled from the side. By the way, this also applies to LEDs without a silicone sealant, since the surface can also become scratched.



(3) When populating boards in SMT production, there are basically no restrictions regarding the form of the pick and place nozzle, except that mechanical pressure on the surface of the resin must be prevented.

This is assured by choosing a pick and place nozzle which is larger than the LED's reflector area.

(4) Silicone differs from materials conventionally used for the manufacturing of LEDs. These conditions must be considered during the handling of such devices. Compared to standard encapsulants, silicone is generally softer, and the surface is more likely to attract dust.

As mentioned previously, the increased sensitivity to dust requires special care during processing. In cases where a minimal level of dirt and dust particles cannot be guaranteed, a suitable cleaning solution must be applied to the surface after the soldering of components.

(5) SSC suggests using isopropyl alcohol for cleaning. In case other solvents are used, it must be assured that these solvents do not dissolve the package or resin. Ultrasonic cleaning is not recommended. Ultrasonic cleaning may cause damage to the ev. 02 LED.

17

October, 2010

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9