


# CGH40090PP

## 90 W, RF Power GaN HEMT

Cree's CGH40090PP is an unmatched, gallium nitride (GaN) high electron mobility transistor (HEMT). The CGH40090PP, operating from a 28 volt rail, offers a general purpose, broadband solution to a variety of RF and microwave applications. GaN HEMTs offer high efficiency, high gain and wide bandwidth capabilities making the CGH40090PP ideal for linear and compressed amplifier circuits. The transistor is available in a 4-lead flange package.

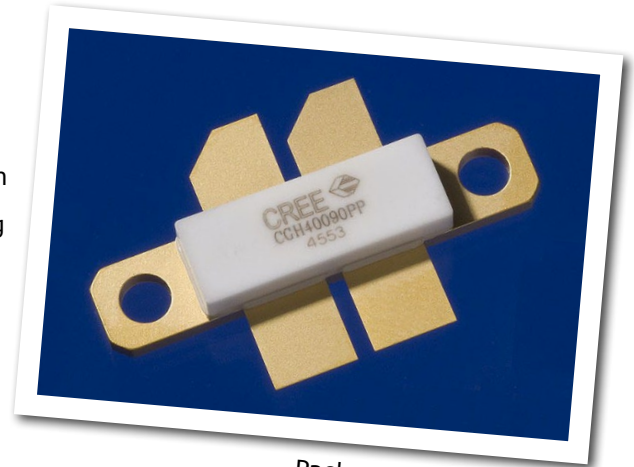

Package Types: 440199  
PN: CGH40090PP

### Typical Performance Over 500 MHz - 2.5 GHz ( $\tau_c = 25^\circ\text{C}$ ) of Demonstration Amplifier

| Parameter                     | 500 MHz | 1.0 GHz | 1.5 GHz | 2.0 GHz | 2.5 GHz | Units |
|-------------------------------|---------|---------|---------|---------|---------|-------|
| Small Signal Gain             | 17.6    | 15.6    | 14.1    | 12.4    | 12.4    | dB    |
| Gain at $P_{SAT}$             | 13.7    | 11.7    | 9.2     | 7.0     | 10.4    | dB    |
| Saturated Power               | 66.8    | 102.7   | 91.4    | 101.7   | 57.0    | W     |
| Drain Efficiency at $P_{SAT}$ | 48.5    | 57.0    | 56.6    | 59.2    | 37.3    | %     |
| Input Return Loss             | 7.3     | 23.0    | 14.9    | 14.3    | 11.3    | dB    |

### Features

- Up to 2.5 GHz Operation
- 16 dB Small Signal Gain at 2.0 GHz
- 100 W Typical  $P_{SAT}$
- 55 % Efficiency at  $P_{SAT}$
- 28 V Operation



Large Signal Models Available for SiC & GaN



## Absolute Maximum Ratings (not simultaneous) at 25 °C Case Temperature

| Parameter   | Symbol          | Rating    | Units | Conditions |
|---|-----------------|-----------|-------|------------|
| Drain-Source Voltage                              | $V_{DSS}$       | 84        | Volts | 25 °C      |
| Gate-to-Source Voltage                            | $V_{GS}$        | -10, +2   | Volts | 25 °C      |
| Storage Temperature                               | $T_{STG}$       | -65, +150 | °C    |            |
| Operating Junction Temperature                    | $T_J$           | 225       | °C    |            |
| Maximum Forward Gate Current                      | $I_{GMAX}$      | 28        | mA    | 25 °C      |
| Maximum Drain Current <sup>1</sup>                | $I_{DMAX}$      | 12        | A     | 25 °C      |
| Soldering Temperature <sup>2</sup>                | $T_S$           | 245       | °C    |            |
| Screw Torque                                      | $\tau$          | 80        | in-oz |            |
| Thermal Resistance, Junction to Case <sup>3</sup> | $R_{\theta JC}$ | 1.45      | °C/W  | 85 °C      |
| Case Operating Temperature <sup>3,4</sup>         | $T_C$           | -40, +150 | °C    | 30 seconds |

Note:

<sup>1</sup> Current limit for long term, reliable operation

<sup>2</sup> Refer to the Application Note on soldering at [www.cree.com/products/wireless\\_appnotes.asp](http://www.cree.com/products/wireless_appnotes.asp)

<sup>3</sup> Measured for the CGH40090PP at  $P_{DISS} = 112W$ .

<sup>4</sup> See also, the Power Dissipation De-rating Curve on Page 6.

## Electrical Characteristics ( $T_C = 25^\circ C$ )

| Characteristics   | Symbol       | Min. | Typ. | Max.   | Units    | Conditions  |
|---|--------------|------|------|--------|----------|---|
| <b>DC Characteristics<sup>1</sup></b>   |              |      |      |        |          |   |
| Gate Threshold Voltage  | $V_{GS(th)}$ | -3.8 | -3.0 | -2.3   | $V_{DC}$ | $V_{DS} = 10 V, I_D = 28.8 mA$  |
| Gate Quiescent Voltage  | $V_{GS(Q)}$  | -    | -2.7 | -      | $V_{DC}$ | $V_{DS} = 28 V, I_D = 1.0 A$  |
| Saturated Drain Current <sup>2</sup>  | $I_{DS}$     | 23.2 | 28.0 | -      | A        | $V_{DS} = 6.0 V, V_{GS} = 2.0 V$  |
| Drain-Source Breakdown Voltage  | $V_{BR}$     | 120  | -    | -      | $V_{DC}$ | $V_{GS} = -8 V, I_D = 28.8 mA$  |
| <b>RF Characteristics<sup>3,4</sup> (<math>T_C = 25^\circ C, F_0 = 2.0 GHz</math> unless otherwise noted)</b> |              |      |      |        |          |   |
| Small Signal Gain   | $G_{SS}$     | 12   | 12.5 | -      | dB       | $V_{DD} = 28 V, I_{DQ} = 1.0 A$   |
| Power Output at Saturation <sup>5</sup>   | $P_{SAT}$    | 80   | 100  | -      | W        | $V_{DD} = 28 V, I_{DQ} = 1.0 A$   |
| Drain Efficiency <sup>6</sup>   | $\eta$       | 45   | 55   | -      | %        | $V_{DD} = 28 V, I_{DQ} = 1.0 A, P_{OUT} = P_{SAT}$  |
| Output Mismatch Stress  | VSWR         | -    | -    | 10 : 1 | $\Psi$   | No damage at all phase angles,<br>$V_{DD} = 28 V, I_{DQ} = 1.0 A,$<br>$P_{OUT} = 90 W CW$ |
| <b>Dynamic Characteristics<sup>7</sup></b>  |              |      |      |        |          |   |
| Input Capacitance   | $C_{GS}$     | -    | 19.0 | -      | pF       | $V_{DS} = 28 V, V_{gs} = -8 V, f = 1 MHz$   |
| Output Capacitance  | $C_{DS}$     | -    | 5.9  | -      | pF       | $V_{DS} = 28 V, V_{gs} = -8 V, f = 1 MHz$   |
| Feedback Capacitance  | $C_{GD}$     | -    | 0.8  | -      | pF       | $V_{DS} = 28 V, V_{gs} = -8 V, f = 1 MHz$   |

Notes:

<sup>1</sup> Measured on wafer prior to packaging.

<sup>2</sup> Scaled from PCM data.

<sup>3</sup> Measured in CGH40090PP-TB.

<sup>4</sup>  $I_{DQ}$  of 1.0 A is by biasing each device at 0.5 A.


<sup>5</sup>  $P_{SAT}$  is defined as: Q1 or Q2 =  $I_G = 14 mA$ .

<sup>6</sup> Drain Efficiency =  $P_{OUT} / P_{DC}$


<sup>7</sup> Capacitance values are for each side of the device.

## Typical Performance

**Gain and Efficiency vs Output Power of the CGH40090PP measured in Broadband Amplifier Circuit CGH40090PP-TB**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 1.0\text{ A}$ , Freq = 0.5 - 2.5 GHz

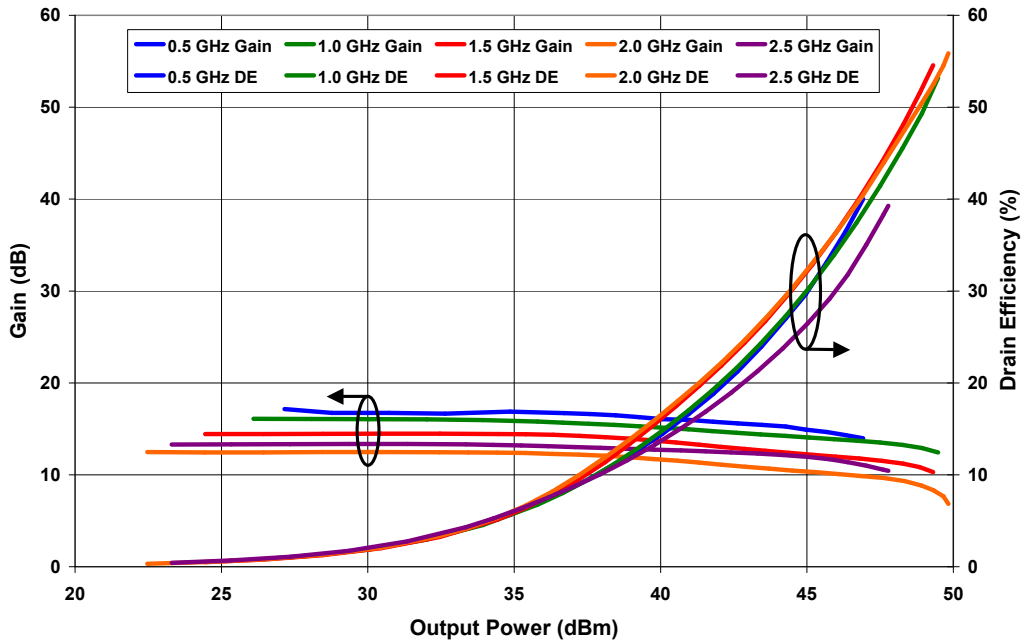


**Output Power and Drain Efficiency vs Frequency of the CGH40090PP measured in Broadband Amplifier Circuit CGH40090PP-TB**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 1.0\text{ A}$

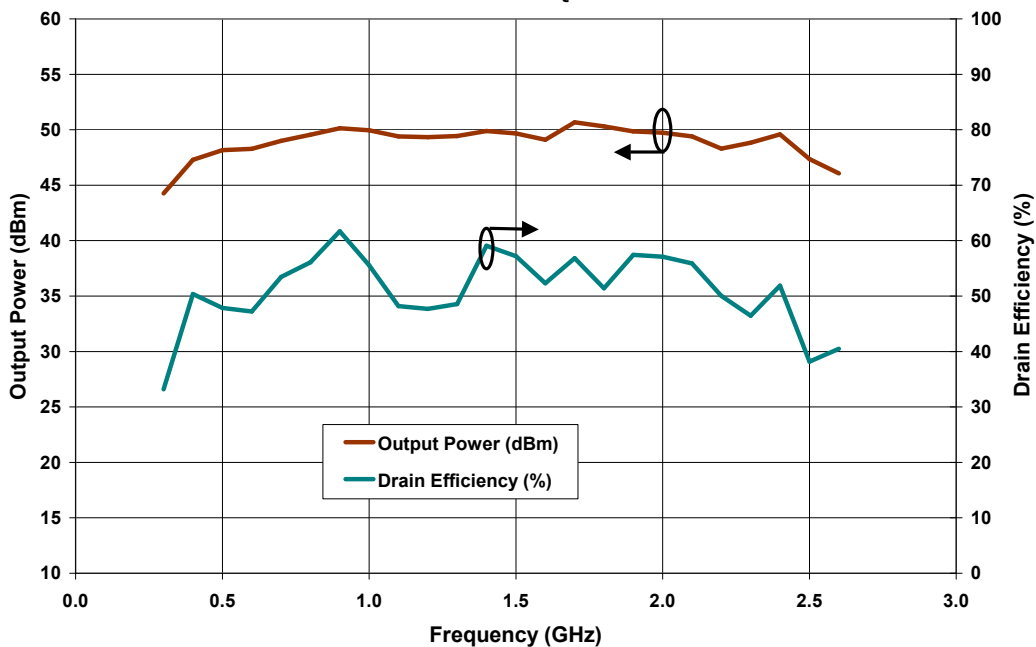


## Typical Performance

**Gain and Input Return Loss vs Frequency from 0.5 GHz to 2.5 GHz  
in Broadband Amplifier Circuit CGH40090PP-TB**  
 $V_{DD} = 28\text{ V}, I_{DQ} = 1.0\text{ A}$

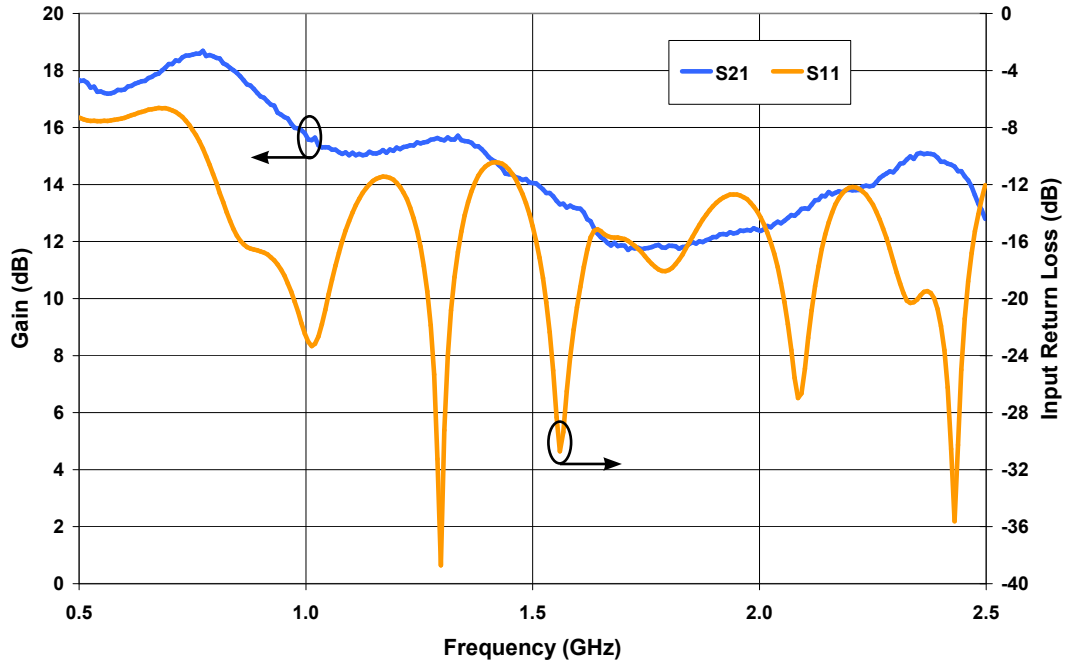


**Maximum Available Gain and K Factor of the CGH40090PP**  
 $V_{DD} = 28\text{ V}, I_{DQ} = 1.0\text{ A}$

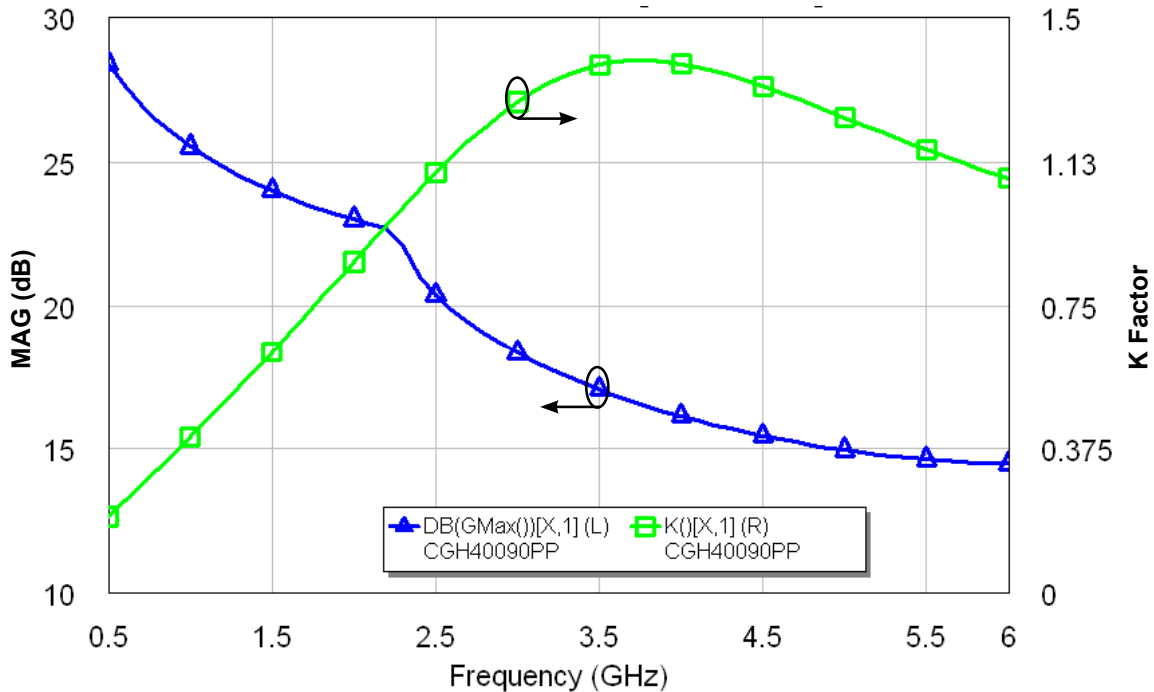

## Typical Noise Performance


**Simulated Minimum Noise Figure and Noise Resistance vs Frequency of the CGH40090PP**  
 $V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 500\text{ mA}$  (per side)

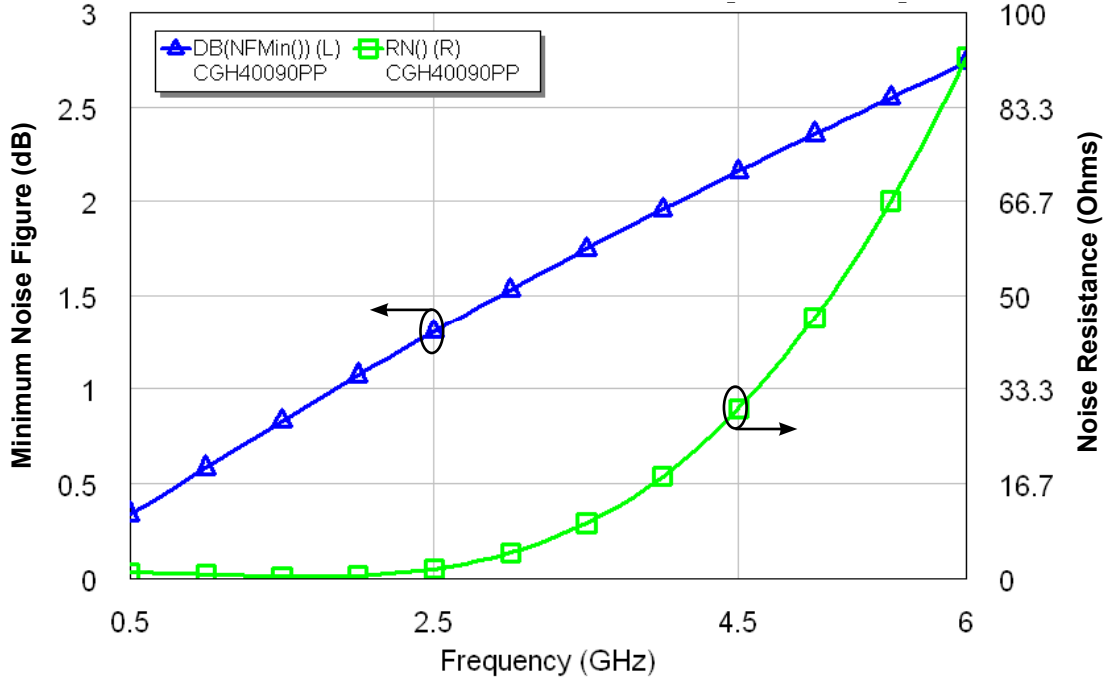

## Electrostatic Discharge (ESD) Classifications

| Parameter           | Symbol | Class      | Test Methodology    |
|---------------------|--------|------------|---------------------|
| Human Body Model    | HBM    | 1A > 250 V | JEDEC JESD22 A114-D |
| Charge Device Model | CDM    | 1 < 200 V  | JEDEC JESD22 C101-C |

## Simulated Source and Load Impedances

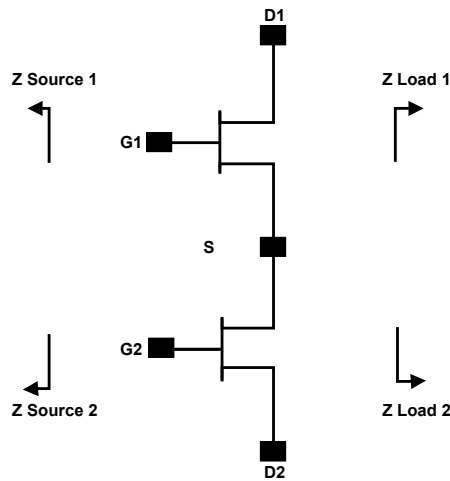


| Frequency (MHz) | Z Source (1,2) | Z Load (1,2)   |
|-----------------|----------------|----------------|
| 500             | $4.28 + j6.47$ | $11 + j2.9$    |
| 1500            | $0.95 - j1.1$  | $5.27 + j3$    |
| 2500            | $0.82 - j5.1$  | $3.49 + j0.08$ |

Note 1.  $V_{DD} = 28V$ ,  $I_{DQ} = 1.0A$  in the 440199 package.

Note 2. Optimized for power gain,  $P_{SAT}$  and PAE.


Note 3. When using this device at low frequency, series resistors should be used to maintain amplifier stability.

## CGH40090PP Power Dissipation De-rating Curve

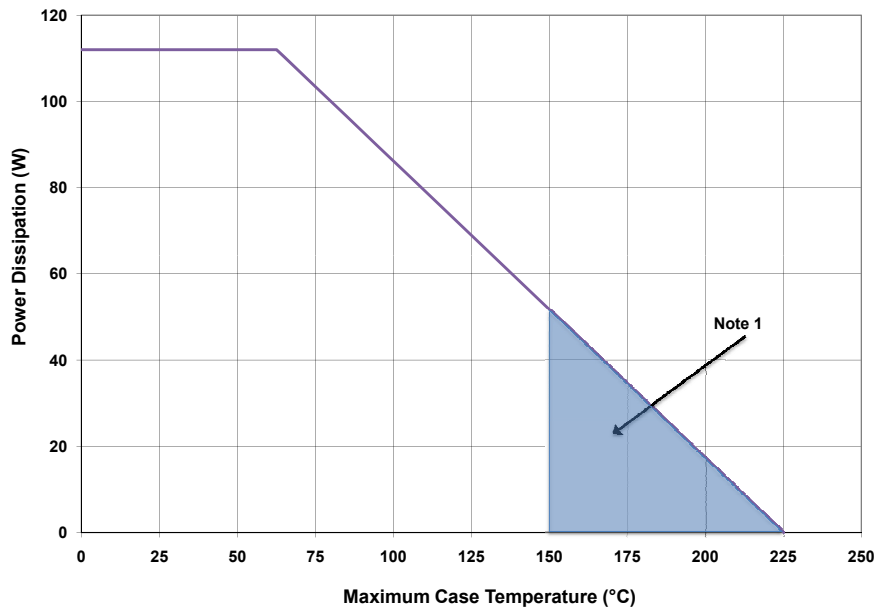


Note 1. Area exceeds Maximum Case Operating Temperature (See Page 2).

# CGH40090PP-TB Demonstration Amplifier Circuit Schematic

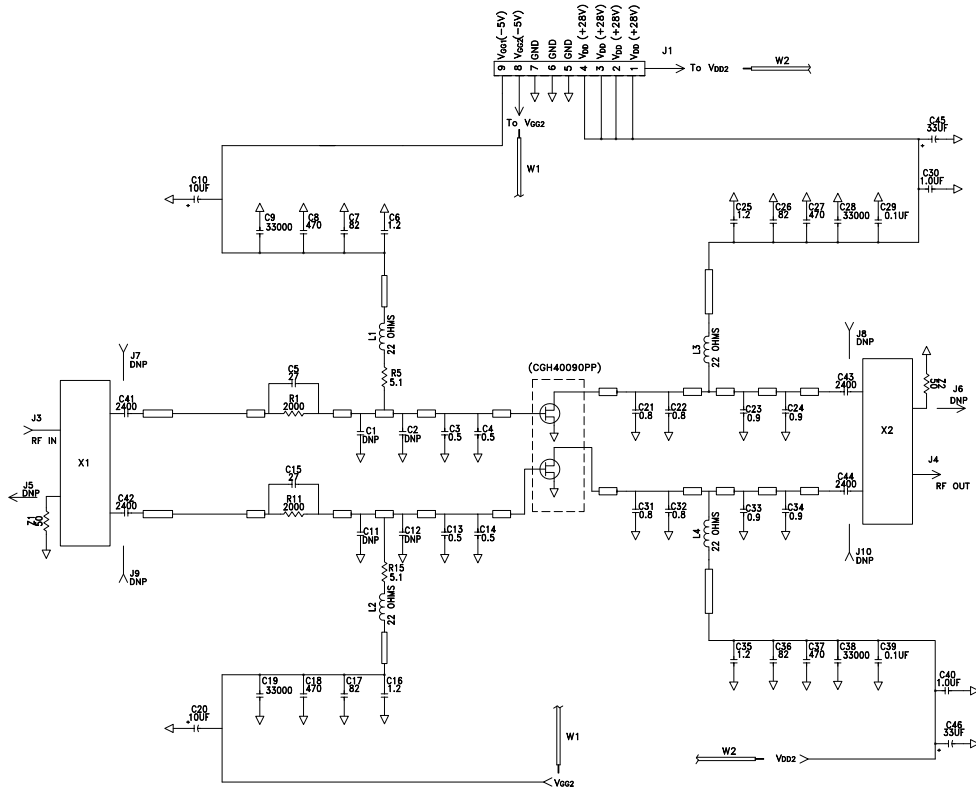


# CGH40090PP-TB Demonstration Amplifier Circuit Outline

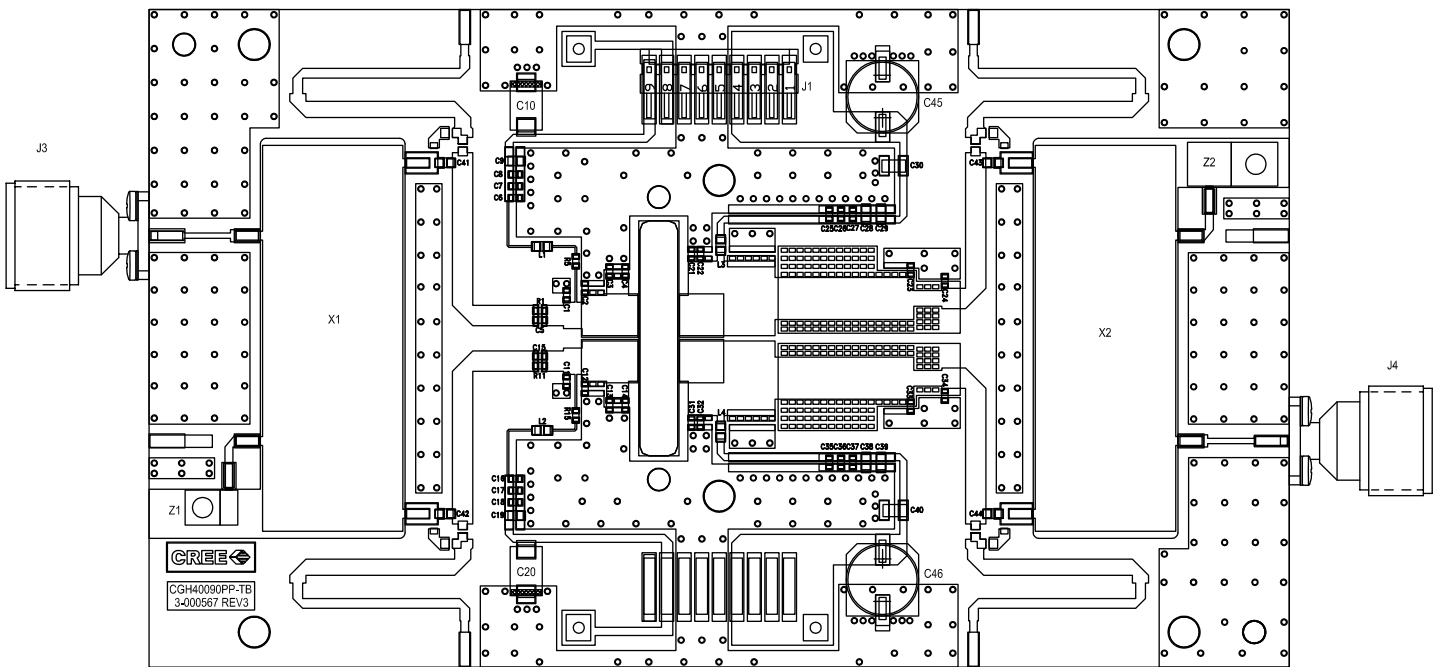

## CGH40090PP-TB Demonstration Amplifier Circuit Bill of Materials

| Designator         | Description                                  | Qty |
|--------------------|--|-----|
| C3, C4, C13, C14   | CAP, 0.5 pF, $\pm 0.05$ pF, 0603, ATC 600S   | 4   |
| C5,C15             | CAP, 27 pF, $\pm 5\%$ , 0603, ATC 600S       | 2   |
| C6,C16,C25,C35     | CAP, 1.2 PF $\pm 0.10$ pF, 0603, ATC 600S    | 4   |
| C7,C17,C26,C36     | CAP, 82 pF, $\pm 5\%$ , 0603, ATC 600S       | 4   |
| C8, C18, C27, C37  | CAP, CER, 470 pF, 100V, 10%, X7R, 0603       | 4   |
| C9,C19,C28,C38     | CAP, CER, 33000 pF, 100V, X7R, 0805          | 4   |
| C10,C20            | CAP, TANTALUM, 10UF, 25V, 10%, SMD           | 2   |
| C21, C22, C31, C32 | CAP, 0.8 pF, $\pm 0.1$ pF, 0603, ATC 600S    | 4   |
| C23,C24,C33,C34    | CAP, 0.9 pF, $\pm 0.1$ pF, 0603, ATC 600S    | 4   |
| C29,C39            | CAP, CER, 0.1UF, 50V, 10%, X7R, 0805         | 2   |
| C30,C40            | CAP, 1.0 UF, 100V, 10%, X7R, 1210            | 2   |
| C41,C42,C43,C44    | CAP, DC BLOCK, MULTI-LAYER, 0805, 2400 pF    | 4   |
| C45, C46           | CAP, 33 UF, 100V, ELECT, FK, SMD             | 2   |
| R1,R11             | RES, 1/16W, 0603, 1%, 2.00K OHMS             | 2   |
| R5,R15             | RES, 1/16W, 0603, 1%, 5.1 OHMS               | 2   |
| L1,L2,L3,L4        | FERRITE, 22 OHM, 0805, BLM21PG220SN1         | 4   |
| Z1                 | 50 OHM, TERMINATION, 30 WATT, HALF FLNG      | 1   |
| Z2                 | 50 OHM, TERMINATION, 50 WATT, FLANGE         | 1   |
| X1,X2              | 1.0 - 2.5 GHZ 50 TO 25 OHM COUPLER, IPP 4011 | 2   |
| J1                 | CONN, HEADER, RT>PLZ .1CEN LK 9POS           | 1   |
| J3,J4              | CONN,N,FEM,W/.500 SMA FLNG                   | 2   |
| -                  | PCB, RO4350B, Er = 3.48, h = 20 mil          | 1   |
| Q1                 | CGH40090PP                                   | 1   |

## CGH40090PP-TB Demonstration Amplifier Circuit

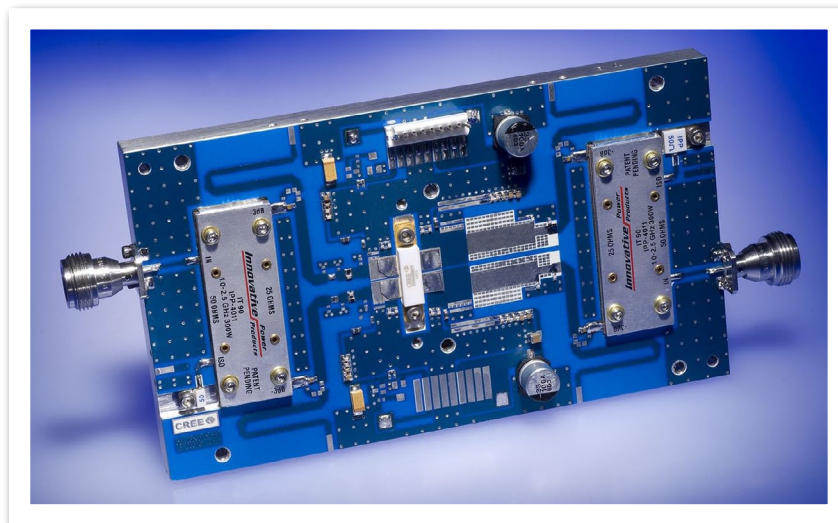





**Typical Package S-Parameters for CGH40090PP, Single Side  
(Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 500\text{ mA}$ , angle in degrees)**

| Frequency | Mag S11 | Ang S11 | Mag S21 | Ang S21 | Mag S12 | Ang S12 | Mag S22 | Ang S22 |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|
| 500 MHz   | 0.943   | -172.11 | 7.37    | 81.62   | 0.011   | 0.42    | 0.671   | -174.75 |
| 600 MHz   | 0.943   | -174.35 | 6.14    | 78.14   | 0.011   | -1.24   | 0.675   | -175.11 |
| 700 MHz   | 0.943   | -176.10 | 5.26    | 74.92   | 0.011   | -2.62   | 0.679   | -175.34 |
| 800 MHz   | 0.943   | -177.56 | 4.60    | 71.87   | 0.010   | -3.80   | 0.683   | -175.51 |
| 900 MHz   | 0.944   | -178.82 | 4.08    | 68.95   | 0.010   | -4.81   | 0.688   | -175.64 |
| 1.0 GHz   | 0.944   | -179.94 | 3.67    | 66.12   | 0.010   | -5.69   | 0.693   | -175.76 |
| 1.1 GHz   | 0.944   | 179.03  | 3.33    | 63.38   | 0.010   | -6.43   | 0.697   | -175.90 |
| 1.2 GHz   | 0.944   | 178.06  | 3.05    | 60.71   | 0.010   | -7.06   | 0.702   | -176.05 |
| 1.3 GHz   | 0.945   | 177.15  | 2.82    | 58.09   | 0.010   | -7.58   | 0.707   | -176.22 |
| 1.4 GHz   | 0.945   | 176.26  | 2.62    | 55.54   | 0.010   | -7.98   | 0.713   | -176.42 |
| 1.5 GHz   | 0.945   | 175.40  | 2.44    | 53.03   | 0.010   | -8.26   | 0.718   | -176.65 |
| 1.6 GHz   | 0.945   | 174.56  | 2.29    | 50.57   | 0.010   | -8.43   | 0.723   | -176.92 |
| 1.7 GHz   | 0.946   | 173.72  | 2.16    | 48.15   | 0.010   | -8.48   | 0.728   | -177.21 |
| 1.8 GHz   | 0.946   | 172.89  | 2.04    | 45.77   | 0.009   | -8.42   | 0.732   | -177.53 |
| 1.9 GHz   | 0.946   | 172.05  | 1.94    | 43.43   | 0.009   | -8.24   | 0.737   | -177.88 |
| 2.0 GHz   | 0.946   | 171.21  | 1.85    | 41.13   | 0.009   | -7.94   | 0.741   | -178.26 |
| 2.1 GHz   | 0.946   | 170.35  | 1.77    | 38.86   | 0.009   | -7.53   | 0.746   | -178.67 |
| 2.2 GHz   | 0.945   | 169.49  | 1.70    | 36.61   | 0.009   | -7.02   | 0.750   | -179.11 |
| 2.3 GHz   | 0.945   | 168.60  | 1.63    | 34.39   | 0.009   | -6.39   | 0.753   | -179.57 |
| 2.4 GHz   | 0.945   | 167.70  | 1.58    | 32.19   | 0.009   | -5.67   | 0.757   | 179.95  |
| 2.5 GHz   | 0.945   | 166.78  | 1.52    | 30.01   | 0.009   | -4.86   | 0.760   | 179.44  |
| 2.6 GHz   | 0.944   | 165.83  | 1.48    | 27.85   | 0.009   | -3.97   | 0.763   | 178.90  |
| 2.7 GHz   | 0.943   | 164.85  | 1.44    | 25.69   | 0.009   | -3.00   | 0.766   | 178.34  |
| 2.8 GHz   | 0.943   | 163.83  | 1.40    | 23.55   | 0.009   | -1.98   | 0.768   | 177.76  |
| 2.9 GHz   | 0.942   | 162.79  | 1.37    | 21.41   | 0.009   | -0.93   | 0.770   | 177.16  |
| 3.0 GHz   | 0.941   | 161.70  | 1.35    | 19.26   | 0.009   | 0.15    | 0.772   | 176.53  |
| 3.2 GHz   | 0.938   | 159.38  | 1.31    | 14.96   | 0.010   | 2.31    | 0.774   | 175.21  |
| 3.4 GHz   | 0.935   | 156.84  | 1.28    | 10.59   | 0.010   | 4.31    | 0.775   | 173.80  |
| 3.6 GHz   | 0.931   | 154.04  | 1.26    | 6.10    | 0.011   | 6.02    | 0.774   | 172.28  |
| 3.8 GHz   | 0.926   | 150.90  | 1.26    | 1.46    | 0.012   | 7.28    | 0.772   | 170.66  |
| 4.0 GHz   | 0.920   | 147.36  | 1.28    | -3.41   | 0.013   | 7.95    | 0.768   | 168.91  |
| 4.2 GHz   | 0.912   | 143.31  | 1.30    | -8.59   | 0.015   | 7.92    | 0.762   | 167.02  |
| 4.4 GHz   | 0.902   | 138.62  | 1.35    | -14.16  | 0.017   | 7.08    | 0.754   | 164.97  |
| 4.6 GHz   | 0.890   | 133.12  | 1.40    | -20.26  | 0.019   | 5.31    | 0.744   | 162.75  |
| 4.8 GHz   | 0.874   | 126.58  | 1.48    | -27.01  | 0.022   | 2.49    | 0.731   | 160.30  |
| 5.0 GHz   | 0.854   | 118.69  | 1.58    | -34.60  | 0.026   | -1.53   | 0.714   | 157.61  |
| 5.2 GHz   | 0.829   | 109.02  | 1.70    | -43.26  | 0.030   | -6.95   | 0.695   | 154.59  |
| 5.4 GHz   | 0.799   | 97.04   | 1.85    | -53.22  | 0.035   | -13.99  | 0.672   | 151.16  |
| 5.6 GHz   | 0.765   | 82.06   | 2.01    | -64.77  | 0.041   | -22.88  | 0.645   | 147.15  |
| 5.8 GHz   | 0.730   | 63.42   | 2.18    | -78.13  | 0.048   | -33.82  | 0.613   | 142.23  |
| 6.0 GHz   | 0.704   | 40.85   | 2.32    | -93.40  | 0.055   | -46.90  | 0.575   | 135.85  |

Download this s-parameter file in ".s2p" format at [http://www.cree.com/products/wireless\\_s-parameters.asp](http://www.cree.com/products/wireless_s-parameters.asp)




**Typical Package S-Parameters for CGH40090PP, Single Side  
(Small Signal,  $V_{DS} = 28\text{ V}$ ,  $I_{DQ} = 1000\text{ mA}$ , angle in degrees)**

| Frequency | Mag S11 | Ang S11 | Mag S21 | Ang S21 | Mag S12 | Ang S12 | Mag S22 | Ang S22 |
|-----------|---------|---------|---------|---------|---------|---------|---------|---------|
| 500 MHz   | 0.952   | -173.06 | 7.25    | 82.49   | 0.009   | 3.57    | 0.707   | -176.99 |
| 600 MHz   | 0.952   | -175.20 | 6.05    | 79.29   | 0.009   | 2.66    | 0.709   | -177.41 |
| 700 MHz   | 0.952   | -176.89 | 5.19    | 76.33   | 0.009   | 2.01    | 0.711   | -177.72 |
| 800 MHz   | 0.952   | -178.31 | 4.55    | 73.53   | 0.009   | 1.53    | 0.713   | -177.97 |
| 900 MHz   | 0.952   | -179.54 | 4.05    | 70.83   | 0.009   | 1.20    | 0.716   | -178.19 |
| 1.0 GHz   | 0.952   | 179.35  | 3.65    | 68.21   | 0.009   | 0.99    | 0.718   | -178.39 |
| 1.1 GHz   | 0.952   | 178.33  | 3.32    | 65.65   | 0.008   | 0.88    | 0.721   | -178.59 |
| 1.2 GHz   | 0.952   | 177.37  | 3.05    | 63.15   | 0.008   | 0.87    | 0.724   | -178.80 |
| 1.3 GHz   | 0.952   | 176.46  | 2.82    | 60.70   | 0.008   | 0.95    | 0.727   | -179.02 |
| 1.4 GHz   | 0.952   | 175.58  | 2.63    | 58.28   | 0.008   | 1.11    | 0.729   | -179.25 |
| 1.5 GHz   | 0.952   | 174.72  | 2.46    | 55.90   | 0.008   | 1.37    | 0.732   | -179.50 |
| 1.6 GHz   | 0.951   | 173.87  | 2.32    | 53.56   | 0.008   | 1.70    | 0.735   | -179.77 |
| 1.7 GHz   | 0.951   | 173.03  | 2.19    | 51.24   | 0.008   | 2.12    | 0.738   | 179.94  |
| 1.8 GHz   | 0.951   | 172.19  | 2.08    | 48.95   | 0.008   | 2.61    | 0.741   | 179.63  |
| 1.9 GHz   | 0.951   | 171.35  | 1.98    | 46.68   | 0.008   | 3.17    | 0.743   | 179.30  |
| 2.0 GHz   | 0.950   | 170.50  | 1.89    | 44.44   | 0.008   | 3.80    | 0.746   | 178.95  |
| 2.1 GHz   | 0.950   | 169.64  | 1.82    | 42.22   | 0.009   | 4.48    | 0.748   | 178.57  |
| 2.2 GHz   | 0.950   | 168.77  | 1.75    | 40.01   | 0.009   | 5.21    | 0.750   | 178.17  |
| 2.3 GHz   | 0.949   | 167.89  | 1.69    | 37.82   | 0.009   | 5.99    | 0.752   | 177.75  |
| 2.4 GHz   | 0.948   | 166.98  | 1.63    | 35.63   | 0.009   | 6.79    | 0.754   | 177.31  |
| 2.5 GHz   | 0.948   | 166.05  | 1.59    | 33.46   | 0.009   | 7.62    | 0.756   | 176.85  |
| 2.6 GHz   | 0.947   | 165.09  | 1.54    | 31.29   | 0.009   | 8.45    | 0.757   | 176.36  |
| 2.7 GHz   | 0.946   | 164.10  | 1.51    | 29.13   | 0.009   | 9.28    | 0.758   | 175.85  |
| 2.8 GHz   | 0.945   | 163.08  | 1.47    | 26.96   | 0.009   | 10.09   | 0.759   | 175.32  |
| 2.9 GHz   | 0.944   | 162.02  | 1.44    | 24.80   | 0.010   | 10.87   | 0.760   | 174.77  |
| 3.0 GHz   | 0.943   | 160.92  | 1.42    | 22.62   | 0.010   | 11.60   | 0.760   | 174.19  |
| 3.2 GHz   | 0.940   | 158.58  | 1.38    | 18.22   | 0.011   | 12.89   | 0.760   | 172.97  |
| 3.4 GHz   | 0.936   | 156.01  | 1.36    | 13.73   | 0.011   | 13.85   | 0.759   | 171.64  |
| 3.6 GHz   | 0.931   | 153.17  | 1.35    | 9.11    | 0.013   | 14.40   | 0.756   | 170.22  |
| 3.8 GHz   | 0.926   | 149.99  | 1.36    | 4.29    | 0.014   | 14.44   | 0.752   | 168.68  |
| 4.0 GHz   | 0.919   | 146.39  | 1.37    | -0.77   | 0.015   | 13.91   | 0.745   | 167.02  |
| 4.2 GHz   | 0.910   | 142.27  | 1.41    | -6.16   | 0.017   | 12.71   | 0.737   | 165.22  |
| 4.4 GHz   | 0.899   | 137.51  | 1.46    | -11.97  | 0.019   | 10.77   | 0.727   | 163.26  |
| 4.6 GHz   | 0.885   | 131.91  | 1.52    | -18.32  | 0.022   | 7.99    | 0.714   | 161.14  |
| 4.8 GHz   | 0.868   | 125.25  | 1.61    | -25.36  | 0.025   | 4.22    | 0.698   | 158.82  |
| 5.0 GHz   | 0.846   | 117.21  | 1.72    | -33.26  | 0.029   | -0.67   | 0.679   | 156.28  |
| 5.2 GHz   | 0.820   | 107.37  | 1.85    | -42.24  | 0.034   | -6.89   | 0.656   | 153.46  |
| 5.4 GHz   | 0.788   | 95.18   | 2.00    | -52.53  | 0.040   | -14.64  | 0.630   | 150.27  |
| 5.6 GHz   | 0.752   | 79.98   | 2.17    | -64.39  | 0.046   | -24.17  | 0.601   | 146.53  |
| 5.8 GHz   | 0.717   | 61.12   | 2.33    | -78.01  | 0.053   | -35.65  | 0.567   | 141.88  |
| 6.0 GHz   | 0.692   | 38.42   | 2.48    | -93.47  | 0.060   | -49.14  | 0.527   | 135.72  |

Download this s-parameter file in ".s2p" format at [http://www.cree.com/products/wireless\\_s-parameters.asp](http://www.cree.com/products/wireless_s-parameters.asp)

# Product Dimensions CGH40090PP (Package Type – 440199)

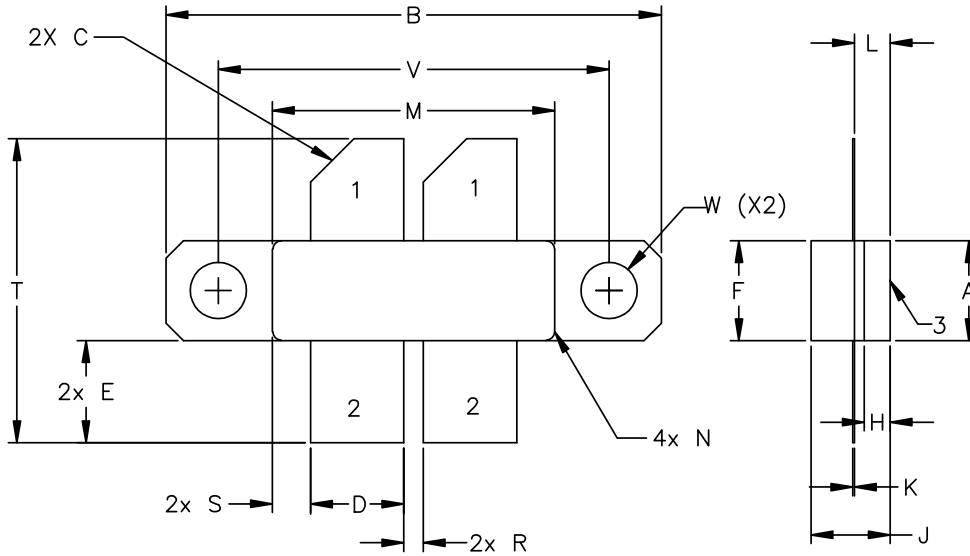

STYLE 1:  
 PIN 1. GATE  
 2. DRAIN  
 3. SOURCE

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ADHESIVE FROM LID MAY EXTEND A MAXIMUM OF 0.020" BEYOND EDGE OF LID.
4. LID MAY BE MISALIGNED TO THE BODY OF PACKAGE BY A MAXIMUM OF 0.008" IN ANY DIRECTION.

| DIM | INCHES    |         | MILLIMETERS |         |
|-----|-----------|---------|-------------|---------|
|     | MIN       | MAX     | MIN         | MAX     |
| A   | 0.225     | 0.235   | 5.72        | 5.97    |
| B   | 1.135     | 1.145   | 28.83       | 29.00   |
| C   | 0.10      | 45° REF | 2.54        | 45° REF |
| D   | 0.210     | 0.220   | 5.33        | 5.59    |
| E   | 0.230     | 0.240   | 5.84        | 6.00    |
| F   | 0.225     | 0.235   | 5.71        | 5.97    |
| H   | 0.055     | 0.065   | 1.40        | 1.65    |
| J   | 0.151     | 0.171   | 3.84        | 4.34    |
| K   | 0.003     | 0.006   | 0.08        | 0.15    |
| L   | 0.075     | 0.085   | 1.91        | 2.16    |
| M   | 0.643     | 0.657   | 16.30       | 16.70   |
| N   | R.020 REF |         | R0.51 REF   |         |
| R   | 0.040     | 0.050   | 1.00        | 1.27    |
| S   | 0.083     | 0.093   | 2.10        | 2.36    |
| T   | 0.680     | 0.720   | 17.30       | 18.30   |
| V   | 0.895     | 0.905   | 22.70       | 22.98   |
| W   | ø.130     |         | ø 3.30      |         |



## Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

For more information, please contact:

Cree, Inc.  
4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.cree.com/wireless](http://www.cree.com/wireless)

Sarah Miller  
Marketing & Export  
Cree, RF Components  
1.919.407.5302

Ryan Baker  
Marketing  
Cree, RF Components  
1.919.407.7816

Tom Dekker  
Sales Director  
Cree, RF Components  
1.919.407.5639

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9