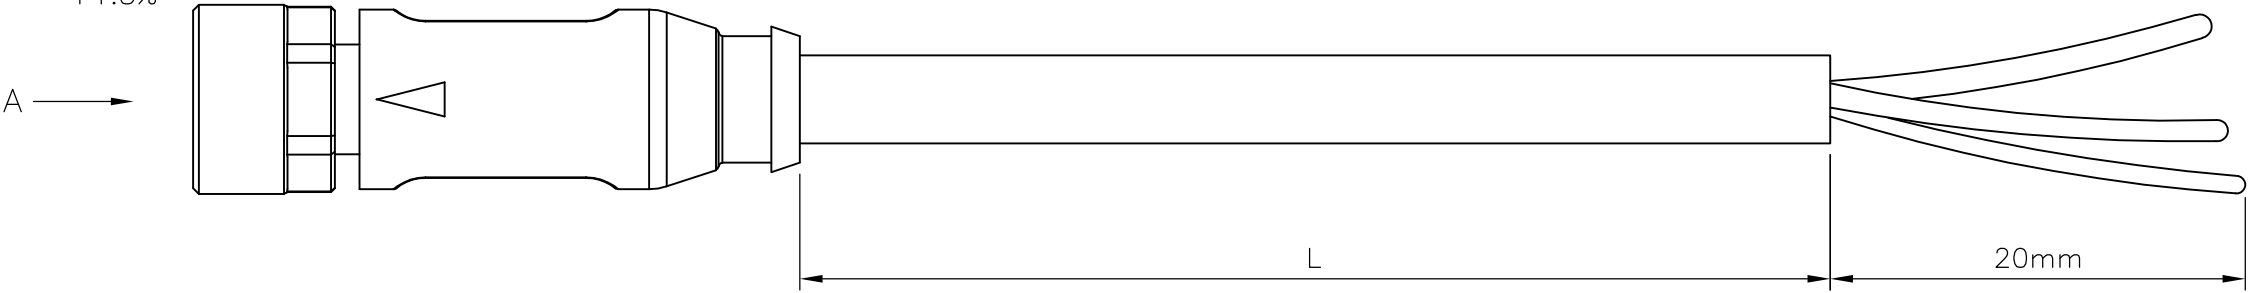



4		3		2		1																																																																																																								
THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS																																																																																																						
© COPYRIGHT — By —		ALL RIGHTS RESERVED.		H		—		P		LTR		DESCRIPTION		DATE		DWN		APVD																																																																																												
NOTES: Tolerances cable lengths: 0m to 0.5m +30mm 0.5m to 1.0m +50mm 1.0m to 3.0m +100mm < 3.0m +1.5%										A		INITIAL RELEASE		12NOV2013		GSK		BvH																																																																																												
										A1		ECR-14-011671		14AUG2014		GSK		BvH																																																																																												
TECHNICAL DATA <table><tr><td>Operating voltage</td><td>max. 60 V AC/DC</td></tr><tr><td>Operating current per contact</td><td>max. 4 A</td></tr><tr><td>Locking of ports</td><td>Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing</td></tr><tr><td>Protection</td><td>IP65 and IP67 when plugged and screwed down (EN 60529)</td></tr></table> PUR CABLE <table><tr><td>No./diameter of wires</td><td>3 x 0.25 mm²</td></tr><tr><td>Wire isolation</td><td>PP (br, bl, bk)</td></tr><tr><td>C-track properties</td><td>5 million</td></tr><tr><td>Jacket</td><td>PUR (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 4.1 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>-40...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>-25...+80 °C</td></tr></table> PVC CABLE <table><tr><td>No./diameter of wires</td><td>3 x 0.25 mm²</td></tr><tr><td>Wire isolation</td><td>PVC (br, bl, bk)</td></tr><tr><td>C-track properties</td><td></td></tr><tr><td>Jacket</td><td>PVC (UL/CSA)</td></tr><tr><td>Outer diameter</td><td>approx. 4.5 mm</td></tr><tr><td>Bend radius (moving)</td><td>10 x outer diameter</td></tr><tr><td>Temperature range (fixed)</td><td>-30...+80 °C</td></tr><tr><td>Temperature range (mobile)</td><td>-5...+80 °C</td></tr></table> 3 pos <table><tr><td>10mtr</td><td rowspan="4">PVC</td><td rowspan="4">Black</td><td>1-2273001-4</td><td>3x22AWG PVC 10.0m</td><td>8</td></tr><tr><td>5mtr</td><td>1-2273001-3</td><td>3x22AWG PVC 5.0m</td><td>7</td></tr><tr><td>3mtr</td><td>1-2273001-2</td><td>3x22AWG PVC 3.0m</td><td>6</td></tr><tr><td>1.5mtr</td><td>1-2273001-1</td><td>3x22AWG PVC 1.5m</td><td>5</td></tr><tr><td rowspan="4">3 pos</td><td>10mtr</td><td rowspan="4">PUR</td><td rowspan="4">Black</td><td>2273001-4</td><td>3x22AWG PUR 10.0m</td><td>4</td></tr><tr><td>5mtr</td><td>2273001-3</td><td>3x22AWG PUR 5.0m</td><td>3</td></tr><tr><td>3mtr</td><td>2273001-2</td><td>3x22AWG PUR 3.0m</td><td>2</td></tr><tr><td>1.5mtr</td><td>2273001-1</td><td>3x22AWG PUR 1.5m</td><td>1</td></tr></table> LENGTH MATERIAL JACKET COLOR TE PN DESCRIPTION ITEM THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm  TOLERANCES UNLESS OTHERWISE SPECIFIED: <table><tr><td>0 PLC</td><td>± -</td></tr><tr><td>1 PLC</td><td>± -</td></tr><tr><td>2 PLC</td><td>± -</td></tr><tr><td>3 PLC</td><td>± -</td></tr><tr><td>4 PLC</td><td>± -</td></tr><tr><td>ANGLES</td><td>± -</td></tr><tr><td>FINISH</td><td>-</td></tr></table> MATERIAL - DWN SATHISH KUMAR .G 12NOV2013 CHK B.VELDHOVEN 12NOV2013 APVD A.VAN ZANDVOORT 12NOV2013 PRODUCT SPEC 108-19483 APPLICATION SPEC 114-32127 WEIGHT - CUSTOMER DRAWING TE Connectivity NAME M8 X 1.0 STRAIGHT SOCKET PIGTAIL SIZE A3 CAGE CODE 00779 DRAWING NO C-2273001 RESTRICTED TO - SCALE NTS SHEET 1 OF 1 REV A1																				Operating voltage	max. 60 V AC/DC	Operating current per contact	max. 4 A	Locking of ports	Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing	Protection	IP65 and IP67 when plugged and screwed down (EN 60529)	No./diameter of wires	3 x 0.25 mm²	Wire isolation	PP (br, bl, bk)	C-track properties	5 million	Jacket	PUR (UL/CSA)	Outer diameter	approx. 4.1 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	-40...+80 °C	Temperature range (mobile)	-25...+80 °C	No./diameter of wires	3 x 0.25 mm²	Wire isolation	PVC (br, bl, bk)	C-track properties		Jacket	PVC (UL/CSA)	Outer diameter	approx. 4.5 mm	Bend radius (moving)	10 x outer diameter	Temperature range (fixed)	-30...+80 °C	Temperature range (mobile)	-5...+80 °C	10mtr	PVC	Black	1-2273001-4	3x22AWG PVC 10.0m	8	5mtr	1-2273001-3	3x22AWG PVC 5.0m	7	3mtr	1-2273001-2	3x22AWG PVC 3.0m	6	1.5mtr	1-2273001-1	3x22AWG PVC 1.5m	5	3 pos	10mtr	PUR	Black	2273001-4	3x22AWG PUR 10.0m	4	5mtr	2273001-3	3x22AWG PUR 5.0m	3	3mtr	2273001-2	3x22AWG PUR 3.0m	2	1.5mtr	2273001-1	3x22AWG PUR 1.5m	1	0 PLC	± -	1 PLC	± -	2 PLC	± -	3 PLC	± -	4 PLC	± -	ANGLES	± -	FINISH	-
Operating voltage	max. 60 V AC/DC																																																																																																													
Operating current per contact	max. 4 A																																																																																																													
Locking of ports	Screw thread M8 x 1 mm (recommended torque 0.4 Nm) self-securing																																																																																																													
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)																																																																																																													
No./diameter of wires	3 x 0.25 mm²																																																																																																													
Wire isolation	PP (br, bl, bk)																																																																																																													
C-track properties	5 million																																																																																																													
Jacket	PUR (UL/CSA)																																																																																																													
Outer diameter	approx. 4.1 mm																																																																																																													
Bend radius (moving)	10 x outer diameter																																																																																																													
Temperature range (fixed)	-40...+80 °C																																																																																																													
Temperature range (mobile)	-25...+80 °C																																																																																																													
No./diameter of wires	3 x 0.25 mm²																																																																																																													
Wire isolation	PVC (br, bl, bk)																																																																																																													
C-track properties																																																																																																														
Jacket	PVC (UL/CSA)																																																																																																													
Outer diameter	approx. 4.5 mm																																																																																																													
Bend radius (moving)	10 x outer diameter																																																																																																													
Temperature range (fixed)	-30...+80 °C																																																																																																													
Temperature range (mobile)	-5...+80 °C																																																																																																													
10mtr	PVC	Black	1-2273001-4	3x22AWG PVC 10.0m	8																																																																																																									
5mtr			1-2273001-3	3x22AWG PVC 5.0m	7																																																																																																									
3mtr			1-2273001-2	3x22AWG PVC 3.0m	6																																																																																																									
1.5mtr			1-2273001-1	3x22AWG PVC 1.5m	5																																																																																																									
3 pos	10mtr	PUR	Black	2273001-4	3x22AWG PUR 10.0m	4																																																																																																								
	5mtr			2273001-3	3x22AWG PUR 5.0m	3																																																																																																								
	3mtr			2273001-2	3x22AWG PUR 3.0m	2																																																																																																								
	1.5mtr			2273001-1	3x22AWG PUR 1.5m	1																																																																																																								
0 PLC	± -																																																																																																													
1 PLC	± -																																																																																																													
2 PLC	± -																																																																																																													
3 PLC	± -																																																																																																													
4 PLC	± -																																																																																																													
ANGLES	± -																																																																																																													
FINISH	-																																																																																																													

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9