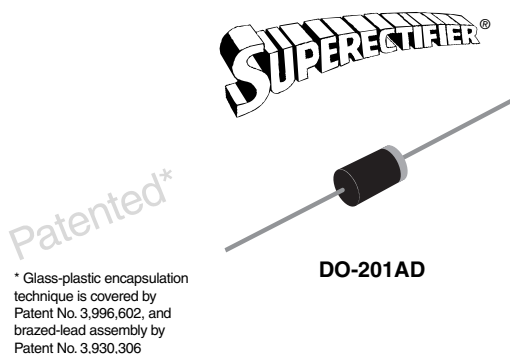


## Glass Passivated Junction Plastic Rectifiers


**DO-201AD**

### FEATURES

- Superectifier structure for high reliability condition
- Cavity-free glass-passivated junction
- Low leakage current, typical  $I_R$  less than  $0.1 \mu A$
- Low forward voltage drop
- High forward surge capability
- Meets environmental standard MIL-S-19500
- Solder dip  $260^\circ C$ , 40 s
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC


**RoHS**  
COMPLIANT

### TYPICAL APPLICATIONS

For use in high voltage rectification of power supply, inverters, converters, freewheeling diodes and snubber circuit application.

### MECHANICAL DATA

**Case:** DO-201AD, molded epoxy over glass body

Epoxy meets UL 94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD22-B102

E3 suffix for consumer grade, meets JESD 201 class 1A whisker test, HE3 suffix for high reliability grade (AEC Q101 qualified), meets JESD 201 class 2 whisker test

**Polarity:** Color band denotes cathode end

### PRIMARY CHARACTERISTICS

|             |                |
|-------------|----------------|
| $I_{F(AV)}$ | 3.0 A          |
| $V_{RRM}$   | 50 V to 1000 V |
| $I_{FSM}$   | 125 A          |
| $I_R$       | $5.0 \mu A$    |
| $V_F$       | 1.2 V, 1.1 V   |
| $T_J$ max.  | $175^\circ C$  |

### MAXIMUM RATINGS ( $T_A = 25^\circ C$ unless otherwise noted)

| PARAMETER                                                                                               | SYMBOL         | GP30A         | GP30B | GP30D | GP30G | GP30J | GP30K | GP30M | UNIT       |
|---------------------------------------------------------------------------------------------------------|----------------|---------------|-------|-------|-------|-------|-------|-------|------------|
| Maximum repetitive peak reverse voltage                                                                 | $V_{RRM}$      | 50            | 100   | 200   | 400   | 600   | 800   | 1000  | V          |
| Maximum RMS voltage                                                                                     | $V_{RMS}$      | 35            | 70    | 140   | 280   | 420   | 560   | 700   | V          |
| Maximum DC blocking voltage                                                                             | $V_{DC}$       | 50            | 100   | 200   | 400   | 600   | 800   | 1000  | V          |
| Maximum average forward rectified current 0.375" (9.5 mm) lead length at $T_A = 55^\circ C$             | $I_{F(AV)}$    | 3.0           |       |       |       |       |       |       | A          |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load                      | $I_{FSM}$      | 125           |       |       |       |       |       |       | A          |
| Maximum full load reverse current, full cycle average 0.375" (9.5 mm) lead length at $T_A = 55^\circ C$ | $I_{R(AV)}$    | 100           |       |       |       |       |       |       | $\mu A$    |
| Operating junction and storage temperature range                                                        | $T_J, T_{STG}$ | - 65 to + 175 |       |       |       |       |       |       | $^\circ C$ |

| ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted) |                                                                             |                                                   |                 |            |       |       |       |       |       |       |      |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------|-----------------|------------|-------|-------|-------|-------|-------|-------|------|
| PARAMETER                                                                  | TEST CONDITIONS                                                             |                                                   | SYMBOL          | GP30A      | GP30B | GP30D | GP30G | GP30J | GP30K | GP30M | UNIT |
| Maximum instantaneous forward voltage                                      | 3.0 A                                                                       |                                                   | V <sub>F</sub>  | 1.2        |       | 1.1   |       |       |       |       | V    |
| Maximum reverse current at rated DC blocking voltage                       |                                                                             | T <sub>A</sub> = 25 °C<br>T <sub>A</sub> = 125 °C | I <sub>R</sub>  | 5.0<br>100 |       |       |       |       |       |       | μA   |
| Maximum reverse recovery time                                              | I <sub>F</sub> = 0.5 A, I <sub>R</sub> = 1.0 V,<br>I <sub>rr</sub> = 0.25 A |                                                   | t <sub>rr</sub> | 5.0        |       |       |       |       |       |       | μs   |
| Typical junction capacitance                                               | 4.0 V, 1 MHz                                                                |                                                   | C <sub>J</sub>  | 40         |       |       |       |       |       |       | pF   |

| THERMAL CHARACTERISTICS (T <sub>A</sub> = 25 °C unless otherwise noted) |                                      |          |       |       |       |       |       |       |      |
|-------------------------------------------------------------------------|--------------------------------------|----------|-------|-------|-------|-------|-------|-------|------|
| PARAMETER                                                               | SYMBOL                               | GP30A    | GP30B | GP30D | GP30G | GP30J | GP30K | GP30M | UNIT |
| Typical thermal resistance <sup>(1)</sup>                               | R <sub>θJA</sub><br>R <sub>θJL</sub> | 20<br>10 |       |       |       |       |       |       | °C/W |

**Note:**

(1) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5 mm) lead length, P.C.B. mounted

| <b>ORDERING INFORMATION</b> (Example) |                 |                        |               |                                  |
|---------------------------------------|-----------------|------------------------|---------------|----------------------------------|
| PREFERRED P/N                         | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE                    |
| GP30J-E3/54                           | 1.28            | 54                     | 1400          | 13" diameter paper tape and reel |
| GP30J-E3/73                           | 1.28            | 73                     | 1000          | Ammo pack packaging              |
| GP30JHE3/54 <sup>(1)</sup>            | 1.28            | 54                     | 1400          | 13" diameter paper tape and reel |
| GP30JHE3/73 <sup>(1)</sup>            | 1.28            | 73                     | 1000          | Ammo pack packaging              |

**Note:**

(1) Automotive grade AEC Q101 qualified

**RATINGS AND CHARACTERISTICS CURVES**

( $T_A = 25\text{ }^{\circ}\text{C}$  unless otherwise noted)

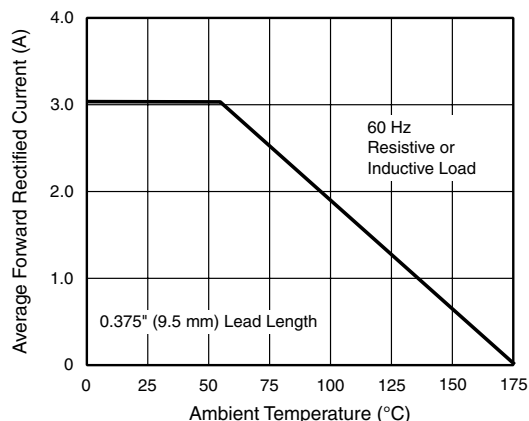


Figure 1. Forward Current Derating Curve

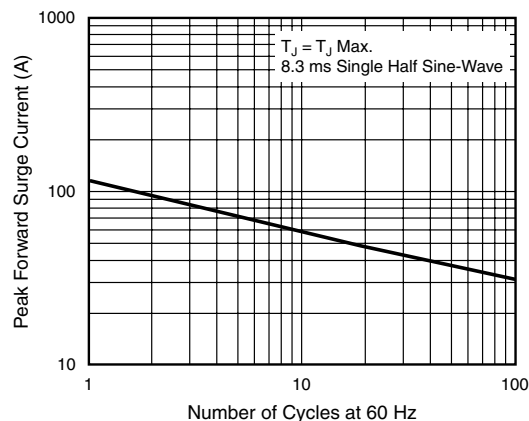


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

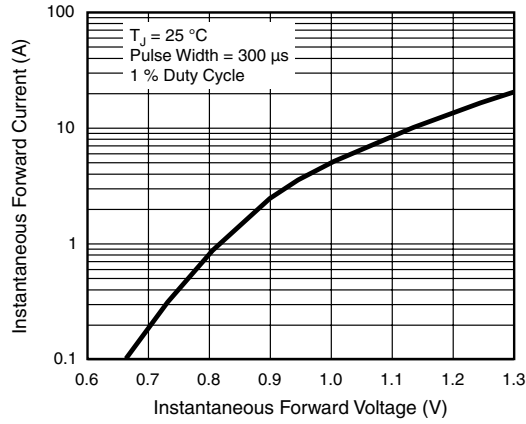


Figure 3. Typical Instantaneous Forward Characteristics

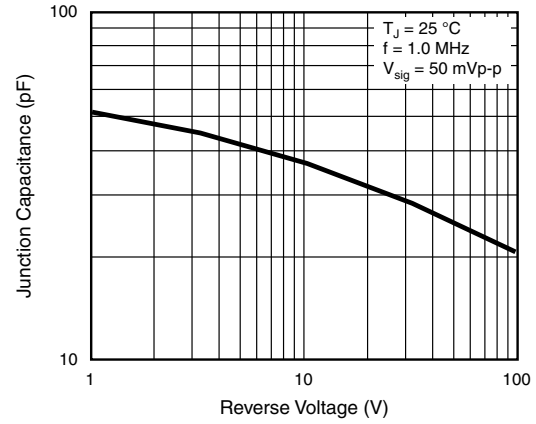


Figure 5. Typical Junction Capacitance


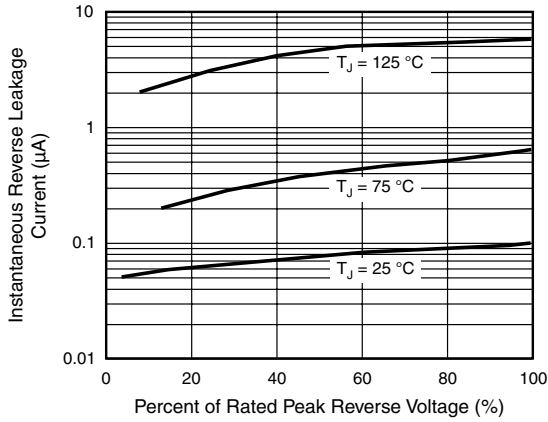


Figure 4. Typical Reverse Characteristics

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)

#### DO-201AD



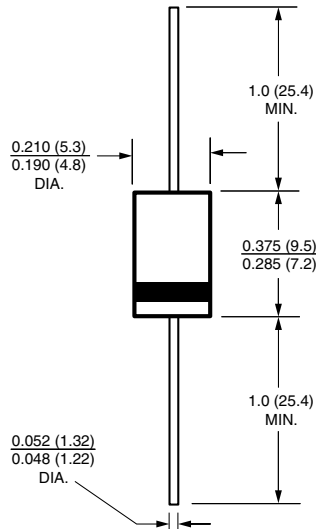

### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9