

LMA100F

LM

A

100

F

-

-

①


②

③

④

⑤

⑥

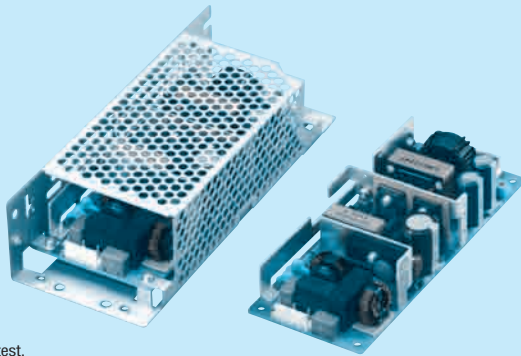Recommended EMI/EMC Filter
NAM-04-101High voltage pulse noise type : NAP series
Low leakage current type : NAM series* The EMI/EMC Filter is recommended
to connect with several devices.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
C : with Coating
G : Low leakage current
H : with the function to be acceptable
to output peak current
J1 : VH(J.S.T.)connector type
R : with Remote ON/OFF
R2 : with Remote ON/OFF
S : with Chassis
SN : with Chassis & cover
P : Setting in the overcurrent
protection rating

Information the Home page is the latest.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit,
so handle the unit with care.

MODEL	LMA100F-24-Y	LMA100F-24-HY
MAX OUTPUT WATTAGE[W]	103.2	103.2 (206.4) *2
DC OUTPUT	24V 4.3A	24V 4.3A (8.6A) *2

SPECIFICATIONS

	MODEL	LMA100F-24-Y	LMA100F-24-HY
INPUT	VOLTAGE[V]	AC85 - 264 1 φ	
	CURRENT[A]	ACIN 100V	1.4typ (Io=100%)
		ACIN 200V	0.7typ (Io=100%)
	FREQUENCY[Hz]	50 / 60 (47 - 63)	
	EFFICIENCY[%]	ACIN 100V	84.0typ (Io=100%)
		ACIN 200V	86.0typ (Io=100%)
	POWER FACTOR	ACIN 100V	0.99typ (Io=100%)
		ACIN 200V	0.95typ (Io=100%)
OUTPUT	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)
		ACIN 200V	30typ (Io=100%) (At cold start) (Ta=25℃)
	LEAKAGE CURRENT[ma]	0.10 / 0.25max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1)	
	VOLTAGE[V]	24	24
	CURRENT[A]	4.3	4.3 (Peak 8.6) *2
	LINE REGULATION[mV] *7	96max	96max
	LOAD REGULATION[mV] *7	150max	150max
	RIPPLE[mVp-p] *3	0 to +50℃	120max
		-10 - 0℃	160max
	RIPPLE NOISE[mVp-p]*3	0 to +50℃	150max
		-10 - 0℃	180max
PROTECTION CIRCUIT AND OTHERS	TEMPERATURE REGULATION[mV]	0 to +50℃	240max
		-10 to +50℃	290max
	DRIFT[mV] *4	96max	96max
	START-UP TIME[ms]	350typ (ACIN 100V, Io=100%)	
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	19.20 to 27.50	19.20 to 27.50
	OUTPUT VOLTAGE SETTING[V]	24.00 to 24.96	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating (works over 101% of peak current at option -H) and recovers automatically	
	OVERVOLTAGE PROTECTION[V]	27.60 to 33.60	27.60 to 33.60
	OPERATING INDICATION	Not provided	
ISOLATION	REMOTE SENSING	Not provided	
	REMOTE ON/OFF	Option (Required external power source.)	
	INPUT-OUTPUT-RC *6	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 2MOOP	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOOP	
	OUTPUT-RC-FG *6	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)	
ENVIRONMENT	OUTPUT-RC *6	AC100V 1minute, Cutoff current = 25mA, DC100V 10MΩ min (At Room Temperature)	
	OPERATING TEMP., HUMID. AND ALTITUDE *5	-10 to +70℃, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS (AT ONIY AC input)	ANSI/AAMI ES60601-1, EN60601-1 3rd	
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B	
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) *8	
OTHERS	CASE SIZE/WEIGHT	62 X 33 X 155mm [2.44 X 1.30 X 6.10 inches] (W X H X D) / 290g max (with chassis & cover : 470g max)	
	COOLING METHOD	Convection *5	

*1 Specification is changed at option, refer to Instruction Manual.

*2 Peak loading for 10sec. And Duty 40% max.

() means peak current. There is a possibility that an internal device
is damaged when the specification is exceeded.*3 This is the value that measured on measuring board with capacitor of
22 μF at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent
to KEISOKU-GIKEN: RM103).*4 Drift is the change in DC output for an eight hour period
after a half-hour warm-up at 25℃, with the input voltage
held constant at the rated input/output.

*5 Derating is required.

*6 Applicable when remote control (optional) is added.

*7 Please contact us about dynamic load and input response.

*8 Please contact us about another class.


* To meet the specifications. Do not operate over-loaded condition.

* Parallel operation is not possible.

* Derating is required when operated with chassis and cover.

* Sound noise may be generated by power supply in case of pulse load.


Block diagram

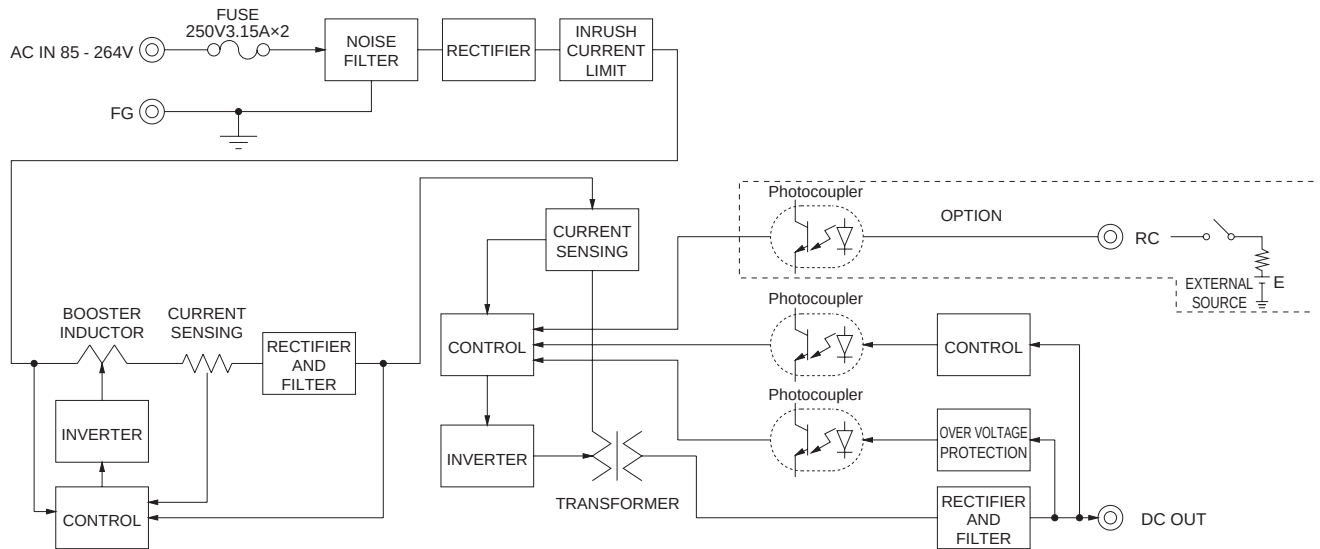


External view

※ External size of option is different from standard model.

Standard type

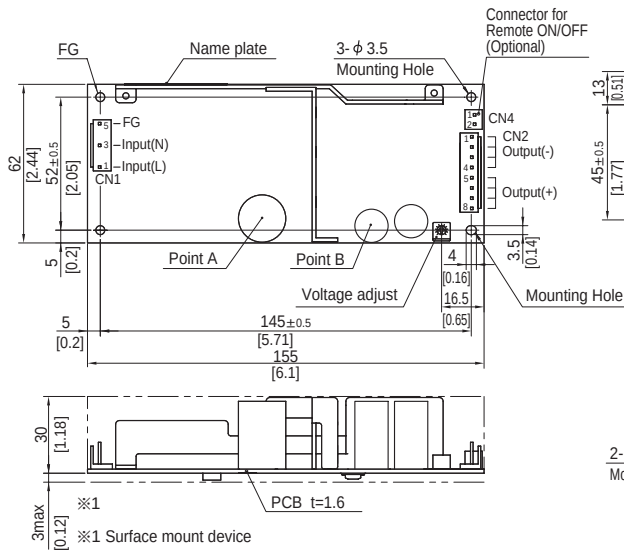

Chassis and cover type

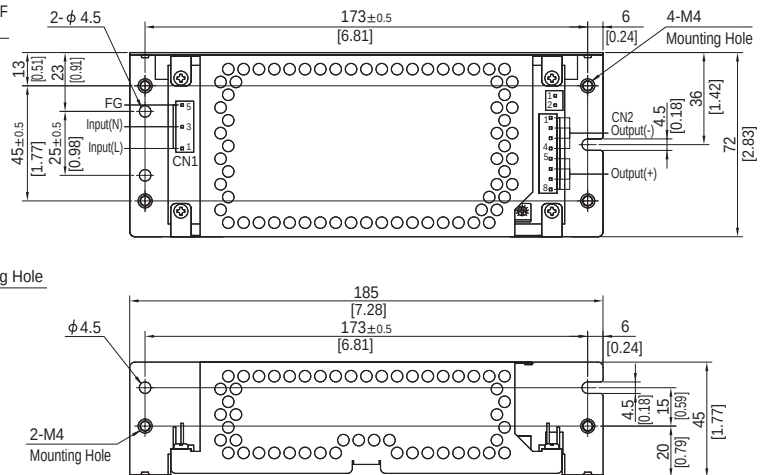

- ※ 4 Mounting holes are existing.
- ※ The back side of P.C.B. of the power supply is assembled some SMDs.
Be attention not to bump against the attached area by vibration.
- ※ Use the spacer of 8mm length or more regarding insulation.
And do not use press-fitting bush.
- ※ Point A, Point B are thermometry points.

I/O Connector	Mating connector	Terminal	
CN1	1-1123724-3	Chain	1123721-1
		Loose	1318912-1
CN2	1-1123723-8	Chain	1123721-1
		Loose	1318912-1

(Mfr:Tyco Electronics)

- ※ I/O Connector is Mfr. Tyco Electronics
- ※ Option:-J1:VH(J.S.T) connector type.

<PIN CONNECTION>

Pin No.	Input
1	AC(L)
2	
3	AC(N)
4	
5	FG

Pin No.	Output
1 to 4	-V
5 to 8	+V

- ※ Keep drawing current per pin below 5A for CN2.

- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 290g max (with chassis & cover : 470g max)
- ※ PCB material : CEM3
- ※ Optional chassis and cover material : Electric galvanizing steel board.
- ※ Dimensions in mm, [] =inches
- ※ Mounting torque (Mounting hole of chassis) : $1.5N \cdot m$ (16kgf $\cdot$ cm) max

Connector type

CN4 Option (Mfr:J.S.T)

PIN No.	Contents
1	RC(+)
2	RC(-)

Barrier strip type

Model B2B-XH-A
Mating Connector (Terminal)
XHP-2
(BXH-001T-P0.6
or SXH-001T-P0.6)

LMA150F

LM

A

150

F

-

-

①


②

③

④

⑤

⑥

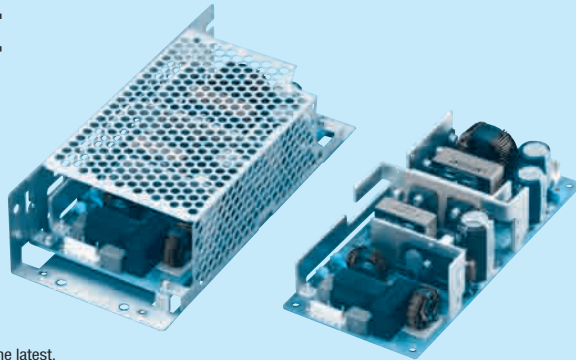Recommended EMI/EMC Filter
NAM-04-101High voltage pulse noise type : NAP series
Low leakage current type : NAM series* The EMI/EMC Filter is recommended
to connect with several devices.

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
C : with Coating
G : Low leakage current
H : with the function to be acceptable
to output peak current
J1 : VH(J.S.T.)connector type
R : with Remote ON/OFF
R2 : with Remote ON/OFF
S : with Chassis
SN : with Chassis & cover
P : Setting in the overcurrent
protection rating

Information the Home page is the latest.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit,
so handle the unit with care.

MODEL	LMA150F-24-Y	LMA150F-24-HY
MAX OUTPUT WATTAGE[W]	151.2	151.2 (302.4) *2
DC OUTPUT	24V 6.3A	24V 6.3A (12.6A) *2

SPECIFICATIONS

	MODEL	LMA150F-24-Y	LMA150F-24-HY
INPUT	VOLTAGE[V]	AC85 - 264 1 φ	
	CURRENT[A]	ACIN 100V	2.0typ (Io=100%)
		ACIN 200V	1.0typ (Io=100%)
	FREQUENCY[Hz]	50 / 60 (47 - 63)	
	EFFICIENCY[%]	ACIN 100V	85.0typ (Io=100%)
		ACIN 200V	87.0typ (Io=100%)
	POWER FACTOR	ACIN 100V	0.99typ (Io=100%)
		ACIN 200V	0.95typ (Io=100%)
OUTPUT	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)
		ACIN 200V	30typ (Io=100%) (At cold start) (Ta=25℃)
	LEAKAGE CURRENT[ma]	0.10 / 0.25max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1)	
	VOLTAGE[V]	24	24
	CURRENT[A]	6.3	6.3 (Peak 12.6) *2
	LINE REGULATION[mV] *7	96max	96max
	LOAD REGULATION[mV] *7	150max	150max
	RIPPLE[mVp-p] *3	0 to +50℃	120max
		-10 - 0℃	160max
	RIPPLE NOISE[mVp-p] *3	0 to +50℃	150max
		-10 - 0℃	180max
PROTECTION CIRCUIT AND OTHERS	TEMPERATURE REGULATION[mV]	0 to +50℃	240max
	TEMPERATURE REGULATION[mV]	-10 to +50℃	290max
		-10 to +50℃	290max
	DRIFT[mV] *4	96max	96max
	START-UP TIME[ms]	350typ (ACIN 100V, Io=100%)	
	HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	19.20 to 27.50	19.20 to 27.50
	OUTPUT VOLTAGE SETTING[V]	24.00 to 24.96	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating (works over 101% of peak current at option -H) and recovers automatically	
	OVERVOLTAGE PROTECTION[V]	27.60 to 33.60	27.60 to 33.60
ISOLATION	OPERATING INDICATION	Not provided	
	REMOTE SENSING	Not provided	
	REMOTE ON/OFF	Option (Required external power source.)	
	INPUT-OUTPUT-RC *6	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 2MOOP	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOOP	
ENVIRONMENT	OUTPUT-RC-FG *6	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)	
	OUTPUT-RC	AC100V 1minute, Cutoff current = 25mA, DC100V 10MΩ min (At Room Temperature)	
	OPERATING TEMP., HUMID. AND ALTITUDE *5	-10 to +70℃, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max	
SAFETY AND NOISE REGULATIONS	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis	
	AGENCY APPROVALS (AT ONIY AC input)	ANSI/AAMI ES60601-1, EN60601-1 3rd	
OTHERS	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B	
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) *8	
	CASE SIZE/WEIGHT	75 X 36.5 X 160mm [2.95 X 1.44 X 6.30 inches] (W X H X D) / 370g max (with chassis & cover : 600g max)	
	COOLING METHOD	Convection *5	

*1 Specification is changed at option, refer to Instruction Manual.

*2 Peak loading for 10sec. And Duty 40% max.

() means peak current. There is a possibility that an internal device is damaged when the specification is exceeded.

*3 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.
Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).

*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃, with the input voltage held constant at the rated input/output.

*5 Derating is required.

*6 Applicable when remote control (optional) is added.

*7 Please contact us about dynamic load and input response.

*8 Please contact us about another class.


* To meet the specifications. Do not operate over-loaded condition.

* Parallel operation is not possible.

* Derating is required when operated with chassis and cover.

* Sound noise may be generated by power supply in case of pulse load.


Block diagram

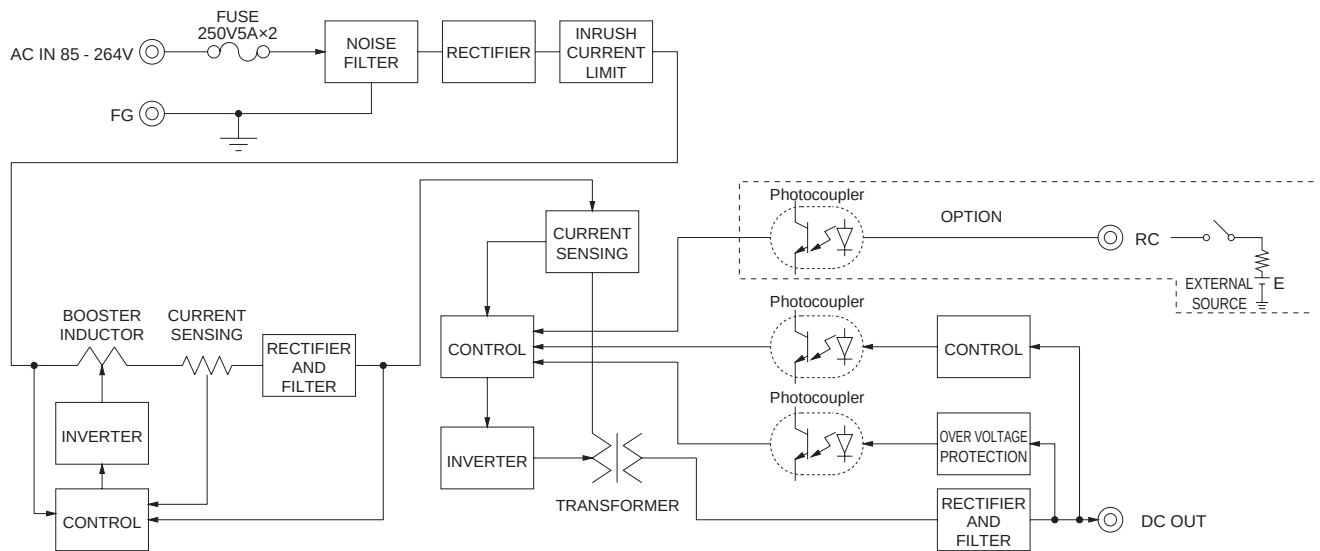


External view

※ External size of option is different from standard model.

Standard type

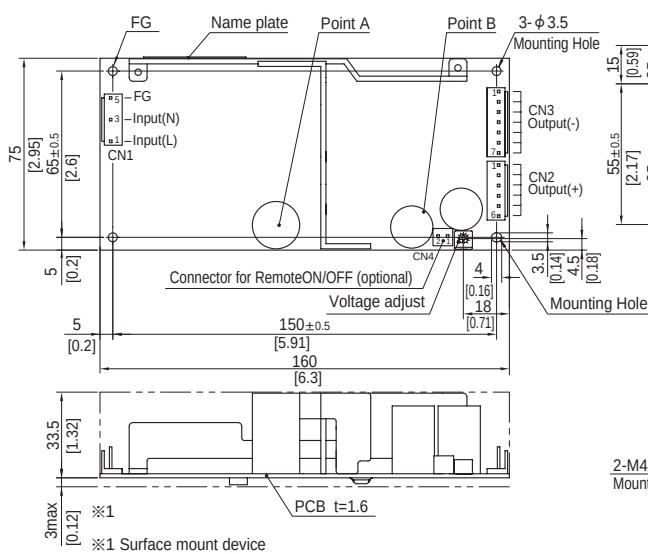

Chassis and cover type

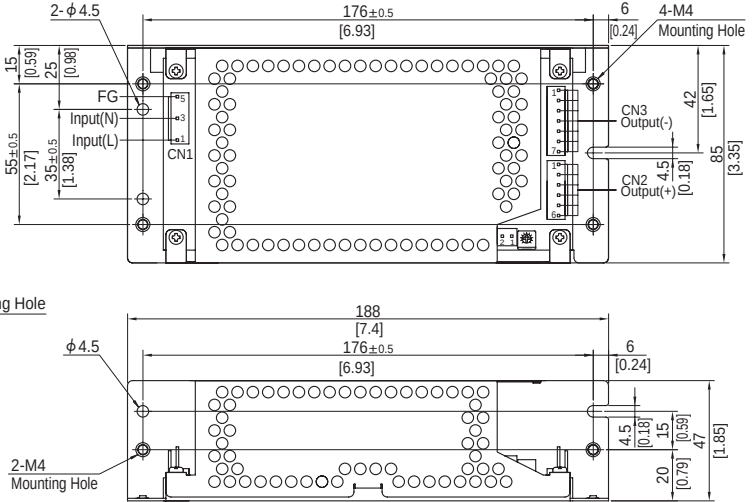

- ※ 4 Mounting holes are existing.
- ※ The back side of P.C.B. of the power supply is assembled some SMDs.
- Be attention not to bump against the attached area by vibration.
- ※ Use the spacer of 8mm length or more regarding insulation.
- And do not use press-fitting bush.
- ※ Point A, Point B are thermometry points.

I/O Connector	Mating connector	Terminal
CN1	1-1123724-3	1-1123722-5
CN2	1-1123723-6	1-1123722-6
CN3	1-1123723-7	1-1123722-7

(Mfr: Tyco Electronics)

- ※ I/O Connector is Mfr. Tyco Electronics
- ※ Option: -J1:VH(J.S.T) connector type.

<PIN CONNECTION>

CN1	CN2	CN3
Pin No.	Pin No.	Pin No.
1	1 to 6	1 to 7
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		
17		
18		
19		
20		
21		
22		
23		
24		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		
49		
50		
51		
52		
53		
54		
55		
56		
57		
58		
59		
60		
61		
62		
63		
64		
65		
66		
67		
68		
69		
70		
71		
72		
73		
74		
75		
76		
77		
78		
79		
80		
81		
82		
83		
84		
85		
86		
87		
88		
89		
90		
91		
92		
93		
94		
95		
96		
97		
98		
99		
100		

※ Keep drawing current per pin below 5A for CN2, CN3.

- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 370g max (with chassis & cover : 600g max)
- ※ PCB material : CEM3
- ※ Optional chassis and cover material : Electric galvanizing steel board.
- ※ Dimensions in mm, [] = inches
- ※ Mounting torque (Mounting hole of chassis) : 1.5N · m (16kgf · cm) max

Connector type

CN4 Option (Mfr: J.S.T)

PIN No.	Contents
1	RC(+)
2	RC(-)

Barrier strip type

Model B2B-XH-A
Mating Connector (Terminal)
XHP-2
(BXH-001T-P0.6
or SXH-001T-P0.6)

LMA240F

LM

A

240

F

-

-

①


②

③

④

⑤

⑥

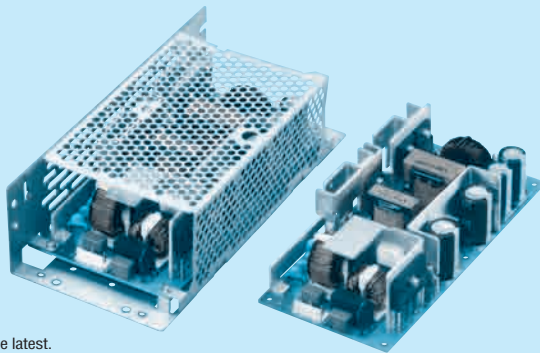

Recommended EMI/EMC Filter
NAM-06-101



High voltage pulse noise type : NAP series
Low leakage current type : NAM series

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional *1
C : with Coating
G : Low leakage current
H : with the function to be acceptable to output peak current
J1 : VH(J.S.T.)connector type
R : with Remote ON/OFF
R2 : with Remote ON/OFF
S : with Chassis
SN : with Chassis & cover
P : Setting in the overcurrent protection rating

Information the Home page is the latest.

This power supply is manufactured by SMD technology. The stress to P.C.B like twisting or bending causes the defect of the unit, so handle the unit with care.

MODEL	LMA240F-24-Y	LMA240F-24-HY
MAX OUTPUT WATTAGE[W]	300	300 (480) *2
DC OUTPUT	Convection 24V 10A	24V 10A (20A) *2
	Forced air 24V 12.5A	24V 12.5A (20A) *2

SPECIFICATIONS

	MODEL	LMA240F-24-Y	LMA240F-24-HY
INPUT	VOLTAGE[V]	AC85 - 264 1 φ	
	CURRENT[A]	ACIN 100V 3.9typ (Io=100%)	
		ACIN 200V 1.8typ (Io=100%)	
	FREQUENCY[Hz]	50 / 60 (47 - 63)	
	EFFICIENCY[%]	ACIN 100V 86.0typ (Io=100%)	86.0typ (Io=100%)
		ACIN 200V 88.0typ (Io=100%)	88.0typ (Io=100%)
	POWER FACTOR	ACIN 100V 0.99typ (Io=100%)	
		ACIN 200V 0.95typ (Io=100%)	
OUTPUT	INRUSH CURRENT[A]	ACIN 100V 15 / 30typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3 sec. to re-start)	
		ACIN 200V 30 / 30typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3 sec. to re-start)	
	LEAKAGE CURRENT[ma]	0.15 / 0.40max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60601-1)	
	VOLTAGE[V]	24	24
	CURRENT[A]	Convection 10	10 (Peak 20) *2
		Forced air 12.5	12.5 (Peak 20) *2
	LINE REGULATION[mV] *7	96max	
	LOAD REGULATION[mV] *7	150max	
	RIPPLE[mVp-p] *3	0 to +50°C 120max	120max
		-10 - 0°C 160max	160max
	RIPPLE NOISE[mVp-p] *3	0 to +50°C 150max	150max
		-10 - 0°C 180max	180max
PROTECTION CIRCUIT AND OTHERS	TEMPERATURE REGULATION[mV]	0 to +50°C 240max	240max
		-10 to +50°C 290max	290max
	DRIFT[mV] *4	96max	
	START-UP TIME[ms]	350typ (ACIN 100V, Io=100%)	
	HOLD-UP TIME[ms] *9	20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]	19.20 to 27.50	19.20 to 27.50
	OUTPUT VOLTAGE SETTING[V]	24.00 to 24.96	24.00 to 24.96
	OVERCURRENT PROTECTION	Works over 105% of rating (works over 101% of peak current at option -H) and recovers automatically	
	OVERVOLTAGE PROTECTION[V]	27.60 to 33.60	27.60 to 33.60
	OPERATING INDICATION	Not provided	
ISOLATION	REMOTE SENSING	Not provided	
	REMOTE ON/OFF	Option (Required external power source.)	
	INPUT-OUTPUT-RC *6	AC4,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 2MOOP	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature) 1MOOP	
	OUTPUT-RC-FG *6	AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)	
ENVIRONMENT	OUTPUT-RC *6	AC100V 1minute, Cutoff current = 25mA, DC100V 10MΩ min (At Room Temperature)	
	OPERATING TEMP., HUMID. AND ALTITUDE *5	-10 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis	
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS (AT ONIY AC input)	ANSI/AAMI ES60601-1, EN60601-1 3rd	
	CONDUCTED NOISE	Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B	
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Class A) *8	
OTHERS	CASE SIZE/WEIGHT	84 X 46 X 180mm [3.31 X 1.81 X 7.09 inches] (W X H X D) / 540g max (with chassis & cover : 860g max)	
	COOLING METHOD	Convection / Forced air *5	

*1 Specification is changed at option, refer to Instruction Manual.

*2 Peak loading for 10sec. And Duty 40% max.

() means peak current. There is a possibility that an internal device is damaged when the specification is exceeded.

*3 This is the value that measured on measuring board with capacitor of 22 μF at 150mm from output terminal.

Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).

*4 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*5 Derating is required.

*6 Applicable when remote control (optional) is added.

*7 Please contact us about dynamic load and input response.

*8 Please contact us about another class.


* To meet the specifications. Do not operate over-loaded condition.

* Parallel operation is not possible.

* Derating is required when operated with chassis and cover.

* Sound noise may be generated by power supply in case of pulse load.


Block diagram

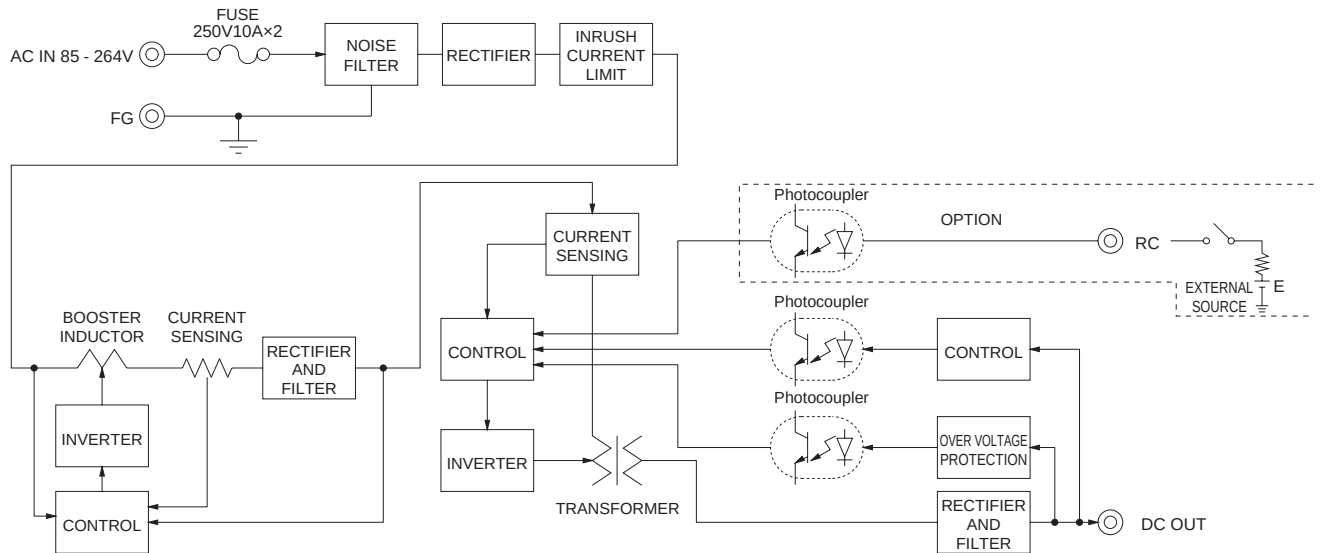


External view

※ External size of option is different from standard model.

Standard type

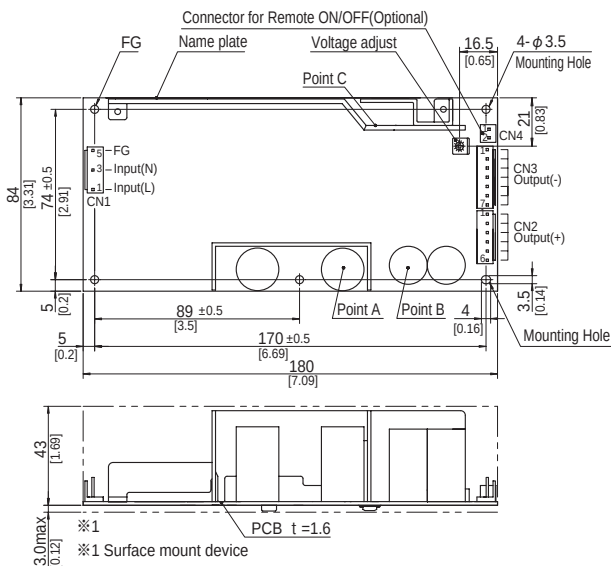

Chassis and cover type

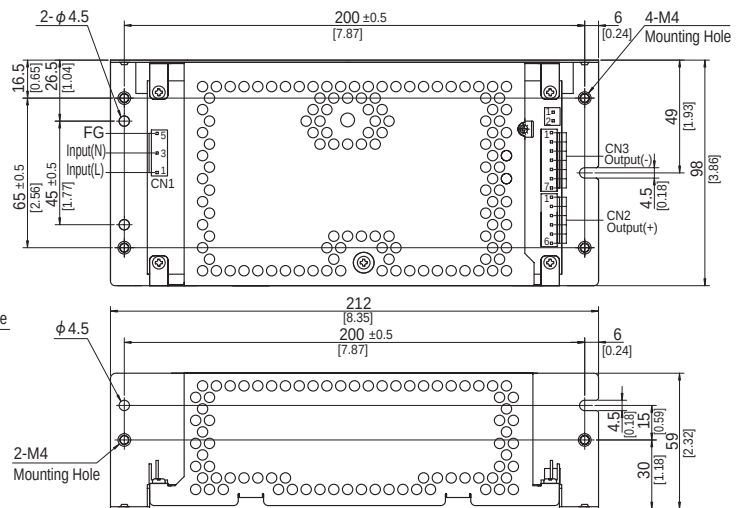

- ※ 5 Mounting holes are existing.
- ※ The back side of P.C.B. of the power supply is assembled some SMDs.
Be attention not to bump against the attached area by vibration.
- ※ Use the spacer of 8mm length or more regarding insulation.
And do not use press-fitting bush.
- ※ Point A, Point B, Point C are thermometry points.

<PIN CONNECTION>

I/O Connector		Mating connector	Terminal	
CN1	1-1123724-3	1-1123722-5	Chain	1123721-1
			Loose	1318912-1
CN2	1-1123723-6	1-1123722-6	Chain	1123721-1
			Loose	1318912-1
CN3	1-1123723-7	1-1123722-7	Chain	1123721-1
			Loose	1318912-1

(Mfr:Tyco Electronics)

Three truth tables are shown, each with a title (CN1, CN2, CN3) and a table structure.

CN1

Pin No.	Input
1	AC(L)
2	
3	AC(N)
4	
5	FG

CN2

Pin No.	Output
1 to 6	+V

CN3

Pin No.	Output
1 to 7	-V

- ※ Keep drawing current per pin below 5A for CN2,CN3.
- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 540g max (with chassis & cover : 860g max)
- ※ PCB material : CEM3
- ※ Optional chassis and cover material : Electric galvanizing steel board.
- ※ Dimensions in mm, [] =inches
- ※ Mounting torque (Mounting hole of chassis) : $1.5\text{N} \cdot \text{m}$ (16kgf $\cdot$ cm) max

Connector type

PIN No.	Contents
1	RC(+)
2	RC(-)

Barrier strip type

Model B2B-XH-A
Mating Connector (Terminal)
XHP-2
(BXH-001T-P0.6
or SXH-001T-P0.6)

- ※ I/O Connector is Mfr. Tyco Electronics
※ Option:-J1:VH(J.S.T) connector type.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[LMA100F-24-HY](#) [LMA240F-24-HY](#) [LMA240F-24-Y](#) [LMA150F-24-HY](#) [LMA100F-24-Y](#) [LMA150F-24-Y](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9