

Thin-Film Directional Couplers



CP0603 High Directivity LGA Termination

GENERAL DESCRIPTION

ITF (Integrated Thin-Film) TECHNOLOGY

The ITF LGA Coupler is based on thin-film multilayer technology. The technology provides a miniature part with excellent high frequency performance and rugged construction for reliable automatic assembly. The ITF Coupler is offered in a variety of frequency bands compatible with various types of high frequency wireless systems.

APPLICATIONS


- Mobile Communications
- Satellite TV Receivers
- GPS
- Vehicle Location Systems
- Wireless LAN's

FEATURES

- Inherent Low Profile
- Self Alignment during Reflow
- Excellent Solderability
- Low Parasitics
- Better Heat Dissipation
- Operating/Storage Temp -40°C to +85°C
- Power Rating 3W RF Cont

DIMENSIONS: (Bottom View)

millimeters (inches)

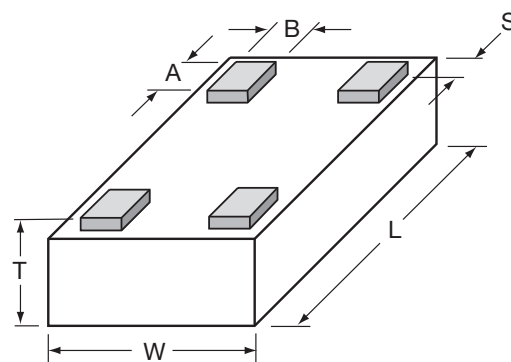

L	1.60±0.10 (0.063±0.004)
W	0.84±0.10 (0.033±0.004)
T	0.60±0.10 (0.024±0.004)

A	0.25±0.05 (0.010±0.002)
B	0.20±0.05 (0.008±0.002)
S	0.05±0.05 (0.002±0.002)

HOW TO ORDER

CP T Style Directional Coupler	0603 T Size 0603	X T Type	**** T Frequency (MHz)	X T Sub Type	N T Termination Code L = LGA Sn90, Pb10 **N = LGA Sn100	TR T Packaging Code TR = Tape and Reel
---	---	------------------------------	---	----------------------------------	---	---

**RoHS compliant

QUALITY INSPECTION


Finished parts are 100% tested for electrical parameters and visual characteristics. Each production lot is evaluated on a sample basis for:

- Static Humidity: 85°C, 85% RH, 160 hours
- Endurance: 125°C, I_R, 4 hours


TERMINATION

Sn90Pb10 or Lead-Free Sn100 Nickel/Solder coating compatible with automatic soldering technologies: reflow, wave soldering, vapor phase and manual.

ORIENTATION IN TAPE

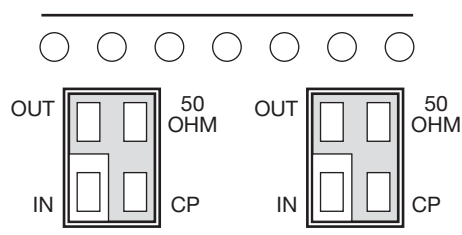

TERMINALS (Top View)

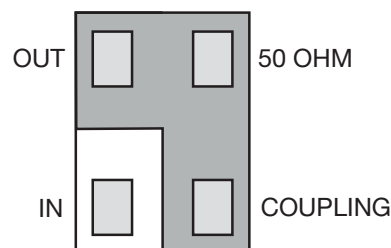


Not RoHS Compliant



For RoHS compliant products, please select correct termination style.

Recommended Pad Layout Dimensions

mm (inches)

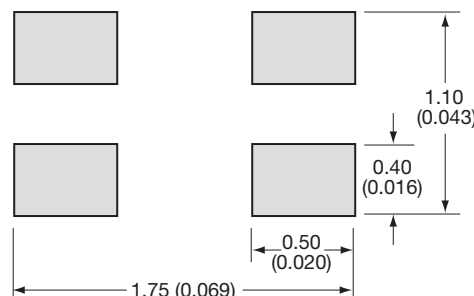

*The recommended distance to the PCB Ground Plane is 0.254mm (0.010")


Thin-Film Directional Couplers



CP0603 High Directivity LGA Termination

COUPLER TYPE SELECTION GRAPH

Coupling vs. Frequency

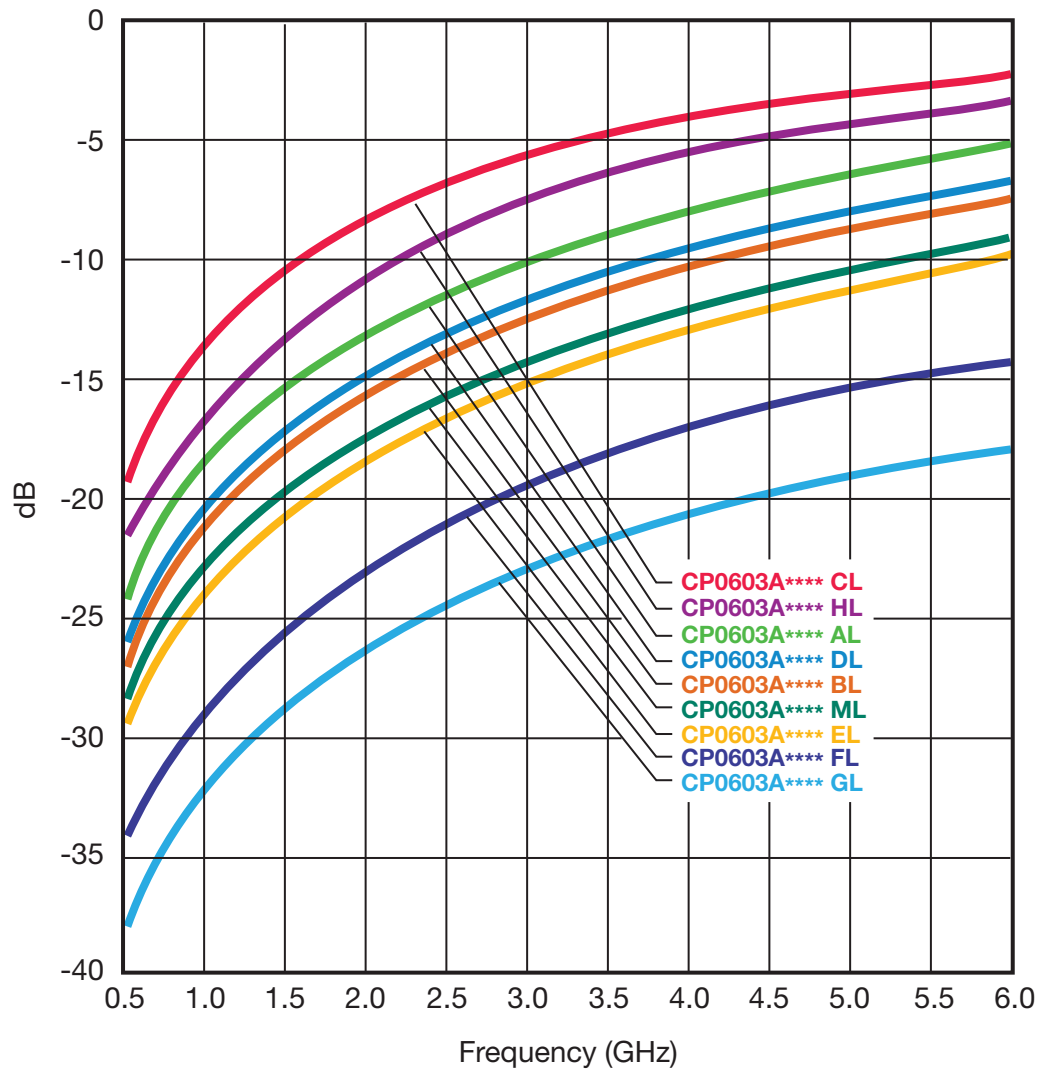

Intermediate coupling factors are readily available.
Please contact factory.

Thin-Film Directional Couplers



CP0603 High Directivity LGA Type

Coupler P/N CP0603AxxxxAL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0603A0836AL	824 - 849	20.0	0.25	28	22
	CP0603A0881AL	869 - 894	19.7			
GSM	CP0603A0902AL	890 - 915	19.4			
	CP0603A0947AL	935 - 960	19.0			
E-GSM	CP0603A0897AL	880 - 915	19.4		27	
	CP0603A0942AL	925 - 960	19.0			
PDC	CP0603A1441AL	1429 - 1453	15.5	0.40	24	
PCN	CP0603A1747AL	1710 - 1785	14.0	0.50	22	
	CP0603A1842AL	1805 - 1880	13.5			
PCS	CP0603A1880AL	1850 - 1910	13.2	0.55	21	
	CP0603A1960AL	1930 - 1990	13.0			
PHP	CP0603A1907AL	1895 - 1920	13.2	0.50	22	
DECT	CP0603A1890AL	1880 - 1900				
Wireless LAN	CP0603A2442AL	2400 - 2484	11.5	0.75	20	

CP0603AxxxxALTR



Coupler P/N CP0603AxxxxBL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]		
AMPS	CP0603A0836BL	824 - 849	23.0	0.20	31	20		
	CP0603A0881BL	869 - 894	22.7					
GSM	CP0603A0902BL	890 - 915	22.5					
	CP0603A0947BL	935 - 960	22.0					
E-GSM	CP0603A0897BL	880 - 915	22.5	0.25	30			
	CP0603A0942BL	925 - 960	22.0					
PDC	CP0603A1441BL	1429 - 1453	18.5				0.25	25
PCN	CP0603A1747BL	1710 - 1785	17.0					
	CP0603A1842BL	1805 - 1880	16.4					
PCS	CP0603A1880BL	1850 - 1910	16.2					
	CP0603A1960BL	1930 - 1990	16.0					
PHP	CP0603A1907BL	1895 - 1920	16.1	0.35	23			
DECT	CP0603A1890BL	1880 - 1900	16.2					
Wireless LAN	CP0603A2442BL	2400 - 2484	14.2	0.35	23			

CP0603AxxxxBLTR



Coupler P/N CP0603AxxxxCL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]	
AMPS	CP0603A0836CL	824 - 849	15.2	0.35	23	23	
	CP0603A0881CL	869 - 894	15.0				
GSM	CP0603A0902CL	890 - 915	14.7	0.40	22		
	CP0603A0947CL	935 - 960	14.3				
E-GSM	CP0603A0897CL	880 - 915	14.7	0.35	23		
	CP0603A0942CL	925 - 960	14.3				0.40
PDC	CP0603A1441CL	1429 - 1453	11.0	0.70	19		
PCN	CP0603A1747CL	1710 - 1785	9.5	0.80	18		21
	CP0603A1842CL	1805 - 1880	9.0				
PCS	CP0603A1880CL	1850 - 1910	8.8	0.90	17		
	CP0603A1960CL	1930 - 1990	8.5				
PHP	CP0603A1907CL	1895 - 1920	8.8	0.90			
DECT	CP0603A1890CL	1880 - 1900					
Wireless LAN	CP0603A2442CL	2400 - 2484	7.0	1.40	15		

CP0603AxxxxCLTR



Important: Couplers can be used at any frequency within the indicated range.

Thin-Film Directional Couplers

CP0603 High Directivity LGA Type

Coupler P/N CP0603AxxxxDL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0603A0836DL	824 - 849	22.0	0.25	31	22
	CP0603A0881DL	869 - 894	21.8			
GSM	CP0603A0902DL	890 - 915	21.3		0.30	
	CP0603A0947DL	935 - 960	21.0			
E-GSM	CP0603A0897DL	880 - 915	21.3	0.25		
	CP0603A0942DL	925 - 960	21.0	0.30		
PDC	CP0603A1441DL	1429 - 1453	17.7	0.40	27	21
PCN	CP0603A1747DL	1710 - 1785	16.0		25	
	CP0603A1842DL	1805 - 1880	15.4			
PCS	CP0603A1880DL	1850 - 1910	15.2		24	
	CP0603A1960DL	1930 - 1990	15.0			
PHP	CP0603A1907DL	1895 - 1920	15.2			
DECT	CP0603A1890DL	1880 - 1900				
Wireless LAN	CP0603A2442DL	2400 - 2484	13.3	0.55	22	

CP0603AxxxxDLTR



Coupler P/N CP0603AxxxxEL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]	
AMPS	CP0603A0836EL	824 - 849	25.8	0.20	32	21	
	CP0603A0881EL	869 - 894	25.3				
GSM	CP0603A0902EL	890 - 915	25.0		31		
	CP0603A0947EL	935 - 960	24.7				
E-GSM	CP0603A0897EL	880 - 915	25.0		32		
	CP0603A0942EL	925 - 960	24.7				31
PDC	CP0603A1441EL	1429 - 1453	21.0	0.25	28		
PCN	CP0603A1747EL	1710 - 1785	19.5	0.30	26		
	CP0603A1842EL	1805 - 1880	19.0				
PCS	CP0603A1880EL	1850 - 1910	18.8				0.40
	CP0603A1960EL	1930 - 1990	18.5				
PHP	CP0603A1907EL	1895 - 1920	18.7				
DECT	CP0603A1890EL	1880 - 1900	18.8				
Wireless LAN	CP0603A2442EL	2400 - 2484	17.0				


CP0603AxxxxELTR



Coupler P/N CP0603AxxxxFL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0603A0836FL	824 - 849	31.2	0.20	28	12
	CP0603A0881FL	869 - 894	30.8			
GSM	CP0603A0902FL	890 - 915	30.5		27	
	CP0603A0947FL	935 - 960	30.2			
E-GSM	CP0603A0897FL	880 - 915	30.5		23	
	CP0603A0942FL	925 - 960	30.2			
PDC	CP0603A1441FL	1429 - 1453	27.0	0.25	21	
PCN	CP0603A1747FL	1710 - 1785	25.0			
	CP0603A1842FL	1805 - 1880	24.5		20	
PCS	CP0603A1880FL	1850 - 1910	24.3			
	CP0603A1960FL	1930 - 1990	24.0		21	
PHP	CP0603A1907FL	1895 - 1920	24.2			
DECT	CP0603A1890FL	1880 - 1900	24.2		20	
Wireless LAN	CP0603A2442FL	2400 - 2484	21.5			

CP0603AxxxxFLTR

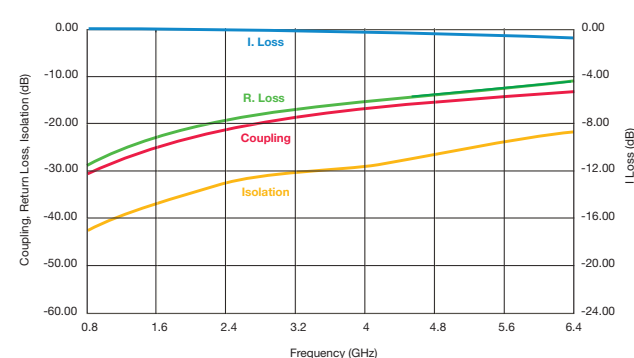

Important: Couplers can be used at any frequency within the indicated range.

Thin-Film Directional Couplers



CP0603 High Directivity LGA Type

Coupler P/N CP0603AxxxxGL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0603A0836GL CP0603A0881GL	824 - 849 869 - 894	34.2 33.8	0.20	39	13
GSM	CP0603A0902GL CP0603A0947GL	890 - 915 935 - 960	33.6 33.2		38 39	
E-GSM	CP0603A0897GL CP0603A0942GL	880 - 915 925 - 960	33.6 33.2		39 38	
PDC	CP0603A1441GL	1429 - 1453	30.0	0.25	34	
PCN	CP0603A1747GL CP0603A1842GL	1710 - 1785 1805 - 1880	28.5 28.0		32	
PCS	CP0603A1880GL CP0603A1960GL	1850 - 1910 1930 - 1990	27.7 27.5		31	
PHP	CP0603A1907GL	1895 - 1920	27.6		32	
DECT	CP0603A1890GL	1880 - 1900	27.7		31	
Wireless LAN	CP0603A2442GL	2400 - 2484	25.5		31	

CP0603AxxxxGLTR



Coupler P/N CP0603AxxxxHL

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0603A0836HL CP0603A0881HL	824 - 849 869 - 894	17.3 17.0	0.30	26	26
GSM	CP0603A0902HL CP0603A0947HL	890 - 915 935 - 960	16.7 16.3	0.35	25	
E-GSM	CP0603A0897HL CP0603A0942HL	880 - 915 925 - 960	17.0 16.3		25	
PDC	CP0603A1441HL	1429 - 1453	13.0	0.55	22	24
PCN	CP0603A1747HL CP0603A1842HL	1710 - 1785 1805 - 1880	11.4 11.0	0.75	20	
PCS	CP0603A1880HL CP0603A1960HL	1850 - 1910 1930 - 1990	10.8 10.5		19	
PHP	CP0603A1907HL	1895 - 1920	10.7		19	
DECT	CP0603A1890HL	1880 - 1900	10.8		19	
Wireless LAN	CP0603A2442HL	2400 - 2484	8.8	1.00	17	

CP0603AxxxxHLTR



Coupler P/N CP0603AxxxxML

Application	P/N Examples	Frequency Band [MHz]	Coupling [dB]	I. Loss max. [dB]	Return Loss [dB]	Directivity [dB]
AMPS	CP0603A0836ML CP0603A0881ML	824 - 849 869 - 894	24.2 23.8	0.20	33	23
GSM	CP0603A0902ML CP0603A0947ML	890 - 915 935 - 960	23.4 23.2		32	
E-GSM	CP0603A0897ML CP0603A0942ML	880 - 915 925 - 960	23.4 23.2		32	
PDC	CP0603A1441ML	1429 - 1453	20.0	0.25	28	20
PCN	CP0603A1747ML CP0603A1842ML	1710 - 1785 1805 - 1880	18.4 18.0		27	
PCS	CP0603A1880ML CP0603A1960ML	1850 - 1910 1930 - 1990	17.8 17.5		26	
PHP	CP0603A1907ML	1895 - 1920	17.7		26	
DECT	CP0603A1890ML	1880 - 1900	17.8		26	
Wireless LAN	CP0603A2442ML	2400 - 2484	15.6	0.35	24	

CP0603AxxxxMLTR



Important: Couplers can be used at any frequency within the indicated range.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9