

# NCP456R, NCP457

## 2 A Single Load Switch for Low Voltage Rail

The NCP456R and NCP457 are power load switch with very low  $R_{on}$  NMOSFET controlled by external logic pin, allowing optimization of battery life, and portable device autonomy.

Indeed, thanks to a best in class current consumption optimization with NMOS structure, leakage currents are drastically decreased. Offering optimized leakages isolation on the ICs connected on the battery.

Output discharge path is proposed, in the NCP457 version, to eliminate residual voltages on the external components connected on output pin.

Reverse voltage protection, from OUT to IN is offered in the NCP456R version.

Proposed in wide input voltage range from 0.75 V to 5.5 V, and a very small CSP6 0.85 x 1.25 mm<sup>2</sup>.

### Features

- 0.75 V – 5.5 V Operating Range
- 24 mΩ N MOSFET
- Vbias Rail Input
- DC Current up to 2 A
- Output Auto-discharge Option
- Reverse Blocking Option
- Active High EN Pin
- CSP6, 0.85 x 1.25 mm<sup>2</sup>, Pitch 0.4 mm
- These Devices are Pb-Free and are RoHS Compliant

### Typical Applications

- Notebooks
- Tablets
- Wireless
- Mobile Phones
- Digital Cameras




ON Semiconductor®

<http://onsemi.com>

### MARKING DIAGRAM




WLCSP6, 1.25x0.85  
CASE 567GZ



A = Assembly Location  
Y = Year  
W = Work Week

### PIN CONNECTIONS

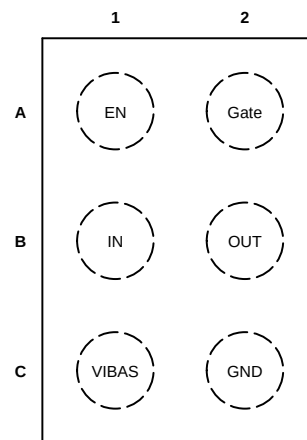

Top View

### ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 12 of this data sheet.

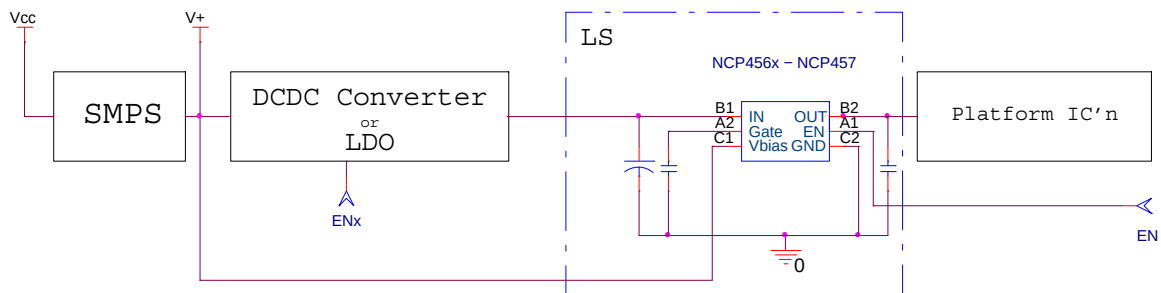


Figure 1. Typical Application Schematic

## NCP456R, NCP457

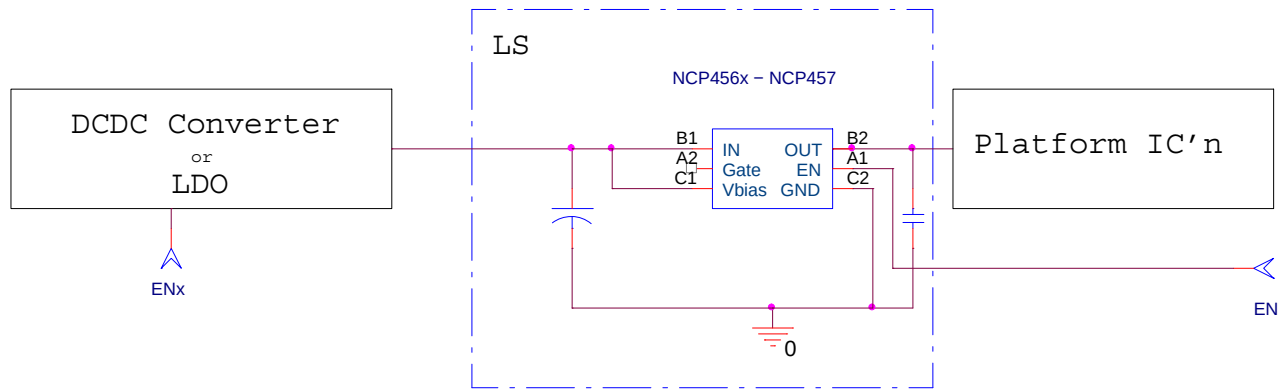


Figure 2. Application Schematic with Vbias Connected to IN and No Gate Delay

### PIN FUNCTION DESCRIPTION

| Pin Name | Pin Number | Type  | Description                                      |
|----------|------------|-------|--------------------------------------------------|
| EN       | A1         | INPUT | Enable input, logic high turns on power switch . |
| IN       | B1         | POWER | Load-switch input pin.                           |
| VBIAS    | C1         | POWER | External supply voltage input.                   |
| GATE     | A2         | INPUT | OUT pin slew rate control ( $t_{rise}$ ).        |
| OUT      | B2         | POWER | Load-switch output pin.                          |
| GND      | C2         | POWER | Ground connection.                               |

## BLOCK DIAGRAMS



# NCP456R, NCP457

## MAXIMUM RATINGS

| Rating                                                           | Symbol                                        | Value         | Unit |
|------------------------------------------------------------------|-----------------------------------------------|---------------|------|
| IN, OUT, EN, VBIAS, GATE Pins: (Note 1)                          | $V_{EN}, V_{IN}, V_{OUT}, V_{BIAS}, V_{GATE}$ | -0.3 to + 6.5 | V    |
| From IN to OUT Pins: Input/Output (Note 1) NCP457                | $V_{IN}, V_{OUT}$                             | 0 to + 6.5    | V    |
| From IN to OUT Pins: Input/Output (Note 1) NCP456R               | $V_{IN}, V_{OUT}$                             | ±6.5          | V    |
| Human Body Model (HBM) ESD Rating are (Note 2)                   | ESD HBM                                       | 2000          | V    |
| Machine Model (MM) ESD Rating are (Note 2)                       | ESD MM                                        | 200           | V    |
| Latch-up Protection (Note 3)<br>Pins IN, OUT, EN, VBIAS and GATE | LU                                            | 100           | mA   |
| Maximum Junction Temperature                                     | $T_J$                                         | -40 to + 125  | °C   |
| Storage Temperature Range                                        | $T_{STG}$                                     | -40 to + 150  | °C   |
| Moisture Sensitivity (Note 4)                                    | MSL                                           | Level 1       |      |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. According to JEDEC standard JESD22-A108.
2. This device series contains ESD protection and passes the following tests:  
Human Body Model (HBM) ±2.0 kV per JEDEC standard: JESD22-A114 for all pins.  
Machine Model (MM) ±250 V per JEDEC standard: JESD22-A115 for all pins.
3. Latch up Current Maximum Rating: ±100 mA per JEDEC standard: JESD78 class II.
4. Moisture Sensitivity Level (MSL): 1 per IPC/JEDEC standard: J-STD-020.

## OPERATING CONDITIONS

| Symbol          | Parameter                                                        | Conditions    | Min  | Typ | Max | Unit |
|-----------------|------------------------------------------------------------------|---------------|------|-----|-----|------|
| $V_{IN}$        | Operational Power Supply                                         |               | 0.75 |     | 5.5 | V    |
| $V_{EN}$        | Enable Voltage                                                   |               | 0    |     | 5.5 | V    |
| $V_{BIAS}$      | Bias voltage ( $V_{BIAS} \geq \text{best of } V_{IN}, V_{OUT}$ ) |               | 1.2  |     | 5.5 | V    |
| $T_A$           | Ambient Temperature Range                                        |               | -40  | 25  | +85 | °C   |
| $C_{IN}$        | Decoupling input capacitor                                       |               | 100  |     |     | nF   |
| $C_{OUT}$       | Decoupling output capacitor                                      |               | 100  |     |     | nF   |
| $R_{\theta JA}$ | Thermal Resistance Junction to Air                               | CSP6 (Note 5) |      | 100 |     | °C/W |
| $I_{OUT}$       | Maximum DC current                                               |               |      |     | 2   | A    |
| $P_D$           | Power Dissipation Rating                                         | (Note 6)      |      | 0.2 |     | W    |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

5. The  $R_{\theta JA}$  is dependent of the PCB heat dissipation and thermal via.
6. The maximum power dissipation ( $P_D$ ) is given by the following formula:

$$P_D = \frac{T_{JMAX} - T_A}{R_{\theta JA}}$$

# NCP456R, NCP457

**ELECTRICAL CHARACTERISTICS** Min & Max Limits apply for  $T_A$  between  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for  $V_{IN}$  and  $V_{BIAS}$  between 0.75 V to 5.5 V (Unless otherwise noted). Typical values are referenced to  $T_A = +25^{\circ}\text{C}$ ,  $V_{IN} = 3.3\text{ V}$  and  $V_{BIAS} = 5\text{ V}$  (Unless otherwise noted).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

## POWER SWITCH

|              |                                                       |                                                       |                             |  |     |    |                  |
|--------------|-------------------------------------------------------|-------------------------------------------------------|-----------------------------|--|-----|----|------------------|
| $R_{DS(on)}$ | Static drain-source on-state resistance for each rail | $V_{IN} = V_{BIAS} = 5.5\text{ V}$                    | $T_A = 25^{\circ}\text{C}$  |  | 24  | 33 | $\text{m}\Omega$ |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 39 | $\text{m}\Omega$ |
|              |                                                       | $V_{IN} = V_{BIAS} = 3.3\text{ V}$                    | $T_A = 25^{\circ}\text{C}$  |  | 24  | 33 |                  |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 39 |                  |
|              |                                                       | $V_{IN} = V_{BIAS} = 1.8\text{ V}$                    | $T_A = 25^{\circ}\text{C}$  |  | 25  | 34 |                  |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 40 |                  |
|              |                                                       | $V_{IN} = V_{BIAS} = 1.5\text{ V}$                    | $T_A = 25^{\circ}\text{C}$  |  | 26  | 35 |                  |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 41 |                  |
|              |                                                       | $V_{IN} = V_{BIAS} = 1.2\text{ V}$                    | $T_A = 25^{\circ}\text{C}$  |  | 28  | 40 |                  |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 42 |                  |
|              |                                                       | $V_{IN} = 1.0\text{ V},$<br>$V_{BIAS} = 1.2\text{ V}$ | $T_A = 25^{\circ}\text{C}$  |  | 30  | 40 |                  |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 42 |                  |
|              |                                                       | $V_{IN} = 0.8\text{ V},$<br>$V_{BIAS} = 1.2\text{ V}$ | $T_A = 25^{\circ}\text{C}$  |  | 35  | 45 |                  |
|              |                                                       |                                                       | $T_J = 125^{\circ}\text{C}$ |  |     | 50 |                  |
| $R_{DIS}$    | Output discharge path                                 |                                                       | EN = low, NCP457            |  | 220 |    | $\Omega$         |

## TIMINGS

|                 |                  |                       |                                                                                            |  |      |  |    |
|-----------------|------------------|-----------------------|--------------------------------------------------------------------------------------------|--|------|--|----|
| T <sub>R</sub>  | Output rise time | V <sub>IN</sub> = 5 V | No cap on GATE pin                                                                         |  | 0.11 |  | ms |
|                 |                  |                       | Gate capacitor = 1 nF                                                                      |  | 1.4  |  |    |
|                 |                  |                       | Gate capacitor = 10 nF                                                                     |  | 15.7 |  |    |
| T <sub>F</sub>  | Output fall time |                       | C <sub>LOAD</sub> = 1 μF, R <sub>LOAD</sub> = 25 Ω (Note 8)                                |  | 50   |  | μs |
| T <sub>en</sub> | Enable time      |                       | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. 10 nF gate capacitor   |  | 3    |  | ms |
|                 |                  |                       | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. 1 nF gate capacitor    |  | 300  |  | μs |
|                 |                  |                       | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. Without gate capacitor |  | 51   |  | μs |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

7. Parameters are guaranteed for  $C_{LOAD}$  and  $R_{LOAD}$  connected to the OUT pin with respect to the ground

8. Guaranteed by design and characterization, not production tested.

# NCP456R, NCP457

**ELECTRICAL CHARACTERISTICS** Min & Max Limits apply for  $T_A$  between  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for  $V_{IN}$  and  $V_{BIAS}$  between 0.75 V to 5.5 V (Unless otherwise noted). Typical values are referenced to  $T_A = +25^{\circ}\text{C}$ ,  $V_{IN} = 3.3\text{ V}$  and  $V_{BIAS} = 5\text{ V}$  (Unless otherwise noted).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

## TIMINGS

|                 |                  |                         |                                                                                            |  |      |     |    |
|-----------------|------------------|-------------------------|--------------------------------------------------------------------------------------------|--|------|-----|----|
| T <sub>R</sub>  | Output rise time | V <sub>IN</sub> = 3.3 V | No cap on GATE pin                                                                         |  | 0.1  | 0.3 | ms |
|                 |                  |                         | Gate capacitor = 1 nF                                                                      |  | 1    |     |    |
|                 |                  |                         | Gate capacitor = 10 nF                                                                     |  | 11   |     |    |
| T <sub>F</sub>  | Output fall time |                         | C <sub>LOAD</sub> = 1 μF, R <sub>LOAD</sub> = 25 Ω (Note 8)                                |  | 60   | 120 | μs |
| T <sub>en</sub> | Enable time      |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. 10 nF Gate capacitor.  |  | 2.4  |     | ms |
|                 |                  |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. 1 nF Gate capacitor.   |  | 230  |     | μs |
|                 |                  |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. Without gate capacitor |  | 50   | 120 | μs |
| T <sub>R</sub>  | Output rise time | V <sub>IN</sub> = 1.8 V | No cap on GATE pin                                                                         |  | 0.06 |     | ms |
|                 |                  |                         | Gate capacitor = 1 nF                                                                      |  | 0.6  |     |    |
|                 |                  |                         | Gate capacitor = 10 nF                                                                     |  | 6    |     |    |
| T <sub>F</sub>  | Output fall time |                         | C <sub>LOAD</sub> = 1 μF, R <sub>LOAD</sub> = 25 Ω (Note 8)                                |  | 35   |     | μs |
| T <sub>en</sub> | Enable time      |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– 10 nF Gate capacitor            |  | 1.8  |     | ms |
|                 |                  |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– 1 nF Gate capacitor             |  | 180  |     | μs |
|                 |                  |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. Without gate capacitor |  | 42   |     | μs |
| T <sub>R</sub>  | Output rise time | V <sub>IN</sub> = 1 V   | No cap on GATE pin                                                                         |  | 0.04 |     | ms |
|                 |                  |                         | Gate capacitor = 1 nF                                                                      |  | 0.35 |     |    |
|                 |                  |                         | Gate capacitor = 10 nF                                                                     |  | 3.5  |     |    |
| T <sub>F</sub>  | Output fall time |                         | C <sub>LOAD</sub> = 1 μF, R <sub>LOAD</sub> = 25 Ω (Note 8)                                |  | 20   |     | μs |
| T <sub>en</sub> | Enable time      |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. 1 nF gate capacitor    |  | 140  |     | μs |
|                 |                  |                         | From EN low to high to V <sub>out</sub> = 10% of fully on– NCP456R. Without gate capacitor |  | 40   |     | μs |

## LOGIC

|          |                          |  |     |  |     |            |
|----------|--------------------------|--|-----|--|-----|------------|
| $V_{IH}$ | High-level input voltage |  | 0.9 |  |     | V          |
| $V_{IL}$ | Low-level input voltage  |  |     |  | 0.4 | V          |
| $R_{EN}$ | Pull down resistor       |  | 3   |  | 7   | M $\Omega$ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

7. Parameters are guaranteed for  $C_{LOAD}$  and  $R_{LOAD}$  connected to the OUT pin with respect to the ground

8. Guaranteed by design and characterization, not production tested.

## NCP456R, NCP457

**ELECTRICAL CHARACTERISTICS** Min & Max Limits apply for  $T_A$  between  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for  $V_{IN}$  and  $V_{BIAS}$  between 0.75 V to 5.5 V (Unless otherwise noted). Typical values are referenced to  $T_A = +25^{\circ}\text{C}$ ,  $V_{IN} = 3.3\text{ V}$  and  $V_{BIAS} = 5\text{ V}$  (Unless otherwise noted).

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|--------|-----------|------------|-----|-----|-----|------|
|--------|-----------|------------|-----|-----|-----|------|

### REVERSE CURRENT BLOCKING

|                 |                                  |                                 |  |     |  |               |
|-----------------|----------------------------------|---------------------------------|--|-----|--|---------------|
| $V_{rev\_thr}$  | Reverse threshold                | $V_{out}-V_{in}$                |  | 32  |  | mV            |
| $V_{rev\_hyst}$ | Reverse threshold hysteresis     |                                 |  | 50  |  | mV            |
| $T_{rev}$       | Reverse comparator response time | $V_{out}-V_{in} > V_{rev\_thr}$ |  | 2.5 |  | $\mu\text{s}$ |

### QUIESCENT CURRENT- NCP456R

|                 |                              |                                                       |  |      |     |               |
|-----------------|------------------------------|-------------------------------------------------------|--|------|-----|---------------|
| $I_{VBIAS}$     | Bias current for charge pump | $V_{BIAS} = 3.3\text{ V}$ , EN = high                 |  | 1.5  | 6   | $\mu\text{A}$ |
| $I_{IN}$        | IN Current consumption       | EN = high                                             |  | 0.01 | 0.3 | $\mu\text{A}$ |
| $I_{STB}$       | Standby current IN           | EN = low, IN standby current, $V_{IN} = 3.3\text{ V}$ |  | 0.01 | 0.3 | $\mu\text{A}$ |
| $I_{STDVbias}$  | Standby current $V_{BIAS}$   | $V_{BIAS} = 3.3\text{ V}$ EN = low                    |  | 0.4  | 2   | $\mu\text{A}$ |
| $I_{out\_leak}$ | Output leakage current       | IN connected to GND, $V_{OUT} = 5\text{ V}$           |  | 0.01 | 0.5 | $\mu\text{A}$ |

### QUIESCENT CURRENT- NCP457

|                |                              |                                                       |  |      |     |               |
|----------------|------------------------------|-------------------------------------------------------|--|------|-----|---------------|
| $I_{VBIAS}$    | Bias current for charge pump | $V_{BIAS} = 3.3\text{ V}$ , EN = high                 |  | 1.3  | 5   | $\mu\text{A}$ |
| $I_Q$          | IN Current consumption       | EN = high                                             |  | 0.01 | 0.3 | $\mu\text{A}$ |
| $I_{STB}$      | Standby current IN           | EN = low, IN standby current, $V_{IN} = 3.3\text{ V}$ |  | 0.01 | 1.6 | $\mu\text{A}$ |
| $I_{STDVbias}$ | Standby current $V_{BIAS}$   | $V_{BIAS} = 3.3\text{ V}$ EN = low                    |  | 0.4  | 2   | $\mu\text{A}$ |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

7. Parameters are guaranteed for  $C_{LOAD}$  and  $R_{LOAD}$  connected to the OUT pin with respect to the ground
8. Guaranteed by design and characterization, not production tested.

TIMINGS

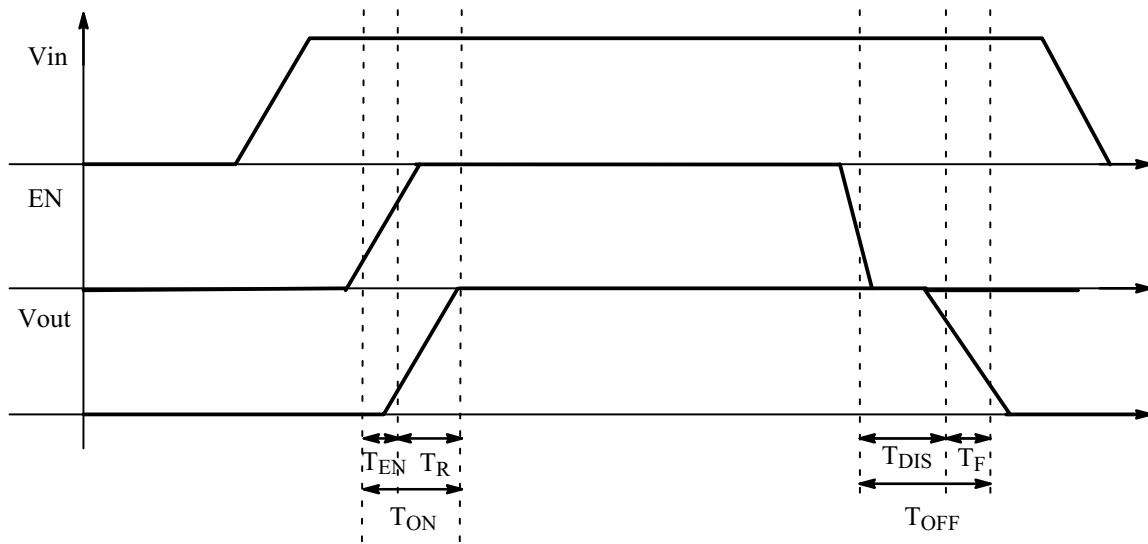


Figure 5. Enable, Rise and Fall Time



TYPICAL CHARACTERISTICS

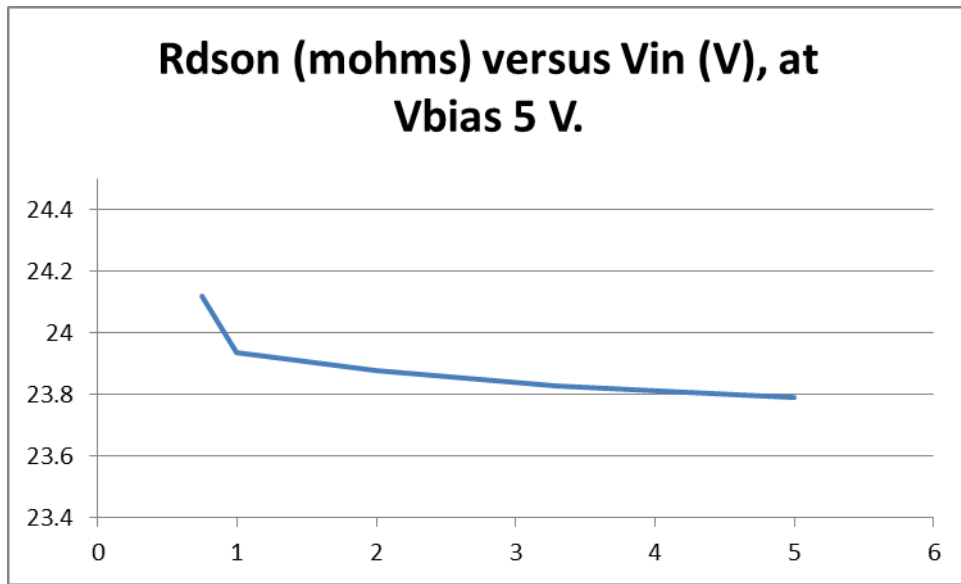


Figure 6.  $R_{DS(on)}$  versus  $V_{in}$ , Room Temperature, Vbias 5 V

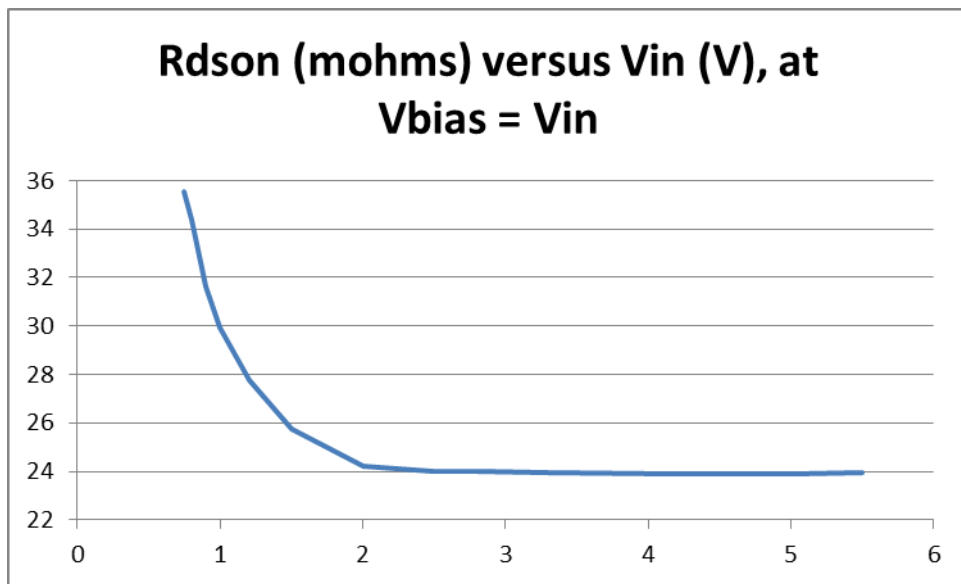


Figure 7.  $R_{DS(on)}$  versus  $V_{in}$ , Room Temperature, Vbias Connected to  $V_{in}$

## FUNCTIONAL DESCRIPTION

### Overview

The NCP456R and NCP457 are high side N Channel MOSFET power distribution switch designed to isolate ICs connected on the battery or DCDC supplies in order to save energy. The part can be used with a wide range of supply from 0.75 V to 5.5 V.

### Enable input

Enable pin is an active high. The path is opened when EN pin is tied low (disable), forcing NMOS switch off.

The IN/OUT path is activated with a minimum of  $V_{BIAS} \geq \text{best of } V_{IN}, V_{OUT} = 0.75 \text{ V}$  and EN forced to high level.

### Auto Discharge (Optional – NCP457)

NMOS FET is placed between the output pin and GND, in order to discharge the application capacitor connected on OUT pin.

The auto-discharge is activated when EN pin is set to low level (disable state).

The discharge path ( Pull down NMOS) stays activated as long as EN pin is set at low level and  $V_{BIAS} > 0.75 \text{ V}$ .

In order to limit the current across the internal discharge N-MOSFET, the typical value is set at  $220 \Omega$ .

### $V_{BIAS}$ Rail

The core of the IC is supplied due to  $V_{BIAS}$  supply rail (common +5 V, 3.3 V, 1.8 V, 1.2 V ...etc). Indeed, no current consumption is used on IN pin, allowing to improve power saving of the rail that must be isolated by the power switch.

If  $V_{bias}$  rail is not available or used,  $V_{bias}$  pin and  $V_{in}$  pin can be connected together as close as possible the DUT.

### Output Rise Time – Gate Control

The NMOS is control with internal charge pump and driver. A minimum gate slew rate is internally set to avoid huge inrush current when EN is set from low to high. The default gate slew rate depends on  $V_{in}$  level. The higher  $V_{in}$  level, the longer rise time.

In addition, an external capacitor can be connected between Gate pin and GND in order to slow down the gate rising. See electrical table for more details.

### $C_{in}$ and $C_{out}$ Capacitors

100 nF external capacitors must be connected as close as possible the DUT for noise immunity and better stability. In case of input hot plug (input voltage connected with fast slew rate – few  $\mu\text{s}$  – it's strongly recommended to avoid big capacitor connected on the input. That allows to avoid input over voltage transients.

### Reverse Blocking Control (Optional NCP456R)

A reverse blocking control circuitry is embedded to eliminate leakages from OUT to IN in case of  $V_{out} > V_{in}$ .

A comparator measures the dropout voltage on the switch between OUT and IN and turn off the NMOS if this voltage exceeds specified reverse voltage. This comparator is available whatever the EN pin level.

## APPLICATION INFORMATION

### Power Dissipation

Main contributor in term of junction temperature is the power dissipation of the power MOSFET. Assuming this, the power dissipation and the junction temperature in normal mode can be calculated with the following equations:

$$P_D = R_{DS(on)} \times (I_{out})^2 \quad (\text{eq. 1})$$

$P_D$  = Power dissipation (W)  
 $R_{DS(on)}$  = Power MOSFET on resistance ( $\Omega$ )  
 $I_{out}$  = Output current (A)

$$T_J = R_D \times R_{\theta JA} + T_A \quad (\text{eq. 2})$$

$T_J$  = Junction temperature ( $^{\circ}\text{C}$ )  
 $R_{\theta JA}$  = Package thermal resistance ( $^{\circ}\text{C/W}$ )  
 $T_A$  = Ambient temperature ( $^{\circ}\text{C}$ )

### Demoboard

The NCP456R and NCP457 integrate a 2 A rated NMOS FET, and the PCB rules must be respected to properly evacuate the heat out of the silicon.

The package is a CSP and due to the low thermal resistance of the silicon, all the balls can be used to improved power dissipation. Indeed, even if the power crosses the IN / OUT pins only, all the balls around this power area should be connected to the larger PCB area.

In the below PCB example (application demonstration board), all the PCB areas connected to 6 balls are enlarged. In addition vias are connected to bottom side with exactly same form factor of the other PCB side.

Additional improvements can be done also by using more copper thickness and the thinner epoxy as possible.

# NCP456R, NCP457

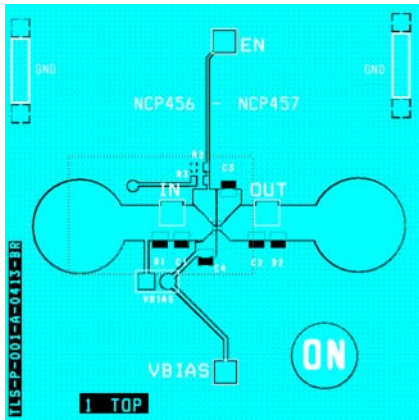


Figure 8. PCB Top View

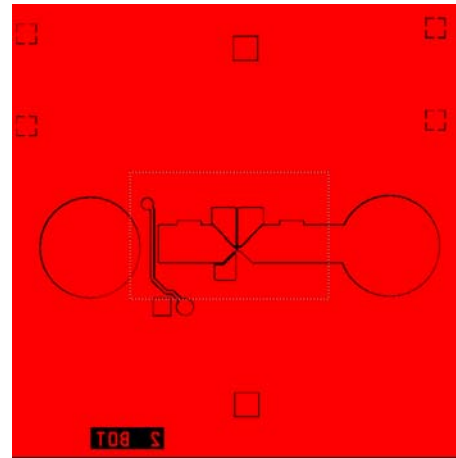


Figure 9. PCB Bottom View

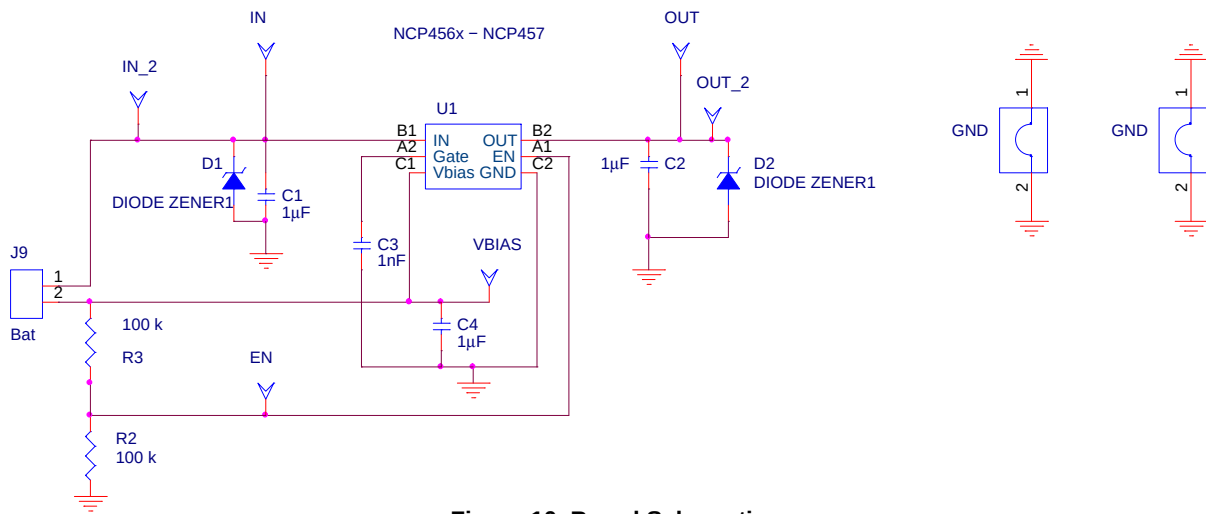


Figure 10. Board Schematic

## NCP456R, NCP457

### BILL OF MATERIAL

| Quantity | Reference schem        | Part description        | Part number             | Manufacturer     |
|----------|------------------------|-------------------------|-------------------------|------------------|
| 2        | IN, OUT                | Socket, 4mm, metal, PK5 | B010                    | HIRSCHMANN       |
| 4        | IN_2, OUT_2, VBIAS, EN | HEADER200               | 2.54 mm, 77313-101-06LF | FC               |
| 1        | J9 (Bat)               | HEADER200-2             | 2.54 mm, 77313-101-06LF | FC               |
| 3        | C1, C2, C4             | 1uF                     | GRM155R70J105KA12#      | Murata           |
| 1        | C3                     | 1nF, Not mounted        | GRM188R60J102ME47#      | Murata           |
| 1        | D1, D2                 | TVS                     | ESD9x                   | ON semiconductor |
| 2        | GND2,GND               | GND JUMPER              | D3082F05                | Harvin           |
| 2        | R2, R3                 | Resistor 100k 0603      | MC 0.063 0603 1% 100K   | MULTICOMP        |
| 1        | U1                     | Load switch             | NCP456 - 457            | ON semiconductor |

### ORDERING INFORMATION

| Device        | Options                    | Marking | Package                        | Shipping         |
|---------------|----------------------------|---------|--------------------------------|------------------|
| NCP456RFCCT2G | Reverse Voltage Protection | 56dYW   | WLCSP 1.25 x 0.85 mm (Pb-Free) | 3000 Tape / Reel |
| NCP457FCT2G   | Discharge Path             | 57dYW   | WLCSP 1.25 x 0.85 mm (Pb-Free) | 3000 Tape / Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9