


Features


- Surface Mount
- 2:1 Impedance
- 75 Ohm
- Excellent temperature stability
- RoHS Compliant and lead free

Description

M/A-COM's MABA-007681-CT2010 is a 2:1 RF Transmission line transformer in a low cost, surface mount package. Ideally suited for high volume CATV/Broadband applications.

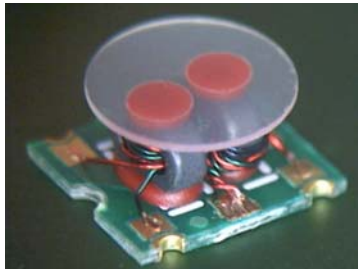


Functional Block Diagram

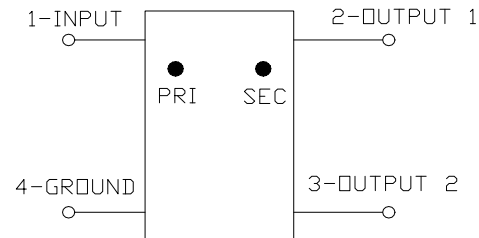

Pin Configuration

Pin No.	Function
1	Input (PRI dot)
2	Output 1 (SEC dot)
3	Output 2 (SEC)
4	Ground (PRI)

Case Style: SM-118

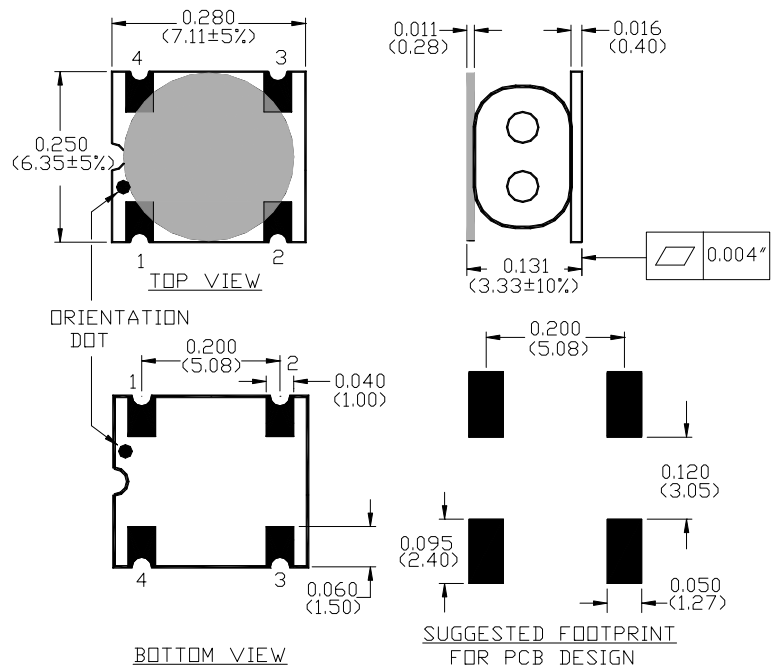

Unless otherwise stated, dimensions in inches [mm]
 Tolerance: .xx ± .02, .xxx ± .010

Ordering Information

Part Number	Description
MABA-007681-CT2010	900 piece reel
MABA-007681-CT20TB	Customer test board

Note: Reference Application Note **M513** for reel size information.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$


Parameter	Test Conditions	Units	Min	Typ	Max
Insertion Loss 1 Pin 1 to pin 2	5 - 50 MHz	dB	-	0.35	0.50
	50 - 1000 MHz	dB	-	0.60	1.10
	1000 - 1200 MHz	dB	-	0.60	1.40
Insertion Loss 2 Pin 1 to pin 3	5 - 50 MHz	dB	-	0.5	0.70
	50 - 1000 MHz	dB	-	0.9	1.50
	1000 - 1200 MHz	dB	-	1.8	2.20
Amplitude Unbalance	5 - 50 MHz	dB	-	± 0.10	± 0.40
	50 - 1000 MHz	dB	-	± 0.30	± 1.50
	1000 - 1200 MHz	dB	-	± 0.60	± 1.80
Phase Unbalance	5 - 50 MHz	$^\circ$	-	± 0.2	± 1.50
	50 - 1200 MHz	$^\circ$	-	± 3.0	± 7.00
Input Return Loss Single ended	5 - 50 MHz	dB	22	25	-
	50 - 1000 MHz	dB	14	22	-
	1000 - 1200 MHz	dB	8	17	-

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
RF Power	250mW
DC current	30mA
Operating Temperature	-40°C to $+85^\circ\text{C}$
Storage Temperature	-40°C to $+85^\circ\text{C}$

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- M/A-COM does not recommend sustained operation near these survivability limits.

Recommended DC bias circuit

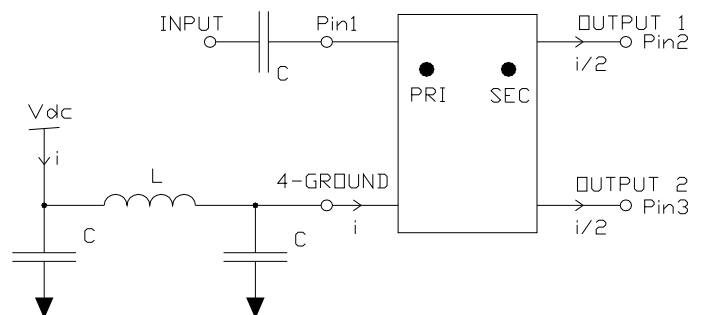


Cap/Ind	5-50MHz	50-1200MHz
C	100nF	10nF
L	10 μH	1 μH

2:1 Transmission Line Balun Transformer 5 - 1200MHz


M/A-COM Products
Part Status: Released Rev V1

Typical Performance Curves: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$


Insertion Loss 1 (Pin1 - Pin2)

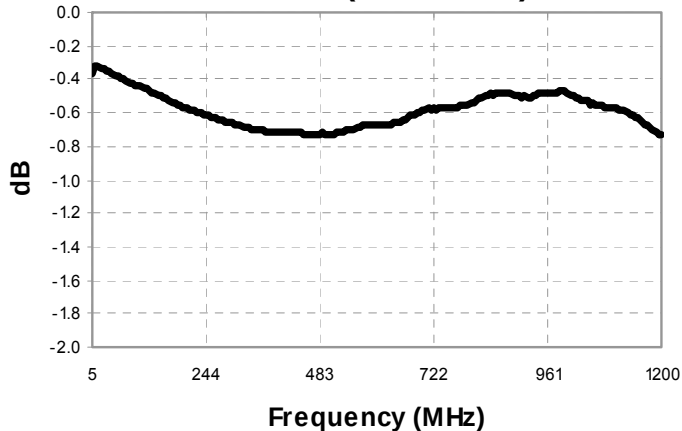


Insertion Loss 2 (Pin1 - Pin3)

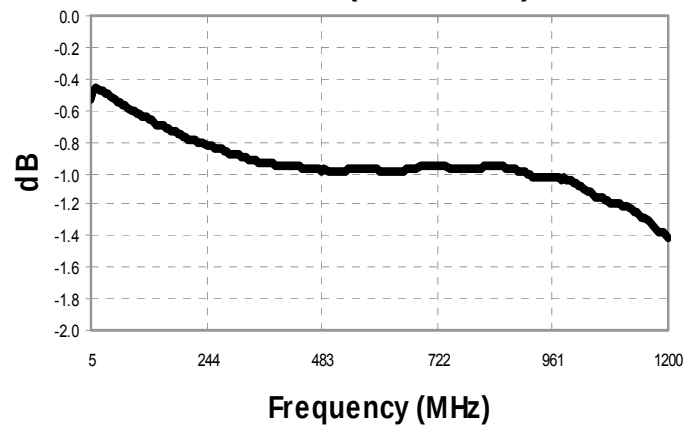


Amplitude Balance

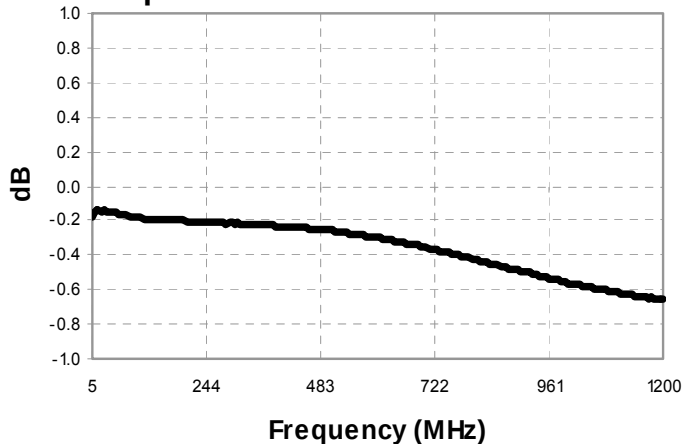

Phase Balance

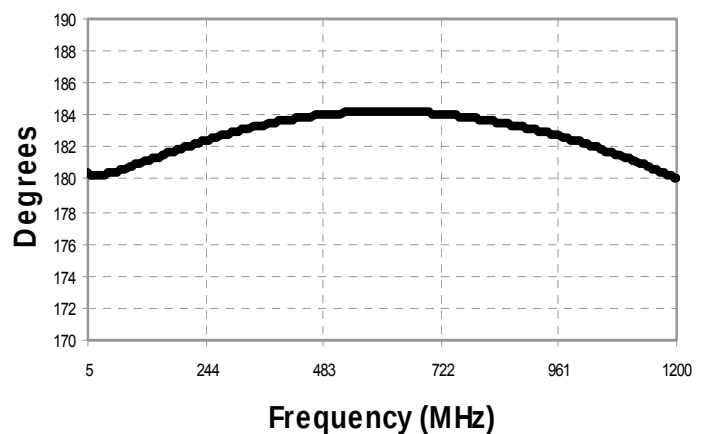

Return Loss: Input

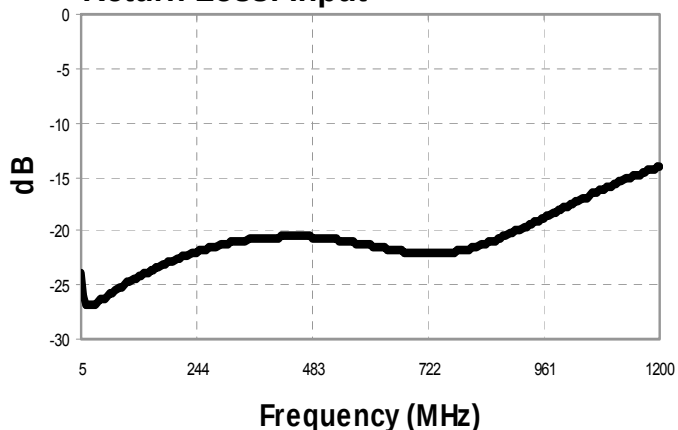

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9