

# NCV7608

## Octal Configurable Low/High Side Driver

The NCV7608 integrates 8 output drivers configurable in any combination of high-side, low-side, or H-Bridge configurations. The integrated standard Serial Peripheral Interface (SPI) allows digital control of all output stages and provides diagnostic fault information. In addition, four channels (#5–8) can be PWM controlled via external control input pins.

Integrated clamping circuits (both in high and low-side operational modes), waveshaping, positive and negative transient protection, and dedicated channel pair overtemperature shutdown circuits provide for a wide range of automotive and industrial applications.

### Features

- Eight Independent Configurable Drivers
- $R_{DS(on)} = 1.2 \Omega$  (typ @25°C)
- SPI Interface for Data Communication
  - ♦ 16 Bit Frame Length, Daisy Chain Compatible
  - ♦ 3.3 V/5 V Compatible
  - ♦ Frame Detection
- PWM Inputs for 4 Outputs
- Ultra-low Standby Current
- Over Current Protection
  - ♦ Characterized to AEC Q10X-12-REV A
- High-Side and Low-Side Flyback Protection
- Fault Reporting
- Undervoltage Lockout (VS and V<sub>CC</sub>)
- Overvoltage Shutdown (VS)
- Supports LED Loads
- Supports Cold Cranking Operation Down to 3 V
- Overtemperature Protection
- These are Pb-Free Devices


### Typical Applications

- Automotive
- Industrial



**ON Semiconductor®**

<http://onsemi.com>




SOIC-28  
DW SUFFIX  
CASE 751F

### MARKING DIAGRAM



A = Assembly Location  
WL = Wafer Lot  
YY = Year  
WW = Work Week  
G = Pb-Free Package


### PIN CONNECTIONS



### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 22 of this data sheet.

# NCV7608

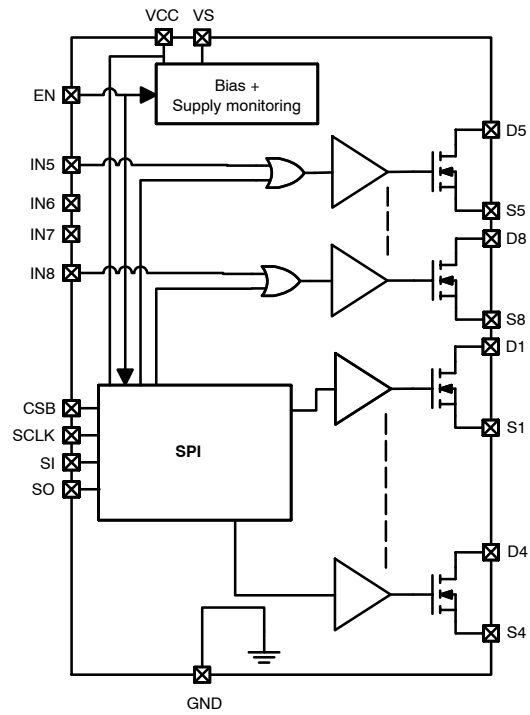

**Figure 1. Block Diagram** (See Figure 2 for detailed diagram)

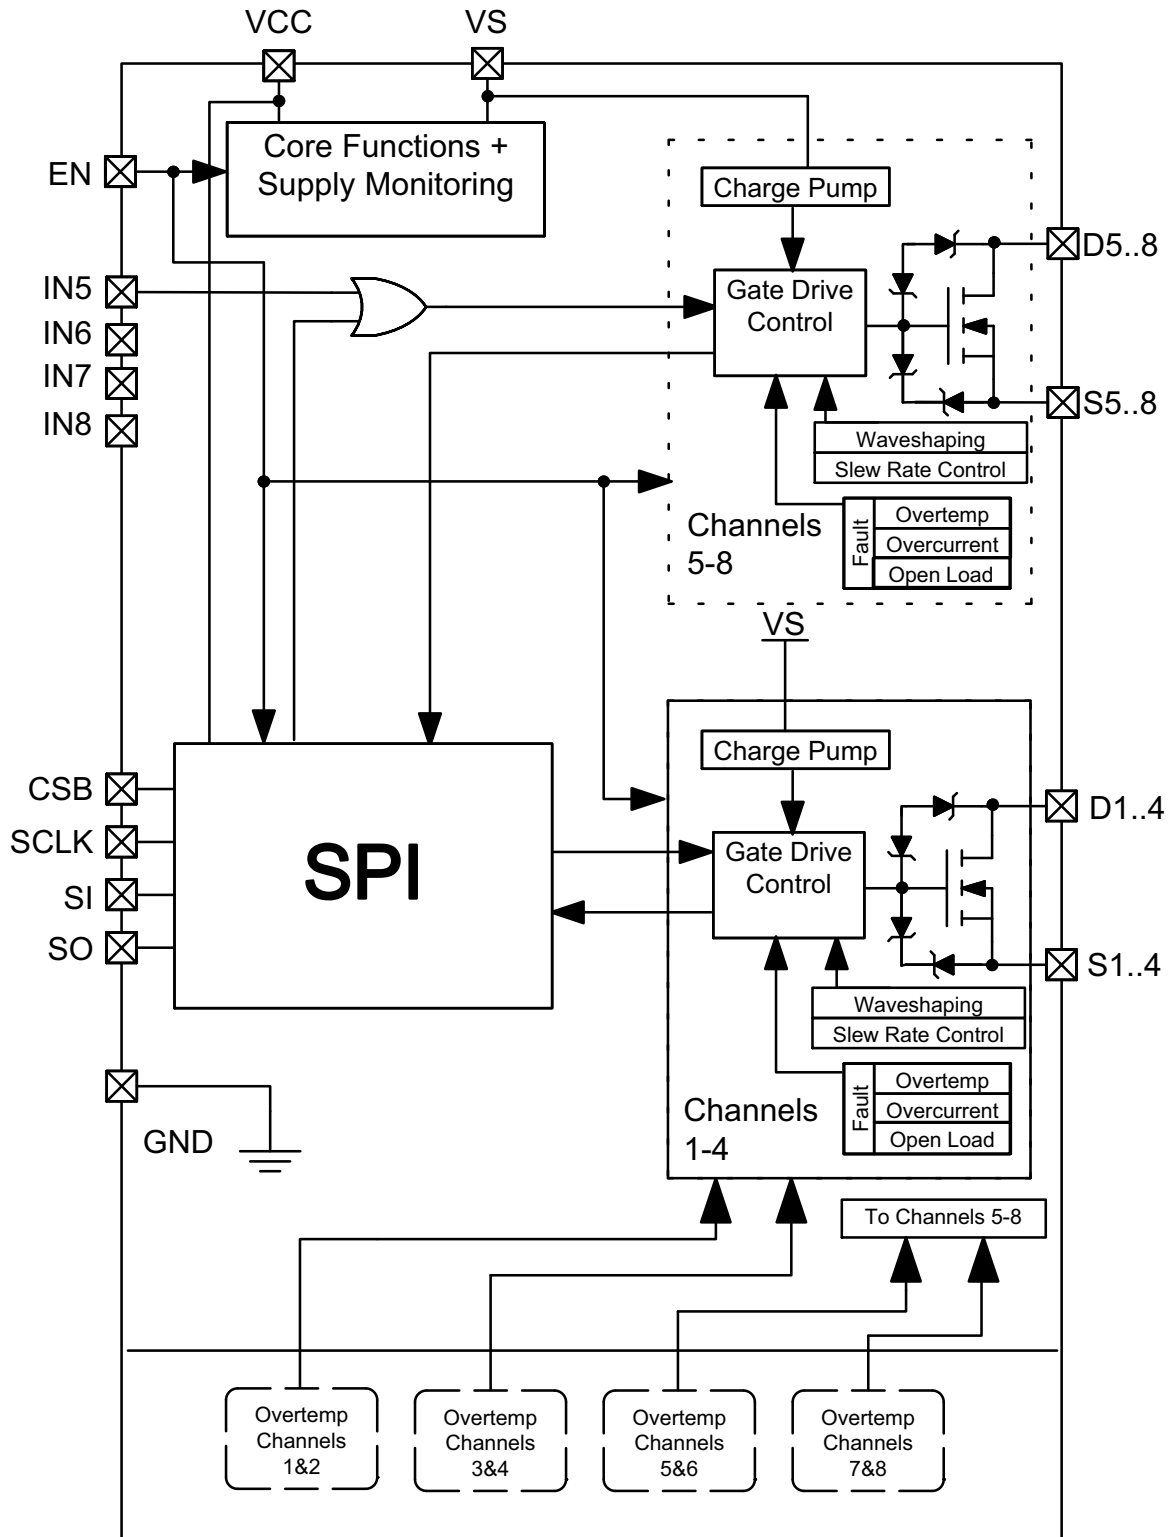


Figure 2. Detailed Block Diagram

PACKAGE PIN DESCRIPTION

| Pin # | Symbol | Description                                                                                              |
|-------|--------|----------------------------------------------------------------------------------------------------------|
| 1     | D2     | Drain of configurable driver #2                                                                          |
| 2     | S2     | Source of configurable driver #2                                                                         |
| 3     | S1     | Source of configurable driver #1                                                                         |
| 4     | D1     | Drain of configurable driver #1                                                                          |
| 5     | CSB    | SPI Chip Select "Bar" (100 k $\Omega$ pullup resistor to V <sub>CC</sub> )                               |
| 6     | SCLK   | SPI clock (100 k $\Omega$ pulldown resistor)                                                             |
| 7     | SI     | SPI serial data input (100 k $\Omega$ pulldown resistor)                                                 |
| 8     | VCC    | Logic Supply Input Voltage                                                                               |
| 9     | SO     | SPI serial data output                                                                                   |
| 10    | GND    | Ground – Device substrate                                                                                |
| 11    | D5     | Drain of configurable driver #5                                                                          |
| 12    | S5     | Source of configurable driver #5                                                                         |
| 13    | S6     | Source of configurable driver #6                                                                         |
| 14    | D6     | Drain of configurable driver #6                                                                          |
| 15    | D7     | Drain of configurable driver #7                                                                          |
| 16    | S7     | Source of configurable driver #7                                                                         |
| 17    | S8     | Source of configurable driver #8                                                                         |
| 18    | D8     | Drain of configurable driver #8                                                                          |
| 19    | EN     | Global Enable (active high) (100 k $\Omega$ pulldown resistor)                                           |
| 20    | IN5    | PWM control input for driver #5, (active high) (100 k $\Omega$ pulldown resistor)<br>Ground if not used. |
| 21    | IN6    | PWM control input for driver #6, (active high) (100 k $\Omega$ pulldown resistor)<br>Ground if not used. |
| 22    | IN7    | PWM control input for driver #7, (active high) (100 k $\Omega$ pulldown resistor)<br>Ground if not used. |
| 23    | IN8    | PWM control input for driver #8, (active high) (100 k $\Omega$ pulldown resistor)<br>Ground if not used. |
| 24    | VS     | Battery Supply Input Voltage.                                                                            |
| 25    | D4     | Drain of configurable driver #4                                                                          |
| 26    | S4     | Source of configurable driver #4                                                                         |
| 27    | S3     | Source of configurable driver #3                                                                         |
| 28    | D3     | Drain of configurable driver #3                                                                          |

**MAXIMUM RATINGS** (Voltages are with respect to device substrate)

| Rating                                                                                                                                    | Symbol                             | Value                                         | Unit     |
|-------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-----------------------------------------------|----------|
| Digital supply input voltage ( $V_{CC}$ )                                                                                                 | $V_{CCmax}$                        | -0.3 to 7                                     | V        |
| Battery supply input voltage ( $V_S$ )<br>DC input supply voltage<br>Transient input supply voltage                                       | $V_{SDCmax}$<br>$V_{SACmax}$       | -0.3 to 34<br>-0.3 to 40                      | V<br>V   |
| Digital I/O pin voltage (IN5, IN6, IN7, IN8, SI, SO, CSB, SCLK, EN)                                                                       | $V_{IOmax}$                        | -0.3 to 7                                     | V        |
| Configured for High-Side Operation<br>Drain = $V_S$<br>Source Output DC Voltage (S1–S8)<br>Transient Source Output voltage (S1–S8)        | $V_{SHSXDCmax}$<br>$V_{SHSXACmax}$ | -1 to 34<br>-29 to 34                         | V<br>V   |
| Configured for Low-Side Operation<br>Source = GND<br>Drain Output DC Voltage (D1–D8)<br>Transient Drain Output Voltage (D1–D8)            | $V_{DLSXDCmax}$<br>$V_{DLSXACmax}$ | -1 to 34 (Note 1)<br>-1 to 48 (Note 2)        | V<br>V   |
| Clamping energy<br>Maximum (single pulse)<br>Repetitive (multiple pulse) (Note 3)                                                         | $W_{max}$<br>$W_{rep}$             | 100<br>20                                     | mJ<br>mJ |
| Electrostatic Discharge ( $V_S$ , D1–D8, S1–S8)<br>Human Body Model (100 pF, 1.5 k $\Omega$ )<br>Machine Model (200 pF)<br>Charged Device | ESD4                               | -4000 to 4000<br>-200 to 200<br>-1000 to 1000 | V        |
| Electrostatic Discharge (All Other Pins)<br>Human Body Model (100 pF, 1.5 k $\Omega$ )<br>Machine Model (200pF)<br>Charged Device         | ESD2                               | -2000 to 2000<br>-200 to 200<br>-1000 to 1000 | V        |
| AECQ10x–12–REVA<br>SHORT-CIRCUIT<br>RELIABILITY CHARACTERIZATION                                                                          | AECsc                              | Grade B                                       |          |
| Moisture Sensitivity Level                                                                                                                | MSL                                | MSL3                                          | –        |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. In this configuration lower voltage limit is due to drain–gate clamp.
2. Internally limited.
3. 1638000 pulses (triangular), 350 mA peak,  $V_S = 18$  V, 47  $\Omega$ , 410 mH,  $T_A = 85^\circ\text{C}$ .

**RECOMMENDED OPERATING CONDITIONS**

| Rating                                    | Symbol     | Value |      | Unit             |
|-------------------------------------------|------------|-------|------|------------------|
|                                           |            | Min   | Max  |                  |
| Digital supply input voltage ( $V_{CC}$ ) | $V_{CCop}$ | 3.15  | 5.25 | V                |
| Battery supply input voltage ( $V_S$ )    | $V_{sop}$  | 5.5   | 28   | V                |
| DC Output current ( $S_x, D_x$ )          | $I_{xop}$  | –     | 350  | mA               |
| Junction temperature                      | $T_J$      | -40   | 150  | $^\circ\text{C}$ |

**THERMAL CONDITIONS**

| Thermal Parameters                                               | Min | Max | Unit               |
|------------------------------------------------------------------|-----|-----|--------------------|
| Junction–to–Lead ( $\Psi_{JL}$ , $\Psi_{JL}$ )                   | 25  | 40  | $^\circ\text{C/W}$ |
| Junction–to–Ambient ( $R_{\theta JA}$ , $\theta_{JA}$ ) (Note 4) | –   | 82  | $^\circ\text{C/W}$ |

4. 1 oz copper, 300 mm<sup>2</sup> copper area, 0.062" thick FR4.

# NCV7608

**ELECTRICAL CHARACTERISTICS** ( $-40^{\circ}\text{C} < T_J < 150^{\circ}\text{C}$ ,  $5.5\text{ V} < V_S < 28\text{ V}$ ,  $3.15\text{ V} < V_{CC} < 5.25\text{ V}$ ,  $EN = V_{CC}$ , unless otherwise specified)

| Characteristic                                        | Symbol          | Conditions                                                                                                                                                  | Min    | Typ    | Max     | Unit                |
|-------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|--------|---------|---------------------|
| <b>GENERAL PARAMETERS</b>                             |                 |                                                                                                                                                             |        |        |         |                     |
| VS Supply Current<br>Standby (Note 5)<br>Run (Note 6) | IQVS85<br>IVSop | En = 0 V, $0\text{ V} \leq V_{CC} \leq 5.25\text{ V}$ , Dx = VS = 13.2 V, Sx = 0 V, $-40^{\circ}\text{C} < T_J < 85^{\circ}\text{C}$<br>All channels Active | 0<br>– | 1<br>– | 5<br>12 | $\mu\text{A}$<br>mA |
| VCC Supply Current<br>Standby (Note 7)<br>Run         | IQVCC<br>IVCCop | EN = 0 V, CSB = VCC, $-40^{\circ}\text{C} < T_J < 85^{\circ}\text{C}$<br>all channels active, $I_{(SO)} = 0$                                                | 0<br>– | 1<br>– | 5<br>3  | $\mu\text{A}$<br>mA |
| VCC Power-on reset Threshold                          | VCCPOR          | VCC increasing                                                                                                                                              | 2.6    | 2.8    | 3.0     | V                   |
| VCC Power-on reset Hysteresis                         | VCChys          |                                                                                                                                                             | 100    | 200    | –       | mV                  |
| VS Undervoltage Threshold                             | VSUV            | VS increasing                                                                                                                                               | 2.5    | 2.8    | 3.0     | V                   |
| VS Undervoltage Hysteresis                            | VSUhys          |                                                                                                                                                             | 100    | 200    | –       | mV                  |
| VS Overvoltage Threshold                              | VSOV            | VS increasing                                                                                                                                               | 32     | 36     | 40      | V                   |
| VS Overvoltage Hysteresis                             | VSOhys          |                                                                                                                                                             | 1.0    | 2.5    | 4.0     | V                   |

## THERMAL RESPONSE

|                                                      |        |                |      |      |     |                                     |
|------------------------------------------------------|--------|----------------|------|------|-----|-------------------------------------|
| Thermal Warning                                      | TW     | Not ATE tested | 120  | 145  | 170 | $^{\circ}\text{C}$                  |
| Thermal Warning Hysteresis                           | TWH    | Not ATE tested | –    | 30   | –   | $^{\circ}\text{C}$                  |
| Overtemperature Shutdown                             | TLIM   | Not ATE tested | 155  | 175  | 195 | $^{\circ}\text{C}$                  |
| Overtemperature Shutdown hysteresis                  | TLIMHY | Not ATE tested | –    | 30   | –   | $^{\circ}\text{C}$                  |
| Ratio of Overtemperature Shutdown to Thermal Warning | TSTOTW | Not ATE tested | 1.05 | 1.20 | –   | $^{\circ}\text{C}/^{\circ}\text{C}$ |

## POWER OUTPUTS, DC CHARACTERISTICS

|                                                         |                               |                                                                                                |               |                   |                   |               |
|---------------------------------------------------------|-------------------------------|------------------------------------------------------------------------------------------------|---------------|-------------------|-------------------|---------------|
| Output Transistor $R_{DS(on)}$<br>(Note 8)              | RonOPx<br>RonVSminx<br>RonVS3 | VS = 8 V, I(Dx) = 200 mA<br>VS = 5.5 V, I(Dx) = 200 mA<br>VS = 3 V, I(Dx) = 200 mA             | –<br>–<br>–   | 1.2<br>1.4<br>1.6 | 2.8<br>5.6<br>9.9 | $\Omega$      |
| Output Leakage Current (Note 9)                         | Ilkgx                         | VS = Dx = 16 V, Sx = 0 V                                                                       | –             | –                 | 5                 | $\mu\text{A}$ |
| Open Load Diagnostic Sink Current Low Side              | IdiagLSx                      | Dx = 2.6 V, Sx = 0 V, Output disabled                                                          | 100           | 215               | 350               | $\mu\text{A}$ |
| Open Load Diagnostic Source Current High Side (Note 10) | IdiagHSx                      | Dx = VS, Sx = VS – 2.6 V, Output disabled<br>$-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$ | –500          | –330              | –150              | $\mu\text{A}$ |
| Open load detection threshold voltage, VD (LS)          | VOLDx                         |                                                                                                | 1.0           | 2.0               | 3.0               | V             |
| Open load detection threshold voltage, VS (HS)          | VOLSx                         |                                                                                                | VS–3          | VS–2              | VS–1              | V             |
| Over Current (Note 11)<br>High-Side<br>Low-Side         | IlimHS<br>IlimLS              | VS = 16 V<br>VS = 16 V                                                                         | –1.90<br>0.80 | –1.35<br>1.35     | –0.80<br>1.90     | A             |
| Output fault filter time<br>Over Current<br>Open Load   | TFOC<br>TFOL                  |                                                                                                | 50<br>50      | 100<br>100        | 200<br>200        | $\mu\text{s}$ |

- Refer to Figures 12 and 17 for the VS standby current behavior.
- Refer to Figure 10. I(VS) versus Temperature.
- Refer to Figure 16 for the VCC standby current behavior.
- Refer to Figures 11 and 14 for  $R_{DS(on)}$  behavior.
- Refer to Figure 15 for output leakage current behavior.
- Refer to Figures 18 and 19 for open load diagnostic current behavior.
- Refer to Figure 13 for current limit behavior.

# NCV7608

**ELECTRICAL CHARACTERISTICS** ( $-40^{\circ}\text{C} < T_J < 150^{\circ}\text{C}$ ,  $5.5\text{ V} < V_S < 28\text{ V}$ ,  $3.15\text{ V} < V_{CC} < 5.25\text{ V}$ ,  $EN = V_{CC}$ , unless otherwise specified)

| Characteristic | Symbol | Conditions | Min | Typ | Max | Unit |
|----------------|--------|------------|-----|-----|-----|------|
|----------------|--------|------------|-----|-----|-----|------|

## OUTPUT CLAMPS

|                                                      |       |                                               |     |     |     |   |
|------------------------------------------------------|-------|-----------------------------------------------|-----|-----|-----|---|
| Output clamp Voltage<br>Drain with respect to Source | VOCLS | $I(Dx) = 50\text{ mA}$<br>Source = GND        | 34  | –   | 48  | V |
| Output clamp Voltage<br>Source with respect to GND   | VOCHS | $I(Sx) = -50\text{ mA}$ , $V_S = 14\text{ V}$ | –29 | –22 | –16 | V |

## POWER OUTPUTS, AC CHARACTERISTICS

|                                                                                    |        |                                                                                                                                                                              |   |    |     |               |
|------------------------------------------------------------------------------------|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|----|-----|---------------|
| Low Side Rise Time                                                                 | T_LSr  | $8\text{ V} < V_S < 16\text{ V}$<br>$R_{load} = 70\ \Omega$<br>10/90% criteria, Figure 4                                                                                     | – | 12 | 50  | $\mu\text{s}$ |
| Low Side Fall Time                                                                 | T_LSf  | $8\text{ V} < V_S < 16\text{ V}$<br>$R_{load} = 70\ \Omega$<br>10/90% criteria, Figure 3                                                                                     | – | 12 | 50  | $\mu\text{s}$ |
| High side Rise Time                                                                | T_HSr  | $8\text{ V} < V_S < 16\text{ V}$<br>$R_{load} = 70\ \Omega$<br>10/90% criteria, Figure 3                                                                                     | – | 12 | 50  | $\mu\text{s}$ |
| High side Fall Time                                                                | T_HSf  | $8\text{ V} < V_S < 16\text{ V}$<br>$R_{load} = 70\ \Omega$<br>10/90% criteria, Figure 4                                                                                     | – | 12 | 50  | $\mu\text{s}$ |
| Serial Control<br>Output turn-on time (High side<br>and Low-side configuration)    | TDONs  | $8\text{ V} < V_S < 16\text{ V}$<br>CSB going high (at 90%)<br>to $V_{final}$ going high (at 10%)<br>or $V_{final}$ going low (at 90%)<br>$R_{load} = 70\ \Omega$ , Figure 3 | 1 | –  | 50  | $\mu\text{s}$ |
| Serial Control<br>Output turn-off time (High side<br>and Low-side configuration)   | TDOFFs | $8\text{ V} < V_S < 16\text{ V}$<br>CSB going high (at 90%)<br>to $V_{final}$ going low (at 90%)<br>or $V_{final}$ going high (at 10%)<br>$R_{load} = 70\ \Omega$ , Figure 4 | 1 | –  | 100 | $\mu\text{s}$ |
| Parallel Control<br>Output turn-on time (High side<br>and Low-side configuration)  | TDONp  | $8\text{ V} < V_S < 16\text{ V}$<br>Inx going high (at 90%)<br>to $V_{final}$ going high (at 10%)<br>or $V_{final}$ going low (at 90%)<br>$R_{load} = 70\ \Omega$ , Figure 5 | 1 | –  | 50  | $\mu\text{s}$ |
| Parallel Control<br>Output turn-off time (High side<br>and Low-side configuration) | TDOFFp | $8\text{ V} < V_S < 16\text{ V}$<br>Inx going low (at 10%)<br>to $V_{final}$ going low (at 90%)<br>or $V_{final}$ going high (at 10%)<br>$R_{load} = 70\ \Omega$ , Figure 6  | 1 | –  | 100 | $\mu\text{s}$ |

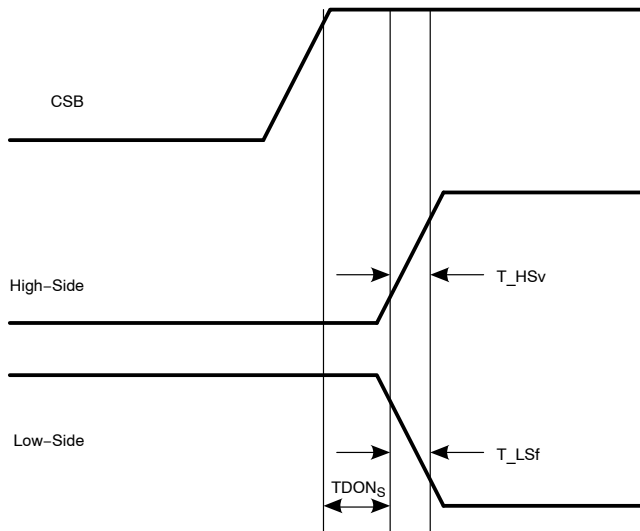


Figure 3. Serial Turn On

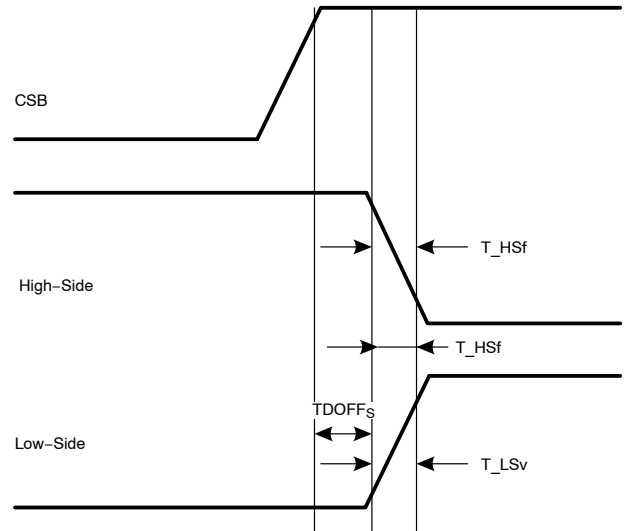


Figure 4. Serial Turn Off

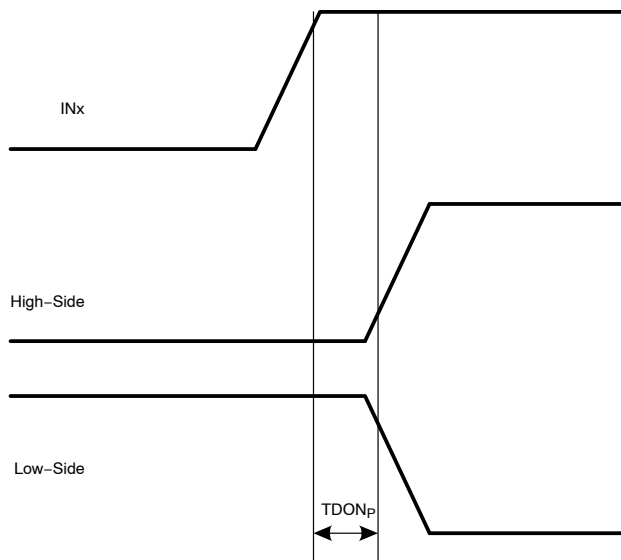


Figure 5. Parallel Turn On

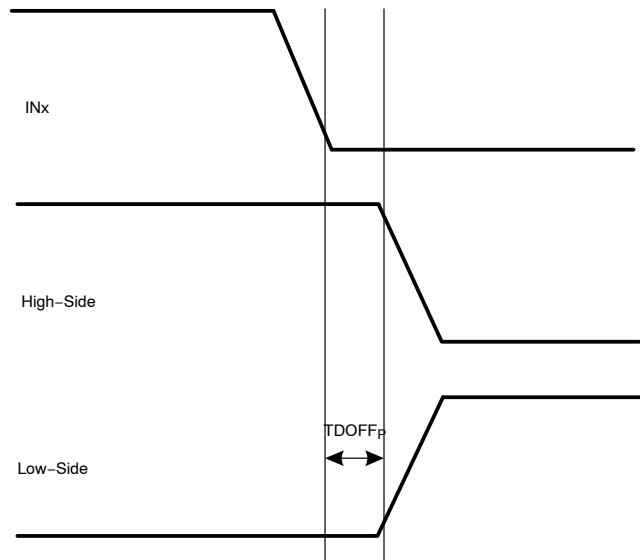


Figure 6. Parallel Turn Off

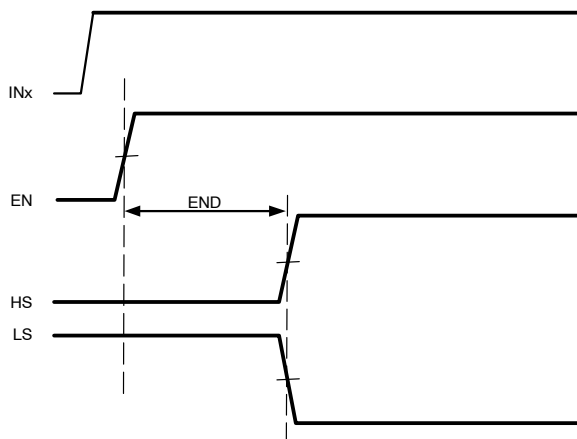


Figure 7. EN Delay Time

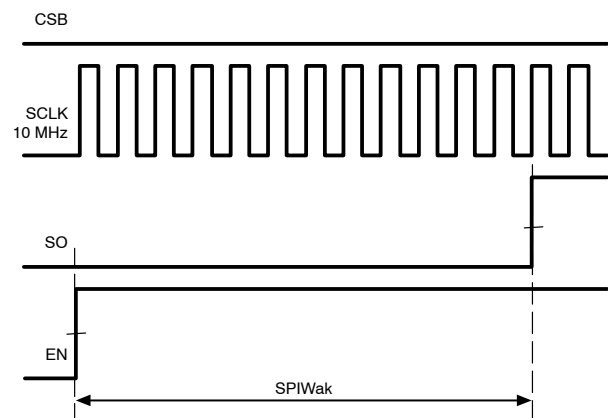


Figure 8. SPI Wake Up

Table 1. DIGITAL INTERFACE CHARACTERISTICS

| Characteristic                                               | Symbol             | Conditions                                                                                    | Min                   | Typ    | Max    | Unit     |
|--------------------------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------|-----------------------|--------|--------|----------|
| Digital Input High Threshold                                 | VINH               |                                                                                               | 2.0                   | –      | –      | V        |
| Digital Input Low Threshold                                  | VINL               |                                                                                               | –                     | –      | 0.6    | V        |
| Input Pulldown Resistance (EN, SI, SCLK, IN5, IN6, IN7, IN8) | RPDx               | EN = SI = SCLK = V <sub>CC</sub> ,<br>IN5 = IN6 = IN7 = IN8 = V <sub>CC</sub>                 | 50                    | 100    | 200    | kΩ       |
| Input Pullup Resistance (CSB)                                | IPUCSB             | CSB = 0 V                                                                                     | 50                    | 100    | 200    | kΩ       |
| CSB Leakage to V <sub>CC</sub>                               | ILCSx              | CSB = 5 V, V <sub>CC</sub> = 0 V                                                              | –                     | –      | 10     | μA       |
| Input Capacitance (Note 12)                                  | CINx               | Not ATE Tested                                                                                | –                     | –      | 15     | pF       |
| SO – Output High                                             | VOUTH              | I(out) = –1 mA                                                                                | V <sub>CC</sub> – 1.0 | –      | –      | V        |
| SO – Output Low                                              | VOUTL              | I(out) = 1.6 mA                                                                               | –                     | –      | 0.4    | V        |
| SO Tristate Leakage                                          | ILSOx              | CSB = V <sub>CC</sub>                                                                         | –10                   | –      | 10     | μA       |
| SO Tristate Input Capacitance (Note 12)                      | CSOx               | Not ATE Tested                                                                                | –                     | –      | 15     | pF       |
| SCLK Frequency                                               | CLKf               | V <sub>CC</sub> = 5 V<br>V <sub>CC</sub> = 3.3 V                                              | –<br>–                | –<br>– | 5<br>2 | MHz      |
| SCLK Clock Period                                            | CLKper             | V <sub>CC</sub> = 5 V<br>V <sub>CC</sub> = 3.3 V                                              | 200<br>500            | –<br>– | –<br>– | ns<br>ns |
| SCLK High Time                                               | CLKH               | V <sub>CC</sub> = 5 V, Figure 9                                                               | 85                    | –      | –      | ns       |
| SCLK Low Time                                                | CLKL               | V <sub>CC</sub> = 5 V, Figure 9                                                               | 85                    | –      | –      | ns       |
| SCLK Setup Time                                              | CLKsup             | V <sub>CC</sub> = 5 V, Figure 9                                                               | 85                    | –      | –      | ns       |
| SI Setup Time                                                | Sisup              | V <sub>CC</sub> = 5 V, Figure 9                                                               | 50                    | –      | –      | ns       |
| SI Hold Time                                                 | SIH                | V <sub>CC</sub> = 5 V, Figure 9                                                               | 50                    | –      | –      | ns       |
| CSB Setup Time                                               | Cssup              | V <sub>CC</sub> = 5 V, Figure 9                                                               | 100                   | –      | –      | ns       |
| CSB High Time                                                | CSH                | V <sub>CC</sub> = 5 V, Figure 9                                                               | 200                   | –      | –      | ns       |
| SO enable after CSB falling edge (Note 12)                   | CStSO <sub>f</sub> | V <sub>CC</sub> = 5 V, Figure 9                                                               | –                     | –      | 50     | ns       |
| SO disable after CSB rising edge (Note 12)                   | CStSO <sub>r</sub> | V <sub>CC</sub> = 5 V, Figure 9                                                               | –                     | –      | 50     | ns       |
| SO Rise Time                                                 | SOR                | V <sub>CC</sub> = 5 V, C <sub>load</sub> = 40 pF                                              | –                     | –      | 25     | ns       |
| SO Fall Time                                                 | SOF                | V <sub>CC</sub> = 5 V, C <sub>load</sub> = 40 pF                                              | –                     | –      | 25     | ns       |
| SO Valid Time (Note 12)                                      | SOV                | V <sub>CC</sub> = 5 V, C <sub>load</sub> = 40 pF,<br>Figure 9                                 | –                     | –      | 50     | ns       |
| EN Low Valid Time                                            | ENL                |                                                                                               | 10                    | –      | –      | μs       |
| EN Delay Time                                                | END                | V <sub>CC</sub> = INx = 5 V<br>EN going high 50% to OUT5 –<br>OUT8 turning on 50%.            | –                     | –      | 100    | μs       |
| SPI wake up after EN rising edge                             | SPIWak             | SI = 5 V, CSB = 0 V, SCLK =<br>10 MHz, EN going high 50%<br>to SO going high 50%,<br>Figure 8 | –                     | –      | 200    | μs       |

12. Not subject to production testing.

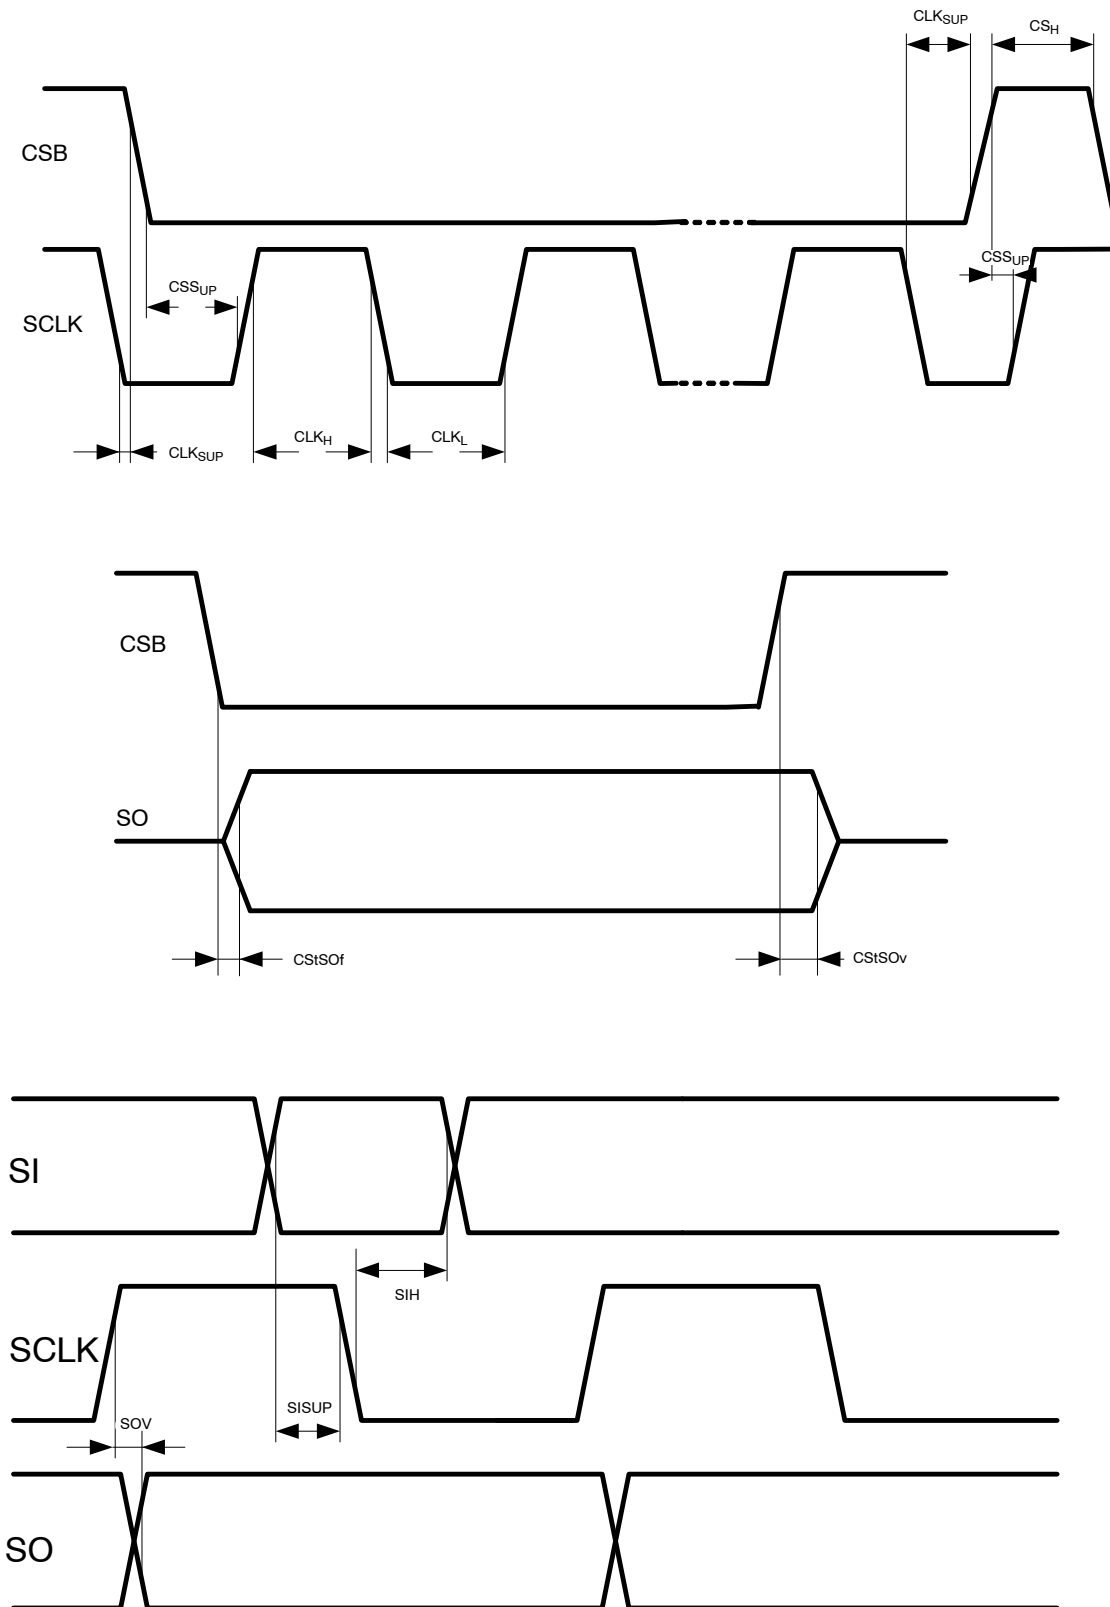


Figure 9. Detailed SPI Timing

TYPICAL PERFORMANCE CHARACTERISTICS

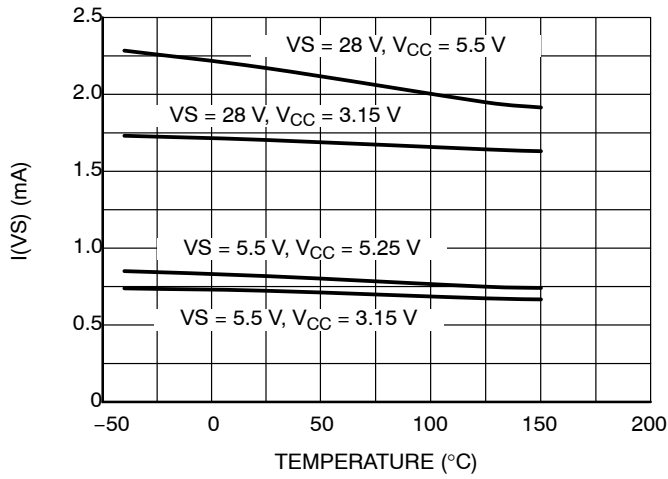


Figure 10.  $I(VS)$  vs. Temperature

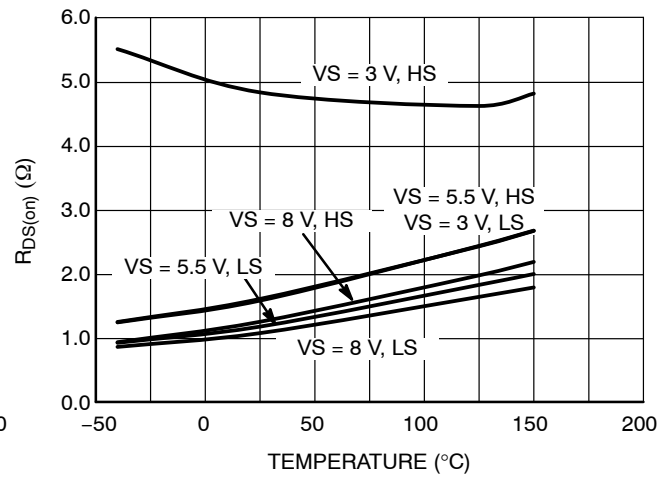


Figure 11.  $R_{DS(on)}$  vs. Temperature

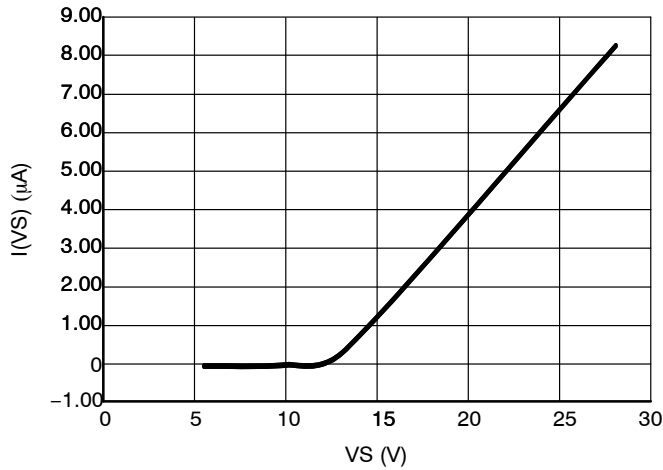


Figure 12.  $I(VS)$  Standby Current vs.  $VS$  at 25°C

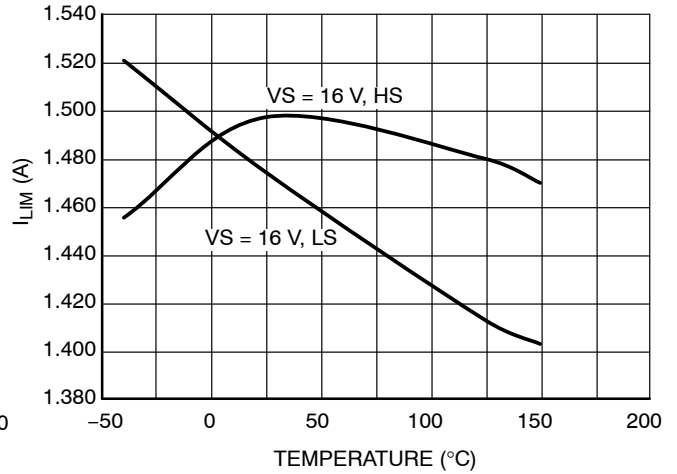


Figure 13. Output Over Current vs. Temperature

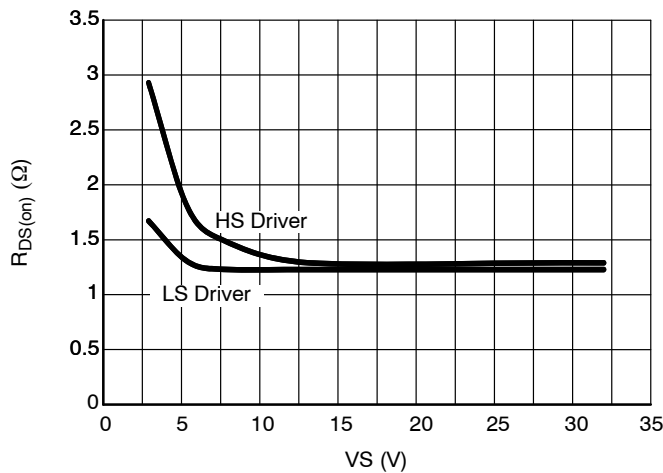


Figure 14.  $R_{DS(on)}$  vs.  $VS$

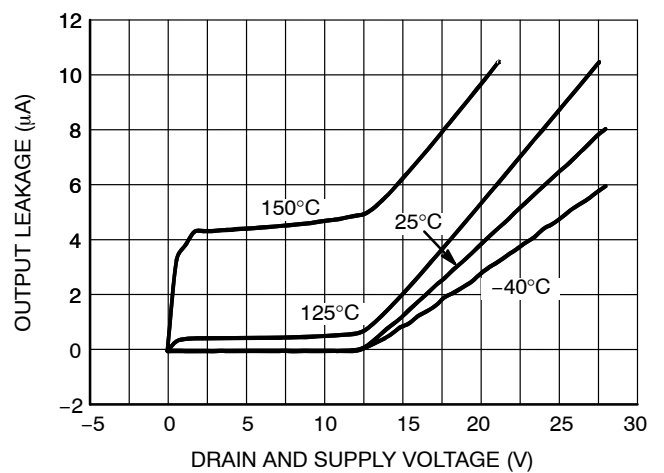


Figure 15. Standby Output Leakage vs.  $VS$

TYPICAL PERFORMANCE CHARACTERISTICS

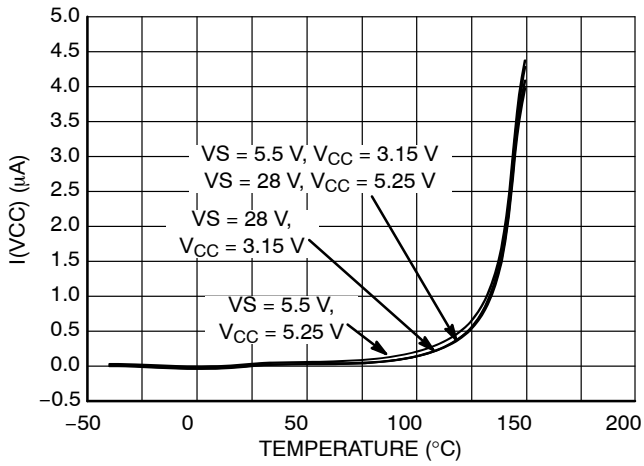


Figure 16.  $I(V_{CC})$  vs. Temperature

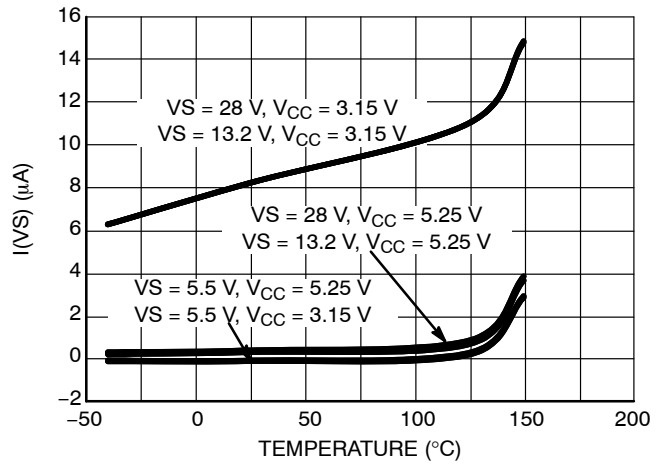


Figure 17.  $V_S$  Standby Current vs. Temperature

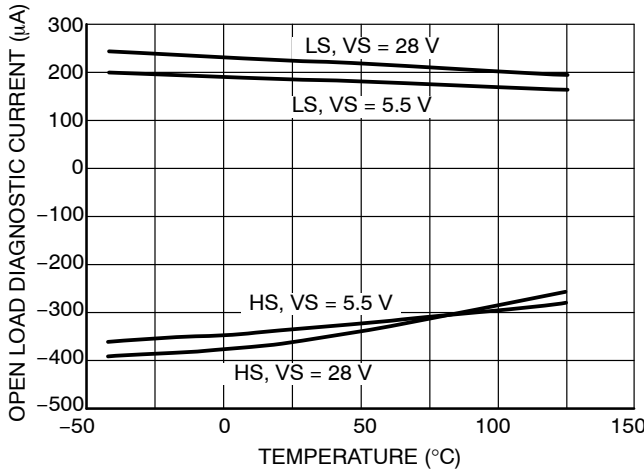


Figure 18. Open Load Detect Current vs. Temperature

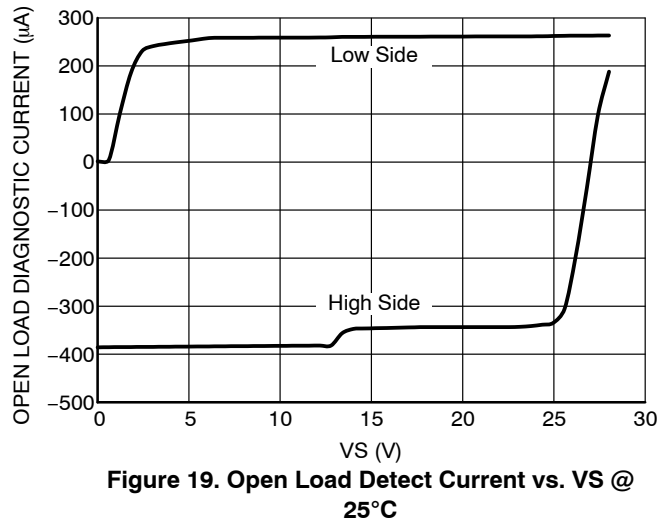


Figure 19. Open Load Detect Current vs.  $V_S$  @ 25°C

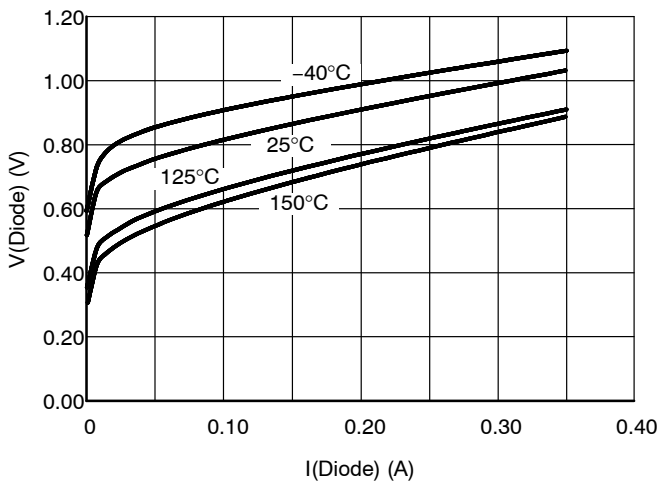


Figure 20. Source-to-Drain Voltage Body Diode

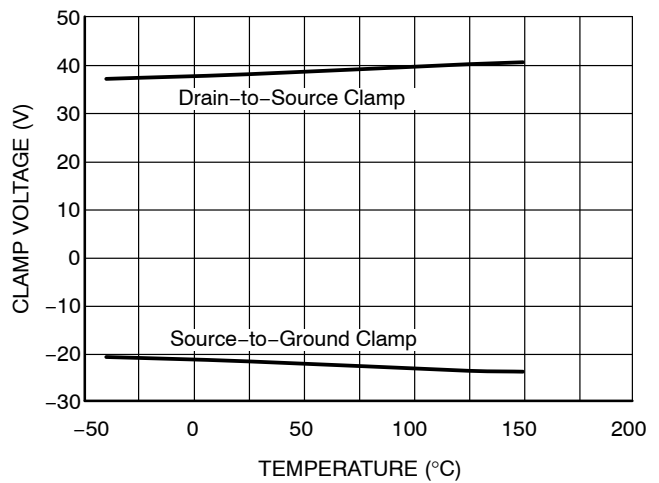


Figure 21. Output Clamp vs. Temperature

## DETAILED OPERATING DESCRIPTION

### Normal Operation

#### Power Outputs

The NCV7608 provides eight independent power transistors with pins D1–D8, and S1–S8 as drain and source outputs respectively. For High-side Drive configurations (sourcing), the drain pins are connected to the battery supply. In Low-Side configurations (sinking), the drain pins are connected to the load. All outputs may be configured as high-side, low-side, half-bridge, or H-bridge. Internal clamping structures are provided to limit transient voltages when switching inductive loads.

#### SPI-Interface

The device provides a 16 bit SPI-interface. Data is imported into the NCV7608 through the SI (serial input) pin. Data is exported out of the NCV7608 through the SO (serial output) pin. The input-frame (SI) is used to command the output stages and program individual channel open load diagnostics. The response frame (SO) provides channel-specific (1bit / channel) status information and fault information. See Table 1 for channel status decoding. Words should be composed of 16 bits LSB (least significant bit) transmitted first.

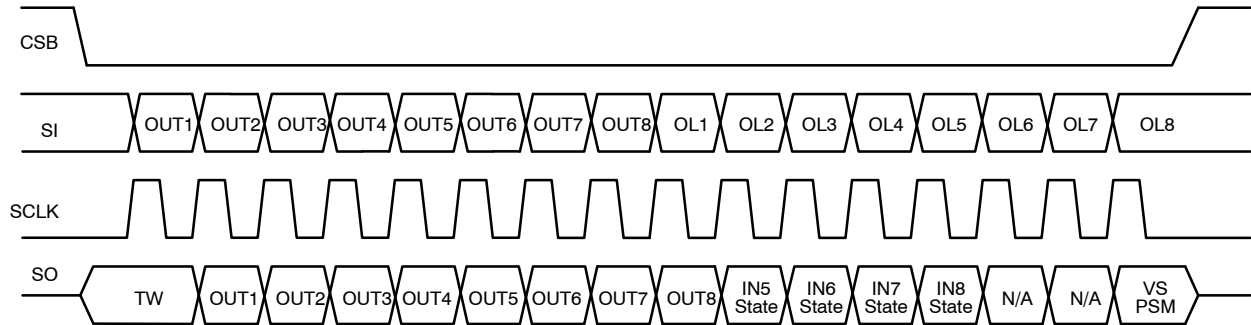


Figure 22. SPI Frame

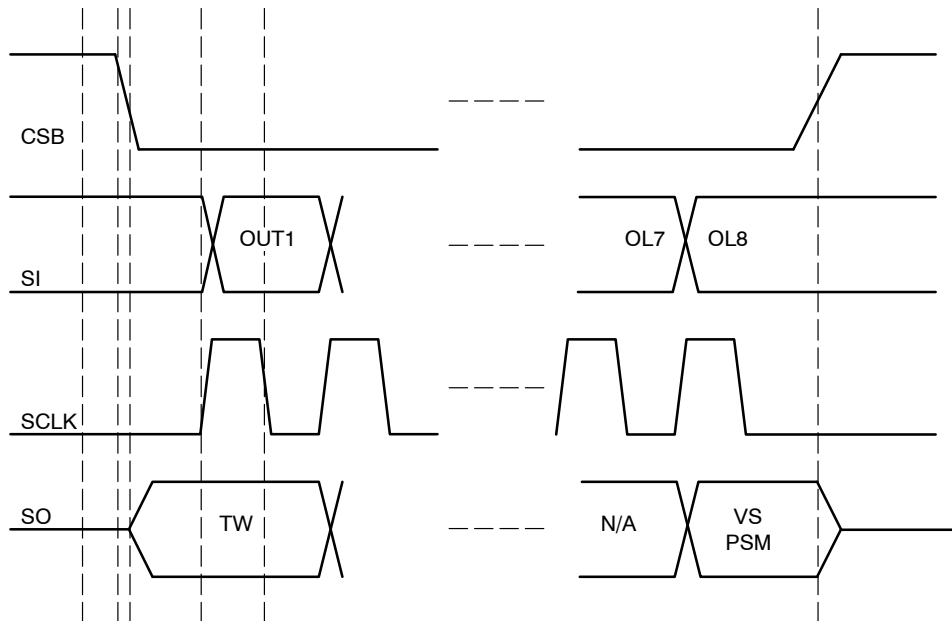


Figure 23. SPI Frame Detail

Table 2. SPI INPUT / OUTPUT

| Input Data |                                                                          |             | Output Data |                               |               |
|------------|--------------------------------------------------------------------------|-------------|-------------|-------------------------------|---------------|
| Bit Number | Bit Description                                                          | Bit Status  | Bit Number  | Bit Description               | Bit Status    |
| 15         | Driver 8<br>Open Diagnostic Enable                                       | 0 = Disable | 15          | VS Power Supply<br>Monitoring | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 14         | Driver 7<br>Open Diagnostic Enable                                       | 0 = Disable | 14          | N/A                           | 0             |
|            |                                                                          | 1 = Enable  |             |                               |               |
| 13         | Driver 6<br>Open Diagnostic Enable<br>Driver 6<br>Open Diagnostic Enable | 0 = Disable | 13          | N/A                           | 0             |
|            |                                                                          | 1 = Enable  |             |                               |               |
| 12         | Driver 5<br>Open Diagnostic Enable                                       | 0 = Disable | 12          | IN8 State (Note 13)           | 0 = (IN8 = 0) |
|            |                                                                          | 1 = Enable  |             |                               | 1 = (IN8 = 1) |
| 11         | Driver 4<br>Open Diagnostic Enable                                       | 0 = Disable | 11          | IN7 State (Note 13)           | 0 = (IN7 = 0) |
|            |                                                                          | 1 = Enable  |             |                               | 1 = (IN7 = 1) |
| 10         | Driver 3<br>Open Diagnostic Enable                                       | 0 = Disable | 10          | IN6 State (Note 13)           | 0 = (IN6 = 0) |
|            |                                                                          | 1 = Enable  |             |                               | 1 = (IN6 = 1) |
| 9          | Driver 2<br>Open Diagnostic Enable                                       | 0 = Disable | 9           | IN5 State (Note 13)           | 0 = (IN5 = 0) |
|            |                                                                          | 1 = Enable  |             |                               | 1 = (IN5 = 1) |
| 8          | Driver 1<br>Open Diagnostic Enable                                       | 0 = Disable | 8           | Driver 8 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 7          | Driver 8 Enable                                                          | 0 = Disable | 7           | Driver 7 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 6          | Driver 7 Enable                                                          | 0 = Disable | 6           | Driver 6 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 5          | Driver 6 Enable                                                          | 0 = Disable | 5           | Driver 5 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 4          | Driver 5 Enable                                                          | 0 = Disable | 4           | Driver 4 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 3          | Driver 4 Enable                                                          | 0 = Disable | 3           | Driver 3 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 2          | Driver 3 Enable                                                          | 0 = Disable | 2           | Driver 2 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 1          | Driver 2 Enable                                                          | 0 = Disable | 1           | Driver 1 Status               | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |
| 0          | Driver 1 Enable                                                          | 0 = Disable | 0           | Thermal Warning<br>(TW)       | 0 = No Fault  |
|            |                                                                          | 1 = Enable  |             |                               | 1 = Fault     |

An output driver (Driver Status) fault is either open load, over current, or over temperature.

13. When over current or thermal shutdown fault occurs, bits 9 through 12 records the state of INx.

## SPI Input

### Driver Enable (bits 0–7)

A zero turns the driver off.

A one turns the driver on.

### Open Load Diagnostic (bits 8–15)

A zero programming bit disables the detection of an open load condition.

A one programming bit enables the detection of an open load condition.

## SPI Output

### Parallel Input (INx) State (bits 9–12)

The state of the parallel (PWM) input pins (INx) are mirrored to SPI output bits #9–12. When overcurrent or thermal shutdown fault occurs, bits 9 through 12 record the state of INx. This enables the user to distinguish an open load fault from an over current fault when the NCV7608 is operated from two isolated controllers for the SPI input and the Parallel input.

**Table 3. SO DRIVER STATUS INFORMATION SUMMARY (Bits 0–8, 15)**

| Driver Enable | Open Load Diagnostic enable | SO Feedback              | Status Information Reset Requirement                                                                             |
|---------------|-----------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------|
| Disabled      | Disabled                    | 0                        | N/A                                                                                                              |
| Disabled      | Enabled                     | 0 (No Open Load)         | N/A                                                                                                              |
|               |                             | 1 (Open Load Detected)   | N/A                                                                                                              |
| Enabled       | X                           | 0 (No Fault)             | N/A                                                                                                              |
|               |                             | 1 (Over Current)         | A valid SPI command with the offending Driver DISABLED is received.                                              |
|               |                             | 1 (VS Power supply fail) | Any valid SPI command <b>AND</b> VS within limits                                                                |
|               |                             | 1 (Thermal Warning)      | N/A                                                                                                              |
|               |                             | 1 (Thermal Shutdown)     | The over temperature goes away <b>AND</b> a valid SPI frame with the offending driver pair DISABLED is received. |

X=Don't Care


### Frame Detection

Input word integrity (SI) is evaluated by the use of a frame consistency check. The word frame length is compared to an  $n * 16$  bit (where n is an integer) acceptable word length before the data is latched into the input register. This guarantees the proper word length has been imported and allows for daisy chain operation applications.

The frame length detector is enabled with the CSB falling edge and the SCLK rising edge.

SCLK must be low during the CSB rising edge.

Reference the valid SPI frame shown below.

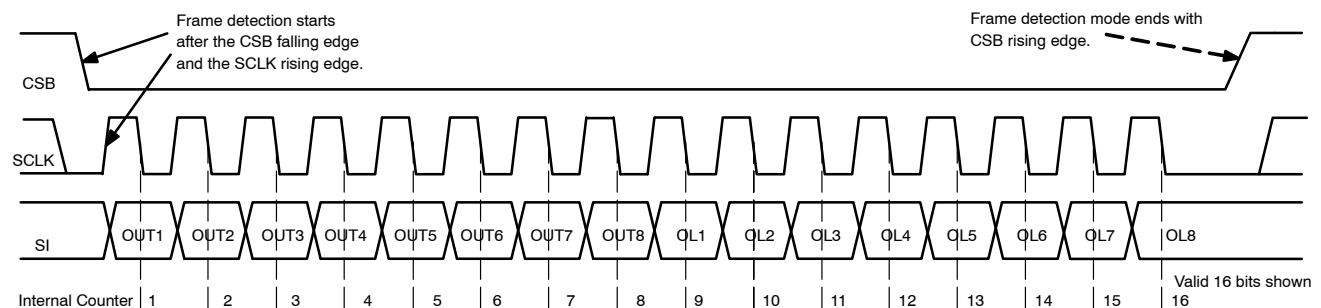

**Figure 24. Frame Detection**

### PWM Operation

Channels 5, 6, 7, and 8 can be controlled via the serial port (SPI) or via the respective parallel port input pins (IN5–IN8).

The SPI information is OR'd with the respective Parallel input control pins (INx).

INx = 1 activates the output stage.

INx = 0 deactivates the output stage.

Special attention should be paid to detection of over current and open load conditions when operated in a pwm mode. These faults are detected in a 100  $\mu$ s (typ) time

window. Faults will not be detected at higher frequencies if the time period of the input signal does not allow for 100  $\mu$ s detection time.

#### Handling of Fault Conditions

**Table 4. FAULT SUMMARY TABLE**

| Fault                | Fault Memory      | Driver Condition                                                            | Output Register Clear Requirement                                                                                |
|----------------------|-------------------|-----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Open Load            | None              | Allowed to turn on                                                          | N/A                                                                                                              |
| Over Current         | Latched           | Latched Off                                                                 | A valid SPI command is received with the offending driver disabled                                               |
| Thermal Warning      | None              | Allowed to turn/ remain on as long as the device is not in thermal shutdown | N/A                                                                                                              |
| Thermal Shutdown     | Latched (Note 14) | Latched Off                                                                 | The over temperature goes away <b>AND</b> a valid SPI frame with the offending driver pair DISABLED is received. |
| VS Power Supply Fail | Latched (Note 14) | Allowed to turn on while the Voltage is within operating range              | After ANY valid SPI frame & voltage within operating range                                                       |

14. Latched conditions are cleared in the same manner (via the SPI port) during normal operation regardless of the driver turn on command path (via a SPI command or via a parallel input command). Latches are also cleared by cycling the EN pin or with a power-on reset of V<sub>CC</sub>.

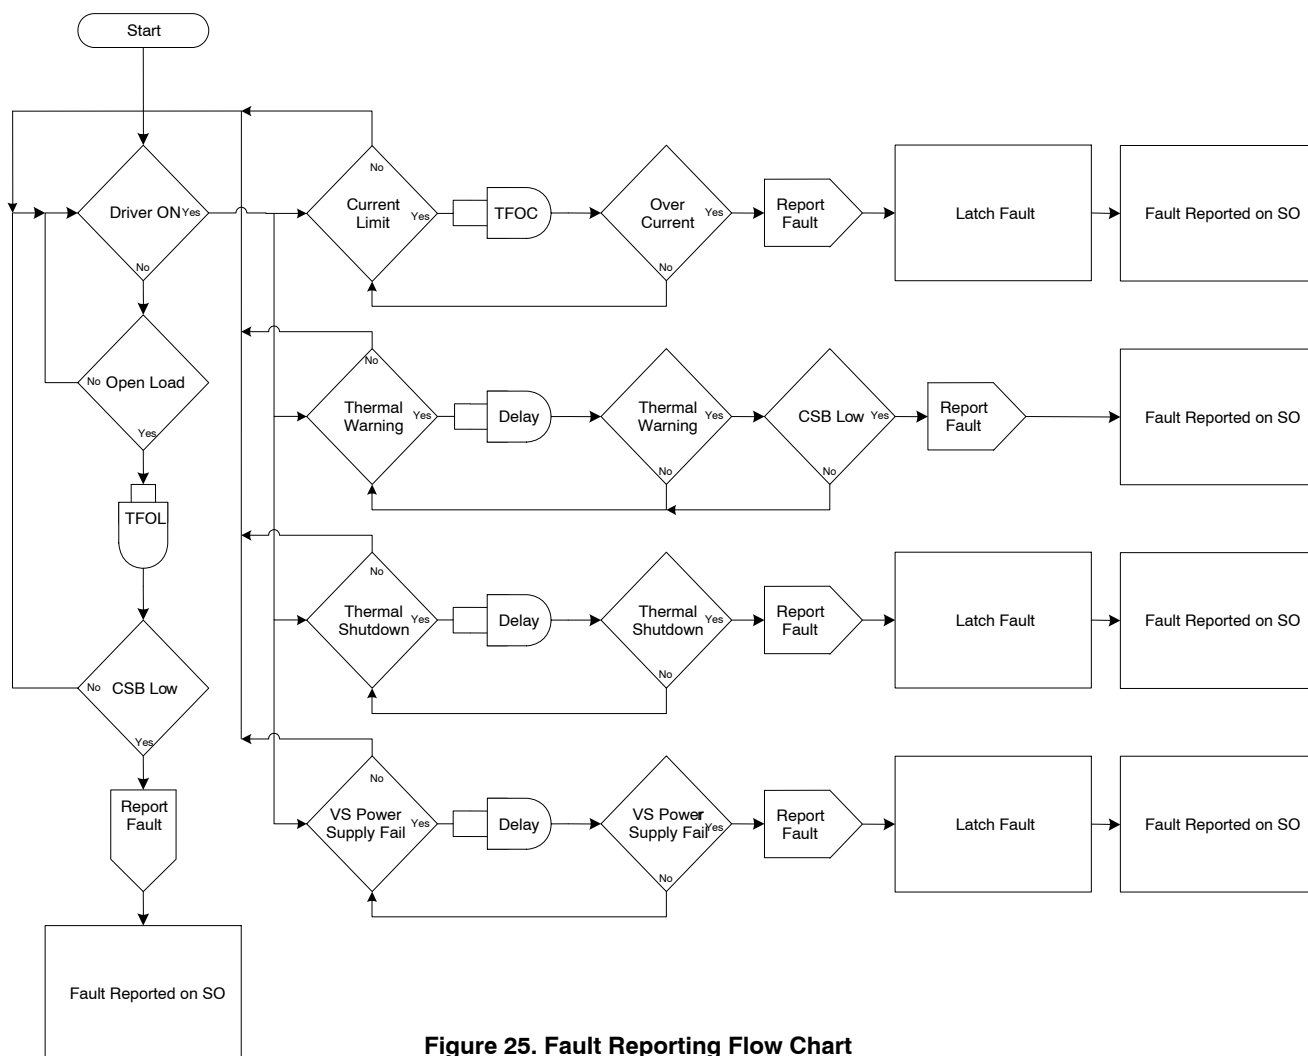


Figure 25. Fault Reporting Flow Chart

### Fault Filters

The NCV7608 detects overtemperature, over current, VS Power Supply and open load faults. Faults are reported in the Output Data fault register. The fault filter timer for over current or open load is 100  $\mu$ s (typ). An over current or open load event must exist for this period of time to be recognized. There are eight fault timers, one dedicated to each driver for use for both over current and open load. Thermal Warning, Thermal Shutdown and VS Power Supply Fail each have their own dedicated timers.

### Open Load

Open Load conditions are detected in the off mode. See “OFF-Mode Open Load Diagnostics” for details.

### Over Current

The output current is limited in both high-side and low-side configuration. Over Current is detected in the turn on mode. High power dissipation during over current can cause overtemperature shutdown. Over Current is a latched off event. Latching off a driver in over current is especially useful in systems utilizing a hierarchical software

architecture whereby the microprocessor sends a command (such as turning a device on when a short circuit exists) and then proceeds to other focused microprocessor activity. Eliminating an auto retry upon over current fault detection scheme reduces IC stress by reducing the frequency of attempts to turn back on.

### Thermal Warning & Overtemperature Shutdown

Four independent Overtemperature shutdown circuits are featured (one common sensor for each drive pair). Channels are sequentially paired together with its own thermal detection circuit as Channels 1 and 2, Channels 3 and 4, Channels 5 and 6, and Channels 7 and 8. Each thermal detection circuit senses two temperature levels, one to give a Thermal Warning (145°C typ) (TW, bit = 0), and one to shut the driver pair off (Overtemperature) at a higher temperature 30°C above TW (175°C typ). When the thermal detection circuit reaches the temperature point of Thermal Warning, the output data bit 0 (TW) will be set to a 1, and the outputs will remain on. Overtemperature events will be recorded as faults to the offending Output Driver pair

independently of the input state (serial or parallel). Overtemperature shutdown is a latched event.

Since thermal warning precedes an overtemperature shutdown, software polling of this bit will allow for load control and possible prevention of overtemperature shutdown conditions.

#### Thermal Warning Retrieval

Thermal warning information can be retrieved immediately without performing a complete SPI access

cycle. Figure 26 below displays how this is accomplished. Bringing the CSB pin from a 1 to a 0 condition immediately displays the information on the output data bit 0, thermal warning, even in the absence of a SCLK signal. As the temperature of the NCV7608 changes from a condition from below the thermal warning threshold to above the thermal warning threshold, the state of the SO pin changes and this level is available immediately when the CSB goes to 0. A 0 on SO indicates there is no thermal warning, while a 1 indicates the IC is above the thermal warning threshold.

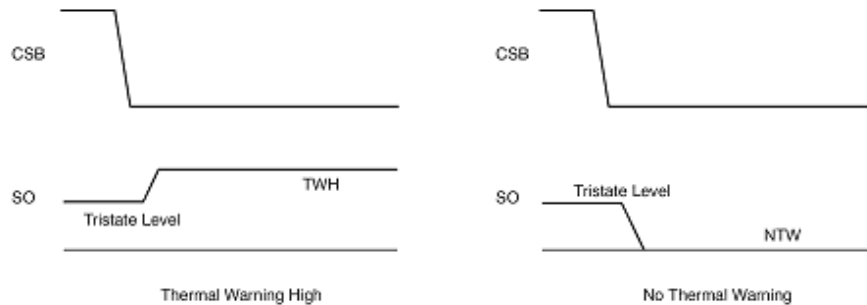


Figure 26. Accessing Thermal Warning Bit

### Power Supply Monitoring

#### Undervoltage shutdown

Both supply voltages ( $V_{CC}$  and  $V_S$ ) are monitored for undervoltage. When  $V_{CC}$  goes below the threshold, all outputs are turned OFF and the input and output registers are cleared. An undervoltage condition on  $V_S$  will cause all channels to shut down. The fault bit (Bit #15) is latched in the Output Data Register. The channels will return to the commanded status after reaching operational  $V_S$  levels provided  $V_{CC}$  UVLO is not breached. The SPI port remains active during  $V_S$  undervoltage within a valid  $V_{CC}$  voltage. Drivers are guaranteed to operate with automotive cranking voltages down to 3 V on  $V_S$  per the undervoltage shutdown thresholds. Bit# 15 is cleared with a valid SPI frame and  $V_S$  within the operating limits.

#### Overvoltage shutdown

$V_S$  is continuously monitored for overvoltage conditions. The threshold is set above automotive jump start conditions allowing operation of the IC during jump start. The minimum overvoltage threshold is 32 V. When  $V_S$  goes above the overvoltage threshold voltage, all outputs are turned OFF. The fault bit (Bit #15) is latched in the Output Data Register. Input and output registers maintain all information. The channels will return to the commanded

status after reaching operational  $V_S$  levels provided  $V_{CC}$  UVLO is not breached. The SPI port remains active during  $V_S$  overvoltage within a valid  $V_{CC}$  voltage. Bit #15 is cleared with any valid SPI frame and  $V_S$  within the operating limits.

#### OFF-Mode Open Load Diagnostics

Open load diagnostics are performed when the drivers are off (provided the channel is programmed to perform the operation via Bits #8 through #15). Open load diagnostics are performed by connecting two tracking current sources (IDIAGHSx and IDIAGLSx) to the corresponding outputs. To support both operation modes (high-side and low-side) and provide minimum delay due to external capacitances, both Drain and Source pin voltages of the device are monitored to generate the diagnostic information. Channel diagnostic information is directed to the output data register. Open load diagnostics are disabled during  $V_S$  undervoltage or overvoltage events or when EN is low.

Figure 27 shows the NCV7608 open load diagnostics principles.

Figure 28 shows the internal circuitry used with the device set up as a low-side driver.

Figure 29 shows the internal circuitry used with the device set up as a high-side driver.

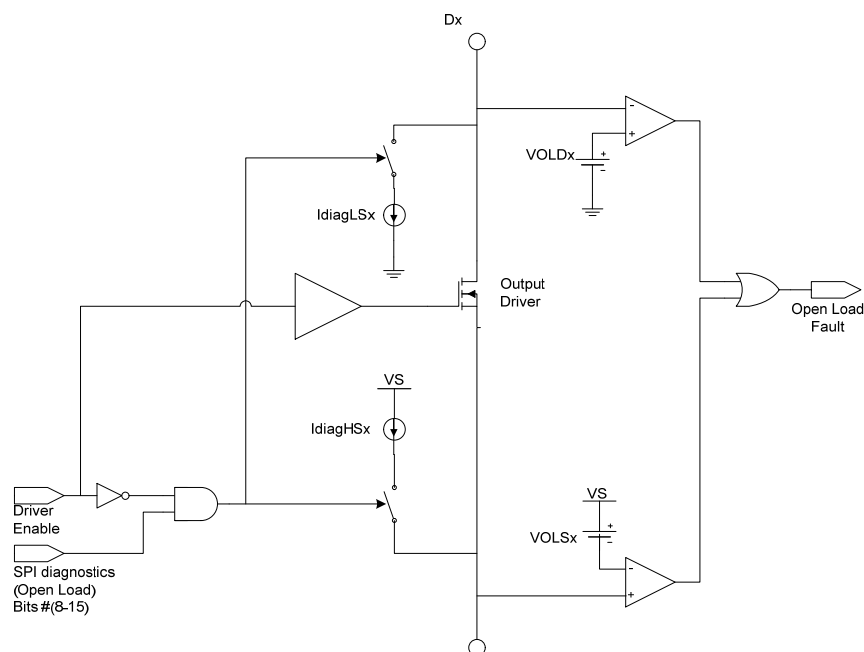


Figure 27. Open Load Diagnostic Principle

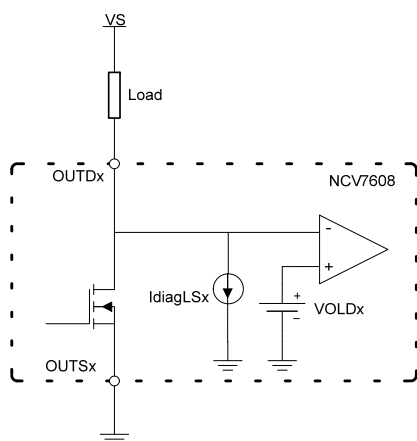


Figure 28. Open Load Circuitry as Low Side Driver

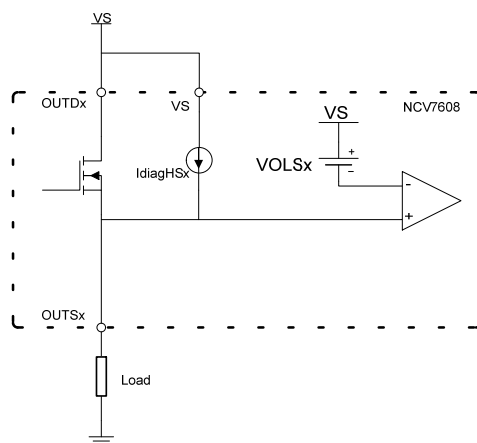


Figure 29. Open Load Circuitry as High Side Driver

### Open Load Diagnostic Performance

System design sometimes requires open load diagnostics to be turned off to prevent unintended operation. Input Bits 8–15 control this function.

One application example would be driving LED's. Leaving the diagnostic circuitry turned on would result in visible illumination of the LED's because of the currents used in open load detection. Open load detection may still be utilized by testing at low time intervals.

### Miscellaneous

#### Enable

A logic low on EN puts the device in a current saving mode. Quiescent current ( $V_{CC}$ ) with EN low is less than 5  $\mu A$ . A logic high on EN powers up the device allowing

operation through the parallel inputs (IN5...IN8). An internal pulldown resistor is provided to ensure device turn-off in the event the enable signal is lost.

A low on EN will result in a power-on-reset to the logic. All outputs will be shut off and all registers reset.

#### Loss of Ground

The NCV7608 output drivers will not be active during a loss of ground condition. No damage to the device will occur during this condition for VS less than or equal to 16 V.

#### Diagnostic Implementation

To provide maximum flexibility in using the device as an H-Bridge driver, a current ratio between the HS and LS diagnostic currents is implemented (the diagnostic source current is always higher in magnitude than the diagnostic

sink current). Equal diagnostic currents would result in unpredictable results due to process variation.

## Timing Information

### Open Load

Open Load is reported if open load is enabled and an open load fault exists.

Open Load is not a latched condition and is not reported when drivers are on.

To be captured, Open Load must be present when CSB goes low.

\* SPI Driver Enable bit = 0 and associated INx = 0

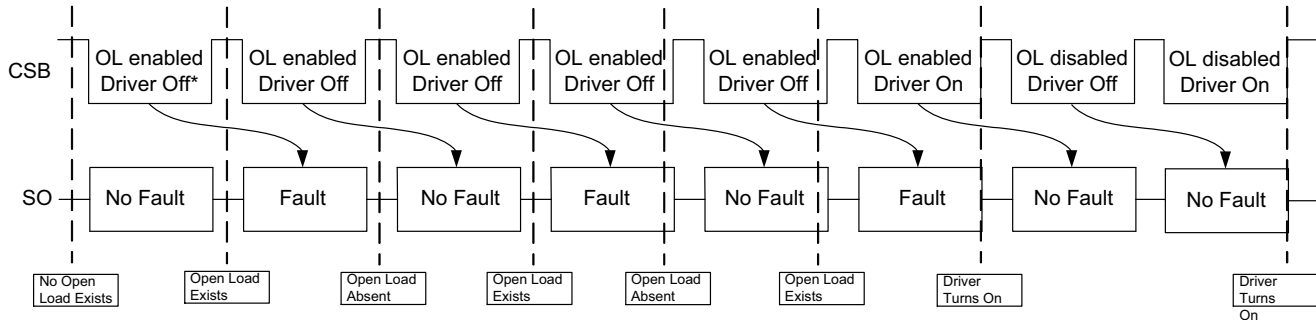


Figure 30. Open Load Timing Diagram

### Over Current

Over current is reported if the drivers' over current detection threshold is breached.

The driver is latched off after 100  $\mu$ s from the over current detection.

To reset the driver status bit for over current, a valid SPI frame with ENx = 0 is required. This will reset the driver status bit and the driver can be turned back on in the next valid SPI frame.

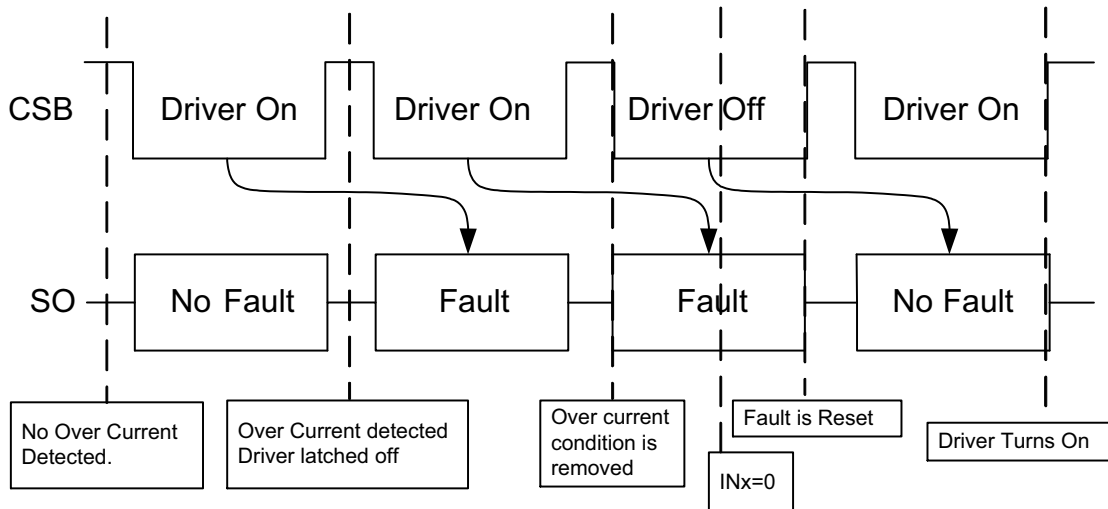


Figure 31. Over Current Timing Diagram

### Thermal Warning and Thermal Shutdown

Thermal Warning is reported in bit #0 when the die temperature goes above 145°C (typ)

and does not fall below 145°C (typ) – 30°C hysteresis (typ). Thermal Warning is only sampled and reported when CSB is low.

Thermal Shutdown will turn off the two drivers associated with the thermal sensor when the die temperature is above 175°C (typ). The driver status bit will be latched.

The driver status is reset if the die temperature falls below 175°C (typ) – 30°C (typ) and a valid SPI frame with the Driver(s) x Enable bit = 0. The driver(s) can then be turned on in the next valid SPI frame with the Driver x Enable(s) = 1.

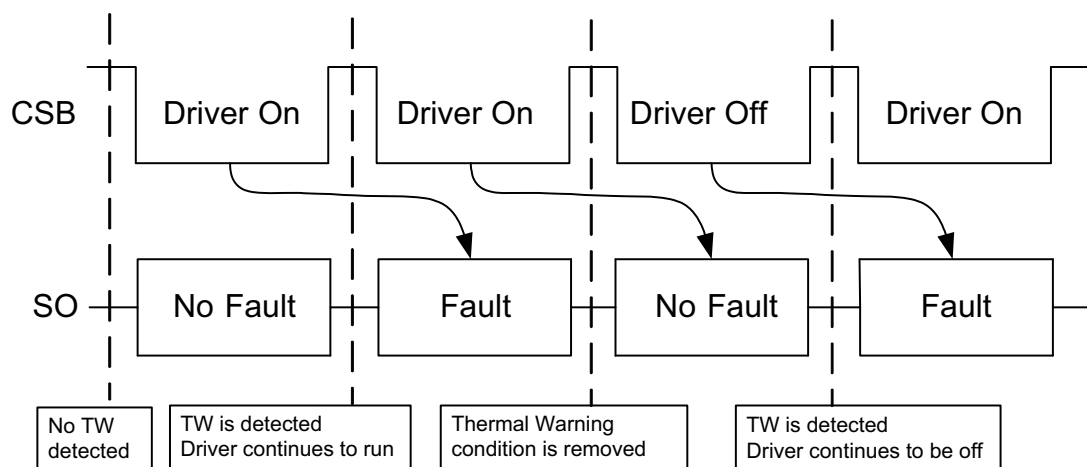


Figure 32. Thermal Warning Timing Diagram

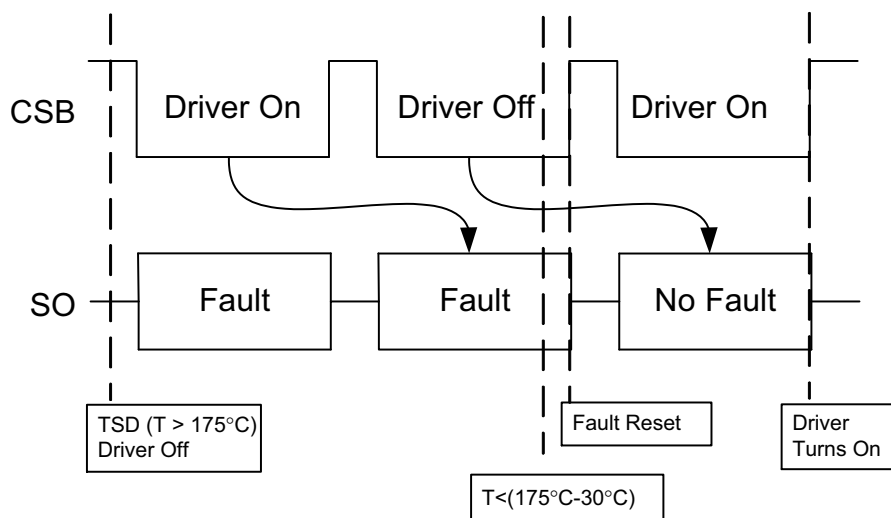


Figure 33. Thermal Shutdown Timing Diagram


### Power Supply Fail

VS Overvoltage (OV) or undervoltage (UV) is reported using bit #15 (PSM) in the SO output data register. This is a latched event.


Drivers will shut off during VS OV or UV.

When coming out of VS OV or UV, the drivers will take on the state determined by the last valid SPI frame.


The VS Power Supply Monitoring bit (bit #15) will be reset by any valid SPI frame.

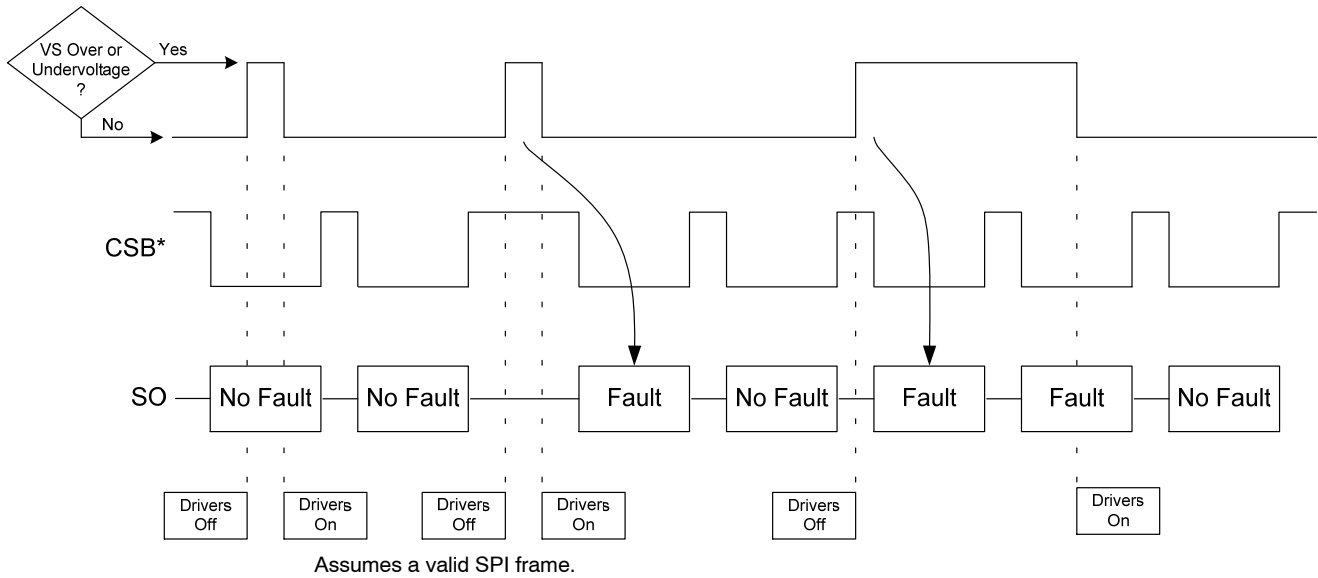

**Figure 34. Power Supply Fail Timing Diagram**

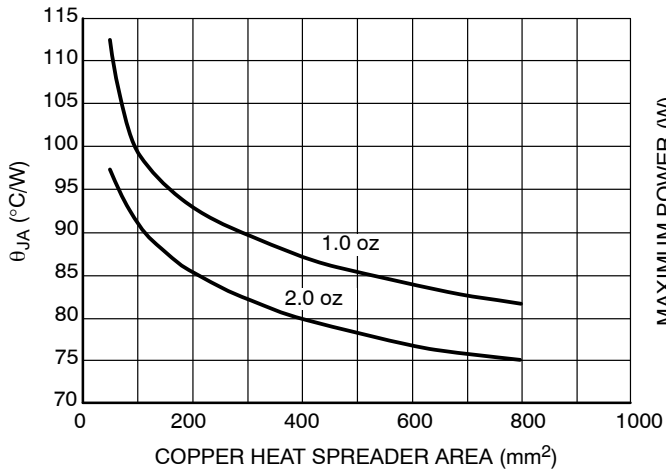

**Figure 35.  $\theta_{JA}$  vs. Copper Heat Spreader**

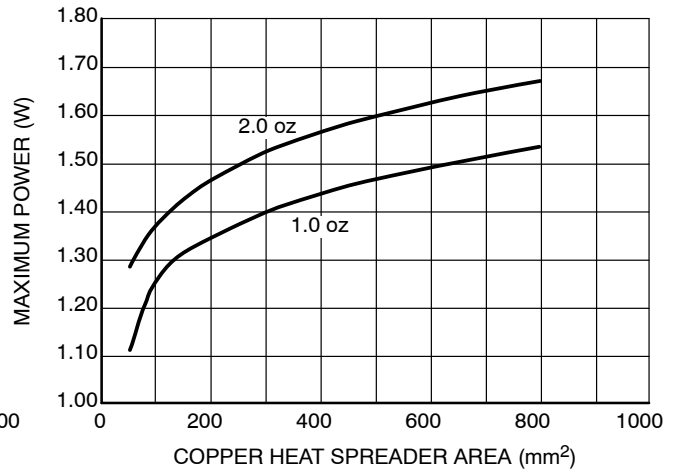

**Figure 36. Maximum Power vs. Copper Heat Spreader**

## ORDERING INFORMATION


| Device       | Package                 | Shipping <sup>†</sup> |
|--------------|-------------------------|-----------------------|
| NCV7608DWR2G | SOIC-28 WB<br>(Pb-Free) | 1000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NCV7608

## PACKAGE DIMENSIONS

SOIC-28 WB  
CASE 751F-05  
ISSUE H

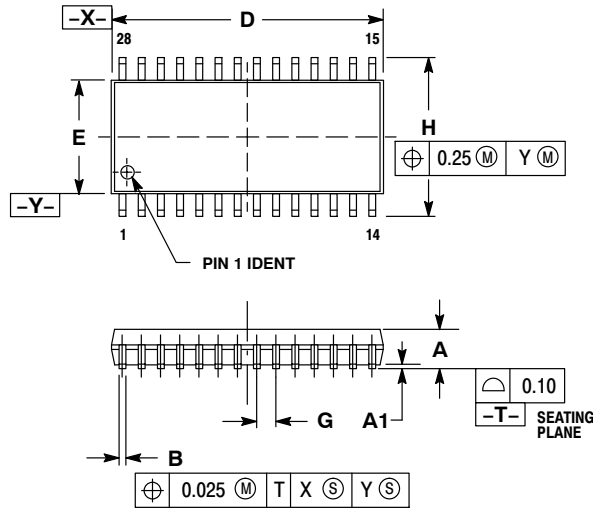


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD PROTRUSION
4. MAXIMUM MOLD PROTRUSION 0.15 PER SIDE.
5. DIMENSION B DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL NOT BE 0.13 TOTAL IN EXCESS OF B DIMENSION AT MAXIMUM MATERIAL CONDITION.

| MILLIMETERS |          |       |
|-------------|----------|-------|
| DIM         | MIN      | MAX   |
| A           | 2.35     | 2.65  |
| A1          | 0.13     | 0.29  |
| B           | 0.35     | 0.49  |
| C           | 0.23     | 0.32  |
| D           | 17.80    | 18.05 |
| E           | 7.40     | 7.60  |
| G           | 1.27 BSC |       |
| H           | 10.05    | 10.55 |
| L           | 0.41     | 0.90  |
| M           | 0°       | 8°    |

## SOLDERING FOOTPRINT\*

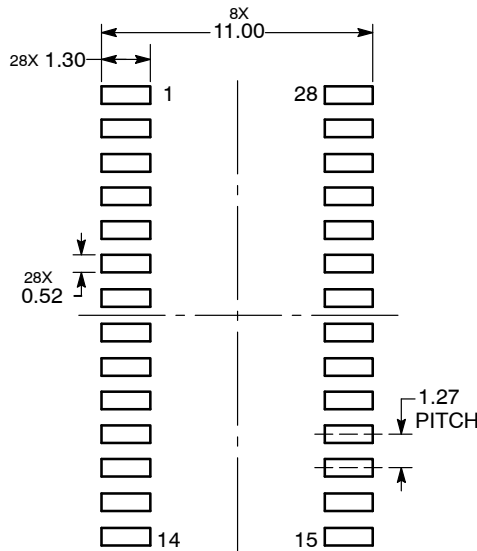

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9