


# SS-P

Subminiature Basic Switch

## SS Series Compatible Mounting with a Simple Construction and Easy-to-Use Design Concept

- One-piece terminal construction to keep out flux.
- A single leaf movable spring construction.
- Conforms to North American and European safety Standards.

RoHS Compliant

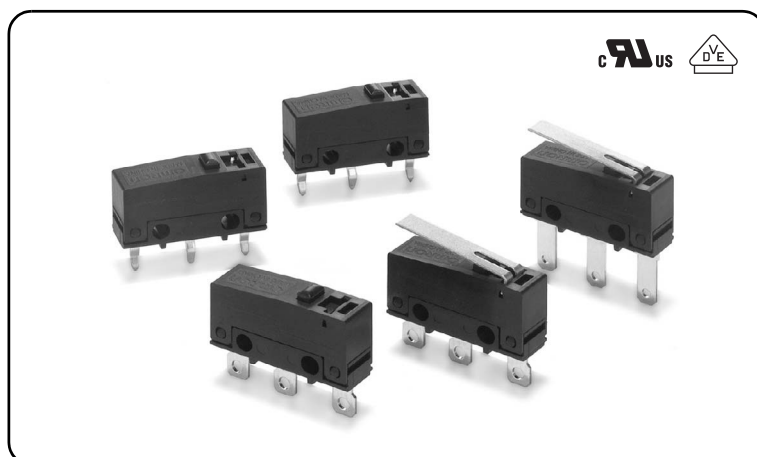

## Model Number Legend


|                                                                                                                                                                                                         |  |                                    |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------|
| SS- <span style="border: 1px solid black; padding: 0 2px;">1</span> G <span style="border: 1px solid black; padding: 0 2px;">2</span> P <span style="border: 1px solid black; padding: 0 2px;">3</span> |  |                                    |
| <b>1. Ratings</b>                                                                                                                                                                                       |  | <b>3. Terminals</b>                |
| 3 : 125 VAC 3 A                                                                                                                                                                                         |  | None : Solder terminals            |
| 01 : 30 VDC 0.1 A                                                                                                                                                                                       |  | T : Quick-connect terminals (#110) |
| <b>2. Actuator</b>                                                                                                                                                                                      |  | D : PCB terminals                  |
| None : Pin plunger                                                                                                                                                                                      |  |                                    |
| L : Hinge lever                                                                                                                                                                                         |  |                                    |
| L13 : Simulated roller lever                                                                                                                                                                            |  |                                    |

## List of Models

| Ratings | Actuator               | Terminals                                                                           | Solder terminals | Quick-connect terminals (#110) | PCB terminals |
|---------|------------------------|-------------------------------------------------------------------------------------|------------------|--------------------------------|---------------|
| 3A      | Pin plunger            |  | SS-3GP           | SS-3GPT                        | SS-3GPD       |
|         | Hinge lever            |  | SS-3GLP          | SS-3GLPT                       | SS-3GLPD      |
|         | Simulated roller lever |  | SS-3GL13P        | SS-3GL13PT                     | SS-3GL13PD    |
| 0.1A    | Pin plunger            |  | SS-01GP          | SS-01GPT                       | SS-01GPD      |
|         | Hinge lever            |  | SS-01GLP         | SS-01GLPT                      | SS-01GLPD     |
|         | Simulated roller lever |  | SS-01GL13P       | SS-01GL13PT                    | SS-01GL13PD   |

## Contact Form

### ●SPDT



Separator (Sold Separately), Terminal Connector (Sold Separately) ➔ Refer to "Basic Switch Common Accessories"

## Contact Specifications

| Item                                        | Model                | SS-3P models | SS-01P models |
|---------------------------------------------|----------------------|--------------|---------------|
| Contact                                     | Specification        | Rivet        | Crossbar      |
|                                             | Material             | Silver       | Gold alloy    |
|                                             | Gap (standard value) | 0.5 mm       | 0.5 mm        |
| Minimum applicable load (reference value) * |                      | 5 VDC 160 mA | 5 VDC 1 mA    |

\* Please refer to "Using Micro Loads" in "●Precautions" for more information on the minimum applicable load.

## Ratings

| Rated voltage | Model | SS-3P models   | SS-01P models |
|---------------|-------|----------------|---------------|
|               | Item  | Resistive load |               |
| 125 VAC       |       | 3 A            | 0.1 A         |
| 30 VDC        |       | 3 A            | 0.1 A         |

Note 1. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 20 operations/min

Note 2. Consult your OMRON sales representative for information on models for other loads.

## Approved Safety Standards

### UL (UL1054/CSA C22.2 No.55)

| Rated voltage | Model | SS-3P          | SS-01P |
|---------------|-------|----------------|--------|
|               | Item  | Resistive load |        |
| 125 VAC       |       | 3 A            | 0.1 A  |
| 30 VDC        |       | 3 A            | 0.1 A  |

### VDE (EN61058-1)

| Rated voltage | Model | SS-3P | SS-01P |
|---------------|-------|-------|--------|
| 125 VAC       |       | 3 A   | 0.1 A  |
| 30 VDC        |       | 3 A   | 0.1 A  |

Testing conditions: 5E4 (50,000 operations) T55 (0 to 55°C)

## Characteristics

| Item                                        |                                                             | Model | SS-3P models                                                                     | SS-01P models                               |
|---------------------------------------------|-------------------------------------------------------------|-------|----------------------------------------------------------------------------------|---------------------------------------------|
| Permissible operating speed                 |                                                             |       | 0.1 mm to 1 m/s (for pin plunger models)                                         |                                             |
| Permissible operating frequency             | Mechanical                                                  |       | 300 operations/min                                                               |                                             |
|                                             | Electrical                                                  |       | 30 operations/min                                                                |                                             |
| Insulation resistance                       |                                                             |       | 100 MΩ min. (at 500 VDC with insulation tester)                                  |                                             |
| Contact resistance (initial value)          |                                                             |       | 50 mΩ max.                                                                       | 100 mΩ max.                                 |
| Dielectric strength *1                      | Between terminals of the same polarity                      |       | 1,000 VAC 50/60 Hz for 1 min                                                     |                                             |
|                                             | Between current-carrying metal parts and ground             |       | 1,500 VAC 50/60 Hz for 1 min                                                     |                                             |
|                                             | Between each terminals and non-current-carrying metal parts |       | 1,500 VAC 50/60 Hz for 1 min                                                     |                                             |
| Vibration resistance *2                     | Malfunction                                                 |       | 10 to 55 Hz, 1.5 mm double amplitude                                             |                                             |
| Shock resistance                            | Durability                                                  |       | 1,000 m/s <sup>2</sup> {approx. 100G} max.                                       |                                             |
|                                             | Malfunction *2                                              |       | 300 m/s <sup>2</sup> {approx. 30G} max.                                          |                                             |
| Durability *3                               | Mechanical                                                  |       | 1,000,000 operations min. (60 operations/min)                                    |                                             |
|                                             | Electrical                                                  |       | 70,000 operations min. (20 operations/min, 125 VAC)                              | 200,000 operations min. (20 operations/min) |
|                                             |                                                             |       | 100,000 operations min. (20 operations/min, 30 VDC)                              |                                             |
| Degree of protection                        |                                                             |       | IEC IP40                                                                         |                                             |
| Degree of protection against electric shock |                                                             |       | Class I                                                                          |                                             |
| Proof tracking index (PTI)                  |                                                             |       | 250                                                                              |                                             |
| Ambient operating temperature               |                                                             |       | -25°C to +85°C (at ambient humidity of 60% max.) (with no icing or condensation) |                                             |
| Ambient operating humidity                  |                                                             |       | 85% max. (for +5 to +35°C)                                                       |                                             |
| Weight                                      |                                                             |       | Approx. 1.6 g (pin plunger models)                                               |                                             |

Note. The data given above are initial values.


\*1. The values for dielectric strength shown are for models with a Separator (refer to "Micro Switch Common Accessories").

\*2. The values are at Free Position and Total Travel Position values for pin plunger, and Total Travel Position value for lever. Close or open circuit of the contact is 1 ms max.


\*3. For testing conditions, consult your OMRON sales representative.

## Terminals/Appearances (Unit: mm)


## ●Solder terminals




## ●Quick Connect Terminals (#110)

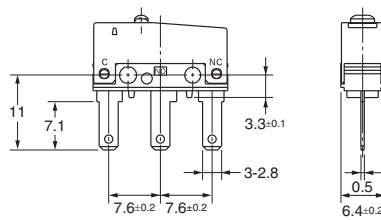


## ●PCB terminals

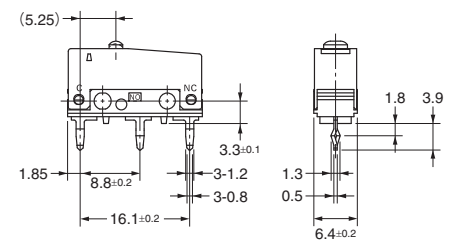

## &lt;PCB Mounting Dimensions (Reference)&gt;



## Mounting Holes (Unit: mm)




## Dimensions (Unit: mm) and Operating Characteristics

The illustrations and dimensions are for models with solder terminals. Refer to "Terminals/Appearances" for details on models with quick connect terminals (#110) or PCB terminals.

## ●Pin plunger

SS-3GP

SS-01GP

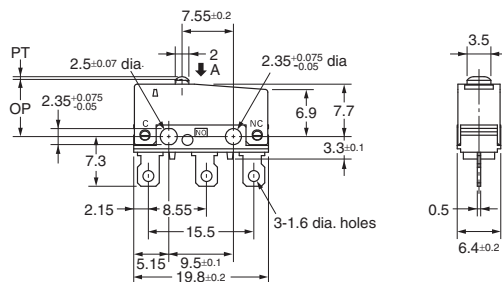


| Operating characteristics | Model | SS-3GP | SS-01GP         |
|---------------------------|-------|--------|-----------------|
| Operating Force           | OF    | Max.   | 1.50 N {153 gf} |
| Releasing Force           | RF    | Min.   | 0.2 N {20 gf}   |
| Pretravel                 | PT    | Max.   | 0.6 mm          |
| Overtravel                | OT    | Min.   | 0.4 mm          |
| Movement Differential     | MD    | Max.   | 0.15 mm         |
| Operating Position        | OP    |        | 8.4±0.3 mm      |

## ●Hinge lever

SS-3GLP

SS-01GLP


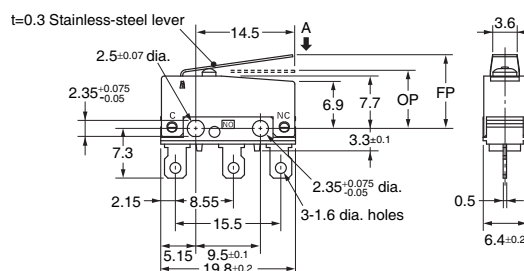


| Operating characteristics | Model | SS-3GLP | SS-01GLP      |
|---------------------------|-------|---------|---------------|
| Operating Force           | OF    | Max.    | 0.5 N {51 gf} |
| Releasing Force           | RF    | Min.    | 0.05 N {5 gf} |
| Overtravel                | OT    | Min.    | 1.0 mm        |
| Movement Differential     | MD    | Max.    | 0.8 mm        |
| Free Position             | FP    | Max.    | 13.6 mm       |
| Operating Position        | OP    |         | 8.8±0.8 mm    |

## ●Simulated roller lever

SS-3GL13P

SS-01GL13P

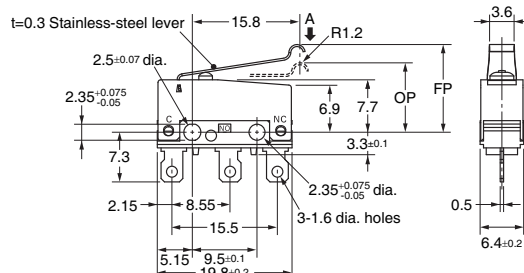

| Operating characteristics | Model | SS-3GL13P | SS-01GL13P    |
|---------------------------|-------|-----------|---------------|
| Operating Force           | OF    | Max.      | 0.5 N {51 gf} |
| Releasing Force           | RF    | Min.      | 0.05 N {5 gf} |
| Overtravel                | OT    | Min.      | 1.0 mm        |
| Movement Differential     | MD    | Max.      | 0.8 mm        |
| Free Position             | FP    | Max.      | 15.5 mm       |
| Operating Position        | OP    |           | 10.7±0.8 mm   |

Note 1. Unless otherwise specified, a tolerance of  $\pm 0.4$  mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

Precautions

★Please refer to "Common Precautions" for correct use.

Cautions

●Soldering

- Connecting to Solder Terminals  
Complete the soldering at the iron tip temperature of 350 to 400°C within 5 seconds, and do not apply any external force for 1 minute after soldering. Soldering at an excessively high temperature or soldering for more than 5 seconds may deteriorate the characteristics of the Switch.
- Connecting to PCB terminals  
When using automatic soldering baths, we recommend soldering at 260±5°C within 5 seconds. Make sure that the liquid surface of the solder does not flow over the edge of the board.  
When soldering terminals manually, complete the soldering at the iron tip temperature between 350 to 400°C within 3 seconds, and do not apply any external force for 1 minute after soldering. When applying solder, keep the solder away from the case of the Switch and do not allow solder or flux to flow into the case.

Correct Use

●Mounting


Use M2.3 mounting screw with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.23 to 0.26 N·m {2.3 to 2.7 kgf·cm}.

●Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result in faulty contact. Use models that operate in the following range. However, even when using micro load models within the following operating range, if inrush current occurs when the contact is opened or closed, it may increase the contact wear and so decrease durability. Therefore, insert a contact protection circuit where necessary. The N-level reference value applies for the minimum applicable load. This value indicates the malfunction reference level for the reliability level of 60% ( $\lambda_{60}$ ).

(JIS C5003)

The equation,  $\lambda_{60}=0.5\times10^{-6}/\text{operation}$  indicates that the estimated malfunction rate is less than  $\frac{1}{2,000,000}$  operations with a reliability level of 60%.

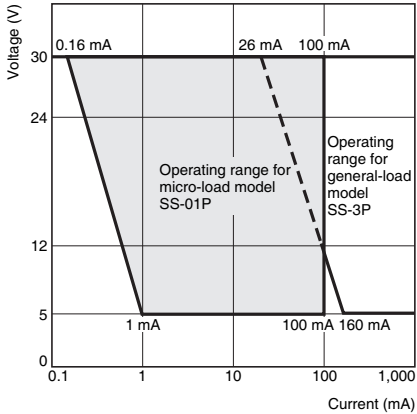

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9