

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0480372200**  
**Status:** **Active**  
**Description:** Universal Serial Bus (USB) Shielded I/O Plug, Type A, Right Angle, Surface Mount, Straight Tab 3.80mm (.150") , 0.76µm (30µ") Gold (Au) Plating, PCB Thickness 1.60mm (.063"), Tape on Reel Package, Lead Free

**Documents:**

[3D Model](#) [Product Specification PS-48037-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

**General**


Product Family	I/O Connectors
Series	48037
Application	Wire-to-Board
Comments	Straight Tab 3.80mm (.150")
Component Type	Plug
Product Name	USB
Type	A

**Physical**

Boot Color	N/A
Circuits (Loaded)	4
Circuits (maximum)	4
Gender	Plug
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Number of Rows	1
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness Recommended (in)	0.063 In
PCB Thickness Recommended (mm)	1.60 mm
Packaging Type	Embossed Tape on Reel
Panel Mount	Yes
Pitch - Mating Interface (in)	0.078 In, 0.098 In
Pitch - Mating Interface (mm)	2.00 mm, 2.50 mm
Pitch - Term. Interface (in)	0.078 In, 0.098 In
Pitch - Term. Interface (mm)	2.00 mm, 2.50 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.76
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-20°C to +85°C
Termination Interface: Style	Surface Mount
Waterproof / Dustproof	No

**Electrical**

Current - Maximum per Contact	1.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	150V AC (RMS)

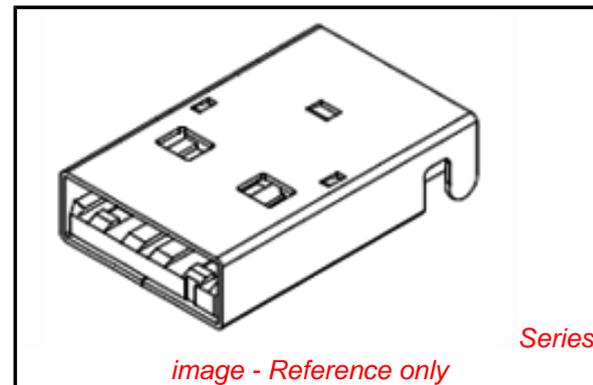

*image - Reference only*

**EU RoHS**

**ELV and RoHS  
Compliant**  
**REACH SVHC**  
 Not Reviewed  
**Halogen-Free  
Status**

**China RoHS**



**Need more information on product  
environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

48037Series

**Mates With**

USB Type A Receptacle

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Reflow Capable (SMT only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260



**Material Info****Reference - Drawing Numbers**

Product Specification	PS-48037-001
Sales Drawing	SD-48037-004





This document was generated on 04/06/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

10 9 8 7 6 5 4 3 2 1

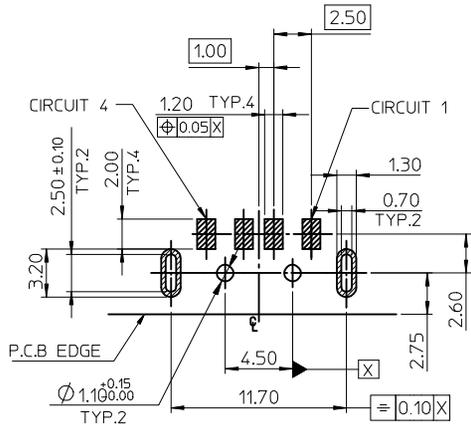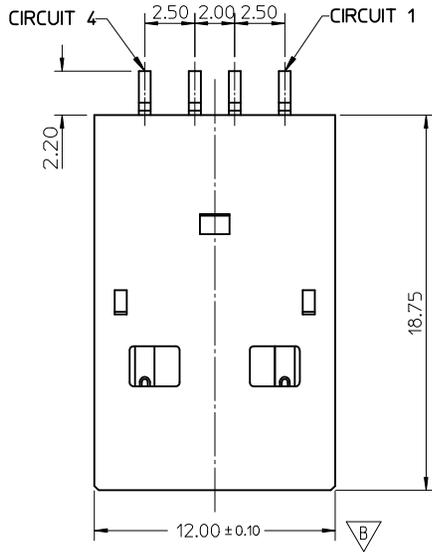

RECOMMEND P.C.B LAYOUT  
GENERAL TOLERANCE ± 0.05

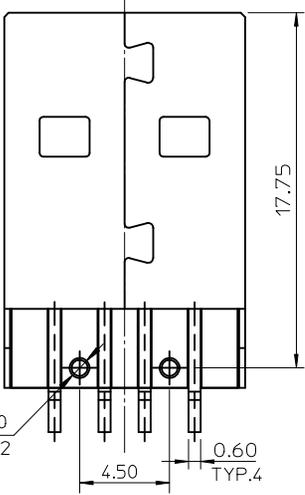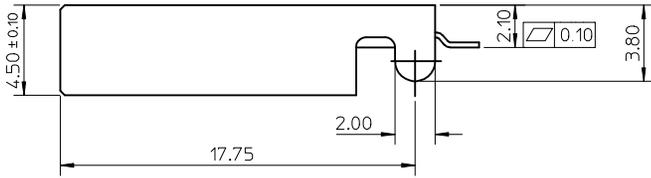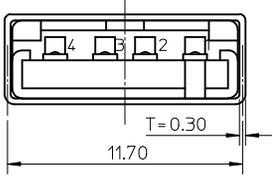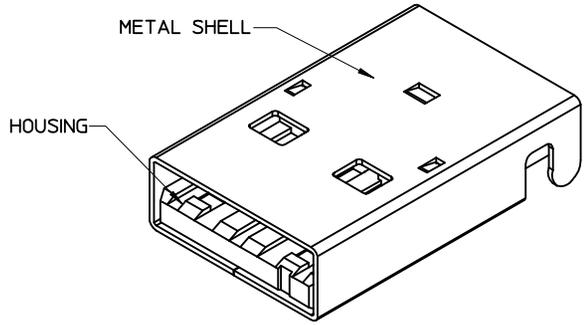

- NOTES:
- MATERIAL:  
HOUSING: NYLON 46, GLASS FIBER FILLED, UL94V-0, COLOR: BLACK.  
SHELL: COLD ROLLED STEEL.  
TERMINAL: BRASS.
  - FINISH:  
TERMINAL:  
SELECTIVE GOLD(Au) IN CONTACT AREA, THICKNESS=30 MICROINCH MINIMUM;  
SELECTIVE TIN(Sn) IN SOLDER TAIL AREA, THICKNESS=120 MICROINCH MINIMUM;  
NICKEL(Ni) OVERALL.  
METAL SHELL:  
NICKEL(Ni) OVERALL,  
UNDER PLATED: COPPER(Cu) OVERALL, THICKNESS=50 MICROINCH MINIMUM.
  - RECOMMENDED PCB THICKNESS: 1.6mmY±0.05.
  - PRODUCT SPECIFICATION REFERS TO PS-48037-001.
  - PACKAGE SPECIFICATION REFERS TO PK-48037-210.
  - TEST SUMMARY REFERS TO TS-48037-001.
  - COPLANARITY TO BE 0.10mm MAX.
  - LEAD FREE AND RoHS COMPLIANT PRODUCT.
  - DATE CODE:  
X X X X X  
YEAR WEEK DAY

REVISED EC NO: SH2009-0435 DRWN: LWZHOU 2008/12/29 CHKD: QMZHANG02 2008/12/29 APPR: HMWANG 2009/01/09	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY TOM	DATE 2006/02/15	TITLE USB A TYPE PLUG SMT TYPE STR SHELL LEG(3.8MM) (LEAD-FREE VERSION)	
		4 PLACES	± ---	± ---	CHECKED BY ROGER TSAI	DATE 2006/02/15	MOLEX INCORPORATED	
		3 PLACES	± ---	± ---	APPROVED BY ALLEN LIN	DATE 2006/02/15	DOCUMENT NO. SD-48037-004	SHEET NO. 1 OF 1
		2 PLACES	± 0.25	± ---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			
		1 PLACE	± 0.25	± ---	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		ANGULAR ± 3 °						

9 8 7 6 5 4 3 2 1

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9