



Outdoor High Speed Data Transmission

The ruggedized solution for outdoor data transmission in harsh environments facing increasing new needs of data information.

2 technical solutions for outdoor High Speed Data Transmission



Standard version with 4 contacts Ø 2.0 mm
Quadrax version with 2 cells

Excellent Data Transmission



1 Gbps per Quadrax contacts
100 Mbps with standard contacts

Compliant to railway standards




NFF61030
I2F3 according to NFF16101 & NFF16102
(Fire & smoke standards)

Standardization oriented



Standard shell
Standard contacts
Standard accessories



838 Series





Technical features



Mechanical, electrical and environmental features according to NFF61030 Railway standards.

Data Transmission

- Standard version with 4 contacts Ø2.0mm: Cat5 - 100 Mbps

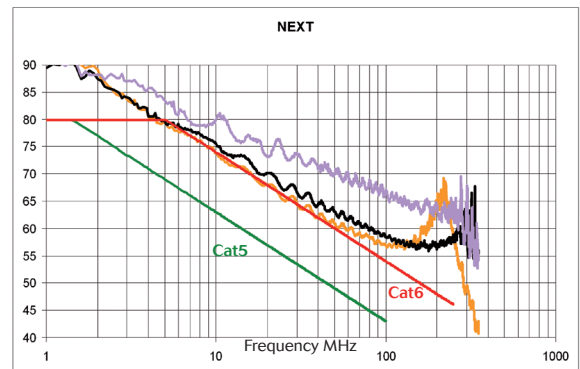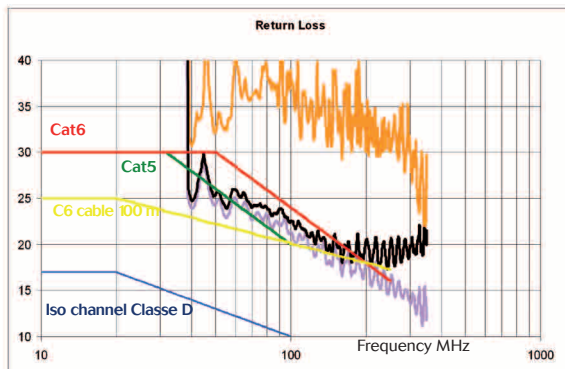

- Quadrax version: Cat6 - 1 Gbps

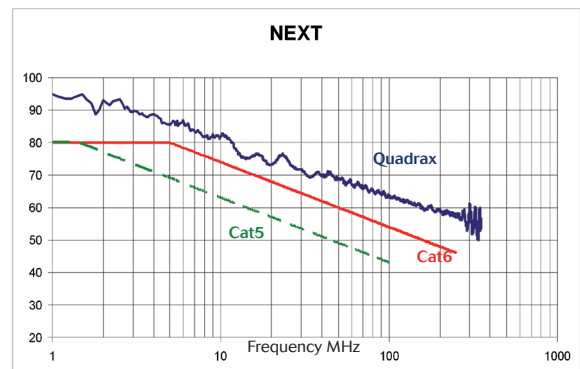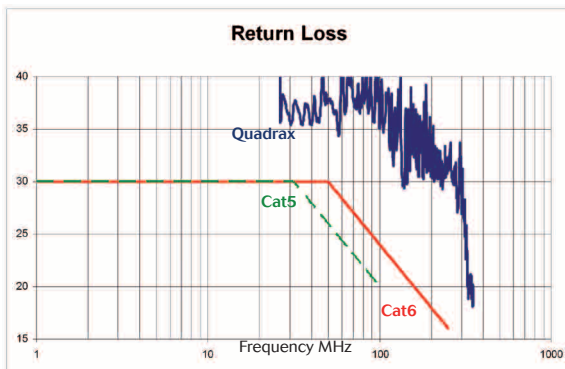

Mechanical

- **Shell:** Aluminium alloy
- **Conductive shell plating**
- **Locking system:** screw with clicker
- **Insulator:** Hard thermoplastic in accordance with NFF16101-16102 exigence I2F3 (Fire & smoke emissions) for installations on equipments category A1 UL94-V0
- **Removable coding system** enables the operator to choose between 12 different key orientations - delivered in position 1
- **Both male & female insulators** can fit in either the plugs or the receptacles
- **Endurance:** 500 mating/unmating


- **Contacts:**
 - Copper alloy, silver or gold plated
 - Crimp type

Electrical

- **Contact type:**

Contacts
Ø2.0 mm
= Standard
version

or



Contacts
Quadrax
Description
● Cell
● Contacts #20

- **Contact resistance:**
 - Contacts Ø2.0 mm: $\leq 2 \text{ m}\Omega$
 - Quadrax: $\leq 6 \text{ m}\Omega$ (contacts #20)
 $\leq 2 \text{ m}\Omega$ (cell)

- **Withstanding voltage:**
 - Contacts Ø2.0 mm: 3250 Vrms
 - Quadrax: $\geq 1000 \text{ V}$ (between contacts #20)
 $\geq 500 \text{ V}$ (between cell / contacts #20)
- **Insulation resistance:**
 - Contacts Ø2.0 mm: $\geq 5000 \text{ M}\Omega$ under 500 Vdc
 - Quadrax: $\geq 3000 \text{ M}\Omega$ (contacts #20)
- **Service voltage per layout:** 380 Vrms max.

Environmental

- **Temperature range:** -40°C to $+100^\circ\text{C}$
- **Salt spray resistance:** 96 hours (NFC 20711)
- **Sealing:** IP66 and IP67 (with adapted backshell)

838 Series



Ordering information

838 standard version with 4 contacts ø 2.0 mm

Type*	838		0	E	1	E	09	1	B	M	0	A	
Coupling type	0: Screw coupling with coding option												
Connector type	E: Receptacle			F: Plug									
Shell type	0: Square flange receptacle without panel gasket												
	1: Square flange receptacle with panel gasket												
	0: Plug without clicker locking												
	1: Plug with clicker locking												
Shell size	E												
Contact layout	09: 4 contacts ø 2.0 mm												
Contact gender	1: Male crimp contact					5: Female crimp contact							
Contact type	L: Connector supplied without contact					B: Contacts ø 2.0 mm							
Backshell type	G: Straight backshell for PMA flexible tube						W: Straight backshell with cable clamp and sealing gland						
	M: Without backshell, nor accessories						T: Backshell with low profile sealing gland						
	N: Boot						U: Backshell T type with shielding termination						
	V: Straight backshell with sealing gland						Z: Backshell for shielding termination						
Index	0 to 20												
Insert	A: Thermoplastic insert												

*Delivered without contact

838 Quadrax version with 2 Quadrax cells

Type*	838	0	E	1	C	02	1	R	M	0	A
Coupling type	0: Screw coupling with coding option										
Connector type	E: Receptacle			F: Plug							
Shell type	0: Square flange receptacle without panel seal										
	1: Square flange receptacle with panel seal										
	0: Plug without clicker locking										
	1: Plug with clicker locking										
Shell size	C										
Contact layout	02: 2 Quadrax contacts										
Contact gender	1: Male crimp contact			5: Female crimp contact							
Contact type	R: Quadrax contacts										
Backshell type	G: Straight backshell for PMA flexible tube			W: Straight backshell with cable clamp and sealing gland							
	M: Without backshell, nor accessories			T: Backshell with low profile sealing gland							
	N: Boot			U: Backshell T type with shielding termination							
	V: Straight backshell with sealing gland			Z: Backshell for shielding termination							
Index	0 to 20										
Insert	A: Thermoplastic insert										

*Delivered without contact

Contacts

Contact ø 2.0 mm (standard version)

Contact type	Male		min.	max.	
	8380 722	Passivated silver	Cable size: (mm ²)	0.6	1.5
	8380 726	Gold		0.6	1.5
	8380 970	Passivated silver		1.34	2.61
	Female				
	8380 725	Passivated silver		0.6	1.5
	8380 727	Gold		0.6	1.5
	8380 973	Passivated silver		1.34	2.61

Other contact versions, please contact us.



Quadrax contact

Contact type	Male		min.	max.
8380 2035A	Copper alloy	Cable size: (mm²)	0.21	0.93
8380 2034A	Copper alloy		0.21	0.93

838 Series





Contact layouts (from front face of female connector)

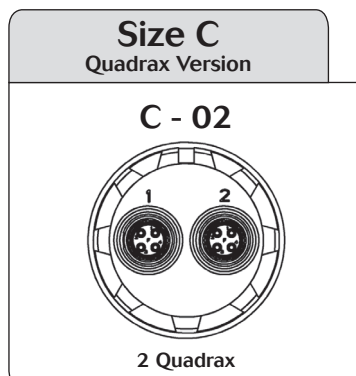
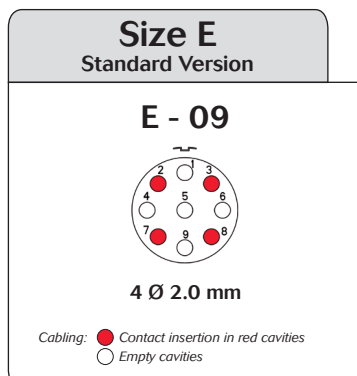


Range presentation

838 size E standard version with 4 contacts Ø 2.0 mm (standard version)

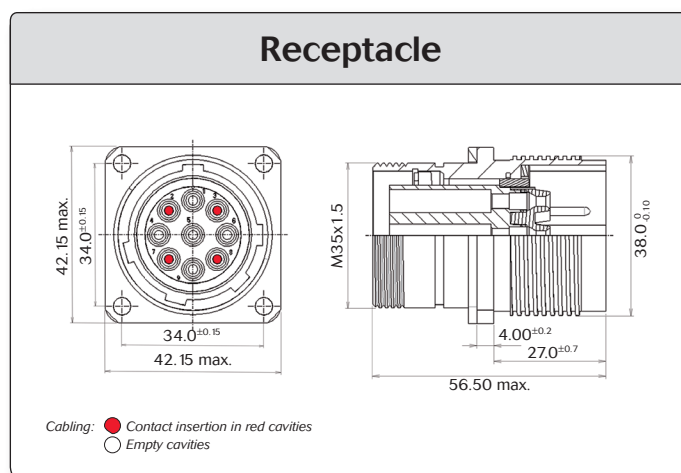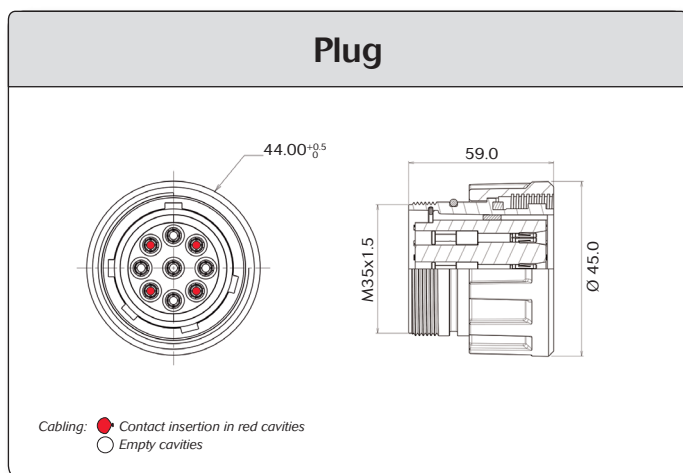

838 size C Quadrax version with 2 Quadrax cells

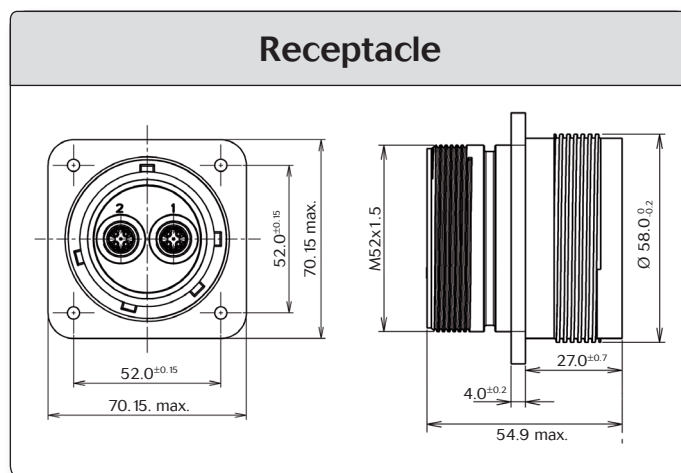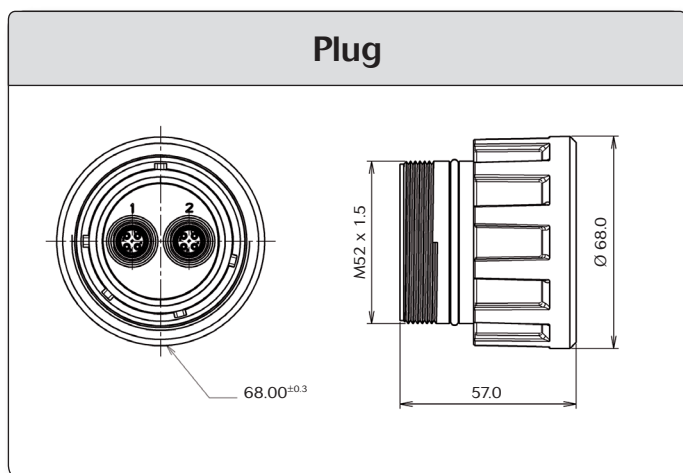


Note : all dimensions are in mm

838 Series




Example of connector with backshell

Plug - Shell size E

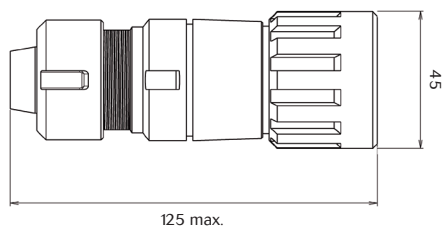

Backshell type: W

Plug - Shell size C

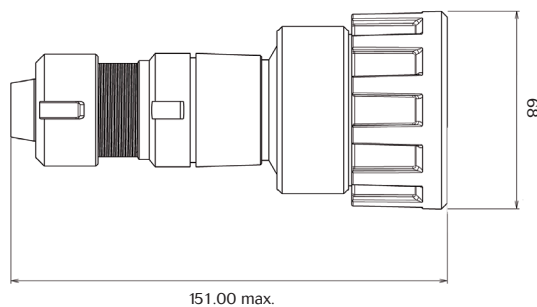


Backshell type: W

For other backshell types, please refer to the 838 catalog.


Contacts

Contacts $\varnothing$ 2.0 mm (standard version)

MALE CONTACT $\varnothing$ 2.0 mm

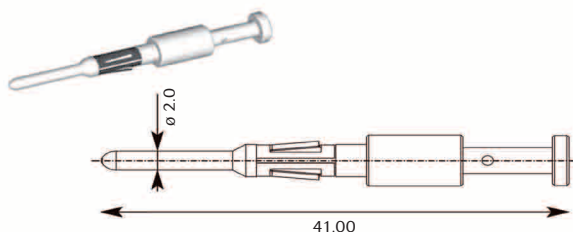


FEMALE CONTACT $\varnothing$ 2.0 mm

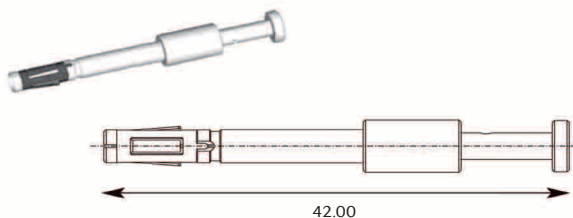


Quadrax contact

MALE QUADRAX CONTACT
P/N: 83802035A

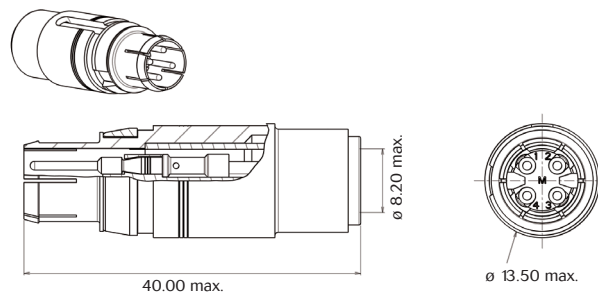

FEMALE QUADRAX CONTACT
P/N: 83802034A

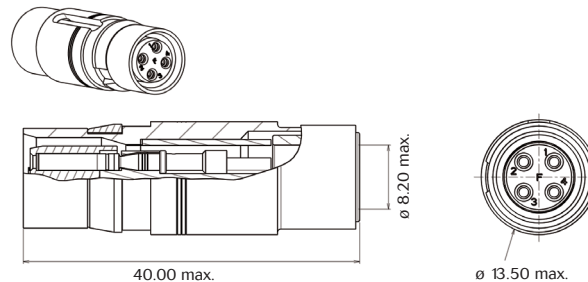

Note : all dimensions are in mm

For further information, visit our website www.railway-connectors.com
or contact us at contactindustry@souriau.com


838 Series

Dedicated for Railway Applications




Railway applications are using more & more data transmission to improve **Safety** (e.g. videosurveillance), **Comfort** (e.g. WIFI, entertainment), **Reliability** (e.g. train service indicators) and **Real-time information** (e.g. passenger counting system).

Souriau's **High Speed Connection** product range has been designed to link all these new equipments along trains.

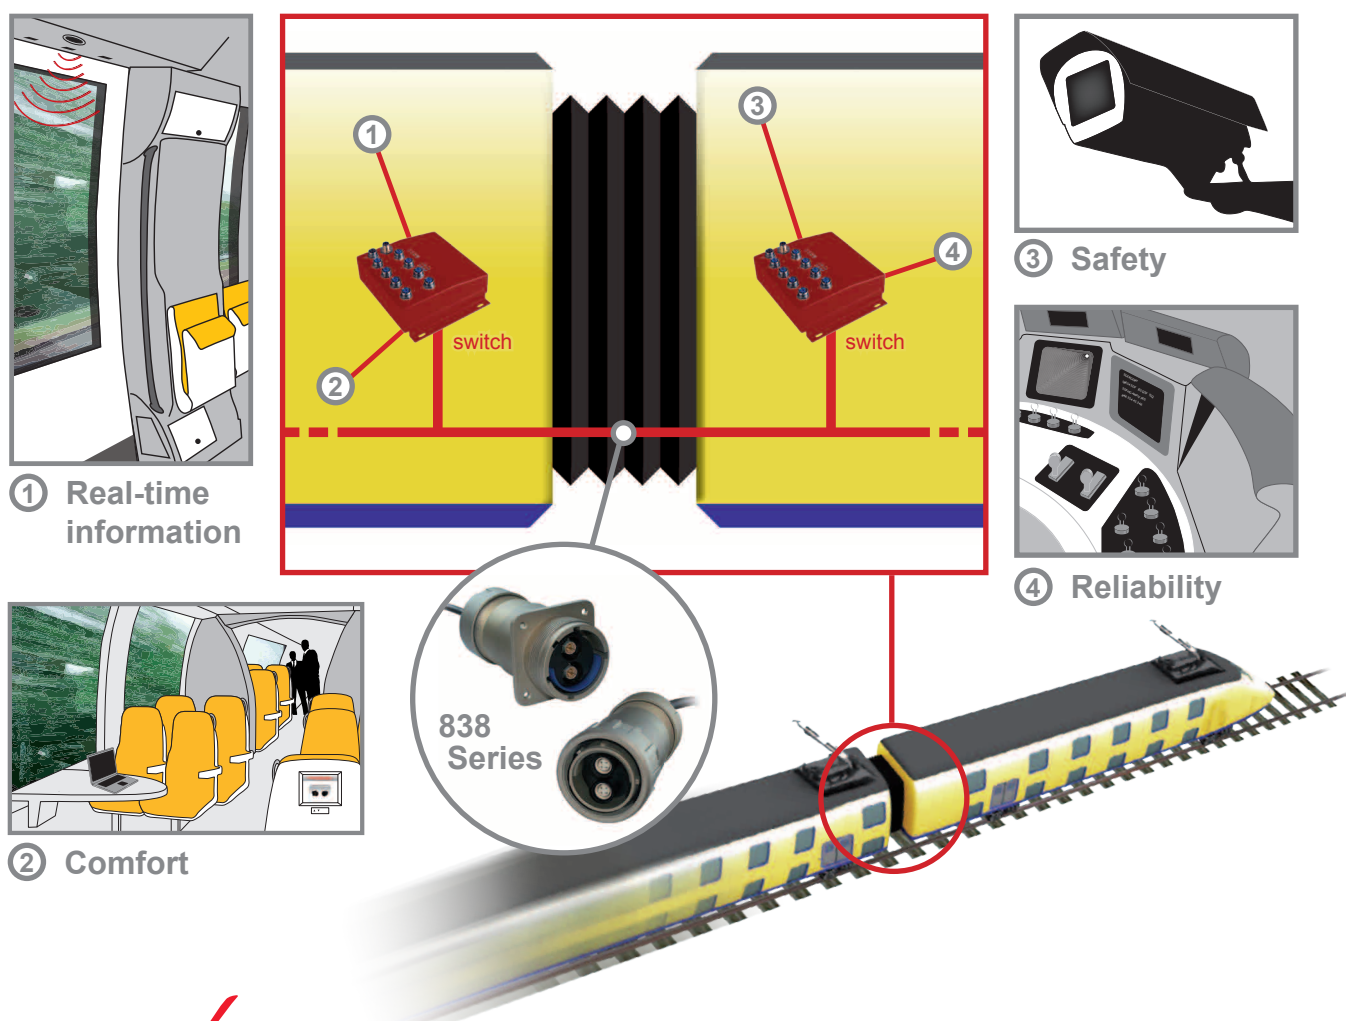

- ✓ For all types of networks: Ethernet, CAN open, MVB etc.
- ✓ From 100 Mbps to 1 Gbps
- ✓ NFF61030 compliant
- ✓ Fire & smoke standards compliant
- ✓ Designed for railway cables



SOURIAU
Connection Technology

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9