

# BAF 13/32" x 1-1/2" 250Vac fast-acting supplemental fuses

250Vac  
1/4 to 30A**Catalog symbol – color code**

- BAF
- Green (250Vac max, 1/4 to 30A)

**Description:**

Fast-acting, supplemental fuse.

For superior protection, Eaton recommends upgrading to Bussmann series Low-Peak™ Class CC fuses. See data sheet No. 1023.

**Specifications:****Ratings**

| Fuse amp range | Interrupting rating at system voltage |         | Agency information |      |
|----------------|---------------------------------------|---------|--------------------|------|
|                | 250 Vac                               | 125 Vac | UL®                | CSA® |
| 1/4 to 1       | 35A                                   | 10kA    | –                  | X    |
| 1-1/2 to 2-1/2 | 100A                                  | 10kA    | –                  | X    |
| 3              | 100A                                  | 10kA    | X                  | X    |
| 4 to 10        | 200A                                  | 10kA    | X                  | X    |
| 12 to 15       | 750A                                  | 10kA    | X                  | X    |
| 20 to 30       | 200A                                  | 10kA    | –                  | –    |

**Agency information**


- CE
- UL Listed, Std. 248-14, 250Vac (3 to 15A) Guide JDYX, File E19180
- CSA Certified, 250Vac (1/4 to 15A) Class 1422-01, File 53787

**Catalog numbers (amps)**

|           |            |           |        |
|-----------|------------|-----------|--------|
| BAF-1/4   | BAF-1-8/10 | BAF-6     | BAF-12 |
| BAF-1/2   | BAF-2      | BAF-6-1/4 | BAF-15 |
| BAF-6/10  | BAF-2-1/2  | BAF-7     | BAF-20 |
| BAF-8/10  | BAF-3      | BAF-8     | BAF-25 |
| BAF-1     | BAF-4      | BAF-9     | BAF-30 |
| BAF-1-1/2 | BAF-5      | BAF-10    |        |

**Carton quantity**

| Amps      | Qty. |
|-----------|------|
| 1/4 to 30 | 10   |

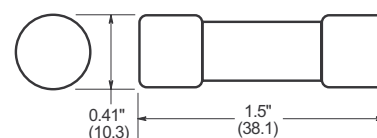**Dimensions - in (mm):****Features:**

- Color coded green for 250Vac maximum voltage rating
- Fiber tube construction
- Nickel-plated endcaps.


**Typical applications**

- General purpose circuits
- Lighting circuit protection
- Meter circuits

**Recommended fuse blocks/fuse holders**

| Catalog symbol                     | Description<br>Blocks                                 | Data sheet No. |
|------------------------------------|-------------------------------------------------------|----------------|
| BMM                                | 1-, 2- and 3-pole modular blocks with optional covers | 10235          |
| <b>DIN-Rail holders / switches</b> |                                                       |                |
| CCP_-30M                           | 1-, 2- and 3-pole switch                              | 1157           |
| CHM                                | 1-, 2- and 3-pole                                     | 3185           |
| Optima NG                          | 3-pole protection module                              | 1109           |
| Optima                             | 3-pole holder                                         | 1102           |
| Optima                             | 3-pole holder + switch                                | 1103           |
| <b>Panel mount holders</b>         |                                                       |                |
| HPM and HPM-D                      | 1-pole holder                                         | 2112           |
| HPC-D                              | 1-pole holder                                         | 2109           |
| HPS2                               | 2-pole holder                                         | 2140           |
| HPF, HPF-C and HPF-WT              | 1-pole holder                                         | 2114           |
| HPS                                | 1-pole holder                                         | 2113           |
| HPG and HPD                        | 1-pole holder                                         | 2108           |
| <b>In-line holders</b>             |                                                       |                |
| HEB                                | 1-pole holder                                         | 2127           |
| HEX                                | 2-pole holder                                         | 2126           |
| <b>Fuseclips</b>                   |                                                       |                |
| 1A3400, 5956 and 5960              | PCB fuseclips                                         | 2132           |
| <b>Fuse covers</b>                 |                                                       |                |
| CVR(I)-CCM(-QC)                    | Finger-safe fuse cover                                | 10235          |

**Time-current characteristic curves – total clear:**

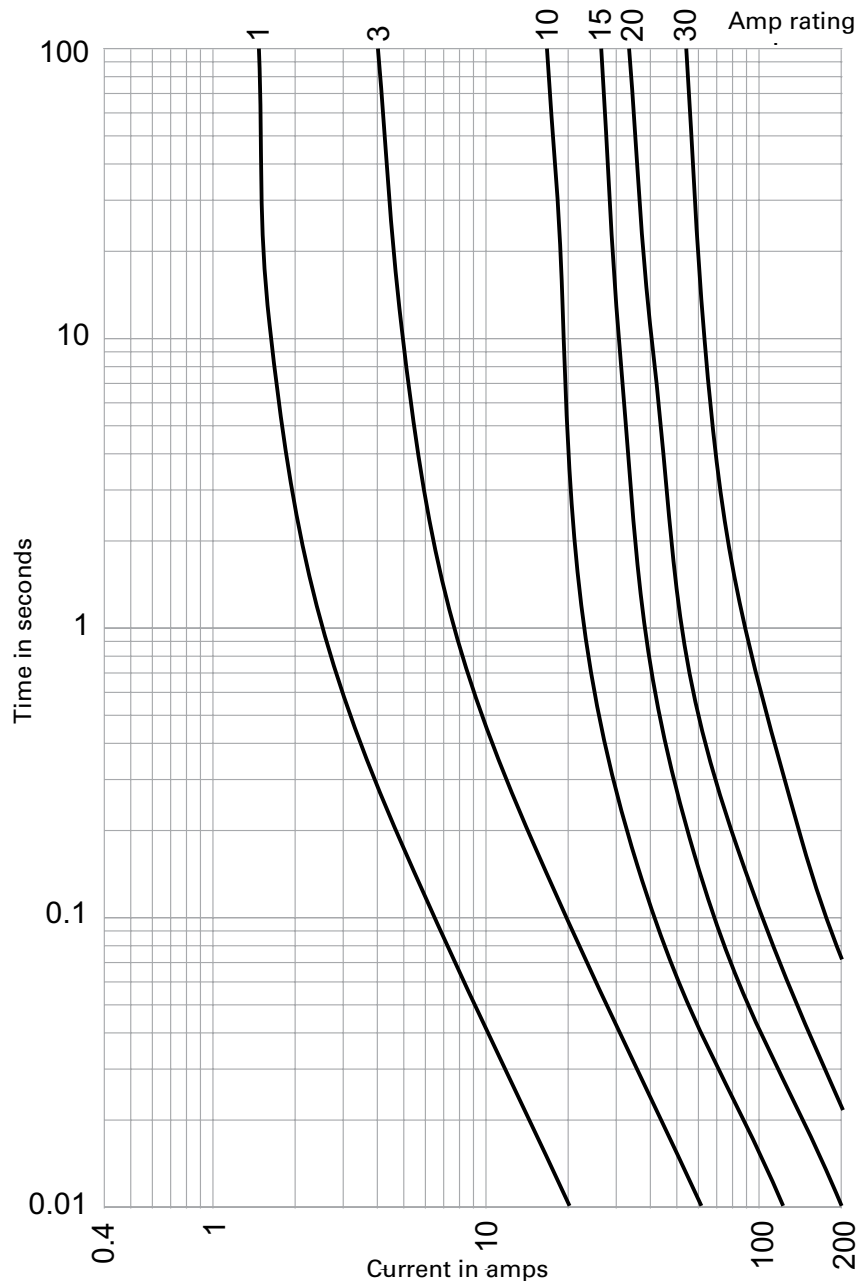

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

Bussmann Division  
114 Old State Road  
Ellisville, MO 63021  
United States  
Eaton.com/bussmannseries

© 2015 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 1011 – BU-SB14288  
December 2015

Eaton, Bussmann and Low-Peak are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.  
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9