


# E3C

**Thin, Compact Head Saves Space and Mounts Closely. Built-in Interference Protection Provided.**

- Input indicator on the Sensor Unit simplifies settings.
























 Be sure to read *Safety Precautions* on page 11.

## Ordering Information

### Sensors






**Sensor Units** [Refer to *Dimensions* on page 12.]

 Red light  Infrared light





| Sensing method                         | Application        | Appearance  | Sensing distance  | Model  |                     |
|--|--------------------|---|---|--|---------------------|
| Through-beam<br>(Emitter + Receiver) * | Small type         |   |  100 mm   | <b>E3C-S10 2M</b><br>Emitter E3C-S10L 2M<br>Receiver E3C-S10D 2M                           |                     |
|  |                    |  |  500 mm | <b>E3C-S50 2M</b><br>Emitter E3C-S50L 2M<br>Receiver E3C-S50D 2M                           |                     |
|  |                    |  |  1 m    | <b>E3C-1 2M</b><br>Emitter E3C-1L 2M<br>Receiver E3C-1D 2M                                 |                     |
|  |                    |  |  2 m    | <b>E3C-2 2M</b><br>Emitter E3C-2L 2M<br>Receiver E3C-2D 2M                                 |                     |
|  |                    |  |  200 mm | <b>E3C-S20W 2M</b><br>Emitter E3C-S20LW 2M<br>Receiver E3C-S20DW 2M                        |                     |
|  |                    |  |  300 mm | <b>E3C-S30W 2M</b><br>Emitter E3C-S30LW 2M<br>Receiver E3C-S30DW 2M                        |                     |
|  | Side-view          |  |   | <b>E3C-S30T 2M</b><br>Emitter E3C-S30LT 2M<br>Receiver E3C-S30DT 2M                        |                     |
|  | Diffuse-reflective | Small type  |          |  100 mm | <b>E3C-DS10 2M</b>  |
|  |                    | Slim type   |          |  50 mm  | <b>E3C-DS5W 2M</b>  |
|  |                    | Side-view   |          |  100 mm | <b>E3C-DS10T 2M</b> |
| Convergent-reflective                  | Small type         |  |  30±3 mm | <b>E3C-LS3R 2M</b>   |                     |

\* Through-beam Sensors are normally sold in sets that include both the Emitter and Receiver. Orders for individual Emitters and Receivers are accepted. (Modifications are required for some models. Ask your OMRON representative for details.)

**Amplifier Units** [Refer to *Amplifier Units* on page 15.]

| Power supply | Application     | Appearance  | Functions  | Model       |
|--------------|-----------------|---|--|-------------|
| AC           | Standard models |  | ---  | E3C-A       |
|              |                 |   |  | E3C-C       |
| DC           | Slim type       |  |  | E3C-JC4P 2M |
|              | Small type      |  | ---  | E3C-GE4     |




**Accessories (Order Separately)**
**Mounting Brackets** [Refer to *E39-L/F39-L/E39-S/E39-R* for Dimensions.]

| Appearance  | Model       | Quantity | Remarks  |
|---|-------------|----------|--|
|    | E39-L41     | 2        | Provided with the E3C-1.                                   |
|   | E39-L42     | 2        | Provided with the E3C-2.<br>Can be used with the E3C-DS10. |
|  | E39-L127-T1 | 1        | Can be used with the E3C-S10.                              |
|   | E39-L127-T2 | 1        |  |
|   | E39-L127-T3 | 1        |  |
|  | E39-L31     | 1*       | Can be used with the E3C-S50.                              |

Note: Refer to *E39-L/F39-F/E39-S/E39-R* for Dimensions.

\* When using through-beam models, order one bracket for the Receiver and one for the Emitter.

**Connector** [Refer to *E39-L/F39-L/E39-S/E39-R* for Dimensions.]

| Name                    | Appearance  | Model  | Quantity | Remarks                       |
|-------------------------|---|--------|----------|-------------------------------|
| Front connection socket |  | PF113A | 1        | Provided with the E3C-A/C.    |
|                         |  | PYF08A | 1        | Can be used with the E3C-GE4. |
| Rear connection socket  |  | PY08   | 1        | Can be used with the E3C-GE4. |

## Ratings and Specifications

### Sensors

| Sensing method                      |                    | Through-beam   |   |   |  |  |                                 |
|-------------------------------------|--------------------|--|---|---|--|--|---------------------------------|
| Item                                | Model              | E3C-S10  | E3C-S20W                                | E3C-S50   | E3C-S30T<br>E3C-S30W                               | E3C-1  | E3C-2                           |
| Sensing distance                    |                    | 100 mm   | 200 mm                                  | 500 mm  | 300 mm   | 1 m  | 2 m                             |
| Standard sensing object             |                    | Opaque, 2-mm dia. min.   |   | Opaque, 3-mm dia. min.  | Opaque, 1.5-mm dia. min.                           | Opaque, 4-mm dia. min.                             | Opaque, 8-mm dia. min.          |
| Directional angle                   |                    | Emitter/Receiver: 10 to 60° each   |   | Emitter/Receiver: 10 to 40° each  |  | Emitter/Receiver: 3 to 20° each                    | Emitter/Receiver: 3 to 15° each |
| Light source (wavelength)           |                    | Infrared LED (950 nm)  |   |   | Infrared LED (940 nm)                              | Infrared LED (950 nm)                              |                                 |
| Ambient illuminance (Receiver side) |                    | Incandescent lamp: 3,000 lx max., Sunlight 10,000 lx max.                                    |   |   |  |  |                                 |
| Ambient temperature range           |                    | Operating/Storage: -25°C to 70°C (with no icing or condensation)                             |   |   |  |  |                                 |
| Ambient humidity range              |                    | Operating: 35% to 85%, Storage: 35% to 95% (with no condensation)                            |   |   |  |  |                                 |
| Insulation resistance               |                    | 20 MΩ min. at 500 VDC  |   |   |  |  |                                 |
| Dielectric strength                 |                    | 500 VAC at 50/60 Hz for 1 minute   |   |   |  |  |                                 |
| Vibration resistance                |                    | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions |   |   |  |  |                                 |
| Shock resistance                    |                    | Destruction: 500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions                 |   |   |  |  |                                 |
| Degree of protection                |                    | IEC 60529 IP64<br>Limited to indoor use  | IEC 60529 IP50<br>Limited to indoor use | IEC 60529 IP64<br>Limited to indoor use                                     | IEC 60529 IP60<br>Limited to indoor use            | IEC 60529 IP66<br>Limited to indoor use            |                                 |
| Connection method                   |                    | Pre-wired models (standard length: 2 m)  |   |   |  |  |                                 |
| Weight (packed state)               |                    | Approx. 50 g   |   |   | Approx. 24 g                                       | Approx. 60 g                                       | Approx. 120 g                   |
| Material                            | Case               | Polycarbonate  |   | ABS   | Polycarbonate                                      |  | Zinc die-cast                   |
|                                     | Lens               | Polycarbonate  |   | Acrylics  | Polycarbonate                                      |  |                                 |
|                                     | Mounting Brackets  | ---  |   |   |  | Steel  |                                 |
| Accessories                         | Instruction manual | Phillips screw M2×8, spring washer, flat washer, M2 nut, instruction manual                  | Instruction manual                      | Phillips screw M2×8, spring washer, flat washer, nut M2, instruction manual | Mounting Bracket (with screws), instruction manual | Mounting Bracket (with screws), instruction manual |                                 |

| Sensing method                      |       | Diffuse-reflective   |                                   |                                 | Convergent-reflective                  |          |
|-------------------------------------|-------|--|-----------------------------------|---------------------------------|--|----------|
| Item                                | Model | E3C-DS5W   | E3C-DS10T                         | E3C-DS10                        | E3C-LS3R                               |          |
| Sensing distance                    |       | 50 mm (White paper 100 × 100 mm)   | 100 mm (White paper 100 × 100 mm) | 100 mm (White paper 50 × 50 mm) | 30 ± 3 mm (White paper 10 × 10 mm)     |          |
| Differential travel                 |       | 20% max. of sensing distance   |                                   |                                 | 10% max.                               | ±3% max. |
| Light source (wavelength)           |       | Infrared LED (950 nm)  | Infrared LED (950 nm)             |                                 | Red LED (680 nm)                       |          |
| Ambient illuminance (Receiver side) |       | Incandescent lamp: 3,000 lx max., Sunlight 10,000 lx max.                                    |                                   |                                 |  |          |
| Ambient temperature range           |       | Operating/Storage: -25°C to 70°C (with no icing or condensation)                             |                                   |                                 |  |          |
| Ambient humidity range              |       | Operating: 35% to 85%, Storage: 35% to 95% (with no condensation)                            |                                   |                                 |  |          |
| Insulation resistance               |       | 20 MΩ min. at 500 VDC  |                                   |                                 |  |          |
| Dielectric strength                 |       | 500 VAC at 50/60 Hz for 1 minute   |                                   |                                 |  |          |
| Vibration resistance                |       | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions |                                   |                                 |  |          |
| Shock resistance                    |       | Destruction: 500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions                 |                                   |                                 |  |          |
| Degree of protection                |       | IEC 60529 IP50 (Limited to indoor use)   |                                   |                                 | IEC 60529 IP64 (Limited to indoor use) |          |
| Connection method                   |       | Pre-wired models (standard length: 2 m)  |                                   |                                 |  |          |
| Weight (packed state)               |       | Approx. 50 g   |                                   |                                 | Approx. 55 g                           |          |
| Material                            | Case  | Polycarbonate  |                                   |                                 |  |          |
|                                     | Lens  | Polycarbonate  |                                   |                                 |  |          |
| Accessories                         |       | Phillips screw M2×8, spring washer, flat washer, M2 nut, instruction manual                  | Instruction manual                |                                 |  |          |

## Amplifier Units

| Item                        | Model             | E3C-A   | E3C-C   | E3C-JC4P   | E3C-GE4   |
|-----------------------------|-------------------|---|---|--|---|
| Power supply voltage        |                   | 100 to 240 VAC±10%, 50/60 Hz  |   | 12 to 24 VDC±10%, ripple (p-p): 1 V max.   |   |
| Power (current) consumption |                   | 3 W max.  |   | 50 mA max.   |   |
| Control output              | Transistor output | Load power supply voltage: 24 VDC max., load current: 80 mA max., voltage output type, output current: 1 to 4 mA (residual voltage: 1.2 V max.)<br>Light-ON/Dark-ON switch selectable |   | Load power supply voltage: 24 VDC max., load current: 100 mA max., NPN open collector output type (residual voltage: 1 V max.)<br>Light-ON/Dark-ON switch selectable | Load power supply voltage: 24 VDC max., load current: 80 mA max., voltage output type, output current: 1 to 4 mA (residual voltage: 0.7 V max.)<br>Light-ON/Dark-ON cable connection selectable |
|                             | Relay output      | 220 VAC 1 A cosφ=1 (resistive load)<br>SPDT contact only  |   | ---  |   |
| External synchronous input  |                   | ---   | H = 6 to 30 V<br>L = 0 to 2 V<br>When L, turns OFF the control output forcibly. | ---  |   |
| Timer function              |                   | ---   | ON/OFF, oneshot delay (selectable): 1 or 10 s max.                              | OFF-delay 0/40 ms (switch selectable)  | ---   |
| Ambient temperature range   |                   | Operating: -10° to 55°C, Storage: -25° to 70°C (with no icing or condensation)  |   |  |   |
| Ambient humidity range      |                   | Operating: 35% to 85%, Storage: 35% to 95% (with no condensation)   |   |  |   |
| Insulation resistance       |                   | 20 MΩ min. at 500 VDC   |   |  |   |
| Dielectric strength         |                   | 500 VAC at 50/60 Hz for 1 minute  |   |  |   |
| Vibration resistance        |                   | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions  |   |  |   |
| Shock resistance            |                   | Destruction: 300 ms <sup>2</sup> three times in each of X, Y and Z directions   |   |  |   |
| Degree of protection        |                   | IEC IP20 (limited to indoor use)  |   | IEC IP60 (limited to indoor use)   | IEC IP20 (limited to indoor use)  |
| Protection                  |                   | Reverse polarity protection, output short-circuit protection, mutual interference prevention  |   |  |   |
| Response time               | No contact        | Operate or reset: 1 ms max./2 ms max. each (switch selectable)  |   | Operate or reset: 1 ms max.  | Operate or reset: 1 ms max./2 ms max. each (switch selectable)  |
|                             | Relay             | Operate or reset: 20 ms max.  |   | ---  |   |
| Connection method           |                   | Terminal block  |   | Terminal block input cable pullout (standard cable length: 2 m)  | Terminal block  |
| Weight (packed state)       |                   | Approx. 200 g   |   | Approx. 80 g   | Approx. 15 g  |
| Material                    | Case              | ABS   |   |  | Polycarbonate   |
|                             | Mounting Brackets | Stainless steel   | ---   | Iron   | ---   |
| Accessories                 |                   | Connection Socket (PF113A)<br>Instruction manual  |   | Mounting Bracket, Adjustment screwdriver, Caution label, Instruction manual  | Instruction manual  |


\* The terminal pins are used for connection between amplifiers for synchronous operation.

# Engineering Data (Typical)

## Parallel Operating Range


### Through-beam

#### E3C-S10

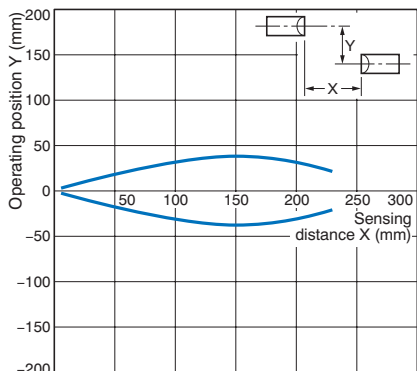


### Through-beam

#### E3C-S20W

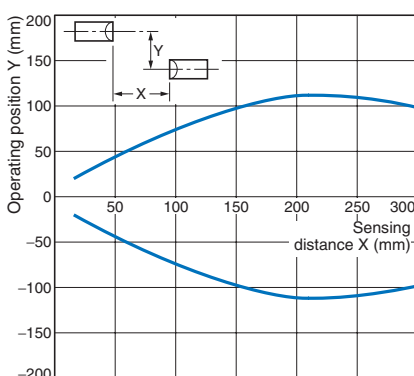


### Through-beam

#### E3C-S50

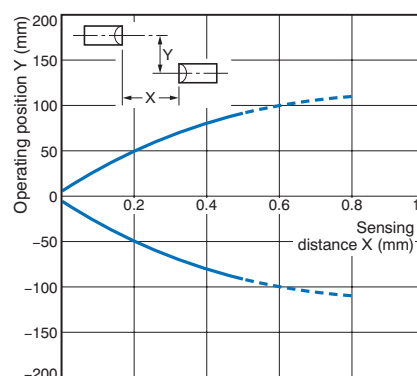


### Through-beam

#### E3C-1

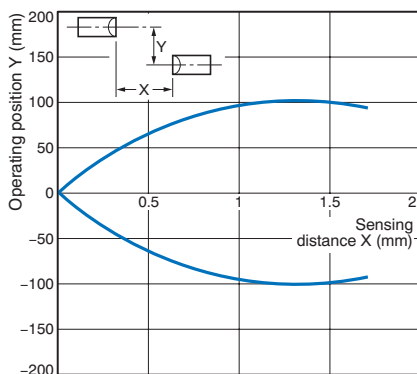


### Through-beam

#### E3C-2

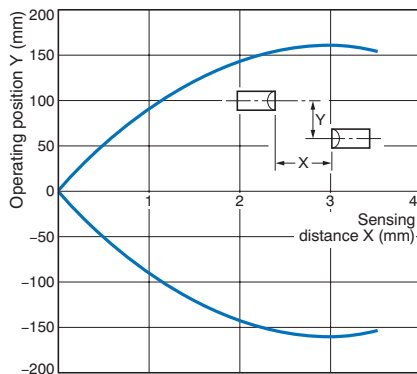

### Through-beam


#### E3C-S30T/-S30W

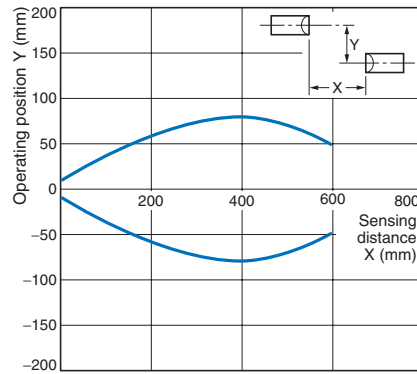

## Operating Range


### Diffuse-reflective

#### E3C-DS5W

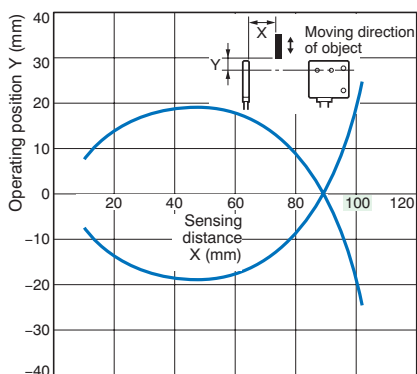


### Diffuse-reflective

#### E3C-DS10T

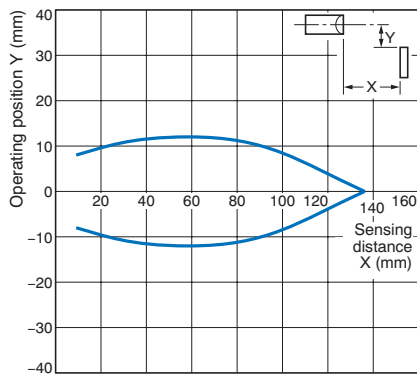


### Diffuse-reflective


#### E3C-DS10 (Example 1)

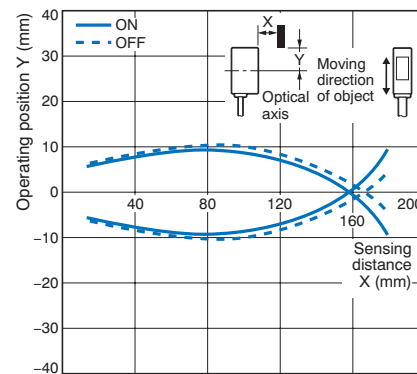


**Diffuse-reflective**  
**E3C-DS10 (Example 2)**

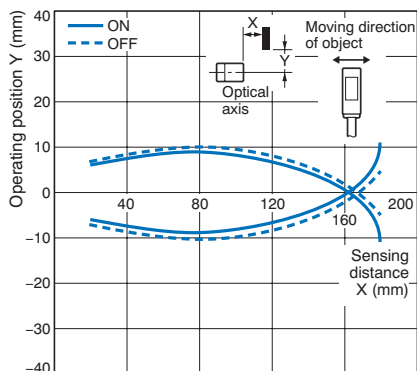

**Convergent-reflective**  
**E3C-LS3R (Example 1)**

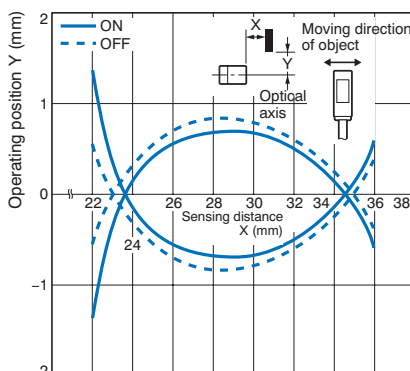


**Convergent-reflective**  
**E3C-LS3R (Example 2)**

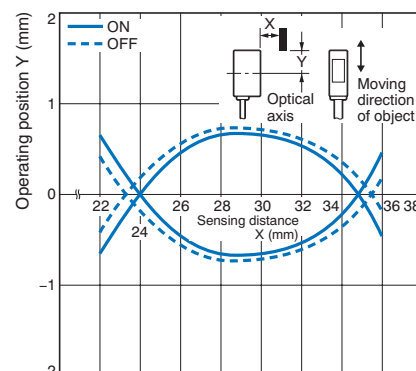


**Excess Gain vs. Set Distance**


**E3C-S20W**

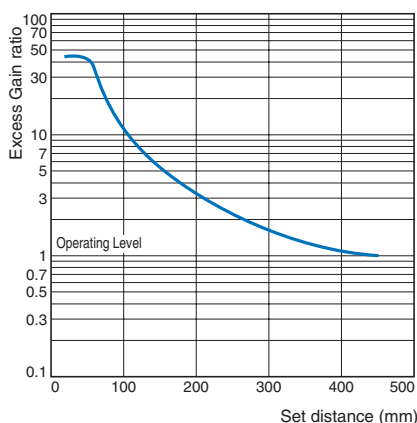


**E3C-S30T/-S30W**

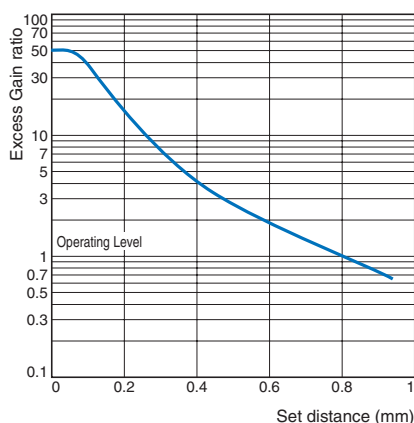


**E3C-S50**

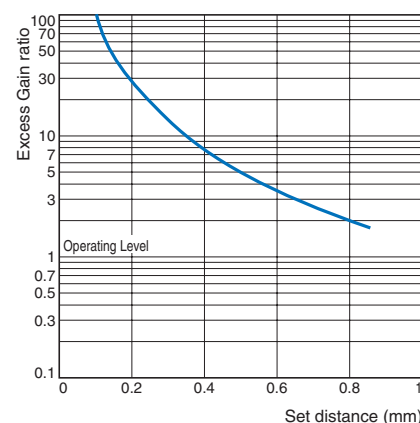


**E3C-DS5W**

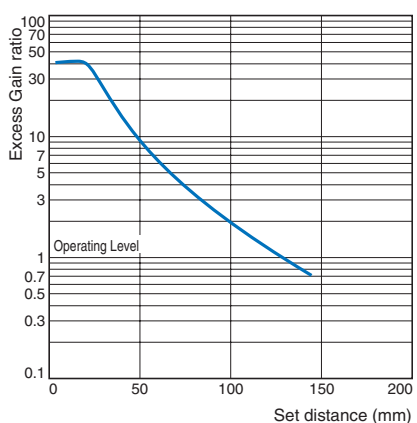

**E3C-DS10T**

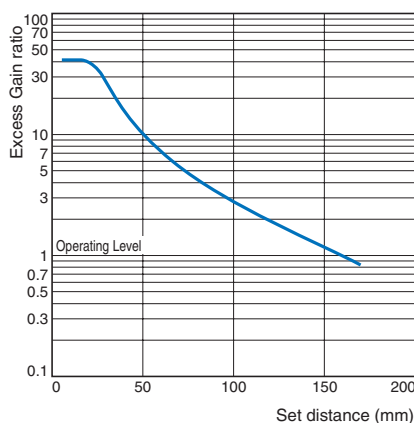

**E3C-LS3R**

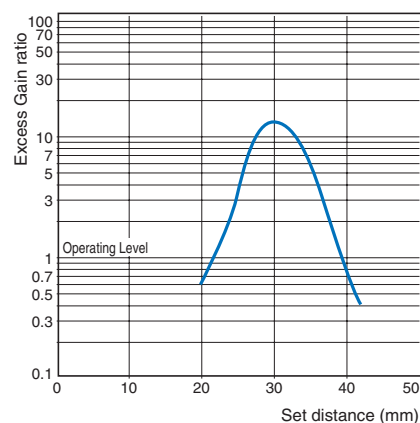

# I/O Circuit Diagrams

## NPN output

| Model          | Operation mode | Timing charts * | Operation selector        | Output circuit |
|----------------|----------------|-----------------|---------------------------|----------------|
| E3C-A<br>E3C-C | Light-ON       |                 | LIGHT ON                  |                |
|                | Dark-ON        |                 | DARK ON                   |                |
| E3C-JC4P       | Light-ON       |                 | L-ON<br>(LIGHT ON)        |                |
|                | Dark-ON        |                 | D-ON<br>(DARK ON)         |                |
| E3C-GE4        | Light-ON       |                 | Switched with wiring.<br> |                |
|                | Dark-ON        |                 | Switched with wiring.<br> |                |

\* For t in the timing chart, refer to Part Names/Selection Method on page 9.




Connection

| Amplifier Units        | Connected to the through-beam model | Connected to the reflective model | Note  |
|------------------------|-------------------------------------|-----------------------------------|---|
| E3C-A/C<br>+<br>PF113A |                                     |                                   | <p>Note: 1. The strip-off length of the shielded cable should always be 20 mm max. on the Receiver side (white) and 50 mm max. on the Emitter side (red).<br/>                 2. The E3C-A does not have a gate input function.<br/>                 3. L when the gate input 2-9 terminals are connected, H when they are disconnected.</p>   |
| E3C-JC4P               |                                     |                                   | <p>Note: 1. The strip-off length of the shielded cable should always be 20 mm max. on the Receiver side (white) and 50 mm max. on the Emitter side (red).</p>   |
| E3C-GE4                |                                     |                                   | <p>Note: 1. The strip-off length of the shielded cable should always be 20 mm max. on the Receiver side (white) and 50 mm max. on the Emitter side (red).<br/>                 2. The response time is 1 ms when (8) is disconnected, and 2 ms when (8) is connected to 0 V (negative side) of the power supply.<br/>                 3. By setting the power supply terminal (4) to – and (14) to +, the output turns "H" when the light is received. With the E2 mode, the output transistor turns OFF. By setting (4) to + and (14) to +, the output turns "L" when the light is received. With the E1 mode, the output transistor turns ON.</p> |



# Nomenclature/Settings

| Amplifier Units                        | Nomenclature  | Settings  |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|--|---|---|---|-----------------------------------|--|----------------------------------|-----------------------------------|---|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|--------------------------------|---------------------------------|------------------------|--------------------------------|---------------------------------|-----------------------|---------------------------------|----------------------------------|-----------------------------------|-------------------------|-----------------------------------|-----------------------------------|-------------------------|--------------------------------|---------------------------------|--|-----------------------------------|----------------------------------|-----------------------------------|-------------------------|-----------------------------------|-----------------------------------|-------------------------|--------------------------------|---------------------------------|--|--|----------------------------------|-----------------------------------|-------------------------|-----------------------------------|-----------------------------------|-------------------------|--------------------------------|---------------------------------|---|
| E3C-A                                  | <p>Operation indicator (red)<br/>When a relay-switch operates, the indicator turns on.</p> <p>Stability indicator (green)<br/>When the light receiving input becomes +20% or more and -20% or less of operating voltage, it will be turned on. (Indicate stable status)</p> <p>Operation selector</p> <p>Response time selector switch</p> <p>Sensitivity adjuster</p> <p>Light indicator (red)<br/>When the light inputs, it will be turned on.</p>  | <p><b>Operation switching</b></p> <table border="1"> <tr> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>DARK turns the relay ON and the transistor output "H".</td> </tr> <tr> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>LIGHT turns the relay ON and the transistor output "H".</td> </tr> </table> <p><b>Response time changing (The different frequency type can be made up by changing the response speed.)</b></p> <table border="1"> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>The response time is set to 2 ms.</td> </tr> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>The response time is set to 1 ms.</td> </tr> </table> <p><b>Timing chart</b></p> <p>Note 1. Control output is produced only during input time.<br/>2. When t exceeds 1 ms or 2 ms, solid-state output is produced.<br/>To produce relay output, t must be longer than 20 ms.</p>  | DARK ON <input type="checkbox"/>                                    | LIGHT ON <input type="checkbox"/> | DARK turns the relay ON and the transistor output "H". | DARK ON <input type="checkbox"/> | LIGHT ON <input type="checkbox"/> | LIGHT turns the relay ON and the transistor output "H". | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | The response time is set to 2 ms. | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | The response time is set to 1 ms. |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | DARK ON <input type="checkbox"/>  | LIGHT ON <input type="checkbox"/>   | DARK turns the relay ON and the transistor output "H".              |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| DARK ON <input type="checkbox"/>       | LIGHT ON <input type="checkbox"/>   | LIGHT turns the relay ON and the transistor output "H".   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| 2 ms (B) <input type="checkbox"/>      | 1 ms (A) <input type="checkbox"/>   | The response time is set to 2 ms.   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| 2 ms (B) <input type="checkbox"/>      | 1 ms (A) <input type="checkbox"/>   | The response time is set to 1 ms.   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| E3C-C                                  | <p>Operation indicator (red)<br/>When a relay-switch operates, the indicator turns on.</p> <p>Stability indicator (green)<br/>When the light receiving input becomes +20% or more and -20% or less of operating voltage, it will be turned on. (Indicate stable status)</p> <p>Operation selector</p> <p>Selector switch for response time</p> <p>Timer function setting switch</p> <p>Delay time setting switch</p> <p>Delay time adjuster</p> <p>Sensitivity adjuster</p> <p>Light indicator (red)<br/>When the light inputs, it will be turned on.</p> | <p><b>Operation switching</b></p> <table border="1"> <tr> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>DARK turns the relay ON and the transistor output "H".</td> </tr> <tr> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>LIGHT turns the relay ON and the transistor output "H".</td> </tr> </table> <p><b>Response time changing (The different frequency type can be made up by changing the response speed.)</b></p> <table border="1"> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>The response time is set to 2 ms.</td> </tr> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>The response time is set to 1 ms.</td> </tr> </table> <p><b>Delay time setting</b></p> <table border="1"> <tr> <td>1 sec <input type="checkbox"/></td> <td>10 sec <input type="checkbox"/></td> <td>0.1 to 1 s can be set.</td> </tr> <tr> <td>1 sec <input type="checkbox"/></td> <td>10 sec <input type="checkbox"/></td> <td>1 to 10 s can be set.</td> </tr> </table> <p>↓</p> <p>After setting the selector, fine-adjust the delay time with the variable adjuster. (Clockwise turn increases the delay time.)</p> <p><b>Timer function setting</b></p> <table border="1"> <tr> <td rowspan="3">When selecting ON delay (ON D.)</td> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>← Set a position freely</td> </tr> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>← Set a position freely</td> </tr> <tr> <td>DELAY <input type="checkbox"/></td> <td>O.S.D. <input type="checkbox"/></td> <td></td> </tr> <tr> <td rowspan="3">When selecting OFF delay (OFF D.)</td> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>← Set a position freely</td> </tr> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>← Set a position freely</td> </tr> <tr> <td>DELAY <input type="checkbox"/></td> <td>O.S.D. <input type="checkbox"/></td> <td></td> </tr> <tr> <td rowspan="3">When selecting one-shot delay (O.S.D.)</td> <td>DARK ON <input type="checkbox"/></td> <td>LIGHT ON <input type="checkbox"/></td> <td>← Set a position freely</td> </tr> <tr> <td>2 ms (B) <input type="checkbox"/></td> <td>1 ms (A) <input type="checkbox"/></td> <td>← Set a position freely</td> </tr> <tr> <td>DELAY <input type="checkbox"/></td> <td>O.S.D. <input type="checkbox"/></td> <td>Since the function has stopped, it allows in both of the positions.</td> </tr> </table> <p><b>Timing chart</b></p> <p>Note 1. t must be longer than 1 ms or 2 ms. 2. T denotes a delay time.</p> <p><b>External synchronous input operation</b><br/>When the external synchronous input terminal (9) is open (HIGH), the output relay performs timer operation according to the input signals (LIGHT, DARK). When the external synchronous input terminal (9) is connected to the 0 V terminal (2) (LOW), the output relay turns OFF, independently of the input signals and output status, and acts as an inhibit signal.</p> | DARK ON <input type="checkbox"/>                                    | LIGHT ON <input type="checkbox"/> | DARK turns the relay ON and the transistor output "H". | DARK ON <input type="checkbox"/> | LIGHT ON <input type="checkbox"/> | LIGHT turns the relay ON and the transistor output "H". | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | The response time is set to 2 ms. | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | The response time is set to 1 ms. | 1 sec <input type="checkbox"/> | 10 sec <input type="checkbox"/> | 0.1 to 1 s can be set. | 1 sec <input type="checkbox"/> | 10 sec <input type="checkbox"/> | 1 to 10 s can be set. | When selecting ON delay (ON D.) | DARK ON <input type="checkbox"/> | LIGHT ON <input type="checkbox"/> | ← Set a position freely | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | ← Set a position freely | DELAY <input type="checkbox"/> | O.S.D. <input type="checkbox"/> |  | When selecting OFF delay (OFF D.) | DARK ON <input type="checkbox"/> | LIGHT ON <input type="checkbox"/> | ← Set a position freely | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | ← Set a position freely | DELAY <input type="checkbox"/> | O.S.D. <input type="checkbox"/> |  | When selecting one-shot delay (O.S.D.) | DARK ON <input type="checkbox"/> | LIGHT ON <input type="checkbox"/> | ← Set a position freely | 2 ms (B) <input type="checkbox"/> | 1 ms (A) <input type="checkbox"/> | ← Set a position freely | DELAY <input type="checkbox"/> | O.S.D. <input type="checkbox"/> | Since the function has stopped, it allows in both of the positions. |
|  | DARK ON <input type="checkbox"/>  | LIGHT ON <input type="checkbox"/>   | DARK turns the relay ON and the transistor output "H".              |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| DARK ON <input type="checkbox"/>       | LIGHT ON <input type="checkbox"/>   | LIGHT turns the relay ON and the transistor output "H".   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| 2 ms (B) <input type="checkbox"/>      | 1 ms (A) <input type="checkbox"/>   | The response time is set to 2 ms.   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| 2 ms (B) <input type="checkbox"/>      | 1 ms (A) <input type="checkbox"/>   | The response time is set to 1 ms.   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| 1 sec <input type="checkbox"/>         | 10 sec <input type="checkbox"/>   | 0.1 to 1 s can be set.  |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| 1 sec <input type="checkbox"/>         | 10 sec <input type="checkbox"/>   | 1 to 10 s can be set.   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| When selecting ON delay (ON D.)        | DARK ON <input type="checkbox"/>  | LIGHT ON <input type="checkbox"/>   | ← Set a position freely   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | 2 ms (B) <input type="checkbox"/>   | 1 ms (A) <input type="checkbox"/>   | ← Set a position freely   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | DELAY <input type="checkbox"/>  | O.S.D. <input type="checkbox"/>   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| When selecting OFF delay (OFF D.)      | DARK ON <input type="checkbox"/>  | LIGHT ON <input type="checkbox"/>   | ← Set a position freely   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | 2 ms (B) <input type="checkbox"/>   | 1 ms (A) <input type="checkbox"/>   | ← Set a position freely   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | DELAY <input type="checkbox"/>  | O.S.D. <input type="checkbox"/>   |   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
| When selecting one-shot delay (O.S.D.) | DARK ON <input type="checkbox"/>  | LIGHT ON <input type="checkbox"/>   | ← Set a position freely   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | 2 ms (B) <input type="checkbox"/>   | 1 ms (A) <input type="checkbox"/>   | ← Set a position freely   |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
|  | DELAY <input type="checkbox"/>  | O.S.D. <input type="checkbox"/>   | Since the function has stopped, it allows in both of the positions. |                                   |  |                                  |                                   |   |                                   |                                   |                                   |                                   |                                   |                                   |                                |                                 |                        |                                |                                 |                       |                                 |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |                                   |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |  |  |                                  |                                   |                         |                                   |                                   |                         |                                |                                 |   |
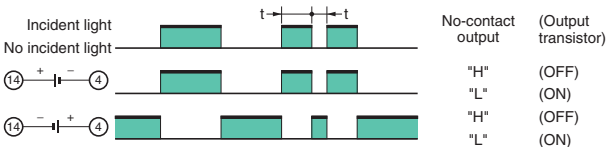
| Amplifier Units  | Nomenclature  | Settings   |  |                            |  |                             |                  |                                   |              |                                   |
|------------------|---|--|--|----------------------------|--|-----------------------------|------------------|-----------------------------------|--------------|-----------------------------------|
| E3C-JC4P         |  <p>Stability indicator (green)</p> <p>Sensitivity adjuster (4-turn endless adjuster)</p> <p>Light indicator (red)</p> <p>Operation selector</p>   | ---  |  |                            |  |                             |                  |                                   |              |                                   |
| E3C-GE4          |  <p>Stability indicator (green)<br/>When the light receiving input becomes +20% or more and -20% or less of operating voltage, it will be turned on. (Indicate stable status)</p> <p>Light indicator (red)<br/>When the light inputs, it will be turned on</p> <p>Sensitivity adjuster</p> | <p><b>Operation switching</b></p> <table border="1" data-bbox="794 719 1437 824"> <tr> <td></td> <td>DARK turns the output "H".</td> </tr> <tr> <td></td> <td>LIGHT turns the output "H".</td> </tr> </table> <p><b>Response time changing (The different frequency type can be made up by changing the response speed.)</b></p> <table border="1" data-bbox="794 904 1437 965"> <tr> <td> -0 V * connected</td> <td>The response time is set to 2 ms.</td> </tr> <tr> <td> disconnected</td> <td>The response time is set to 1 ms.</td> </tr> </table> <p>* 0 V of power supply</p> <p><b>Timing chart</b></p>  <p>Incident light: No incident light, followed by two pulses of duration <math>t</math>.</p> <p>No-contact output (Output transistor):</p> <ul style="list-style-type: none"> <li>Terminal 14 (+) - terminal 4 (-): "H" (OFF), "L" (ON)</li> <li>Terminal 14 (-) - terminal 4 (+): "H" (OFF), "L" (ON)</li> </ul> |  | DARK turns the output "H". |  | LIGHT turns the output "H". | -0 V * connected | The response time is set to 2 ms. | disconnected | The response time is set to 1 ms. |
|                  | DARK turns the output "H".  |  |  |                            |  |                             |                  |                                   |              |                                   |
|                  | LIGHT turns the output "H".   |  |  |                            |  |                             |                  |                                   |              |                                   |
| -0 V * connected | The response time is set to 2 ms.   |  |  |                            |  |                             |                  |                                   |              |                                   |
| disconnected     | The response time is set to 1 ms.   |  |  |                            |  |                             |                  |                                   |              |                                   |

## Safety Precautions

Refer to *Warranty and Limitations of Liability*.

### ⚠ WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



### Precautions for Correct Use


Do not use the product in atmospheres or environments that exceed product ratings.

#### Amplifier Units

##### ● Wiring

##### Connection of E3C-JC4P Amplifier Unit and Sensor

Always run the shielded wires of the Emitter and Receiver separately. Also, route the sensor cable along the cable grooves of the cover and sensor and fix it with the cover.

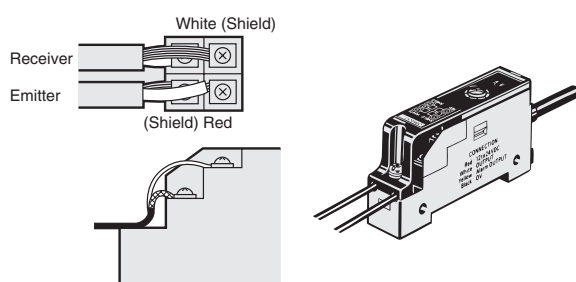

##### Connection Socket


The standard socket is the PF113A for the E3C-A and -C, and the PYF08A, PYF08M or PY08 for the E3C-GE4. Avoid using any other sockets since they may not satisfy the characteristics. (There will be no problem when the STABILITY indicator turns ON)

#### Sensor Units


##### ● Wiring

##### Extension Cable

- The extension distance of the sensor connection cable should be within 10 m.
- The strip-off length of the core in the connection cable should be 20 mm max. on the Receiver side and 50 mm max. on the Emitter side, and the core should be as short as possible. Avoid using the joint terminal and connector.



- Use independent shielded wires for the Emitter and Receiver. Using a common shielded wire can cause a malfunction.



##### Extension Cable

##### Through-beam

| Cable Model                          | Specified cable  | Replacement cable   |
|--------------------------------------|--|---|
| E3C-S10<br>E3C-1<br>E3C-2<br>E3C-S50 | Polyethylene insulation shield Round cable<br><br>12-conductor, 0.18 dia.        | 1-conductor shield/vinyl wire, conductor cross section: 0.3 mm <sup>2</sup> min.<br><br>Gray (vinyl sheath) |
| E3C-S20W                             | Vinyl insulation shield round cable<br><br>12-conductor, 0.18 dia.               | 1-conductor shield/vinyl wire, conductor cross section: 0.3 mm <sup>2</sup> min.                            |
| E3C-S30T<br>E3C-S30W                 | Vinyl insulation shield round cable (robot cable)<br><br>30-conductor, 0.08 dia. | 1-conductor shield/vinyl wire, conductor cross section: 0.3 mm <sup>2</sup> min.                            |

##### Reflective model

| Cable Model   | Specified cable   | Replacement cable  |
|---|---|--|
| E3C-DS10<br>E3C-DS10T<br>E3C-VS1G<br>E3C-VS3R<br>E3C-LS3R | Vinyl insulation shielded parallel cable<br><br>12-conductor, 0.18 dia. | When there is no 1-conductor shielded, vinyl cable (parallel wire), use two 1-conductor shielded, vinyl wires. |
| E3C-DS5W<br>E3C-VS7R<br>E3C-VM35R                         | Vinyl insulation shielded parallel cable<br><br>7-conductor, 0.18 dia.  | When there is no 1-conductor shielded, vinyl cable (parallel wire), use two 1-conductor shielded, vinyl wires. |

##### ● Others

When the E3C is used in a place where high-frequency noise will be generated, e.g. ultrasonic welder, grounding the 0-V terminal (on the shield side of the connection cable) of the Receiver may avoid a malfunction caused by induction.

## Dimensions

Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.


### Sensors

#### Sensor Units


#### E3C-S10




Emitter: E3C-S10L  
Receiver: E3C-S10D

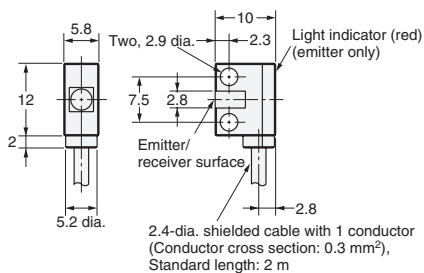


#### E3C-S50




Emitter: E3C-S50L  
Receiver: E3C-S50D

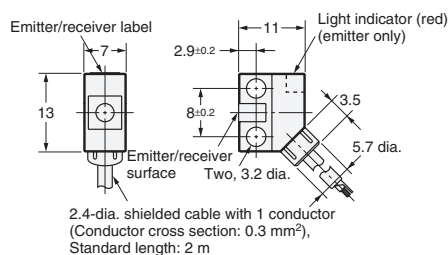


#### E3C-1




Emitter: E3C-1L  
Receiver: E3C-1D

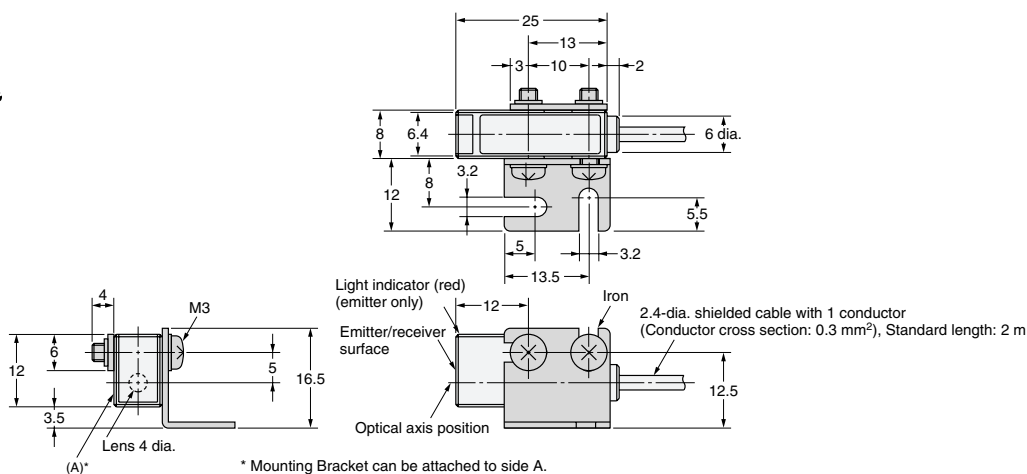



#### E3C-2



Emitter: E3C-2L  
Receiver: E3C-2D


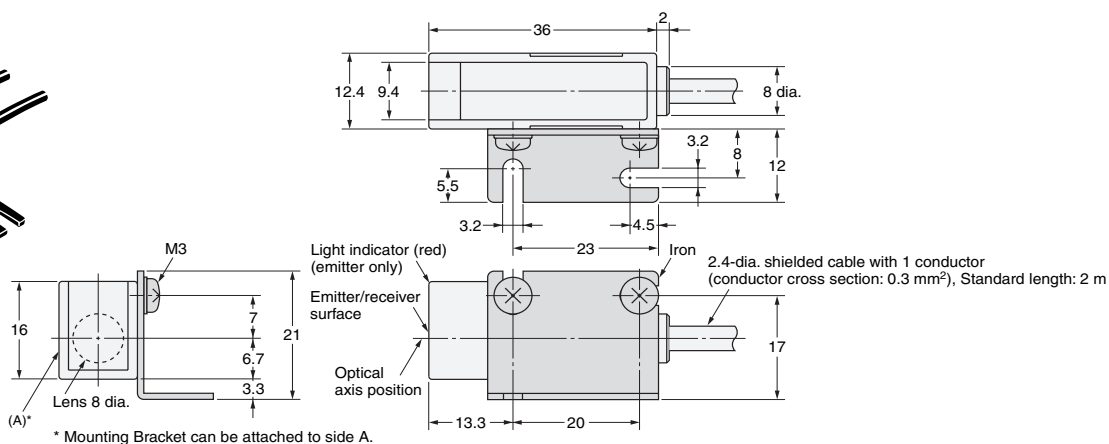


E3C-S20W

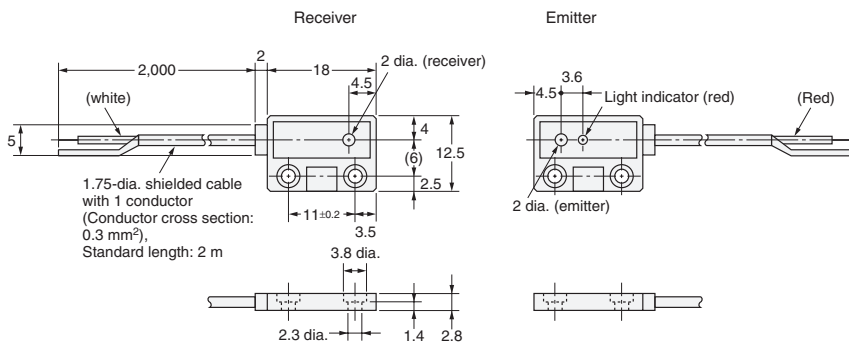



Emitter: E3C-S20LW  
 Receiver: E3C-S20DW

E3C-S30W

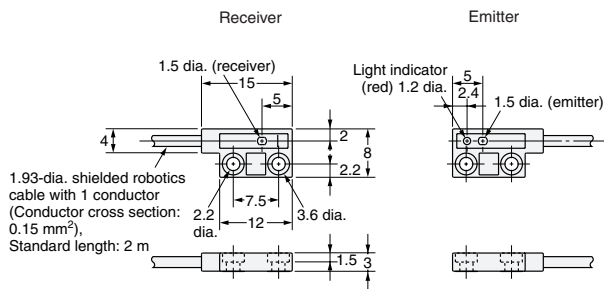



Emitter: E3C-S30LW  
 Receiver: E3C-S30DW

E3C-S30T

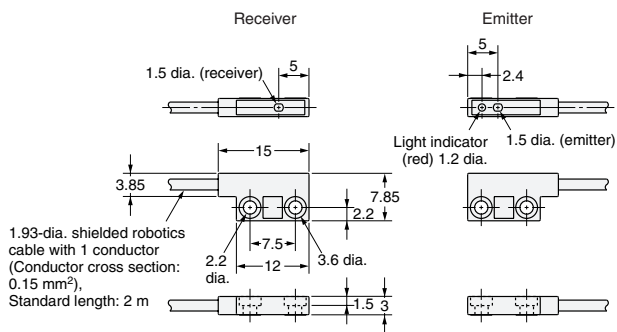



Emitter: E3C-S30LT  
 Receiver: E3C-S30DT


E3C-DS10

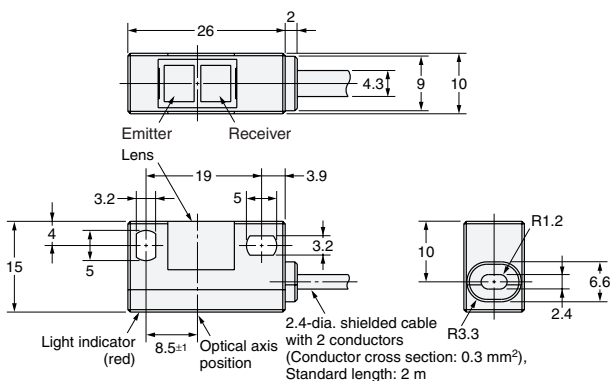



E3C-DS5W

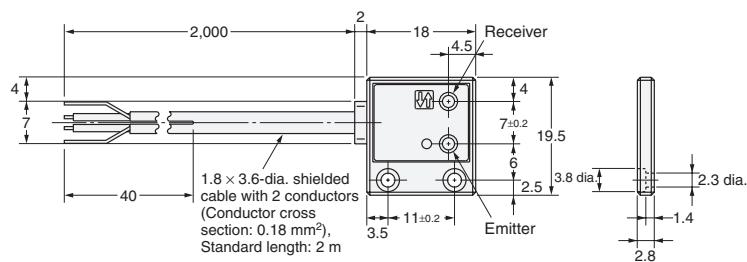

E3C-DS10T


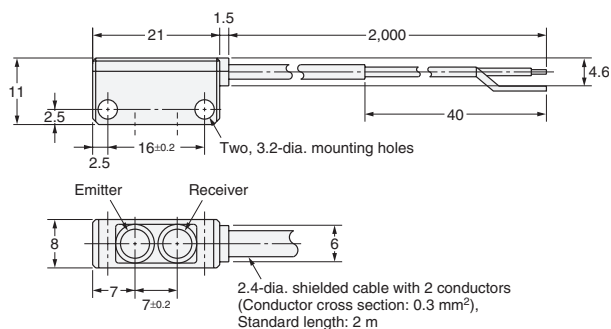


E3C-LS3R

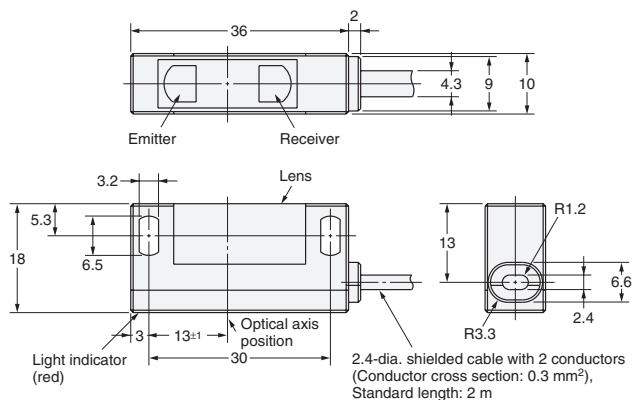


Amplifier Units


E3C-A  
E3C-C

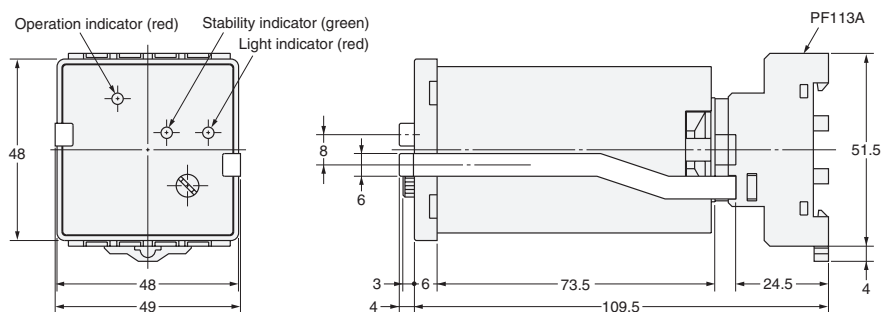


E3C-JC4P




With Mounting Bracket Attached

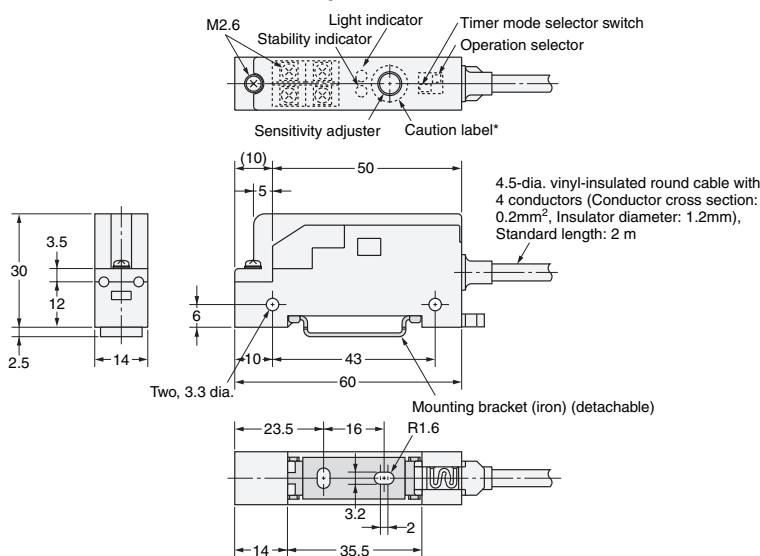

\*After adjusting the sensitivity, attach the caution label at the location indicated by  above to prevent malfunction.

E3C-GE4

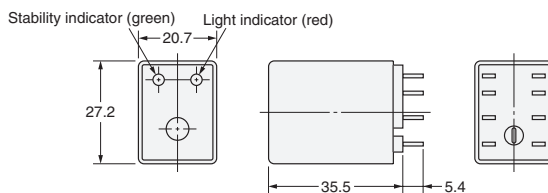

Connector

Use the PYF08A front connection socket or PY08 rear connection socket.

Accessories (Order Separately)

Mounting Brackets

Refer to E39-L/F39-L/E39-S/E39-R for details.

Connecting Sockets

Refer to E39-L/F39-L/E39-S/E39-R for details.

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the products may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased products.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

2011.9

In the interest of product improvement, specifications are subject to change without notice.

**OMRON Corporation**  
Industrial Automation Company

<http://www.ia.omron.com/>

(c)Copyright OMRON Corporation 2011 All Right Reserved.



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[E3C-A](#) [E3C-C](#) [E3C-DS10T](#) [E3C-DS5W](#) [E3C-GE4](#) [E3C-JC4P](#) [E3C-LS3R](#) [E3C-S20DW](#) [E3C-S20LW](#) [E3C-S30T](#)  
[E3C-S30W](#) [E3C-WE4](#) [E3C-WH4F](#)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9