

# Amphenol

the ultimate connection



## SCE Series

Interconnect  
Solutions



For more information call **210 372 0631**  
**Amphenol PCD**

[mhands@amphenolpcd.com](mailto:mhands@amphenolpcd.com)

## **SCE**

### **Snatch Connector Electrical Series**

### **The Ultimate Connector Series**



SCE is a miniature product with a silent push to mate and pull to release design across two styles of cable receptacles. All inserts and contacts are moulded in place, achieving high environmental sealing to IP68. The metalwork is machined from brass, giving an increased number of mating cycles over traditional aluminium connectors.

The snatch push pull design is fully grounded and cannot be locked when mated, as the cable receptacle has no moving parts, i.e. coupling nut, thus eliminating the path for the ingress of moisture and dust to the interface. The latch push pull design can be non-grounded or grounded and is locked when mated by rotating the coupling nut fitted to the cable receptacle by 30°. This coupling mechanism locks the connectors together, ensuring that they cannot be inadvertently demated. Both are fitted with internal and external o-rings for sealing.




The chassis mounting plug remains unchanged to allow the user to select either a snatch or latch cable receptacle without changing the equipment interface.

Scoop proof shell to shell keying is provided with five different key options of A, B, C, D and N positions, to prevent mis-mating between shells of different operations.


Amphenol offers full cable harness solutions with overmoulding capabilities or, where preferred, a heat shrink boot can be used.



## SCE Terminology

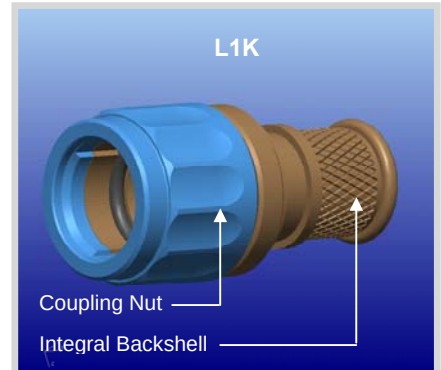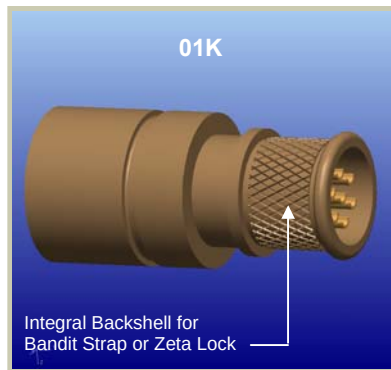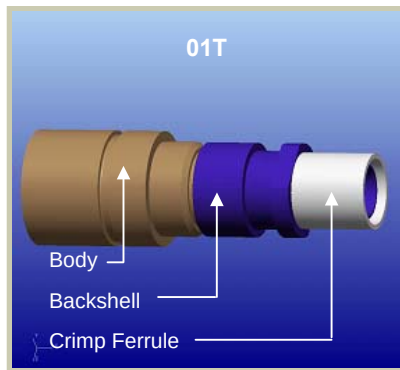

## SCE Mating Options

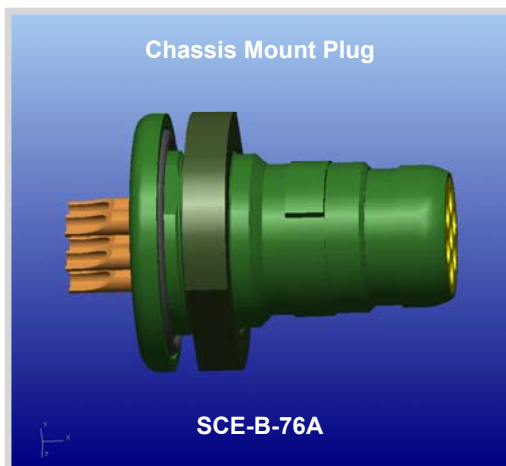

**Chassis Mount Plug remains same to  
mate with Snatch or Latch Receptacle**

## SCE Performance Information

| INSERT AVAILABILITY |                                           |
|---------------------|-------------------------------------------|
| 06-05               | 5 #22 AWG Contacts                        |
| 06-06               | 6 #22 AWG Contacts                        |
| 06-07               | 7 #22 AWG Contacts                        |
| 07-10A              | 8 #22 AWG Contacts and 2 #16 AWG Contacts |
| 07-12               | 12 #22 AWG Contacts                       |
| 07-14               | 14 #22 AWG Contacts                       |
| 08-19               | 19 #22 AWG Contacts                       |

| CONTACT SPECIFICATIONS      |                |                 |
|-----------------------------|----------------|-----------------|
| Contact Resistance          | 5 mΩ initially | Less than 10 mΩ |
| Shell to Shell Conductivity | 5 mΩ initially | Less than 10 mΩ |


| INSERT SPECIFICATIONS                        |                   |
|----------------------------------------------|-------------------|
| Working Voltage (Sea Level)                  | 115 Vac           |
| DWV (Sea Level)                              | 500 Vac           |
| Insulation Resistance (Sea Level)            | 1GΩ @ 500 Vdc     |
| Current Rating (Individual Contact)          | 3A #22 / 7.5A #16 |
| Current Rating (all Contacts simultaneously) | 1A #22 / 5A #16   |

| ENVIRONMENTAL         |                                          |
|-----------------------|------------------------------------------|
| Temperature           | -55°C / +200°C                           |
| Salt Spray Resistance | 500 hours                                |
| Fluids                | As per MIL-C-26482 Series I              |
| Vibration and Shock   | As per MIL-C-26482 Series I              |
| IP Rating             | IP68 through Unmated Bulkhead Connectors |
|                       | IP68 Mated Pair Interface                |
| Sand and Dust         | DEF STAN 07-55 (Part 2) Test D1          |
| Icing/Frosting        | DEF STAN 07-55 (Part 2) Test B10         |


| MECHANICAL |                                                                  |
|------------|------------------------------------------------------------------|
| Durability | 2000 Matings                                                     |
| Materials  | Shell : Brass – Standard plating finish Black Silver             |
|            | Contacts : Turned, Gold Plated                                   |
|            | Inserts and Seal : Proprietary Thermoplastic Polyester Elastomer |

## SCE Insert Availability – Shell Size 06


### RECEPTACLES – PIN CONTACTS ONLY



FRONT FACE VIEW  
SCE 7 WAY




FRONT FACE VIEW  
SCE 6 WAY




FRONT FACE VIEW  
SCE 5 WAY



REAR FACE VIEW  
SCE 7 WAY




REAR FACE VIEW  
SCE 6 WAY




REAR FACE VIEW  
SCE 5 WAY


### PLUGS – SOCKET CONTACTS ONLY




FRONT FACE VIEW  
SCE 7 WAY




FRONT FACE VIEW  
SCE 6 WAY




FRONT FACE VIEW  
SCE 5 WAY



REAR FACE VIEW  
SCE 7 WAY




REAR FACE VIEW  
SCE 6 WAY




REAR FACE VIEW  
SCE 5 WAY

## SCE Insert Availability – Shell Size 07


### RECEPTACLES – PIN SOCKETS ONLY




FRONT FACE VIEW  
10 WAY




FRONT FACE VIEW  
12 WAY




FRONT FACE VIEW  
14 WAY



REAR FACE VIEW  
10 WAY




REAR FACE VIEW  
12 WAY




REAR FACE VIEW  
14 WAY


### PLUGS – SOCKET CONTACTS ONLY




FRONT FACE VIEW  
10A WAY




FRONT FACE VIEW  
12 WAY




FRONT FACE VIEW  
14 WAY



REAR FACE VIEW  
10A WAY




REAR FACE VIEW  
12 WAY




REAR FACE VIEW  
14 WAY

## SCE Insert Availability – Shell Size 08

### RECEPTACLES – PIN CONTACTS ONLY




FRONT FACE VIEW  
19 WAY




REAR FACE VIEW  
19 WAY

### PLUGS – SOCKET CONTACTS ONLY



FRONT FACE VIEW  
19 WAY



REAR FACE VIEW  
19 WAY

## SCE Keyway Orientation

| Part Number           | Keyway Position | AA' |
|-----------------------|-----------------|-----|
| SCE-B-76A**-**SN-**** | NORMAL          | 180 |
| SCE-B-76A**-**SA-**** | A               | 150 |
| SCE-B-76A**-**SB-***  | B               | 210 |
| SCE-B-76A**-**SC-***  | C               | 120 |
| SCE-B-76A**-**SD-***  | D               | 240 |




| Part Number      | Keyway Position | AA' |
|------------------|-----------------|-----|
| SCE-B-01K**-**PN | NORMAL          | 180 |
| SCE-B-01K**-**PA | A               | 150 |
| SCE-B-01K**-**PB | B               | 210 |
| SCE-B-01K**-**PC | C               | 120 |
| SCE-B-01K**-**PD | D               | 240 |

| Part Number      | Keyway Position | AA' |
|------------------|-----------------|-----|
| SCE-B-06K**-**PN | NORMAL          | 180 |
| SCE-B-06K**-**PA | A               | 150 |
| SCE-B-06K**-**PB | B               | 210 |
| SCE-B-06K**-**PC | C               | 120 |
| SCE-B-06K**-**PD | D               | 240 |

| Part Number      | Keyway Position | AA' |
|------------------|-----------------|-----|
| SCE-B-L1K**-**PN | NORMAL          | 180 |
| SCE-B-L1K**-**PA | A               | 150 |
| SCE-B-L1K**-**PB | B               | 210 |
| SCE-B-L1K**-**PC | C               | 120 |
| SCE-B-L1K**-**PD | D               | 240 |



## SCE Table of Styles – Up to 7 Ways

## In Line Receptacle Solder Bucket Contacts

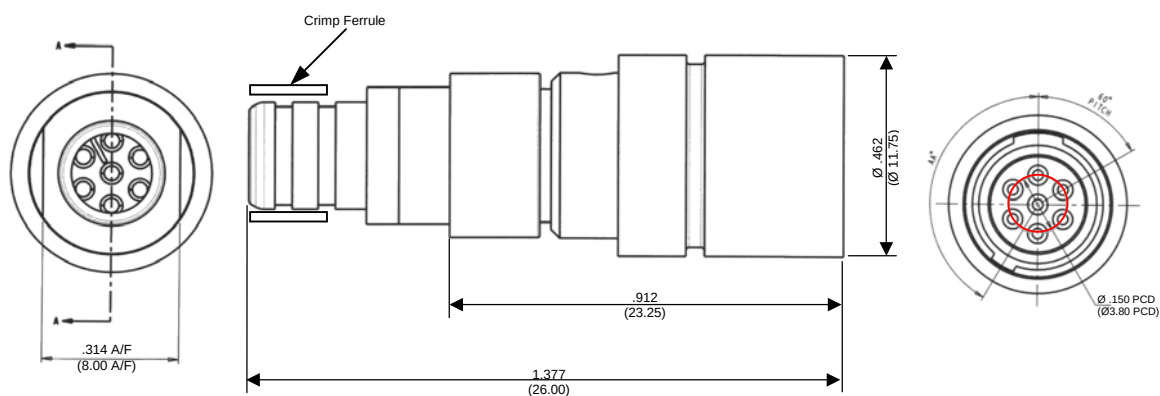

All Dimensions are for reference only  
(Dimensions in brackets are in mm)




## Snatch In Line Receptacle Integral Backshell Shell Size 06

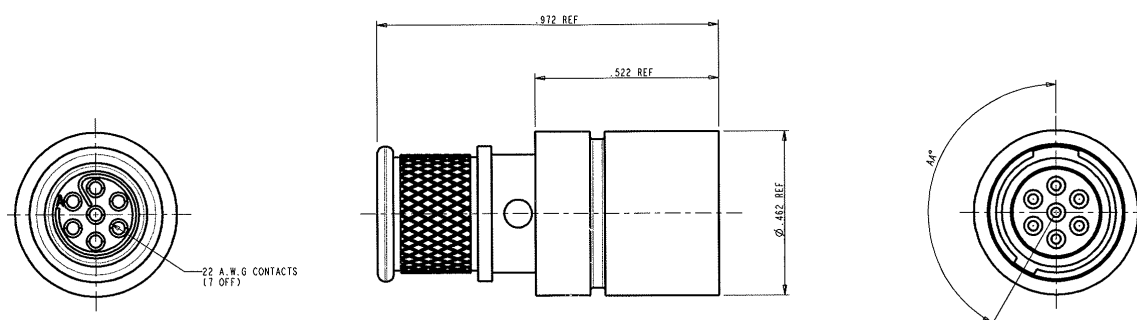

# SCE Table of Styles – Up to 7 Ways

**SCE-B-L1K06-XXPX**  
  
**Latch In Line Receptacle**  
**Integral Backshell,**  
**Non-Grounded (Shell Size 06)**

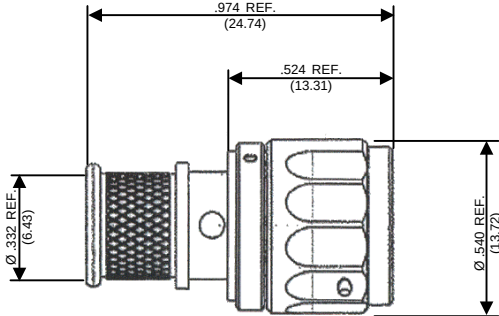


SOLDER BUCKET WILL ACCEPT  
22 A.W.G. WIRE MAX

For Grounded Latch connector, please add (985) to the end of part number

**390-5016-XXX**  
**Receptacle Dust Cap and Cord**  
**Will suit Snatch and Latch**  
**Shell Size 06**

| PART NO.        | SUPPLY WITH                   |
|-----------------|-------------------------------|
| 390-5016-XXX-01 | NO EYELET<br>NO CRIMP FERRULE |
| 390-5016-XXX-02 | CRIMP FERRULE<br>NO EYELET    |
| 390-5016-XXX-03 | EYELET<br>NO CRIMP FERRULE    |

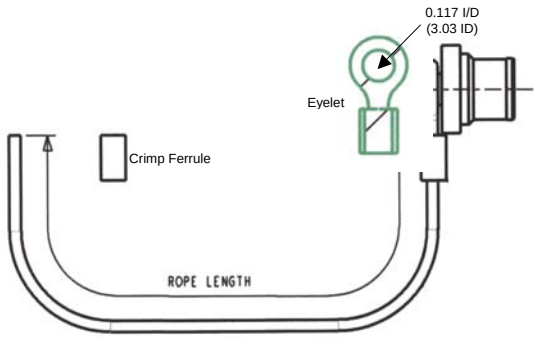**PART NUMBER**  
390 - 5016 - XXX - XX

SERIES

STYLE – CAP FOR RECEPTACLE



CRIMP/EYELET

LENTH OF ROPE  
130 – 130mm  
140 – 140mm

## SCE Table of Styles – Up to 14 Ways


### SCE-B-01K07-XXPX

Snatch In Line Receptacle  
Integral Backshell  
Shell Size 07

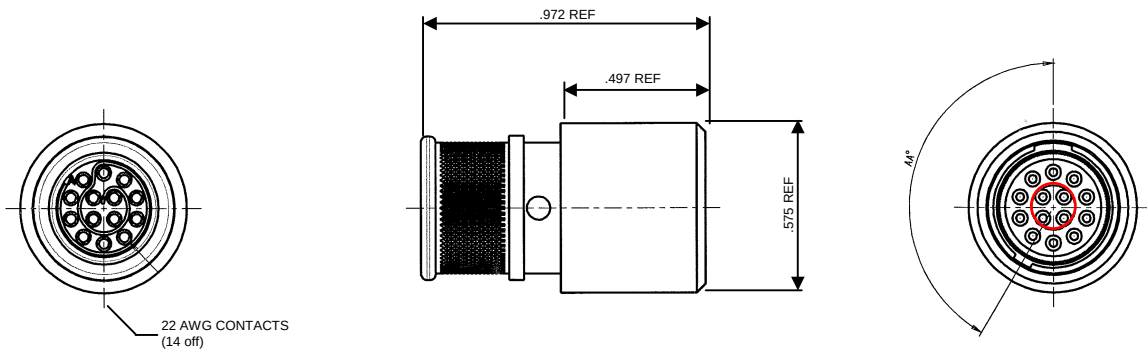

### SCE-B-L1K07-XXPX

Latch In Line Receptacle  
Integral Backshell, Non Grounded  
Shell Size 07

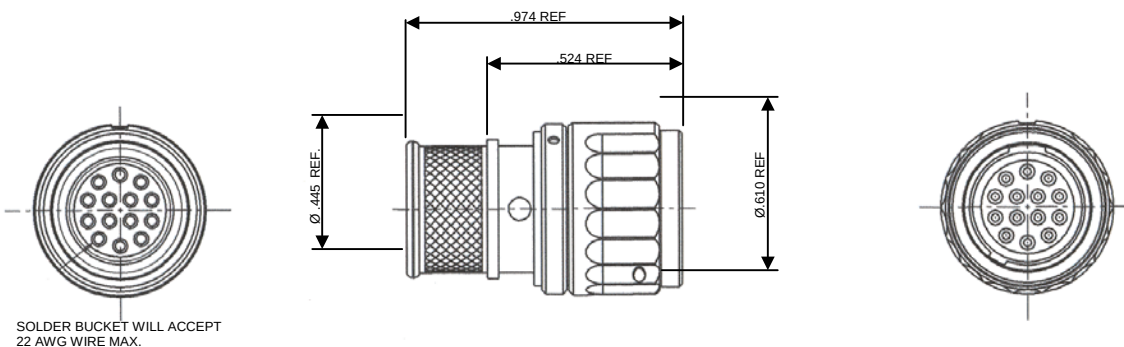

For Grounded Latch connector, please add (985) to the end of part number


## SCE Table of Styles

**390-5020-XXX-XX(771)**

**Receptacle Dust Cap and Cord**  
**Will suit Snatch and Latch**  
**Shell Size 07**

Cord is Black  
 Eyelet and Crimp Ferrule Black Zinc Cobalt

SEE TABLE 1

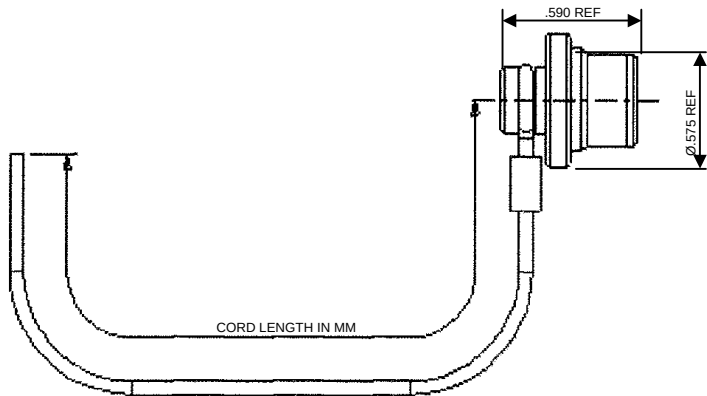

| PART NUMBER           | SUPPLY WITH                   |
|-----------------------|-------------------------------|
| 390-5020-XXX-01 (771) | NO EYELET<br>NO CRIMP FERRULE |
| 390-5020-XXX-02 (771) | CRIMP FERRULE<br>NO EYELET    |
| 390-5020-XXX-03 (771) | EYELET<br>NO CRIMP FERRULE    |

### PART NUMBER BREAKDOWN

390 - 5020 - XXX - XX (771)


SERIES  
 STYLE  
 CAP FOR SCE RECEPTACLE  
 SIZE 07

PLATING DEVIATION – BLACK ZINC COBALT  
 CRIMP/EYELET OPTION  
 CORD LENGTH IN MILLIMETRES

## SCE Table of Styles – Up to 19 Ways

### SCE-B-L1K08-XXPX

Latch In Line Receptacle  
Integral Backshell, Non-Grounded  
Shell Size 08

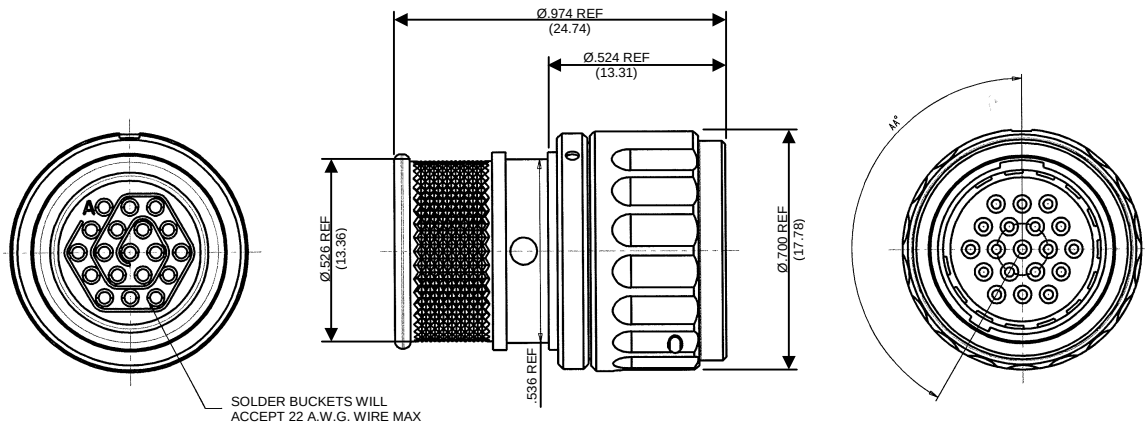


For Grounded Latch connector, please add (985) to the end of part number

### 390-5022-XXX-XX(771)

Receptacle Dust Cap and Cord  
Will suit Snatch and Latch  
Shell Size 08


Cord is Black  
Eyelet and Crimp Ferrule Black Zinc Cobalt

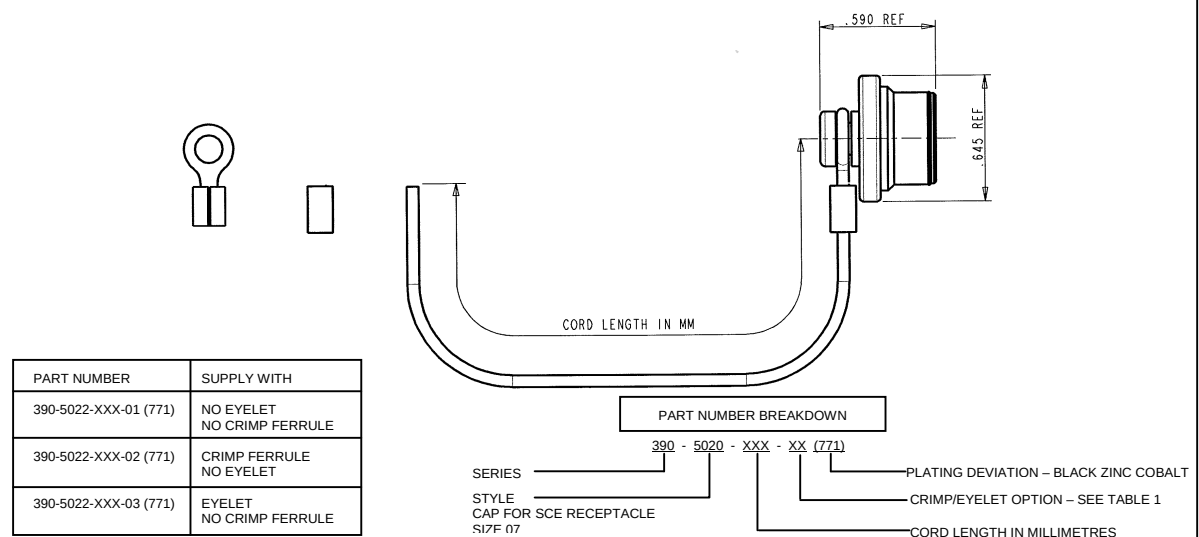

# SCE Table of Styles


## SCE-B-07A06-XXPX-001

Jam Nut Rear Mount Receptacles  
PCB Contacts

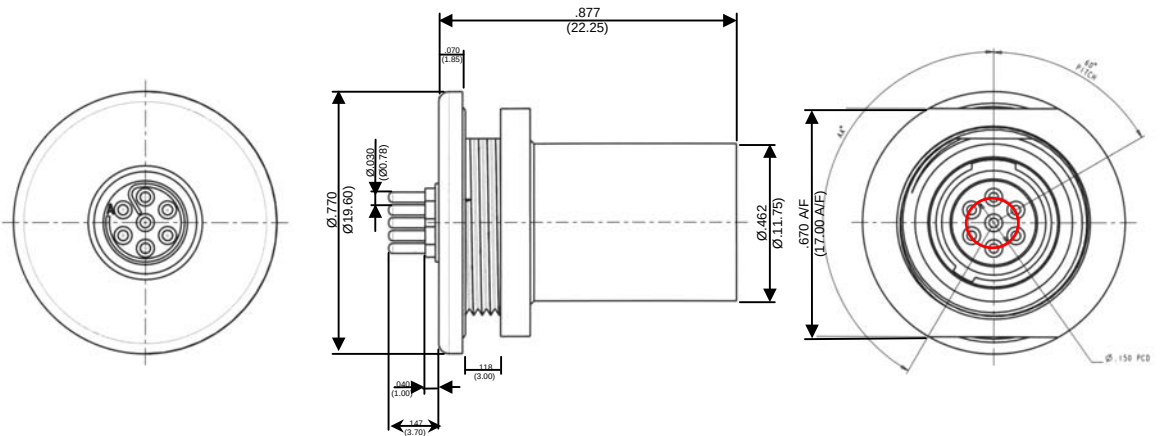

## SCE-B-07A06-XXPX-002


Jam Nut Rear Mount Receptacles  
Solder Bucket Contacts

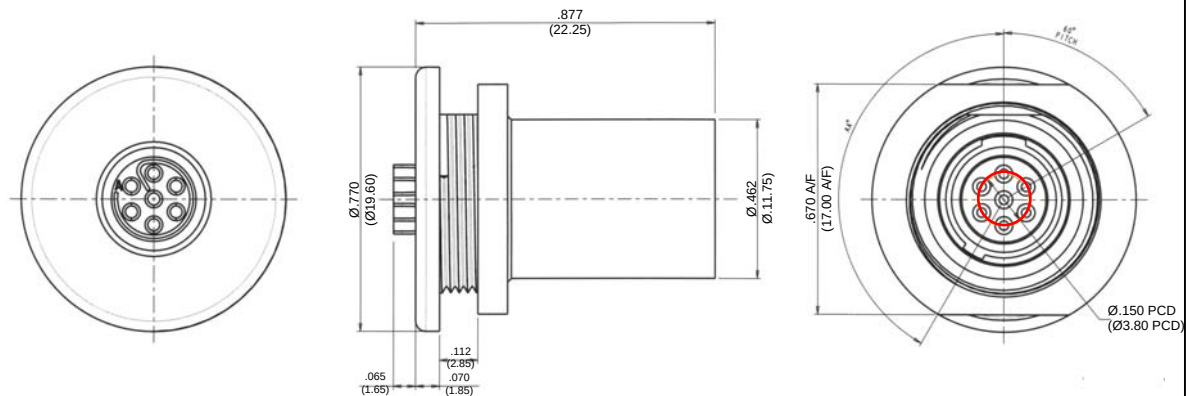

## SCE Table of Styles


### SCE-B-17A06-XXPX-001

Jam Nut Front Mount Receptacles  
PCB Contacts

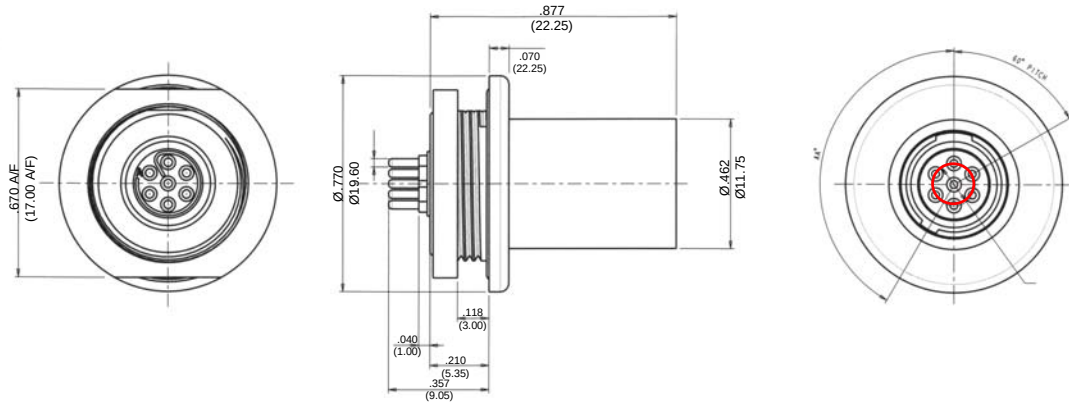

### SCE-B-17A06-XXPX-002


Jam Nut Front Mount Receptacles  
Solder Bucket Contacts

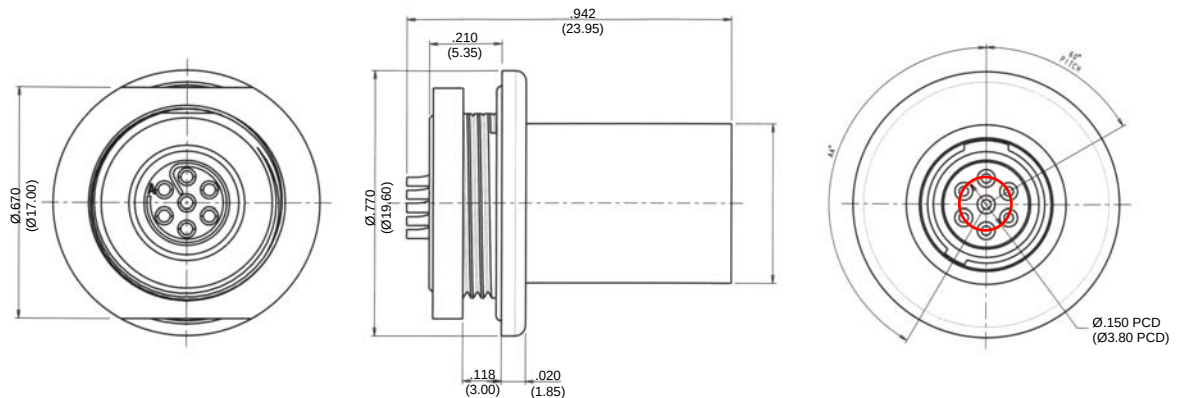

## SCE Table of Styles


### SCE-B-20A06-XXPX-001

2 Hole Mount Receptacle  
PCB Contacts

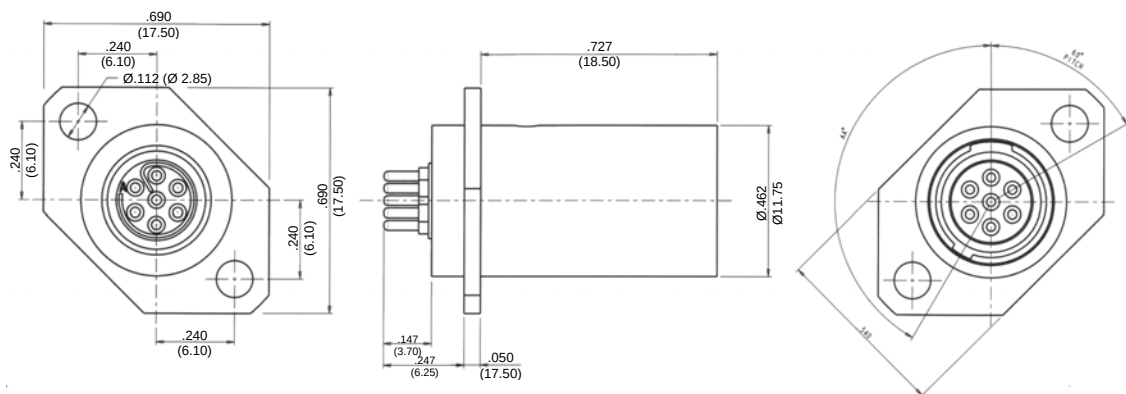

### SCE-B-20A06-XXPX-002




2 Hole Mount Receptacle  
Solder Bucket Contacts

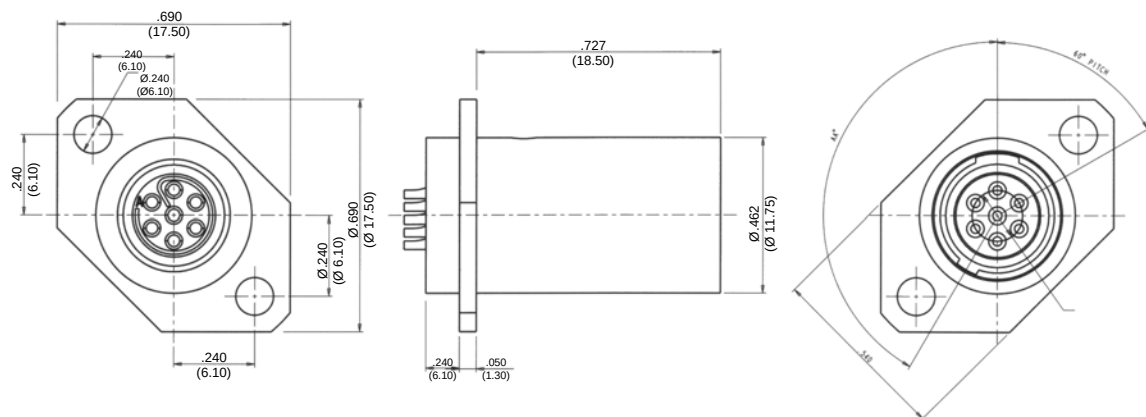

## SCE Table of Styles



### SCE-B-00A06-XXPX-001

#### 4 Hole Mount Receptacle PCB Contacts

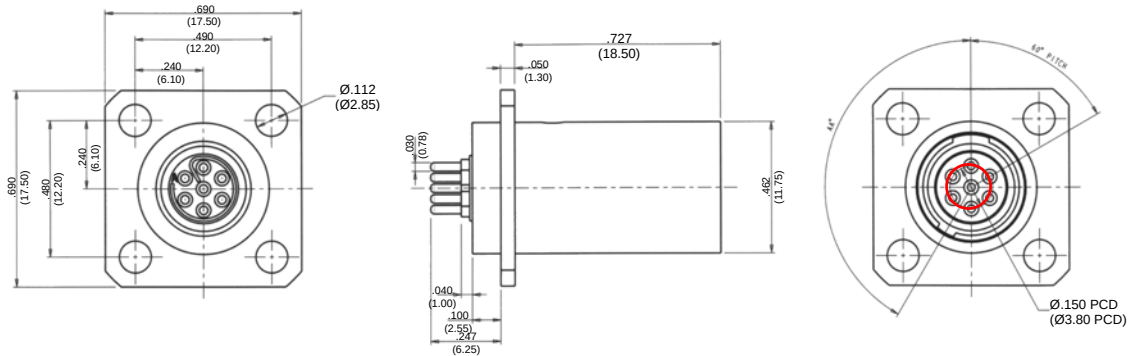


### SCE-B-00A06-XXPX-002

#### 4 Hole Mount Receptacle Solder Bucket Contacts

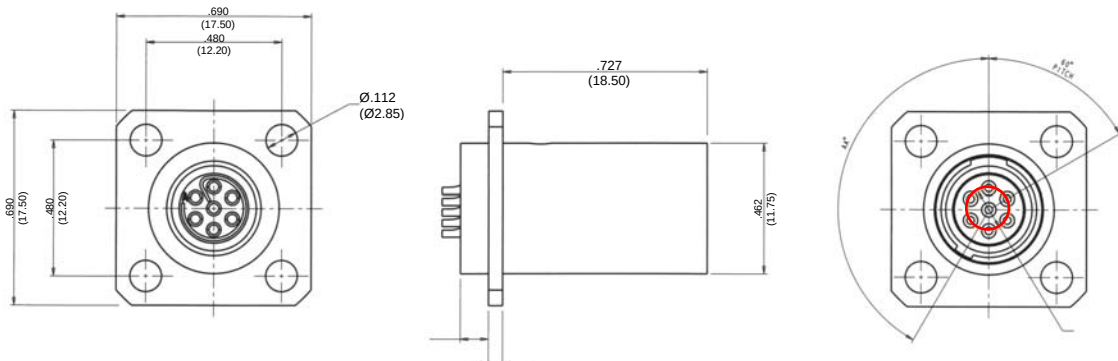


### Panel Mounting Details – Shell Size 06

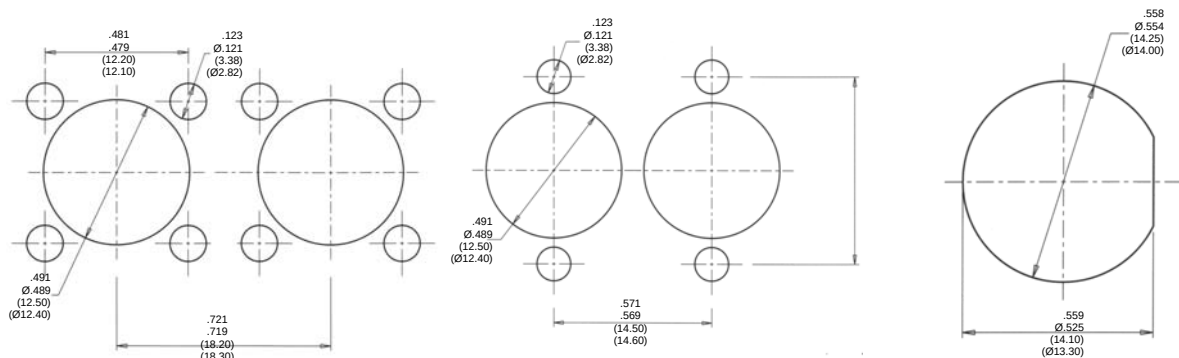

## SCE Table of Styles



390-0120-01

2 Hole Gasket  
for 2 Hole Mount Plug

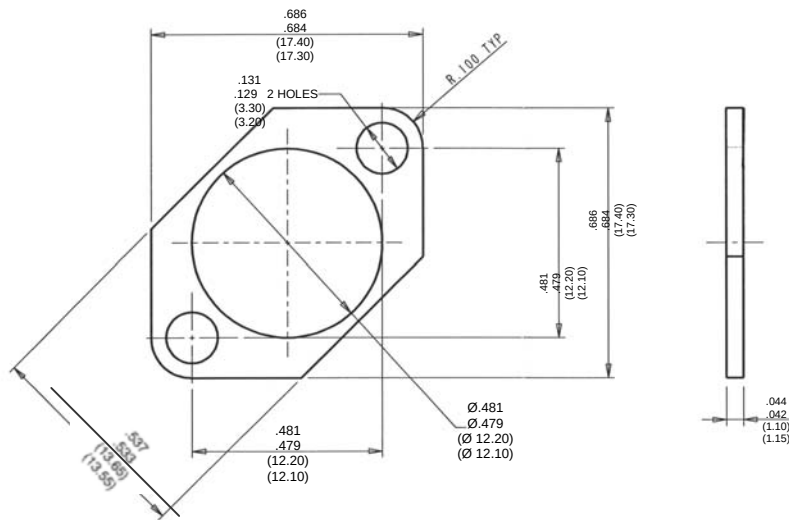

390-0121-01


4 Hole Gasket  
for 4 Hole Mount Plug

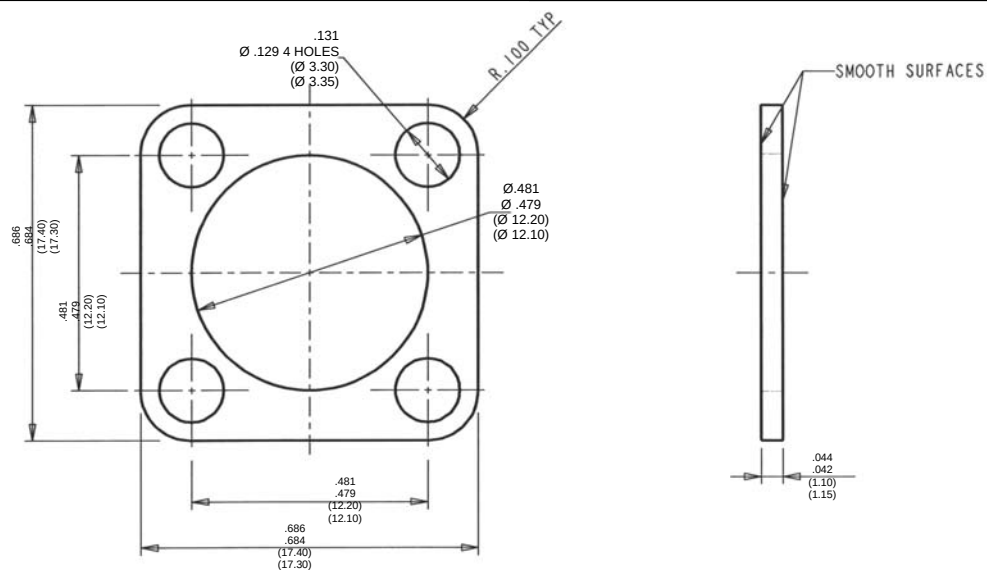

## SCE Table of Styles

### 20GB-SCE-6XXX-XXX


#### Front Mount Jam Nut Receptacle to Header Assembly

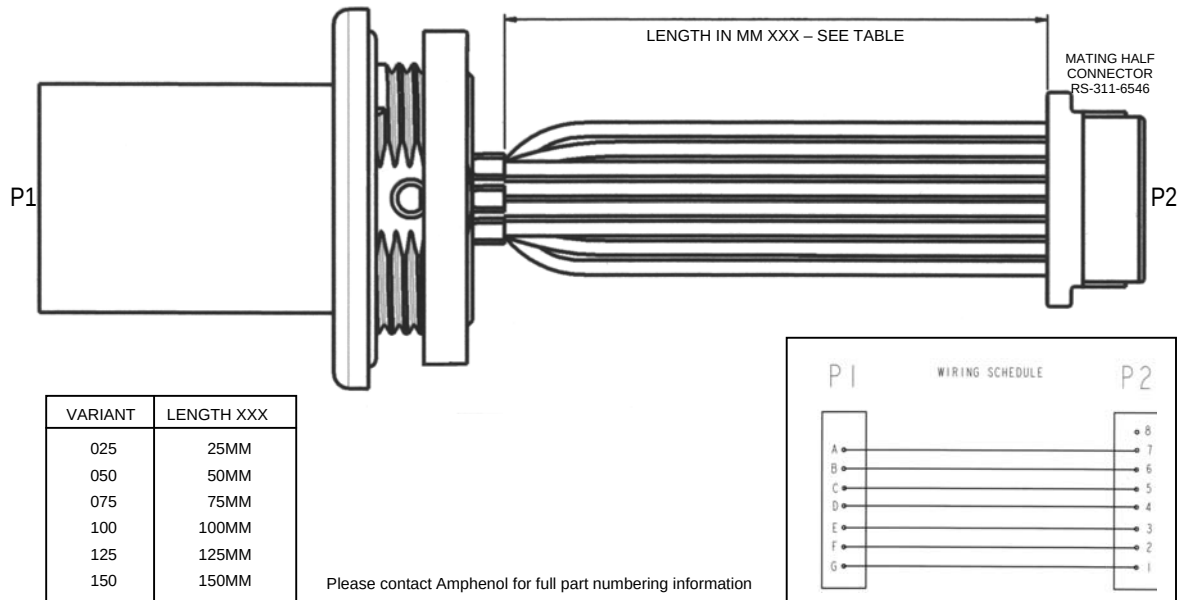

Panel Nut - Torque to 2.25Nm = 1.65 foot pounds force

### 20GB-SCE-6XXX-XXX

#### Rear Mount Jam Nut Receptacle to Header Assembly

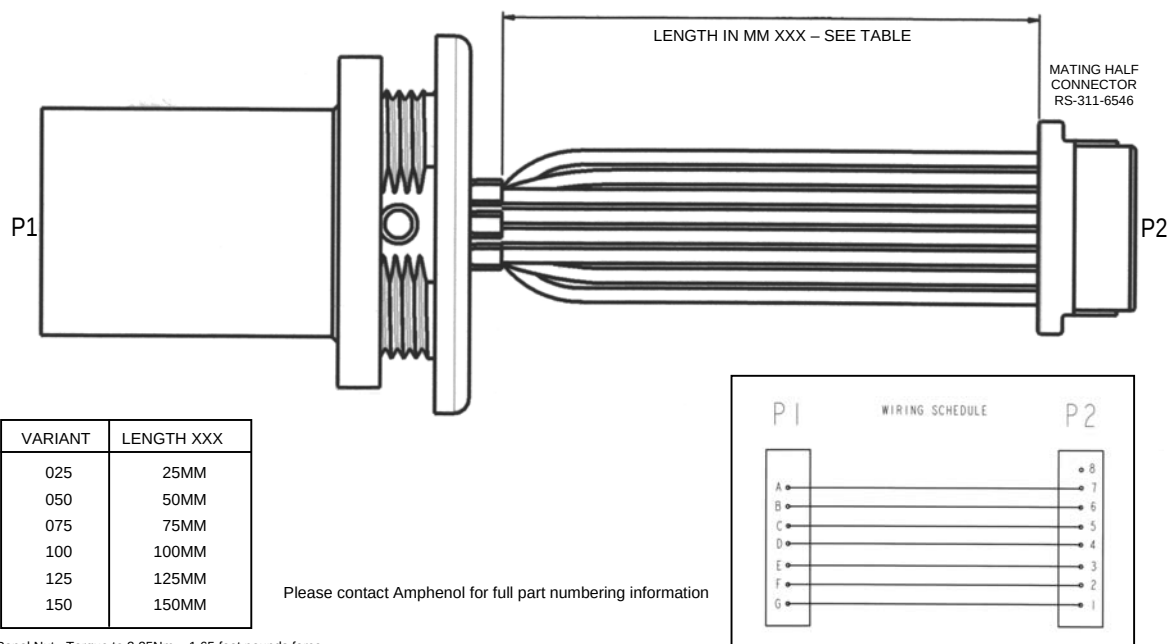


Panel Nut - Torque to 2.25Nm = 1.65 foot pounds force

## SCE Table of Styles – Up to 7 Ways


**SCE-X-76A06-XXSX-001**

**Rear Mount Plug  
PCB Contacts**

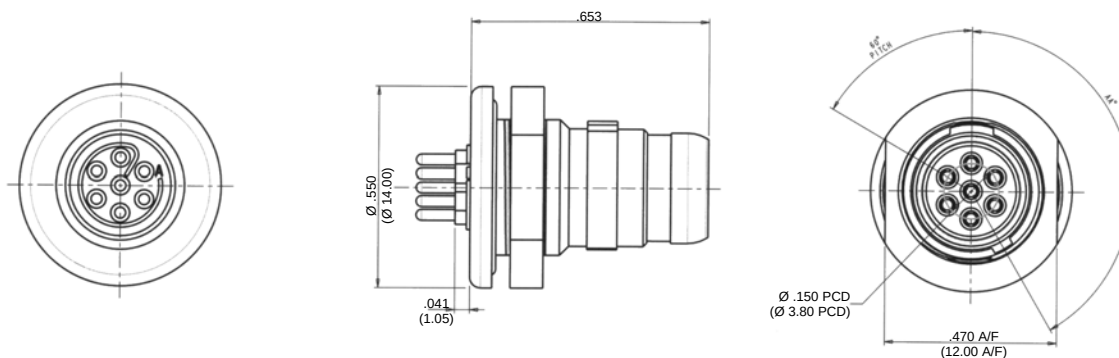

**SCE-X-76A06-XXSX-002**




**Rear Mount Plug  
Solder Bucket Contacts**

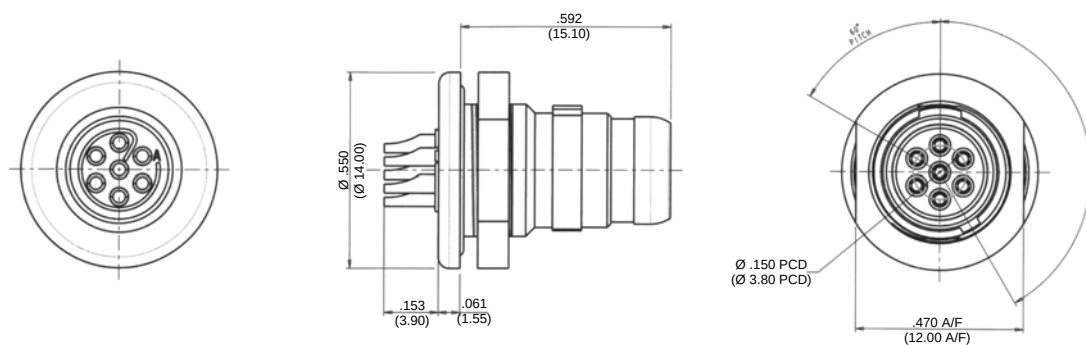

## SCE Table of Styles – Up to 14 Ways




**SCE-B-76A07-XXSX-001**

**Jam Nut Front Mount Plug  
PCB Bucket Contacts**

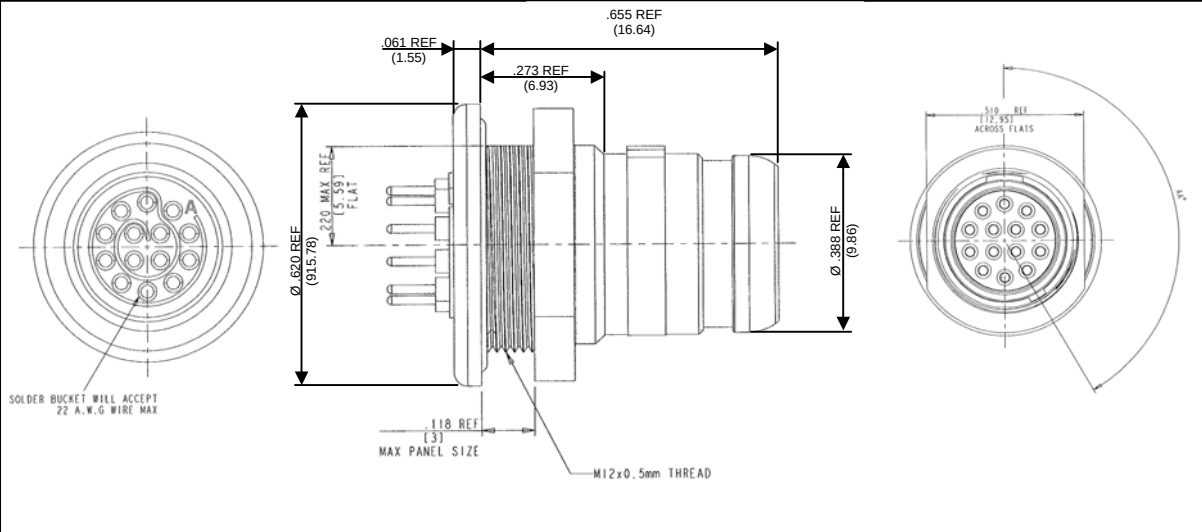

**SCE-B-76A07-XXSX-002**


**Jam Nut Front Mount Plug  
Solder Bucket Contacts**

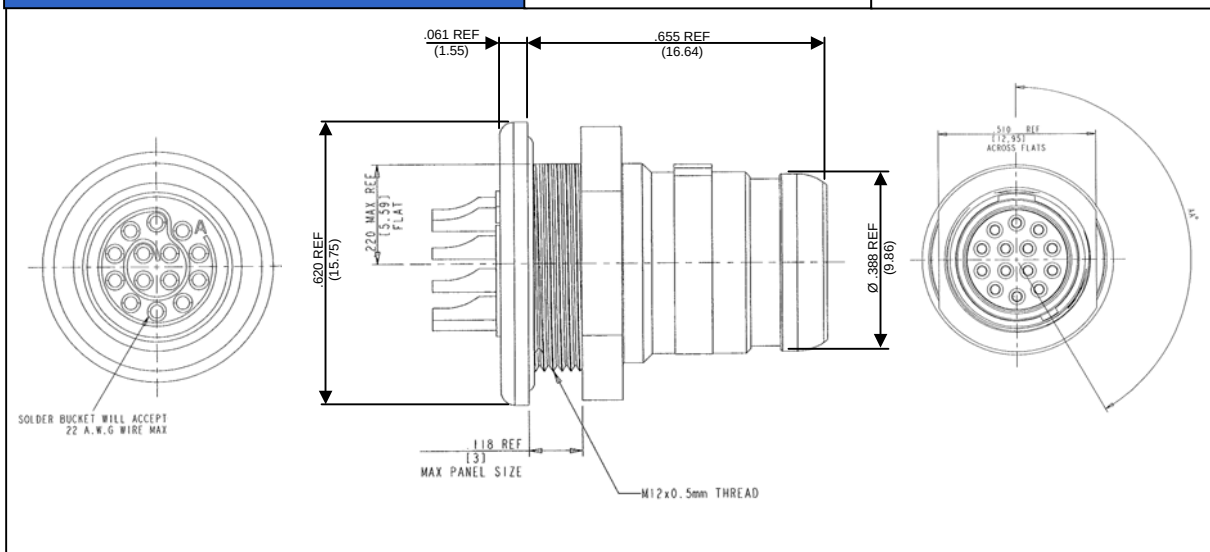

## SCE Table of Styles – Up to 19 Ways


**SCE-B-76A08-19SX-001**

**Jam Nut Front Mount Plug  
PCB Bucket Contacts**

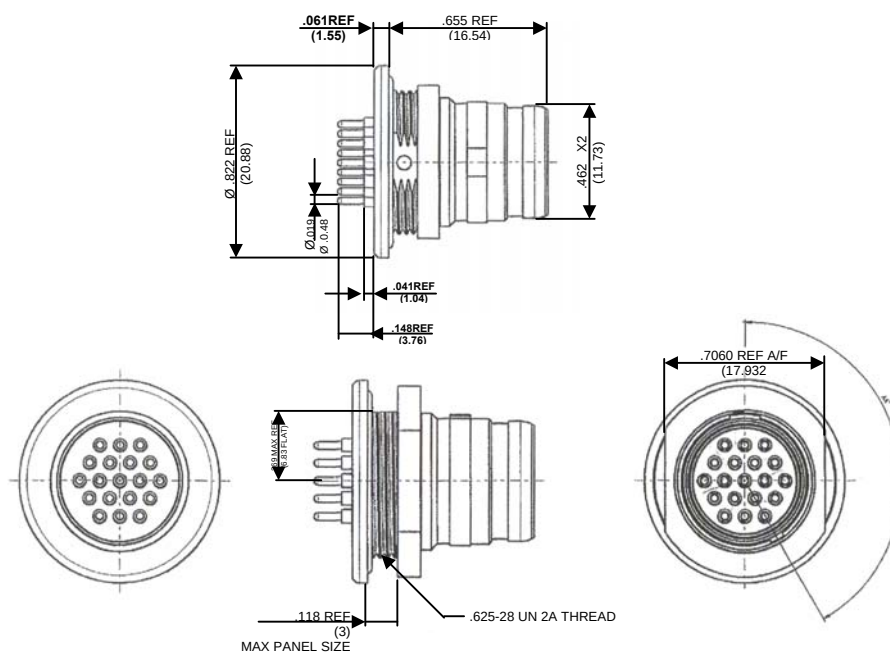

**SCE-B-76A08-19SX-002**




**Jam Nut Front Mount Plug  
Solder Bucket Contacts**

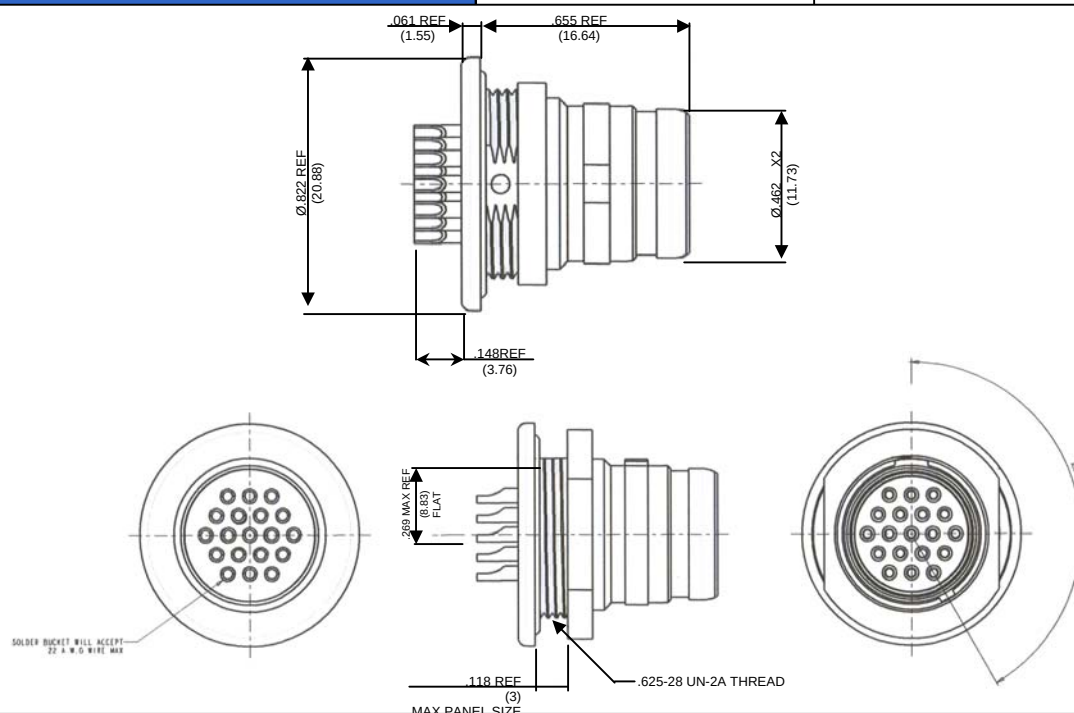

## SCE Table of Styles – Up to 7 Ways




### SCE-X-06T06-XXSX-003

In Line Plug  
Solder Bucket Contacts only  
(complete with Backshell)

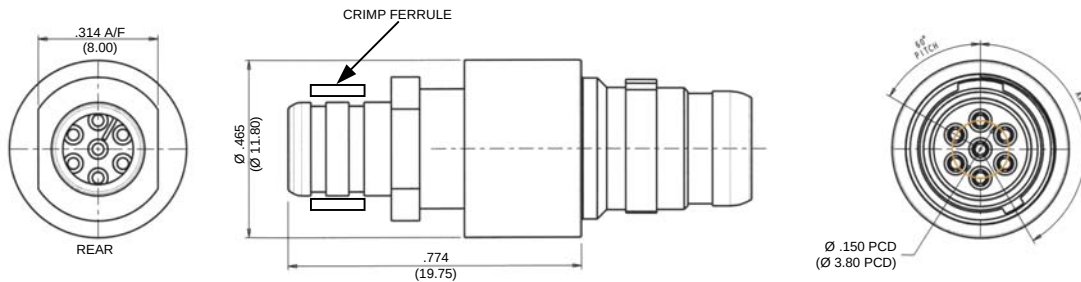

### SCE-B-06K06-XXPX





In Line Plug  
Integral Backshell, Solder Bucket Contacts  
Shell Size 06

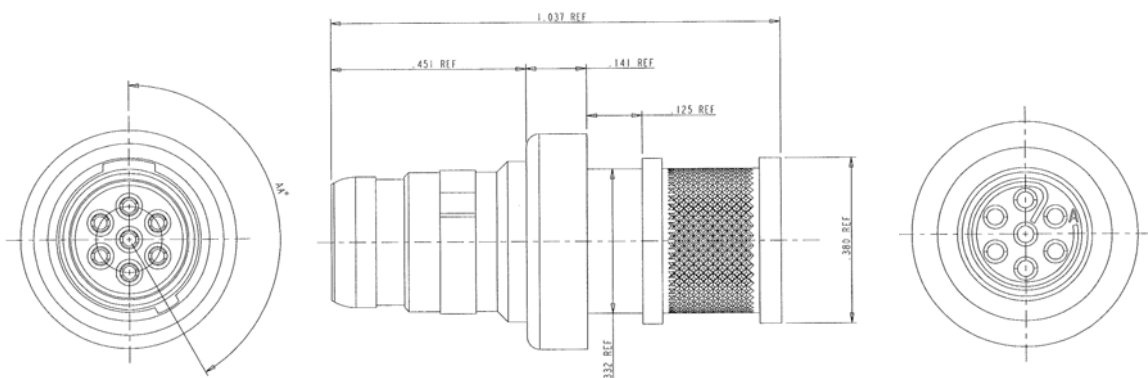

## SCE Table of Styles – Up to 7 Ways






### SCE-X-67A06-XXSX-001

#### Front Mount Plug PCB Contacts

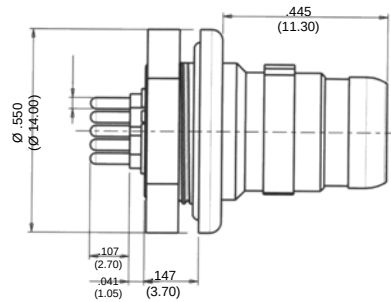


### SCE-X-67A06-XXSX-002

#### Front Mount Plug Solder Bucket Contacts

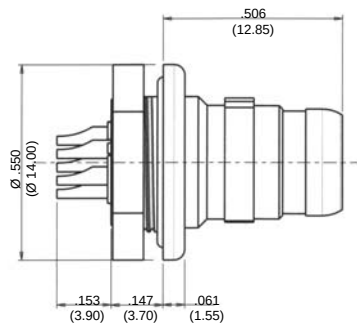


SCE Table of Styles

390-0088-130-XX  
Plug Dust Cap and Cord  
Will suit Plugs  
Shell Size 06

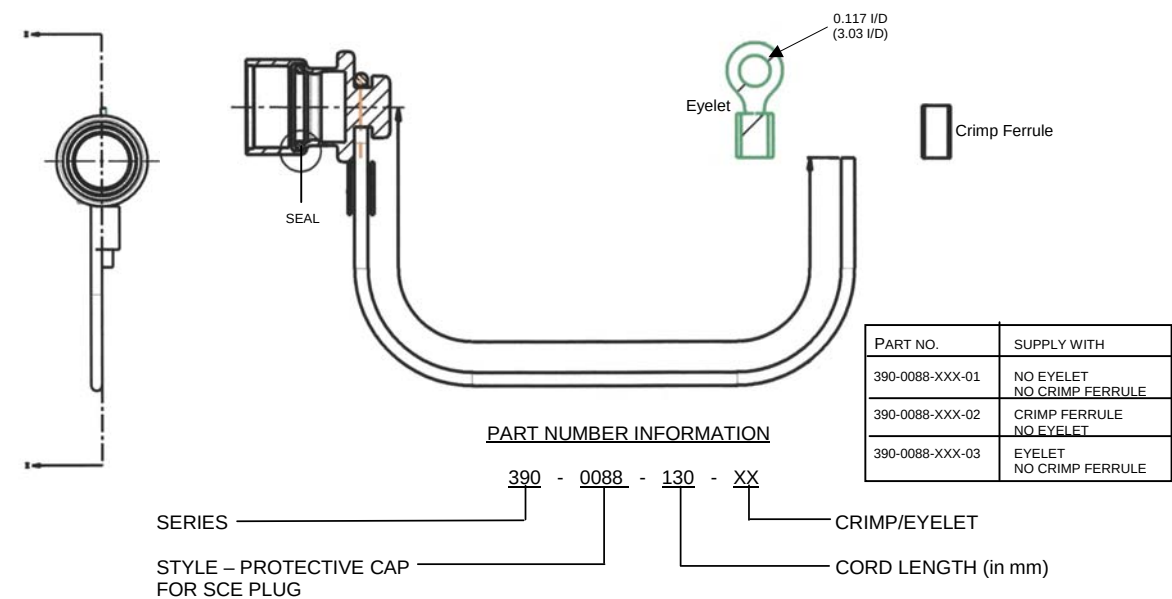

390-5019-XXX-XX(771)  
Receptacle Dust Cap and Cord  
Will suit Snatch and Latch  
Shell Size 07

Cord is Black  
Eyelet and crimp ferrule black zinc cobalt

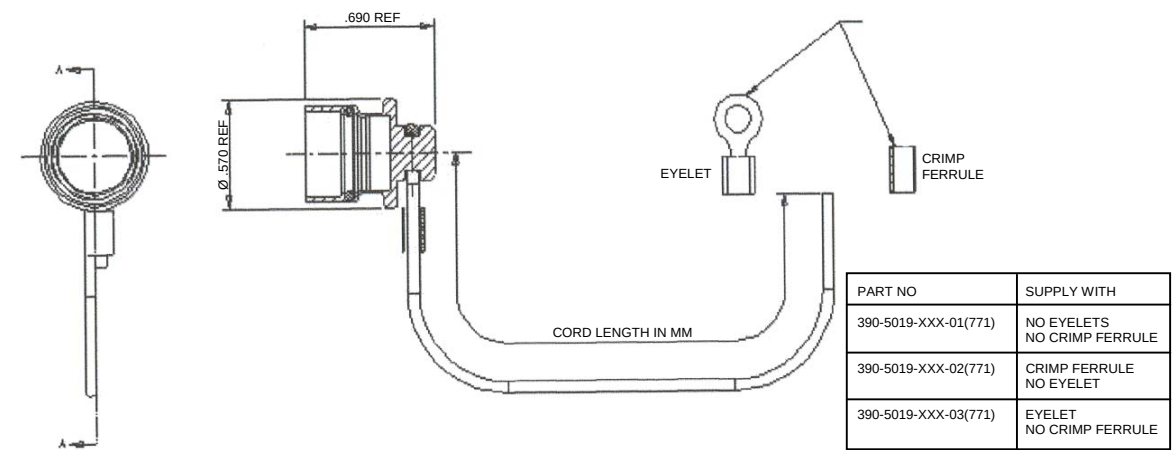


## Heatshrink Boots

### 100 Series – Bottle Shapes with Rib – MIL Style

#### For use with SCE-06T and SCE-01T

We have selected Heatshrink Boots from Hellermann Tyton. Heatshrink Boots from other manufacturers may be used if appropriate.

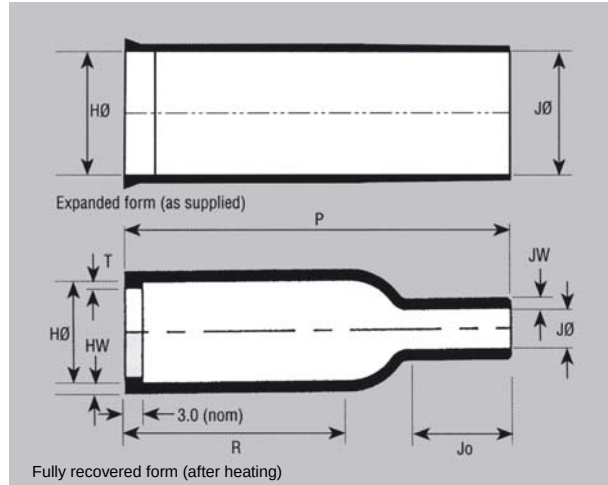


This style is used in conjunction with the backshell (see page 13) providing strain relief and environmental sealing

Dimensions apply to all materials unless otherwise indicated

| Hellermann Part No | Expanded (Min)   |                  |                  |                  | Recovered (Max) |                 | Recovered Dimensions Fully Shrunk |                  |                 |                 |                 |                 |
|--------------------|------------------|------------------|------------------|------------------|-----------------|-----------------|-----------------------------------|------------------|-----------------|-----------------|-----------------|-----------------|
|                    | H                | H -H matl        | JØ               | J -H matl        | H               | JØ              | P ±10%                            | R ±10%           | Jo ±10%         | HW ±10%         | JW ±10%         | T ±10%          |
| 113-4-G-WM250      | 0.3976<br>(10.7) | 0.3976<br>(10.7) | 0.1811<br>(4.6)  | 0.1811<br>(4.6)  | 0.3110<br>(7.9) | 0.0787<br>(2.0) | 1.0<br>(25.4)                     | 0.5709<br>(14.5) | 0.1811<br>(4.6) | 0.0512<br>(1.3) | 0.0512<br>(1.3) | 0.0394<br>(1.0) |
| 104-4-G-WM250      | 0.6456<br>(16.4) | 0.6456<br>(16.4) | 0.6456<br>(16.4) | 0.6456<br>(16.4) | 0.3110<br>(7.9) | 0.149<br>(3.8)  | 1.0<br>(25.4)                     | 0.5590<br>(14.2) | 0.2716<br>(6.9) | 0.0512<br>(1.3) | 0.0512<br>(1.3) | 0.0394<br>(1.0) |

### 1100 Series – Right Angle Shapes with Rib – MIL Style

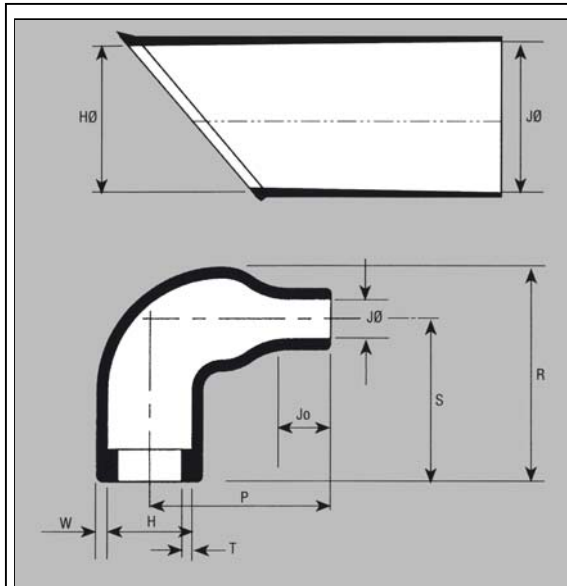


The style provides strain relief for harness systems when used in conjunction with the backshell (see page 13)

Dimensions apply to all materials unless otherwise indicated

| Hellermann Part No | Expanded (Min)   |                  | Recovered (Max)   |                 | Recovered Dimensions Fully Shrunk |                  |                  |                 |                 |                 |
|--------------------|------------------|------------------|-------------------|-----------------|-----------------------------------|------------------|------------------|-----------------|-----------------|-----------------|
|                    | H                | JØ               | H                 | JØ              | P ±10%                            | R ±10%           | S ±10%           | Jo ±10%         | W ±20%          | T ±20%          |
| 1108-4-G-WM250     | 0.6496<br>(16.5) | 0.6496<br>(16.5) | 0.3110<br>(7.9)   | 0.1496<br>(3.8) | 0.6875<br>(17.3)                  | 0.7969<br>(20.1) | 0.6005<br>(15.2) | 0.1614<br>(4.1) | 0.0394<br>(1.0) | 0.0394<br>(1.0) |
| 1106-4-G-WM250     | 0.9173<br>(23.3) | 0.9173<br>(23.3) | 0.4094<br>(10.04) | 0.2204<br>(5.6) | 0.7992<br>(20.3)                  | 0.9015<br>(22.9) | 0.6005<br>(15.2) | 0.2283<br>(5.8) | 0.0511<br>(1.3) | 0.0394<br>(1.0) |

## SCE Plug to Header Cable Assemblies


### 20GB-SCE-6XXX-XXX Jam Nut Plug Rear Mount to Header Assembly – Solder Bucket Contacts only

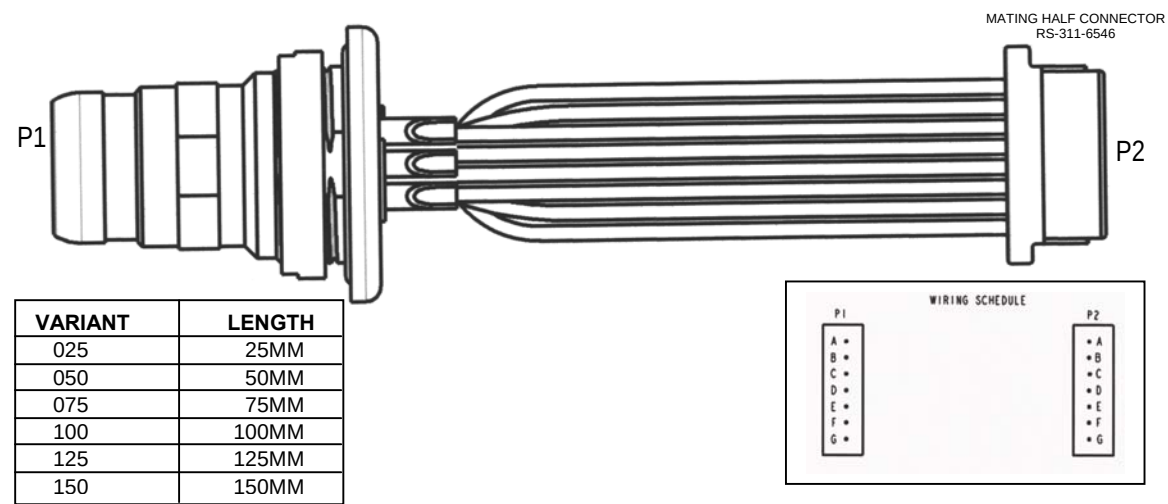

Panel Nut - Torque to 2.25Nm = 1.65 foot lbs force

Please contact Amphenol for full part numbering information

### 20GB- SCE-6XXX-XXX Jam Nut Plug Front Mount to Header Assembly – Solder Bucket Contacts only

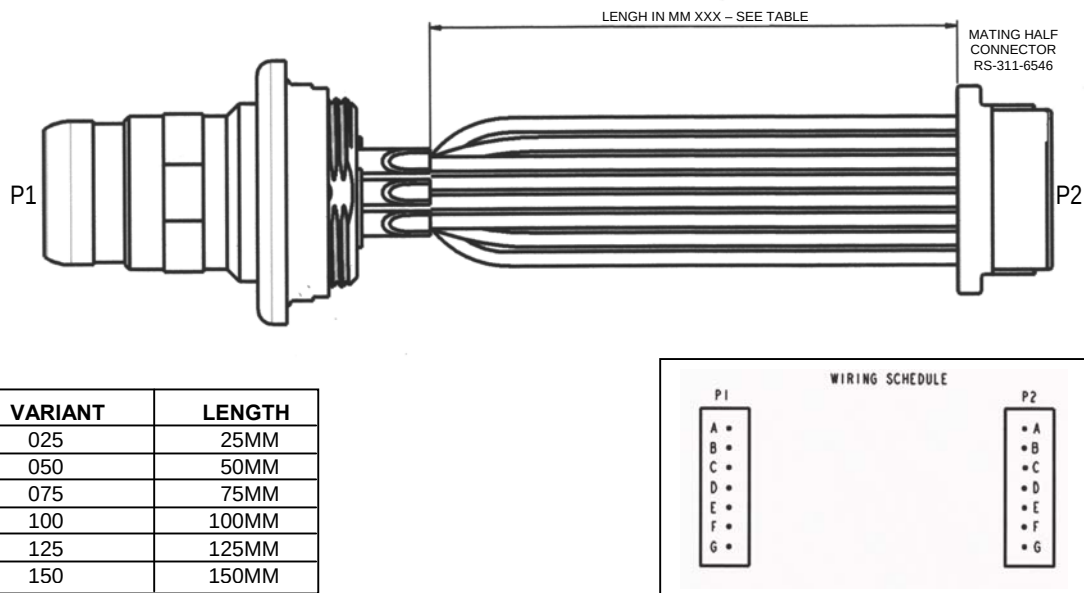


Panel Nut - Torque to 2.25Nm = 1.65 foot lbs force

Please contact Amphenol for full part numbering information

## SCE - Cable Assemblies

Amphenol can supply complete overmoulded cable harness solutions to your specifications.  
Please consult factory for cable number allocation.

### Up to 7 Way Single-Ended Receptacle Cable Assembly

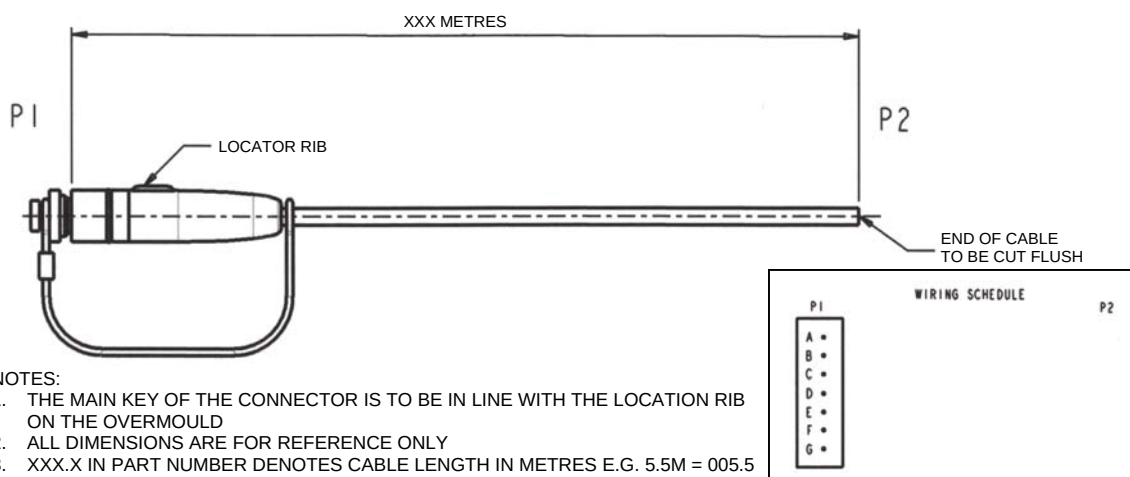

#### NOTES:


1. THE MAIN KEY OF THE CONNECTOR IS TO BE IN LINE WITH THE LOCATION RIB ON THE OVERMOULD
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
3. XXX.X IN PART NUMBER DENOTES CABLE LENGTH IN METRES E.G. 5.5M = 005.5

#### PART NUMBER INFORMATION

CONNECTOR SERIES — 20GB SCE — 5XXX — XXX.X — CABLE LENGTH — TECHNICAL DESCRIPTION - CONSULT FACTORY

All Dimensions are for reference only  
(Dimensions in brackets are in mm)

### Up to 7 Way Double-Ended Receptacle to Receptacle Cable Assembly

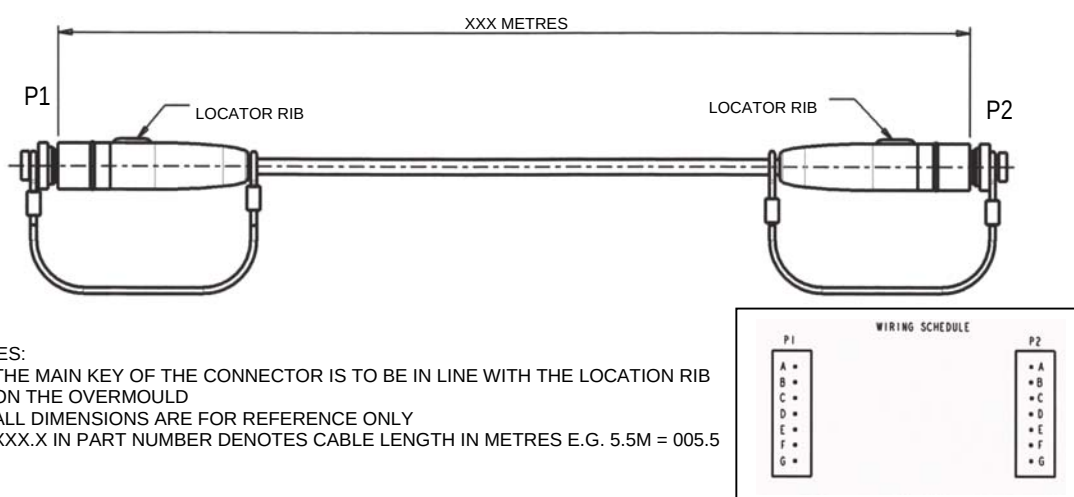

#### NOTES:


1. THE MAIN KEY OF THE CONNECTOR IS TO BE IN LINE WITH THE LOCATION RIB ON THE OVERMOULD
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
3. XXX.X IN PART NUMBER DENOTES CABLE LENGTH IN METRES E.G. 5.5M = 005.5

#### PART NUMBER INFORMATION

CONNECTOR SERIES — 20GB SCE — 5XXX — XXX.X — CABLE LENGTH — TECHNICAL DESCRIPTION - CONSULT FACTORY

## SCE - Cable Assemblies

### Up to 7 Way Single-Ended Receptacle Coiled Cable Assembly

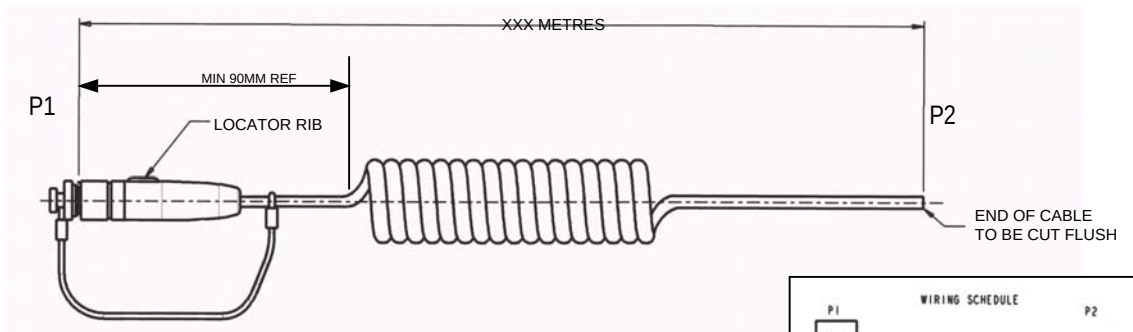

#### NOTES:

1. THE MAIN KEY OF THE CONNECTOR IS TO BE IN LINE WITH THE LOCATION RIB ON THE OVERMOULD
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
3. XXX.X IN PART NUMBER DENOTES CABLE LENGTH IN METRES E.G. 5.5M = 005.5

#### PART NUMBER INFORMATION


CONNECTOR SERIES — 20GB SCE — 5XXX — XXX.X — CABLE LENGTH

TECHNICAL DESCRIPTION CONSULT FACTORY

| P1  | WIRING SCHEDULE | P2 |
|-----|-----------------|----|
| A * |                 |    |
| B * |                 |    |
| C * |                 |    |
| D * |                 |    |
| E * |                 |    |
| F * |                 |    |
| G * |                 |    |

All Dimensions are for reference only  
(Dimensions in brackets are in mm)

### Up to 7 Way Double-Ended Receptacle to Receptacle Coiled Cable Assembly

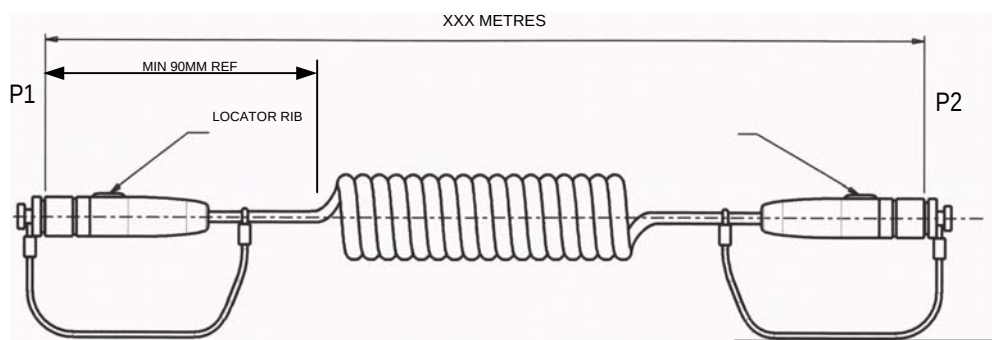

#### NOTES:

1. THE MAIN KEY OF THE CONNECTOR IS TO BE IN LINE WITH THE LOCATION RIB ON THE OVERMOULD
2. ALL DIMENSIONS ARE FOR REFERENCE ONLY
3. XXX.X IN PART NUMBER DENOTES CABLE LENGTH IN METRES E.G. 5.5M = 005.5


#### PART NUMBER INFORMATION

CONNECTOR SERIES — 20GB SCE — 5XXX — XXX.X — CABLE LENGTH

TECHNICAL DESCRIPTION - CONSULT FACTORY

| P1  | WIRING SCHEDULE | P2  |
|-----|-----------------|-----|
| A * |                 | A * |
| B * |                 | B * |
| C * |                 | C * |
| D * |                 | D * |
| E * |                 | E * |
| F * |                 | F * |
| G * |                 | G * |


## SCE Connector Part Numbers – Receptacles only

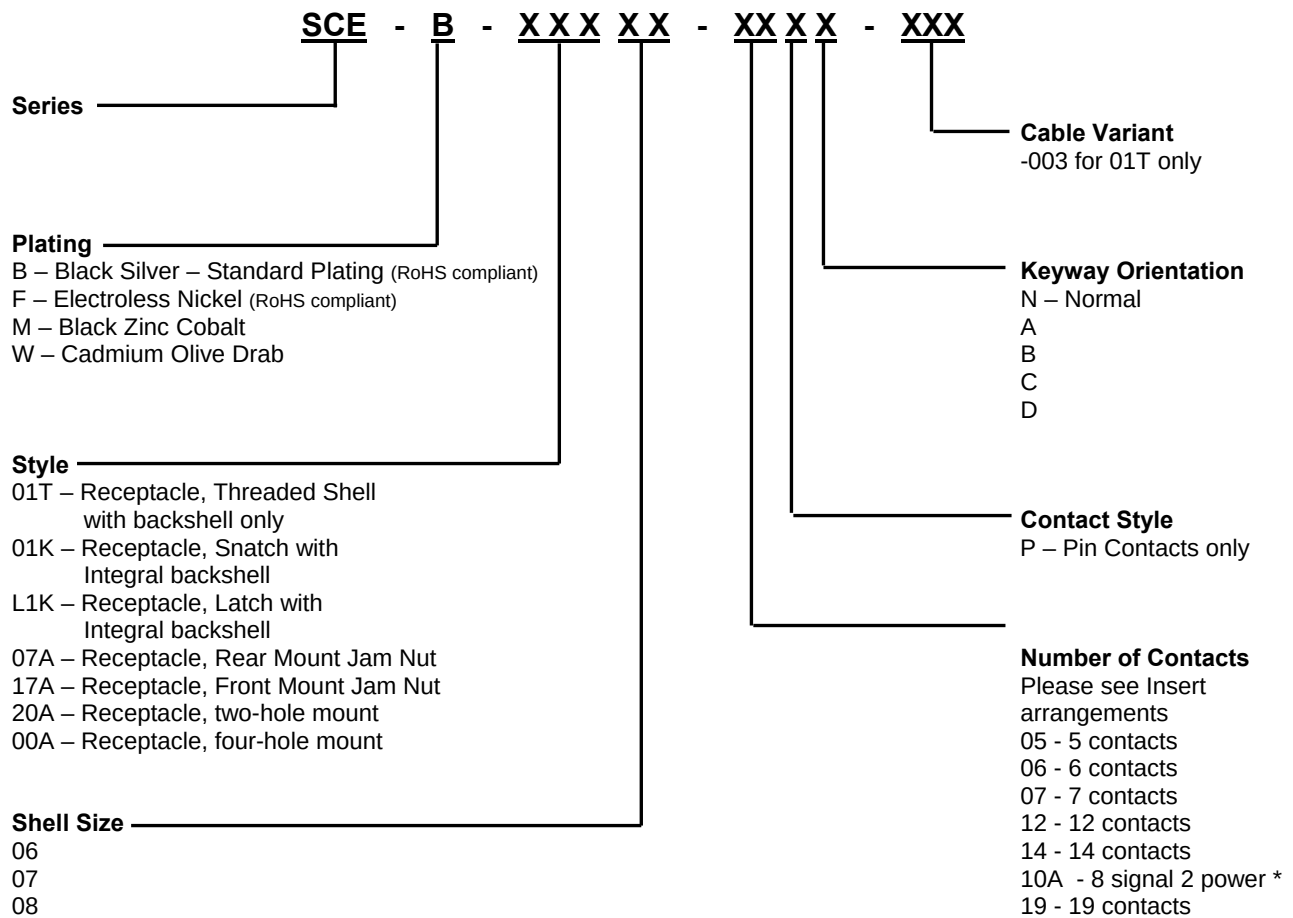

\* Please consult factory.

Note: If ordering 01K and L1K receptacles, please omit the cable variant from the part number.

## SCE Connector Part Numbers – Plugs only

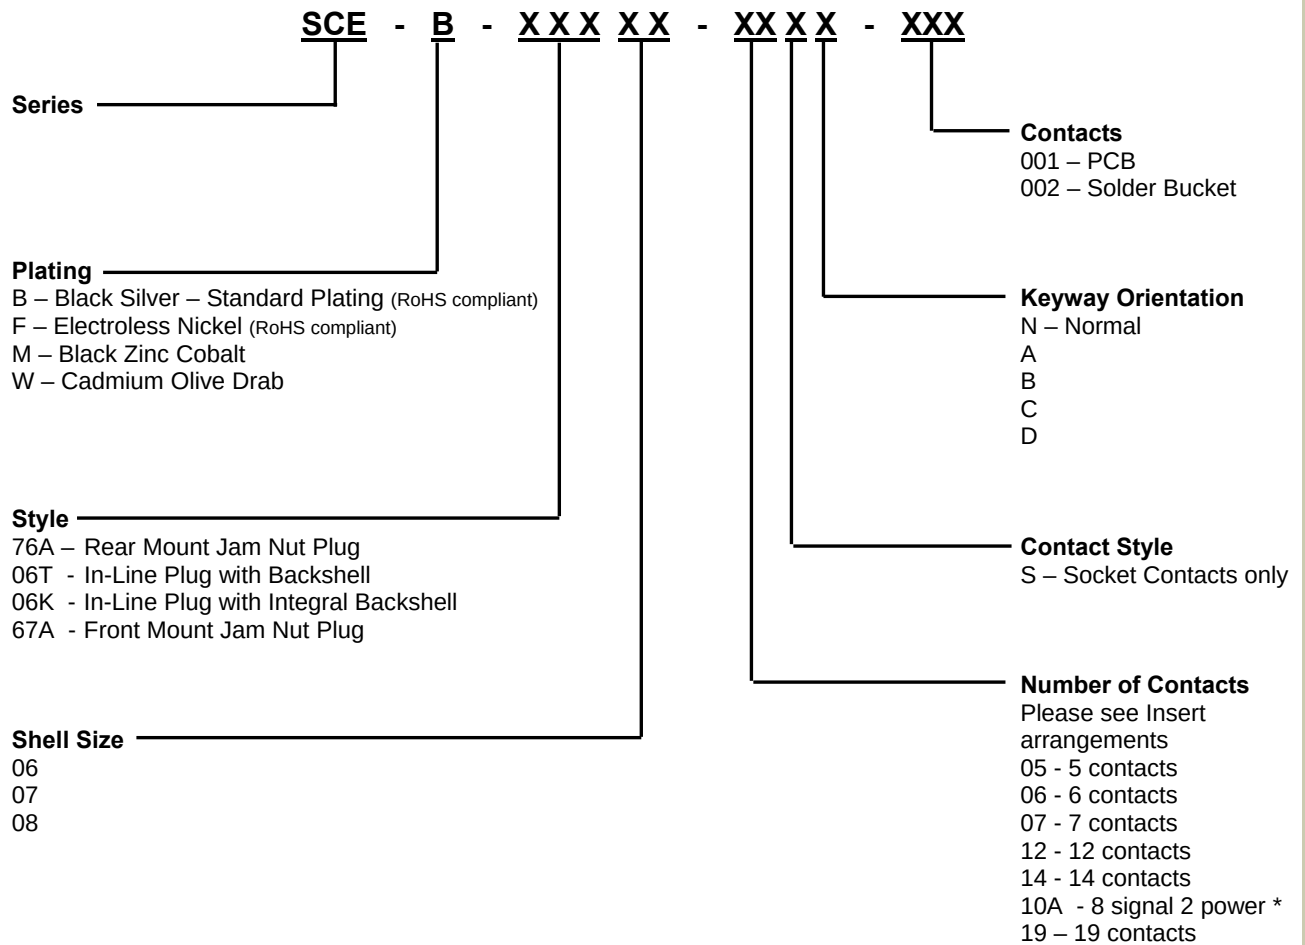

\* Please consult factory.

Note: For castellated panel nut, please add (981) at the end of plug part number

## SCE Crimp Tool

### For Braid Termination Style 003

Crimp the Braid into place so that the ferrule butts up against the shoulder of the backshell. Use crimp tool Daniels HX4 M22520/5-01 handle, crimp die set Daniels Y530 CAGE 11851 at setting 180.



July 2006

**Notice:** Products are sold subject to Amphenol's Standard Conditions of Sale. All specifications and statements contained herein are believed to be correct at the time of printing but no representation or warranty, express or implied, is given as to any specification or statement contained herein. Product specifications including performance characteristics are typical only and subject to deviation. Specifications are also subject to change without notice. Users should not assume that all safety measures are indicated or that other measures may not be required. No representation or warranty, express or implied, is given that any use of products (including any stated or suggested use) does not infringe any patent, registered design or other third party rights and no stated or suggested use of products can be taken to recommend any such infringement.

# Amphenol PCD

72 Cherry Hill Rd, Beverly, MA 01915, USA Tel: 978-624-3400

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9