

DC/DC Product Specification

Embedded Power for
Business-Critical Continuity

- Half brick fully regulated DCDC converter.

AVE450B-48S28 Half brick

Input voltage: 36-75V
Single Output: 28V
Rated O/P power: 450W



Rev 05/07/2012
AVE series
Page 1 of 2

Special Features

- 2:1 Wide input range
- Extra wide trim range
 - 14V - 33V for 28Vo
- Optimised for High density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super High efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium Substrate design

Safety

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

Product Description

The AVE450B-48S28 is the latest high efficiency half brick. It operates from a wide input range of 36Vdc to 75Vdc and provides a regulated output voltage of 28Vdc. The output is rated to a power level up to 450Watts. Its protection features include Non latching OCP, OTP and OVP. It also has an enable pin on the primary side of the converter. The unit is of an Aluminium Substrate design that is optimised for either contact-cooled applications or forced airflow applications.

Specifications

Feature	
Output power:	450W
Efficiency:	94.5% at half load
Functions:	Remote control, trim function, Sense; Input LVP, output OVP and OCP, OTP
Isolation:	Basic Insulation
Safety	
UL:	UL60950
TUV/CE:	IEC/EN60950
Input specification	
Input range	36Vdc to 75Vdc
Input Surge	100V for 100mSec
Control specification	
Enable	TTL compatible Positive or Negative enable
Output specification	
Output Voltage	28V dc
Trim range	-50% to+18%Vout
Output Current	16A
Ripple and noise	200mV pk-pk
Regulation	Load regulation = 28mV Typical, Line regulation =14mV Typical
Switching Frequency	260Khz - 320Khz
Isolation Voltage	1500Vdc
Transient response.	500mV deviation 500uS recovery (50% - 75% - 50% Io,m, 0.1A/μs)

Environmental Specification

Storage Temperature	-55 to +125 deg C
Ambient operating temp	-40 to +85 deg C
MTBF at 25degC	1.5 Million hours (80% load, 300LFM, 40°C Ta)
OTP	110°C Typical


DC/DC Product Specification

Embedded Power for
Business-Critical Continuity


- Half brick fully regulated DCDC converter.

Rev 05/07/2012
AVE series
Page 2 of 2

Mechanical (open frame)

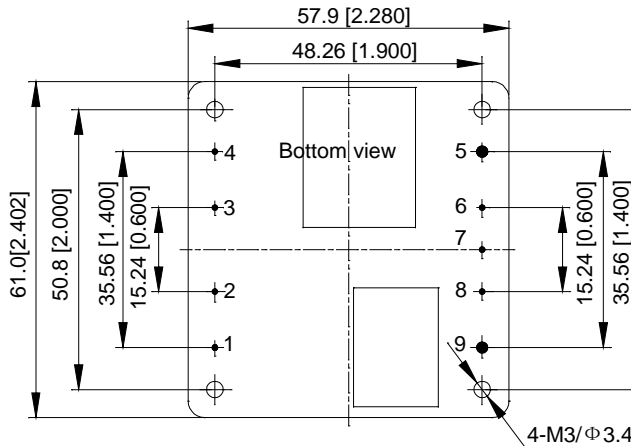

Pin #	Function
1	+V in
2	Enable
3	Case
4	-V in
5	-V out
6	-Sense
7	Trim
8	+Sense
9	+V out

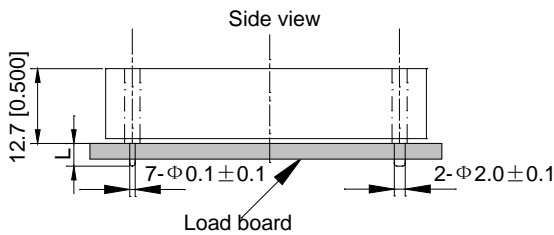

Unit: mm[inch] Bottom view: pin on upside
Tolerance: X.Xmm ± 0.5mm [X.X in. ± 0.02in.]
 X.XXmm ± 0.25mm [X.XX in. ± 0.01in.]

Ordering information

Input voltage	Output voltage	Output current	Efficiency	Part number
48V	28V	16A	94.5%	AVE450B-48S28-6Y/M
48V	28V	16A	94.5%	AVE450B-48S28-6L/M

Notes

- Standard converter is Negative enable
- '-6' = 3.8mm pin length.
- '-L' = RoHS-6 compliant.
- '-Y' = RoHS-5 compliant.
- '-M' = Thread hole fixture.

Notes,

- 1\ 20Mhz bandwidth. External 10uF tantalum capacitor placed across +Vout and -Vout; 33 uF e-cap or equivalent placed across +Vin and -Vin.
- 2\ Efficiency measurements taken at full load and nominal line and Tamb = 25degC
- 3\ All specifications taken at nominal line, full load and Tamb = 25degC unless otherwise noted
- 4\ Mechanical dimensions are for reference only. Dimensions are in MM. Mechanical tolerance = +/- 0.5mmm
- 5\ Technical reference notes should be consulted for detailed information when available.
- 6\ All specifications subject to change without notice
- 7\ Warranty 2 years
- 8\ The through-hole terminated modules are intended for wave-soldering process – special request for other manufacturing processes to be made to Emerson

Americas

5810 Van Allen Way
Carlsbad, CA 92008
USA
Telephone: +1 760 930 4600
Facsimile: +1 760 930 0698

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
Telephone: +44 (0) 1384 842 211
Facsimile: +44 (0) 1384 843 355

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
Telephone: +852 2176 3333
Facsimile: +852 2176 3888

For global contact, visit:

www.powerconversion.com
techsupport.embeddedpower@emerson.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Emerson Network Power assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions.

Emerson Network Power.
The global leader in enabling
business-critical continuity.

- AC Power
- Connectivity
- DC Power
- Embedded Power**
- Inbound Power
- Integrated Cabinet Solutions
- Outside Plant
- Precision Cooling
- Site Monitoring and Services

EmersonNetworkPower.com

Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2007 Emerson Electric Co.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9