DESCRIPTION: QUIK-LOQ - FEMALE - VERTICAL - PANEL MOUNT

UNITS = MM [INCHES]

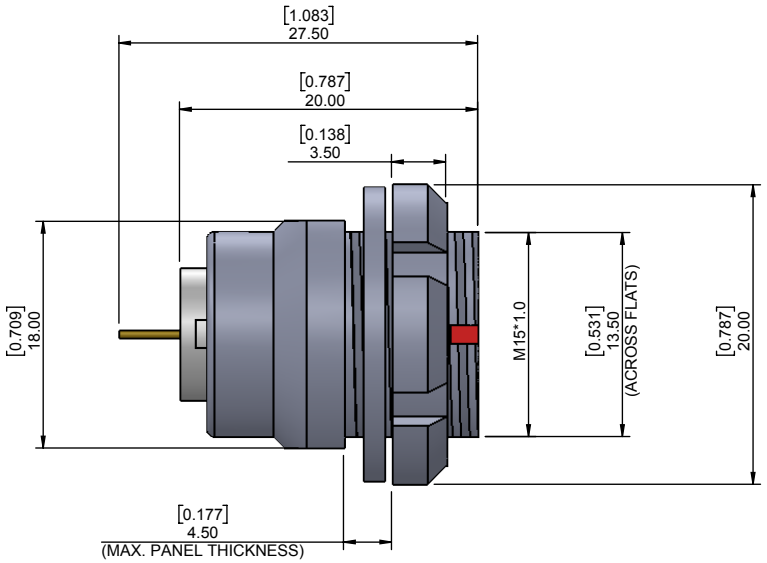

CHARACTERISSTICS

MATERIALS

- SHELL : BRASS
- SHELL PLATING : NICKEL
- NUT : BRASS
- NUT PLATING : NICKEL
- LATCH SLEEVE : BRASS
- LATCH SLEEVE PLATING : NICKEL
- CONTACTS : COPPER ALLOY
- CONTACT PLATING : 7µ" GOLD PLATED OVER 196µ" NICKEL MIN.
- INSULATOR : PPS (HIGH TEMPERATURE)

MECHANICAL

- DURABILITY: 5000 CYCLES
- OPERATING TEMP. RANGE: -40° C ~ +200° C
- PROCESS TEMPERATURE : 260°C FOR 5 SECONDS
- MAX. TORQUE VALUE : 6.0 Nm [53 IN/lbs]
- SHIELDING: 75dB @ 10MHz
  40dB @ 1GHz

IP RATING: 50

822B YYY - 2 1 3 R 00 1

- SERIES 15.00 [0.591]
- # OF POSITIONS (Ex. 002) **SEE CHART A**
- 2 = FEMALE
- VERTICAL (PANEL MOUNT)
- NICKEL/CHROME PLATED SHELL
- RoHS COMPLIANT
- 1 = GOLD FLASH

CHART A

● = KEY LOCATION

VIEW FROM TERMINATION END



2 POSITION
25 AMP MAX.
PIN Ø = 2.00 [0.079]

CONTACT RESISTANCE = 3 mΩ
TEST VOLTAGE = 2100V
WORKING VOLTAGE = 700V



3 POSITION
17 AMP MAX.
PIN Ø = 1.60 [0.063]

CONTACT RESISTANCE = 4 mΩ
TEST VOLTAGE = 2400V
WORKING VOLTAGE = 800V



4 POSITION
15 AMP MAX.
PIN Ø = 1.30 [0.051]

CONTACT RESISTANCE = 5 mΩ
TEST VOLTAGE = 1850V
WORKING VOLTAGE = 615V



6 POSITION
12 AMP MAX.
PIN Ø = 1.30 [0.051]

CONTACT RESISTANCE = 5 mΩ
TEST VOLTAGE = 1350V
WORKING VOLTAGE = 450V



8 POSITION
10 AMP MAX.
PIN Ø = 0.90 [0.035]

CONTACT RESISTANCE = 6 mΩ
TEST VOLTAGE = 1500V
WORKING VOLTAGE = 500V



10 POSITION
8 AMP MAX.
PIN Ø = 0.90 [0.035]

CONTACT RESISTANCE = 6 mΩ
TEST VOLTAGE = 1450V
WORKING VOLTAGE = 500V



12 POSITION
7 AMP MAX.
PIN Ø = 0.70 [0.028]

CONTACT RESISTANCE = 7.5 mΩ
TEST VOLTAGE = 1250V
WORKING VOLTAGE = 480V



14 POSITION
6.5 AMP MAX.
PIN Ø = 0.70 [0.028]

CONTACT RESISTANCE = 7.5 mΩ
TEST VOLTAGE = 1150V
WORKING VOLTAGE = 380V



16 POSITION
6 AMP MAX.
PIN Ø = 0.70 [0.028]

CONTACT RESISTANCE = 7.5 mΩ
TEST VOLTAGE = 950V
WORKING VOLTAGE = 315V



19 POSITION
5 AMP MAX.
PIN Ø = 0.70 [0.028]

CONTACT RESISTANCE = 7.5 mΩ
TEST VOLTAGE = 950V
WORKING VOLTAGE = 315V



26 POSITION
2 AMP MAX.
PIN Ø = 0.50 [0.020]

CONTACT RESISTANCE = 10 mΩ
TEST VOLTAGE = 950V
WORKING VOLTAGE = 315V

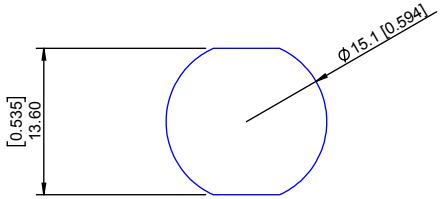

PANEL CUTOUT

TOLERANCE = +0.10, -0.0
[+0.004, -0.00]

NOTE
SEE PAGE 2 FOR BOARD LAYOUTS

RoHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:	DATE:	SCALE:	SHEET	OF	REV:
M. SIGMON	02-10-16	N.T.S.	1	2	3

DWG NO. 822BYYY-213R001

DESCRIPTION: QUIK-LOQ - FEMALE - VERTICAL - PANEL MOUNT

UNITS = MM [INCHES]

BOARD LAYOUTS

● = KEY LOCATION



2 POS

A = 0.80 [0.031]

B = 4.40 [0.173]



3 POS

A = 0.80 [0.031]

B = 4.60 [0.181]



4 POS

A = 0.80 [0.031]

B = 5.00 [0.197]

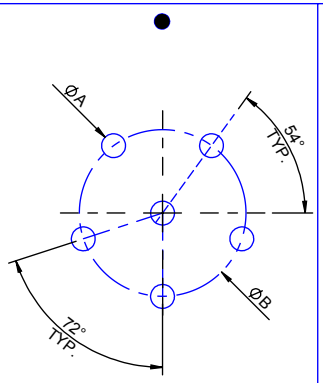

6 POS

A = 0.80 [0.031]

B = 5.60 [0.220]



8 POS

A = 0.80 [0.031]

B = 6.40 [0.252]



10 POS

A = 0.80 [0.031]

B = 6.30 [0.248]

C = 2.15 [0.085]

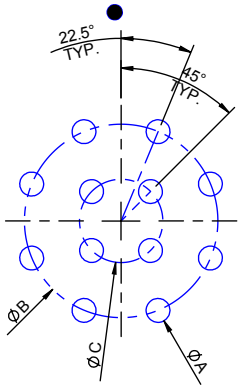

12 POS

A = 0.80 [0.031]

B = 6.50 [0.256]

C = 2.8 [0.110]

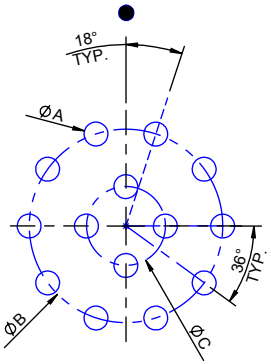

14 POS

A = 0.80 [0.031]

B = 6.50 [0.256]

C = 2.65 [0.104]

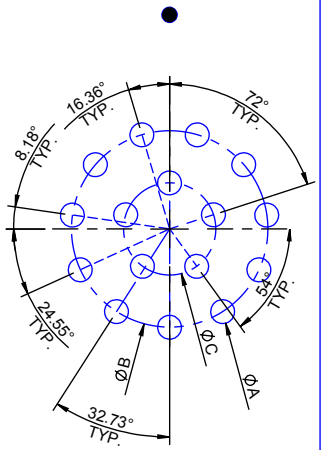

16 POS

A = 0.80 [0.031]

B = 6.60 [0.260]

C = 3.10 [0.122]

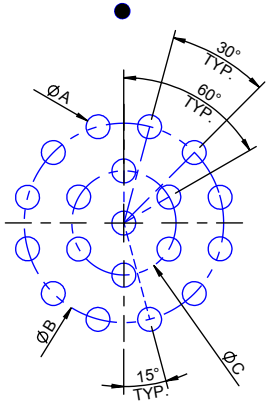

19 POS

A = 0.80 [0.031]

B = 6.70 [0.264]

C = 3.50 [0.138]

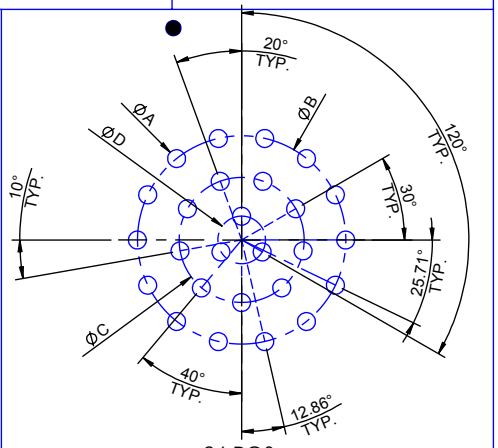

26 POS

A = 0.60 [0.024]

B = 7.00 [0.276]

C = 4.20 [0.165]

D = 1.6 [0.063]

RoHS COMPLIANT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

NorComp

DRAWN:	DATE:	SCALE:	SHEET	OF	REV:
M. SIGMON	02-10-16	N.T.S.	2	2	3

DWG NO. 822BYYY-213R001

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9