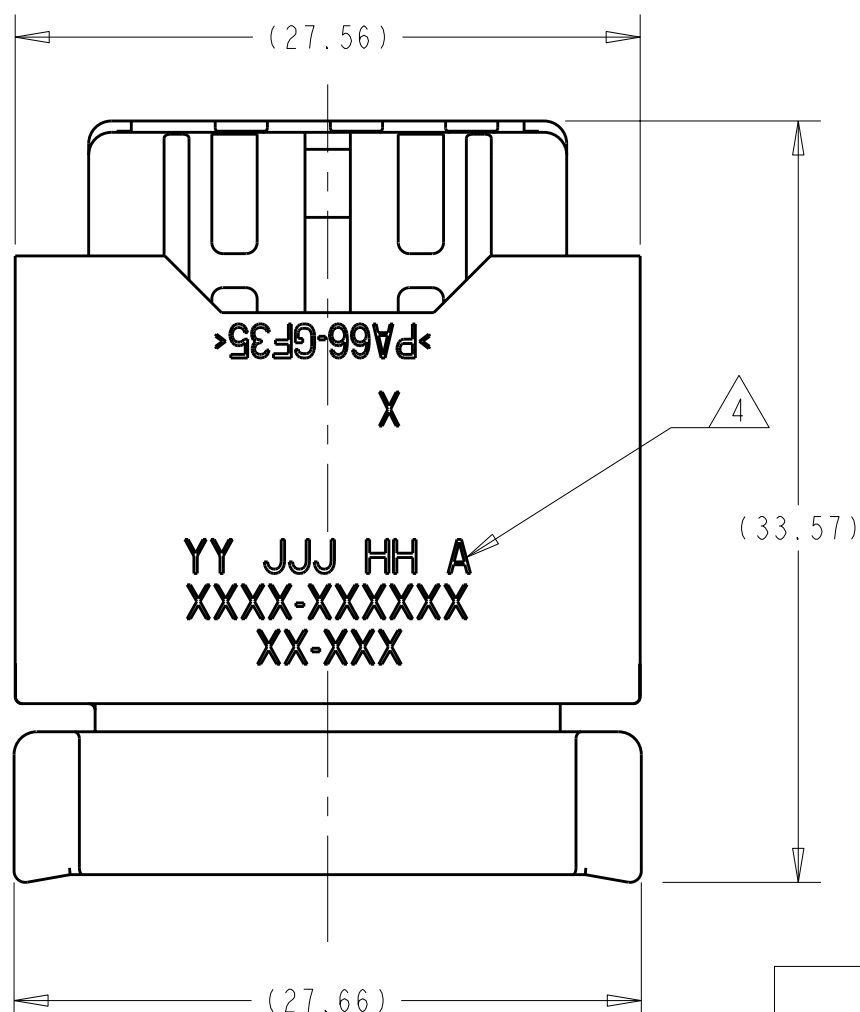


OPTION "B"


[illegible]

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN I.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm2)
3. TPA IS SHIPPED IN IT'S PRE-LOADED POSITION. ALL ASSEMBLIES ARE TO BE TRAY PACKAGED.
4. CUSTOMER PART NUMBER AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR, A = ASSEMBLY PROCESS USED) ARE PRINTED IN THIS LOCATION.
5. PART ASSEMBLY WEIGHT WITHOUT TERMINALS AND WITH STANDARD PIN-OUT CONFIGURATION IS 14.39 GRAMS.
6. OPTIONAL WIRESHIELD P/N 7-1419157-8 (SOLD SEPARATELY). PLEASE CONTACT YOUR TYCO ELECTRONICS SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

[illegible]

	CPA	PBT-GF15	RED
	SHORTING BAR	S.S.	SEE COMPONENT DRAWING
	PERIMETER SEAL	SILICONE	GREEN
	GROMMET	SILICONE	BROWN
	COVER	PA66 35% GF	BLACK
3	TPA WITH SHORTING BAR POSITIONS CONFIGURATION	sPS 30% GF	NATURAL
3	PLUG WITH KEYING OPTION "E" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 30% GF	BLACK
3	PLUG WITH KEYING OPTION "E" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "C" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "A" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "D" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "C" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	NATURAL
3	PLUG WITH KEYING OPTION "B" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
3	PLUG WITH KEYING OPTION "A" AND SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	GRAY
M	DESCRIPTION	MATERIAL	FINISH/COLOR




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG NO. W VESTAL 24JUL2007 CHKD BY W WELLINSKY 24JUL2007 APP'D BY W WELLINSKY 24JUL2007		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$.01 1 PLC $\pm$.03 2 PLC $\pm$.03, .10 3 PLC $\pm$.03 4 PLC $\pm$.03 ANGLES $\pm$ $^{\circ}$		NAME 24 WAY ARM PLUG ASSEMBLY WITH SELECT LOAD SHORTING BARS CUSTOMER SPEC.	
		PRODUCT SPEC - APPLICATION SPEC		SIZE CASE CODE DRAWING NO A1 00779 C-1924674	
MATERIAL SEE CHART ABOVE		WEIGHT SEE NOTE 5		RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 5 REV S	

LOC	DIST	REVISIONS					
FX	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PIN-OUT CHART

[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 24JUL2007 CHK W. WELLINSKY 24JUL2007 APPR W. WELLINSKY		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES ±°		NAME 24 WAY ARM PLUG ASSEMBLY WITH SELECT LOAD SHORTING BARS CUSTOMER SPEC.	
		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A1 00779 C=1924674	
MATERIAL SEE CHART ABOVE		FINISH WEIGHT CUSTOMER DRAWING		RESTRICTED TO - SCALE 3:1 SHEET 4 OF 5 REV S	

LOC	DIST	REVISIONS					
FX	00	REV	LYR	DESCRIPTION	DATE	OWN	APVD
		-	-	SEE SHEET 1	-	-	-

PIN-OUT CHART																																	
		1 / 2																									N	2098376-1	KEY "F"				
		1 / 2																									N	1924686-1	KEY "E"				
		1 / 2																									N	1924685-1	KEY "D"				
		1 / 2																									N	1924684-1	KEY "C"				
		1 / 2																									N	1924683-1	KEY "B"				
		1 / 2																									N	1924682-1	KEY "A"				
5 / 6	3 / 4	1 / 2	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	CPA	ASSEMBLY PART NUMBER	PLUG KEYING OPTION				
SHORTING BAR POSITION			TERMINAL HOLE POSITION																														
CAVITIES W/ A NUMERIC SYMBOL INDICATE SHORTING BAR LOADED			CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS																														
BLANK CAVITIES INDICATE NO SHORTING BAR LOADED			BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS																														

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

MATERIAL

SEE CHART ABOVE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

9 PLC ±.3

1 PLC ±0.10

2 PLC ±.10

3 PLC ±.

4 PLC ±.

ANGLES ±°

FINISH -

DWN R. VESTAL 24JUL2007

CHK W. WELLINSKY 24JUL2007

APVD W. WELLINSKY 24JUL2007

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

NAME 24 WAY ARM PLUG ASSEMBLY WITH SELECT LOAD SHORTING BARS CUSTOMER SPEC.

SIZE A1 CAGE CODE 00779 DRAWING NO C=1924674

RESTRICTED TO -

SCALE 3:1 SHEET 5 OF 5 REV S

TE Connectivity

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9