

4

3

2

1


THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	INITIAL RELEASE	07APR2014	YC	BvH


UNSHIELDED

3, 4 and 5 pos PUR & PVC



3x 0.34mm²

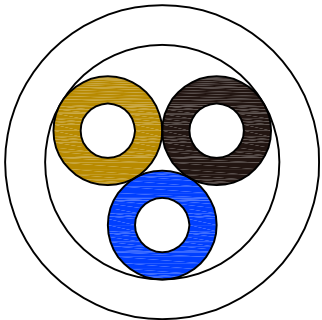

4x 0.34mm²

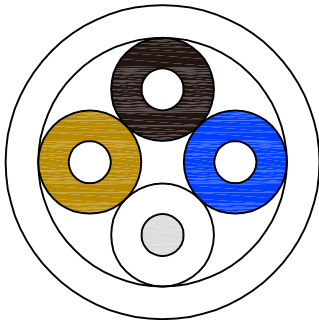


5x 0.34mm²

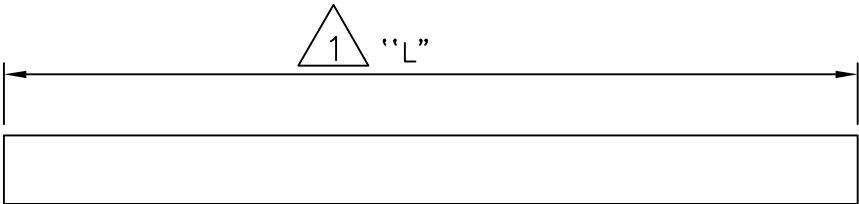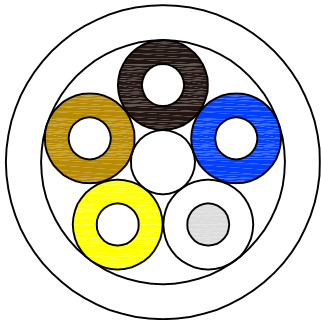

NOTE: Length "L" to be determined by online configurator

8 Pos PUR ONLY


8x 0.25mm²

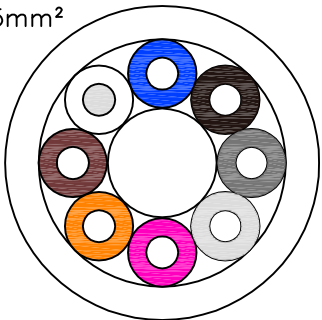


SHIELDED

3, 4 and 5 pos PUR & PVC


3x 0.34mm²

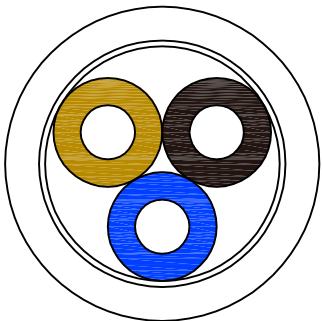

4x 0.34mm²

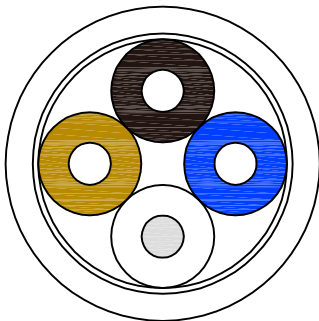


5x 0.34mm²

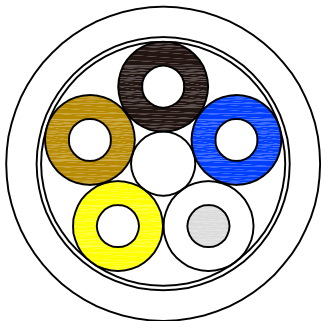

8 Pos PUR ONLY

8x 0.25mm²

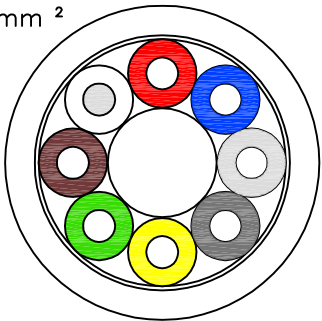

PVC	5	0.34	22	Grey	5x0.34mm ² PVC CABLE SHIELDED	3-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PVC CABLE SHIELDED	3-2273231-2
	3	0.34	22	Grey	3x0.34mm ² PVC CABLE SHIELDED	3-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE SHIELDED	2-2273231-4
	5	0.34	22	Grey	5x0.34mm ² PUR CABLE SHIELDED	2-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PUR CABLE SHIELDED	2-2273231-2
SHIELDED	3	0.34	22	Grey	3x0.34mm ² PUR CABLE SHIELDED	2-2273231-1
PVC	5	0.34	22	Black	5x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-3
	4	0.34	22	Black	4x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-2
	3	0.34	22	Black	3x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE UNSHIELDED	2273231-4
	5	0.34	22	Black	5x0.34mm ² PUR CABLE UNSHIELDED	2273231-3
	4	0.34	22	Black	4x0.34mm ² PUR CABLE UNSHIELDED	2273231-2
UNSHIELDED	3	0.34	22	Black	3x0.34mm ² PUR CABLE UNSHIELDED	2273231-1

#cond	mm ²	AWG	JACKET COLOR	DESCRIPTION	TEPN
-------	-----------------	-----	--------------	-------------	------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C 07APR2014	TE Connectivity		
		CHK B.VELDHOVEN 15APR2014			
DIMENSIONS: mm		APVD A.VAN ZANDVOORT 15APR2014	NAME M8 M12 BULK CABLE TYPES		
		PRODUCT SPEC			
		APPLICATION SPEC			
MATERIAL —		WEIGHT —	SIZE A3	CAGE CODE 00779	DRAWING NO C=2273231
FINISH —		CUSTOMER DRAWING			RESTRICTED TO —
			SCALE NTS	SHEET 1 of 5	REV A

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
- , - .

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

H

—

P

LTR

DESCRIPTION

DATE

DWN

APVD

—

SEE SHEET 1

—

—

—

Unshielded PUR

2273231-1

PUR CABLE

No./diameter of wires

3 x 0.34 mm²

Wire isolation

PP (br, wh, bk)

C-track properties

5 million

Jacket

PUR (UL/CSA)

Outer diameter

approx. 4.3 mm

Bend radius (moving)

10 x outer diameter

Temperature range (fixed)

-40...+80 °C

Temperature range (mobile)

-25...+80 °C

2273231-4

PUR CABLE

No./diameter of wires

8 x 0.25 mm²

Wire isolation

PP (br, wh, bl, bk, gr, pk, vi, or)

C-track properties

2 million

Jacket

PUR (UL/CSA)

Outer diameter

approx. 6.0 mm

Bend radius (moving)

10 x outer diameter

Temperature range (fixed)

-40...+80 °C

Temperature range (mobile)

-20...+80 °C

2273231-2

PUR CABLE

No./diameter of wires

4 x 0.34 mm²

Wire isolation

PP (br, wh, bl, bk)

C-track properties

5 million

Jacket

PUR (UL/CSA)

Outer diameter

approx. 4.7 mm

Bend radius (moving)

10 x outer diameter

Temperature range (fixed)

-40...+80 °C

Temperature range (mobile)

-25...+80 °C

2273231-3

PUR CABLE

No./diameter of wires

5 x 0.34 mm²

Wire isolation

PP (br, wh, bl, bk, gnye)

C-track properties

yes

Jacket

PUR (UL/CSA)

Outer diameter

approx. 5.0 mm

Bend radius (moving)

10 x outer diameter

Temperature range (fixed)

-50...+80 °C

Temperature range (mobile)

-25...+80 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

-

DWN
YATHISH C
07APR2014

CHK
B.VELDHOVEN
15APR2014

APVD
A.VAN ZANDVOORT
15APR2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

SCALE

SHEET

REV

TE

TE Connectivity

M8 M12 BULK CABLE TYPES

A300779C=2273231

NTS2 of 5A

1470-19 (3/11)

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION -,-
© COPYRIGHT - By -	ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				
H	—	P	LTR	DESCRIPTION	DATE	APVD
			—	SEE SHEET 1	—	—

Unshielded PVC

1-2273231-1	PVC CABLE	
	No./diameter of wires	3 x 0.34 mm ²
	Wire isolation	PVC (br, bl, bk)
	C-track properties	n.a.
	Jacket	PVC (UL/CSA)
	Outer diameter	approx. 4.6 mm
	Bend radius (moving)	10 x outer diameter
	Temperature range (fixed)	-30...+80 °C
	Temperature range (mobile)	-5...+80 °C

1-2273231-2	PVC CABLE	
	No./diameter of wires	4 x 0.34 mm ²
	Wire isolation	PVC (br, wh, bl, bk)
	C-track properties	n.a.
	Jacket	PVC (UL/CSA)
	Outer diameter	approx. 5.0 mm
	Bend radius (moving)	10 x outer diameter
	Temperature range (fixed)	-30...+80 °C
	Temperature range (mobile)	-5...+80 °C

1-2273231-3	PVC CABLE	
	No./diameter of wires	5 x 0.34 mm ²
	Wire isolation	PP (br, wh, bl, bk, gnye)
	C-track properties	n.a.
	Jacket	PVC (UL/CSA)
	Outer diameter	approx. 5.2 mm
	Bend radius (moving)	10 x outer diameter
	Temperature range (fixed)	-30...+80 °C
	Temperature range (mobile)	-5...+80 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C 07APR2014		 TE Connectivity					
		CHK B.VELDHOVEN 15APR2014							
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		NAME M8 M12 BULK CABLE TYPES					
				APVD A.VAN ZANDVOORT 15APR2014		RESTRICTED TO —			
				PRODUCT SPEC —					
				APPLICATION SPEC —					
				SIZE A3				CAGE CODE 00779	
MATERIAL —		FINISH —		WEIGHT —		DRAWING NO C=2273231		REV A	
CUSTOMER DRAWING						SCALE NTS		SHEET 3 of 5	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION -,-.
© COPYRIGHT - By -	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
H	—	P	LTR	DESCRIPTION	DATE	APVD
			—	SEE SHEET 1	—	—

Shielded PUR

2-2273231-1

PUR CABLE	
No./diameter of wires	3 x 0.34 mm ²
Wire isolation	PVC (br, wh, bk)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

2-2273231-4


PUR CABLE	
No./diameter of wires	8 x 0.25 mm ²
Wire isolation	PP (br, wh, bl, bk, gr, pk, vi, or)
C-track properties	2 million
Jacket	PUR (UL/CSA)
Outer diameter	approx. 7.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	−40...+80 °C
Temperature range (mobile)	−20...+80 °C

2-2273231-2

PUR CABLE	
No./diameter of wires	4 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

2-2273231-3

PUR CABLE	
No./diameter of wires	5 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk, gnye)
C-track properties	
Jacket	PUR/PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−40...+80 °C
Temperature range (mobile)	−5...+70 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YATHISH C 07APR2014		 TE Connectivity				
		CHK B.VELDHOVEN 15APR2014						
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± − 1 PLC ± − 2 PLC ± − 3 PLC ± − 4 PLC ± − ANGLES ± −		NAME M8 M12 BULK CABLE TYPES				
								
MATERIAL —				FINISH —		PRODUCT SPEC —		
						APPLICATION SPEC —		
		WEIGHT —		SIZE A3	CAGE CODE 00779	DRAWING NO C-2273231	RESTRICTED TO —	
CUSTOMER DRAWING						SCALE NTS	SHEET 4 OF 5	REV A

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
- , - .

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC
H

DIST
—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

Shielded PVC

3—2273231—1

PVC CABLE	
No./diameter of wires	3 x 0.34 mm ²
Wire isolation	PVC (br, bl, bk)
C—track properties	n.a.
Jacket	PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−40...+80 °C
Temperature range (mobile)	−5...+80 °C

3—2273231—2

PVC CABLE	
No./diameter of wires	4 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk)
C—track properties	n.a.
Jacket	PVC (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

3—2273231—3

PVC CABLE	
No./diameter of wires	5 x 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk, gnye)
C—track properties	n.a.
Jacket	PUR (UL/CSA)
Outer diameter	approx. 5.9 mm
Bend radius (moving)	15 x outer diameter
Temperature range (fixed)	−30...+80 °C
Temperature range (mobile)	−5...+70 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± −
1 PLC ± −
2 PLC ± −
3 PLC ± −
4 PLC ± −
ANGLES ± −

MATERIAL −

FINISH −

DWN
YATHISH C 07APR2014
CHK
B.VELDHOVEN 15APR2014
APVD
A.VAN ZANDVOORT 15APR2014
PRODUCT SPEC
APPLICATION SPEC
WEIGHT −

CUSTOMER DRAWING

SCALE NTS

SHEET 5 of 5

REV A

TE Connectivity

NAME
M8 M12 BULK CABLE TYPES

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=2273231

RESTRICTED TO
—

1470—19 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9