



# DESIGN GUIDE

---

**VIPAC™**



# CONTENTS

---




|         |                           |
|---------|---------------------------|
| 2 – 3   | PRODUCT OVERVIEW          |
| 4       | FEATURES                  |
| 5       | INPUT / OUTPUT OPTIONS    |
| 6       | SPECIFICATIONS            |
| 7 – 8   | TECHNICAL OVERVIEW        |
| 9       | INPUT CONNECTIONS         |
| 10 – 12 | OUTPUT CONNECTION OPTIONS |
| 13 – 14 | CHASSIS CONFIGURATIONS    |
| 15 – 16 | MOUNTING OPTIONS          |
| 17 – 20 | MECHANICAL DRAWINGS       |
| 21      | MECHANICAL INFORMATION    |
| 22      | THERMAL MANAGEMENT        |
| 23      | GENERAL INFORMATION       |
| 24      | APPLICATION TIPS          |

The PPU is comprised of:

- VIPACs use remotely located capacitors to facilitate packaging and placement options not previously available. The low profile PPU can be placed closer to the load or attached to cabinet walls while the capacitors may be integrated into the host system away from heat sources for improved reliability. System hold up / ride-thru requirements can also be tailored for specific applications via different value capacitors. The hold up capacitors may be obtained from Vicor as a prepackaged hold up box (HUB). VIPAC is a new class of flexible, high density power

PPU

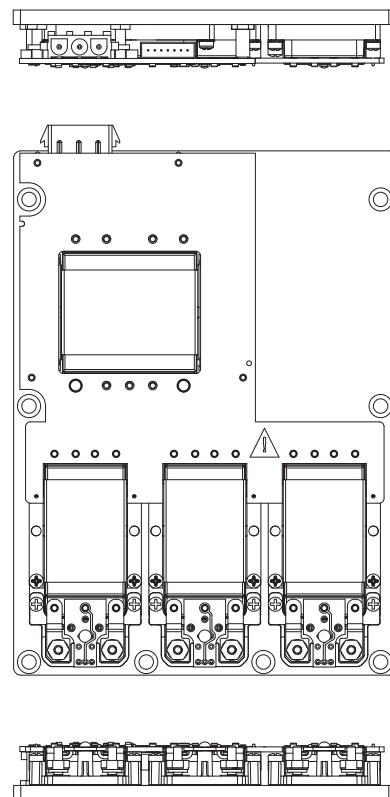


HUB





### AC Input Autoranging

- 115/230 Vac
- 50/60 Hz (400 Hz optional)

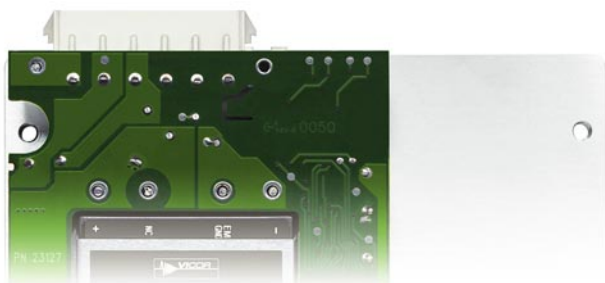


# FEATURES

## • Analog User Interface

Power Up / Down control

BUS-OK

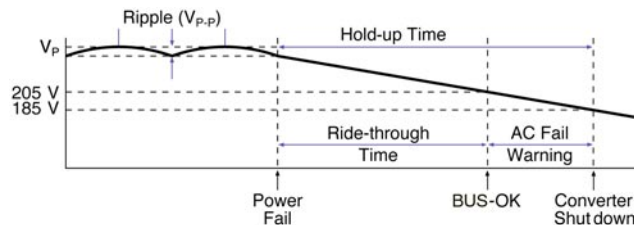

## • Partitioned Power Architecture

Maximizes packaging flexibility

Remote hold-up capacitors (AC input)


User-definable hold-up characteristics (AC input)

Enhanced reliability

Wide operating temperature range

–20° to +95°C chassis C-Grade


–40° to +95°C chassis T-Grade

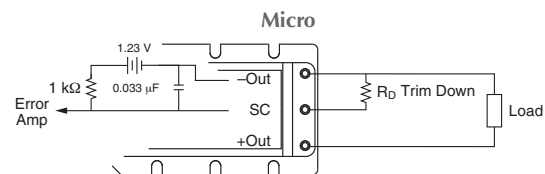

## • Secondary Control

Output voltage trimming

10 – 110%  $V_{out}$

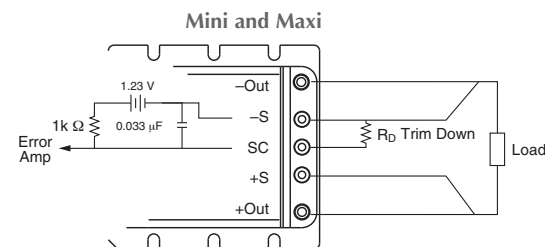

# OUTPUT OPTIONS



Output Voltage Selection

| VIPAC Configuration                                                                         |                                                                                           | 2 V                       | 3.3 V | 5 V | 12 V | 15 V | 24 V | 28 V | 36 V | 48 V | Total |
|---------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|---------------------------|-------|-----|------|------|------|------|------|------|-------|
|                                                                                             |                                                                                           | Maximum Output Power (W)* |       |     |      |      |      |      |      |      |       |
|                                                                                             |                                                                                           | Micro                     |       |     |      |      |      |      |      |      |       |
| <br>VP-G   | # Outputs                                                                                 |                           |       |     |      |      |      |      |      |      |       |
|                                                                                             | Single                                                                                    | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  | 150   |
| <br>VP-D   | Single //                                                                                 | 100                       | 150   | 200 | 300  | 300  | 300  | 300  | 300  | 300  | 300   |
|                                                                                             | Dual                                                                                      | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  | 300   |
|                                                                                             |                                                                                           | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  |       |
|                                                                                             | <br>VP-A | Dual //                   | 100   | 150 | 200  | 300  | 300  | 300  | 300  | 300  | 300   |
|                                                                                             |                                                                                           | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  |       |
| Triple                                                                                      |                                                                                           | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  | 450   |
|                                                                                             |                                                                                           | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  |       |
|                                                                                             |                                                                                           | 50                        | 75    | 100 | 150  | 150  | 150  | 150  | 150  | 150  |       |
|                                                                                             |                                                                                           |                           |       |     |      |      |      |      |      |      |       |
|                                                                                             |                                                                                           | Mini                      |       |     |      |      |      |      |      |      |       |
|                                                                                             |                                                                                           | Maximum Output Power (W)* |       |     |      |      |      |      |      |      |       |
| <br>VP-E | # Outputs                                                                                 |                           |       |     |      |      |      |      |      |      |       |
|                                                                                             | Single                                                                                    | 100                       | 150   | 200 | 250  | 250  | 250  | 250  | 250  | 250  | 250   |
| <br>VP-B | Single //                                                                                 | 200                       | 300   | 400 | 500  | 500  | 500  | 500  | 500  | 500  | 500   |
|                                                                                             | Dual                                                                                      | 100                       | 150   | 200 | 250  | 250  | 250  | 250  | 250  | 250  | 500   |
|                                                                                             |                                                                                           | 100                       | 150   | 200 | 250  | 250  | 250  | 250  | 250  | 250  |       |
|                                                                                             |                                                                                           |                           |       |     |      |      |      |      |      |      |       |
|                                                                                             |                                                                                           | Maxi                      |       |     |      |      |      |      |      |      |       |
|                                                                                             |                                                                                           | Maximum Output Power (W)* |       |     |      |      |      |      |      |      |       |
| <br>VP-F | # Outputs                                                                                 |                           |       |     |      |      |      |      |      |      |       |
|                                                                                             | Single                                                                                    | 160                       | 264   | 400 | 500  | 500  | 500  | 500  | 500  | 500  | 500   |
| <br>VP-C | Single //                                                                                 | 320                       | 528   | 800 | 900  | 900  | 900  | 900  | 900  | 900  | 900   |
|                                                                                             | Dual                                                                                      | 160                       | 264   | 400 | 500  | 500  | 500  | 500  | 500  | 500  | 900   |
|                                                                                             |                                                                                           | 160                       | 264   | 400 | 500  | 500  | 500  | 500  | 500  | 500  |       |
|                                                                                             |                                                                                           |                           |       |     |      |      |      |      |      |      |       |

\*Model numbers and total output power capability are application specific.  
 Component tolerances may effect total output power ( $\pm 5\%$ ) in parallel (//) configurations.  
 See VIPAC configuration tool at: [vicorpower.com/vcad](http://vicorpower.com/vcad)

# SPECIFICATIONS

## 115/230 Vac Autoranging Input

| Parameter                    | Min         | Typ   | Max   | Unit    | Notes                                                                                                         |
|------------------------------|-------------|-------|-------|---------|---------------------------------------------------------------------------------------------------------------|
| Operating input voltage      | 90          |       | 132   | Vac     | Autoranging doubler mode                                                                                      |
|                              | 180         |       | 264   | Vac     | Autoranging bridge mode                                                                                       |
| Input undervoltage shut down |             |       | 90    | Vac     | No damage                                                                                                     |
| AC line frequency            | 47          |       | 63    | Hz      | C-Grade                                                                                                       |
|                              | 47          |       | 440   | Hz      | T-Grade                                                                                                       |
| Power factor                 |             | 0.60  |       |         | Nominal Line                                                                                                  |
| Inrush current               |             |       | 30    | Amps    | 264 Vac peak line, cold start                                                                                 |
| Input surge withstand        | EN61000-4-5 |       |       |         | 2 kV–50 $\mu$ s common mode                                                                                   |
| Performance Criteria B       |             |       |       |         | 1 kV–50 $\mu$ s differential mode                                                                             |
| Hold-up capacitance          |             | 1,800 | 3,300 | $\mu$ F | Refer to VCAD calculator                                                                                      |
| Leakage current              |             |       | 3.2   | mA      | at 264 Vac input                                                                                              |
| EMI                          |             |       |       |         | Additional filter components are required for compliance to EN55022 and FCC conducted emissions requirements. |

## Environmental

| Parameter                       | Min   | Typ | Max | Unit | Notes                                                                                                       |
|---------------------------------|-------|-----|-----|------|-------------------------------------------------------------------------------------------------------------|
| Dielectric withstand            | 2,121 |     |     | Vdc  | Vdc test recommended due to Y-caps                                                                          |
| Input to chassis                | 1,500 |     |     | Vrms | Class 1 product. Isolation components tested prior to assembly. Do not test finished product at this value. |
| Input to output                 | 3,000 |     |     | Vrms |                                                                                                             |
| Operating temperature – chassis |       |     |     |      |                                                                                                             |
| C-Grade                         | -20   |     | 95  | °C   |                                                                                                             |
| T-Grade                         | -40   |     | 95  | °C   |                                                                                                             |
| Shock                           | 50    |     |     | g    | GR 6063, NEBS, Zone 4 (designed to meet)                                                                    |
| Vibration                       | 1     |     |     | g    | GR 6063, NEBS, Zone 4 (designed to meet)                                                                    |
| Humidity                        | 5     |     | 95  | %    | Non-condensing                                                                                              |
| Safety approvals                |       |     |     |      |                                                                                                             |
| cTUVus EN 60950-1,              |       |     |     |      |                                                                                                             |
| UL 60950-1,                     |       |     |     |      |                                                                                                             |
| CE Marked (LVD)                 |       |     |     |      |                                                                                                             |

## Output Specifications – General at 25°C, nominal line and nominal load, per module unless otherwise specified

| Parameter                  | Min | Typ         | Max         | Unit        | Notes                                                                                                                           |
|----------------------------|-----|-------------|-------------|-------------|---------------------------------------------------------------------------------------------------------------------------------|
| Output voltage set point   |     |             | $\pm 1$     | %           | Vout nom                                                                                                                        |
| Line regulation            |     | $\pm 0.02$  | $\pm 0.2$   | %           | Low line to high line; full load                                                                                                |
| Temperature regulation     |     | $\pm 0.002$ | $\pm 0.005$ | %/°C        | Over operating temp. range                                                                                                      |
| Over temperature shut down |     | 115         |             | °C          |                                                                                                                                 |
| Power sharing accuracy     |     | $\pm 2$     | $\pm 5$     | %           | 10% to 100% of full load                                                                                                        |
| Programming range          | 10  |             | 110         | %           | Of nominal output voltage.<br>(For trimming below 90% of nominal, a minimum load of 10% of maximum rated power may be required) |
| Current limit              |     | 115         |             | % Iout max. | Output voltage 95% of nominal                                                                                                   |
| Short circuit current      |     | 115         |             | % Iout max. | Output voltage <250 mV                                                                                                          |

See 300 V Maxi, Mini, Micro Family data sheets for detailed module specifications.

## Interface Control Functions (See technical description)

| Type   | Output<br>Enable /Disable | Output<br>Sequencing | Bus<br>OK |
|--------|---------------------------|----------------------|-----------|
| Remote | ✓                         | ✓                    | ✓         |

# TECHNICAL OVERVIEW

## Overview

Vicor's VIPAC offers a 115/230 Vac autoranging input. The front-end section utilizes Vicor's FARM input module to provide EMI filtering, transient protection, inrush current limiting and rectification. The VIPAC has provisions to allow controlling the operation of the individual outputs and providing a BUS OK status indication. Reference the figure below for circuit operation.

Up to three individually fused Maxi, Mini, Micro Family DC-DC converters are combined with the front end in an integrated mechanical – assembly providing a high efficiency power supply delivering up to 900 W of output power.

## Circuit Operation

The AC autoranging input VIPAC utilizes the FARM module which provides inrush current limiting, transient protection, EMI filtering and rectification. The AC line voltage is applied via an agency approved 6 pin connector. A fuse in the "L1" lead protects the VIPAC from damage due to internal shorts. At start-up, AC inrush current is limited by a PTC thermistor. The PTC thermistor serves as both an inrush current limiter on power up and a current limiting shut-down device in the event of an input over voltage condition. The PTC is shunted out shortly after initial power up by a DC bus voltage sense circuit. The main energy storage capacitors are located remotely in the HUB (Hold-up Box) or as customer supplied hold-up capacitors. The main rectifiers and filter capacitors act as either a full wave bridge or voltage doubler (depending on the applied AC voltage) delivering a nominal 300 Vdc to one or more Vicor Maxi, Mini, Micro

Family DC-DC converters. The DC-DC converters deliver the selected output voltage and current levels, provide output over voltage protection, output current limiting, voltage regulation, trim capability and input to output isolation.

At initial power up, the front end is configured for 230 Vac operation and the PTC inrush limiter permits the main storage capacitors to charge up at a controlled rate toward full operating DC bus potential. If the bus voltage settles below the operating threshold, the unit will auto-strap for 115 Vac operation. The strapping function is performed by an SCR that configures the front end as either a full wave bridge or a voltage doubler. If the unit is operating in the 115 Vac mode and a long duration transient is applied to the VIPAC (>150 Vac for 50 ms), the unit will auto-strap for 230 Vac operation. Input power must be removed for approximately one minute to restore normal operation from 115 Vac. A control circuit holds the DC-DC converter PC pins low, DC outputs off, the PTC shunt inactive and the BUS-OK output in FAIL status until the DC bus potential reaches a minimum threshold. The PC terminals of all converter modules internal to the VIPAC are FET controlled by a logical replica of the BUS-OK status line, and therefore inhibit converter operation at power up until the DC bus potential has settled to a proper operating level. At this point, the converters are enabled and the PTC shunt activated. A voltage sensing circuit connected across the DC bus performs input over voltage sensing and protection. In the event of an over voltage condition, an SCR/PTC combination will simultaneously disable the DC-DC converters and hold down the DC bus. Normal operation will resume when the input voltage returns within steady-state limits.



## BUS-OK

An internal replica of BUS-OK is wired to the PC pin of all internal driver modules. The modules will be disabled (no DC output) during initial power up of the VIPAC until the internal DC input bus voltage to the DC-DC converters is sufficient to support fully-loaded operation. The BUS-OK status output reflects the status of this inhibit function. This same logic circuit will shut down the converters when the internal DC bus voltage is insufficient to support proper loaded operation. This shut down will occur during normal power down, line dropouts of duration exceeding the hold up time, or internal faults causing the internal DC bus voltage at the input of the converters to collapse. The BUS-OK output provide the user with an optically isolated status indication of the internal DC bus. This output, in system applications, can provide power supply status, switch in (standby) backup sources or initiate “power down” sequences to save volatile memory contents in the event of a power loss.

### Individual Module Control

Driving the appropriate optocoupler can independently control each DC-DC module within the VIPAC. The minimum optocoupler input current for disabling the supplies is 3 mA. The maximum allowable current is 20 mA. J3 connector pins 1 and 2 always control module 1, pins 3 and 4 always control module 2 (if present) and pins 5 and 6 control module 3 (if present).

## Electrical Connections

J3 status output pair BUS-OK+ (PIN 8), BUS-OK– (PIN 7) are the collector (+) and emitter (–) of NPN optocoupler output transistor. The collector terminal BUS-OK+ of the optocoupler, in a typical application, and the drive pin (PIN 10) can be connected via current limiting resistors to an external source no greater than 18 Vdc. These resistors should limit the maximum current to the optocoupler output transistors to 2 mA. The emitter terminal BUS-OK– is connected to the return of the external source.

The status FAULT condition will set the BUS OK optocoupler output transistors in saturation and are capable of sinking up to 1.5 mA with a Vce saturation voltage of 0.4 V. Users should be cautioned that although the output of the VIPAC can be used as the pull up source, shortly after BUS-OK changes from OK (High Z) to NOT OK (Saturated), the pull up voltage will be shut down. It is thus advisable to provide a capacitive reservoir, if the pull up source is one of the VIPAC’s outputs, in order to maintain the pull up potential after loss of DC current output. Use edge sensing logic to detect assertion of logic outputs, or a separate source of bias supply voltage (i.e., backup batteries) to provide a safe pull up voltage source regardless of the line status.



# INPUT CONNECTIONS

## AC Input/V Bus

Conn. Pin# Funct. Mating Conn.

|           |   |        |           |
|-----------|---|--------|-----------|
| <b>J2</b> | 1 | V Bus+ | P/N 22499 |
|           | 2 | Strap  |           |
|           | 3 | V Bus- |           |
|           | 4 | L2/N   |           |
|           | 5 | L1     |           |
|           | 6 | GND ⊕  |           |


## I/O Interface\*

Conn. Pin# Funct. Mating Conn.

|           |    |                      |               |
|-----------|----|----------------------|---------------|
| <b>J3</b> | 1  | Module 1 E/D Return  | JST 10ZR-3H-P |
|           | 2  | Module 1 E/D Supply  |               |
|           | 3  | Module 2 E/D Return  |               |
|           | 4  | Module 2 E/D Supply  |               |
|           | 5  | Module 3 E/D Return  |               |
|           | 6  | Module 3 E/D Supply  |               |
|           | 7  | BUS-OK Status Return |               |
|           | 8  | BUS-OK Status Supply |               |
|           | 9  | N/C                  |               |
|           | 10 | BUS-OK Drive Input   |               |




V Bus+  
Strap  
V Bus-



HUB 2200-s  
2700-s  
3300-s




HUB 820-s  
1200-s  
1800-s

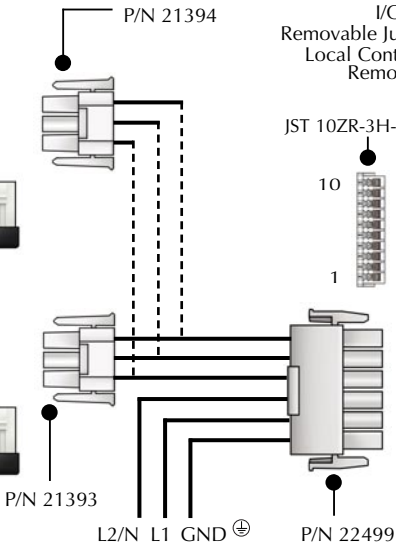

Maximum cable length between  
the HUB and VIPAC 3'

## 115/230 Vac Autoranging

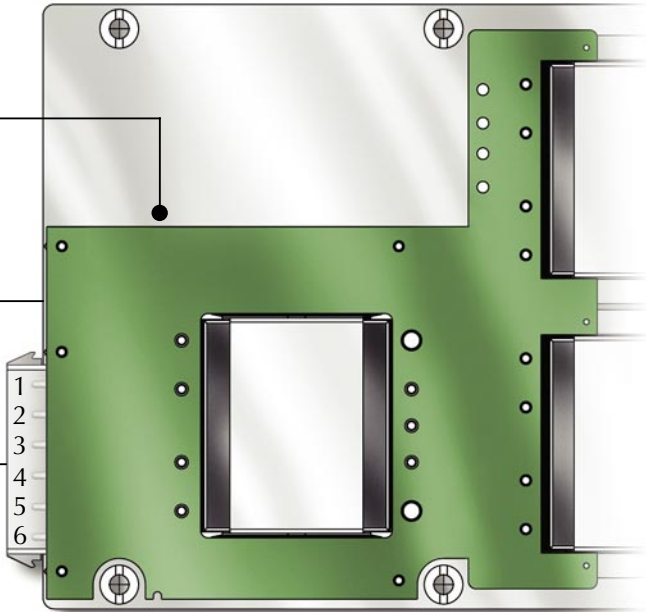

# OUTPUT CONNECTION OPTIONS

## Discrete Output Configurations

### LugMate (Factory Installed Option)


### Ring Lugs

### LugMate Pin Out




| Pin # | Solder Pad | Function          |
|-------|------------|-------------------|
| 1     |            | - Vout            |
|       | Rd         | Trim-Down         |
|       | SC         | Secondary Control |
|       | Ru         | Trim-Up           |
| 3     |            | + Vout            |

Micro LugMate - with Rd/Ru trim resistor solder pads. (Design calculator for trim resistors located at [vicorpower.com](http://vicorpower.com))

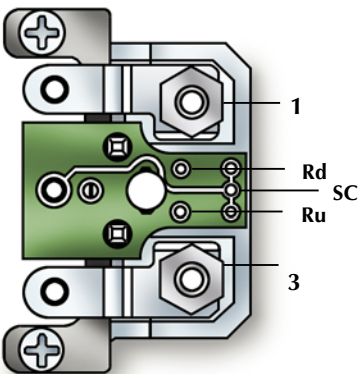

### Mini/Maxi LugMate

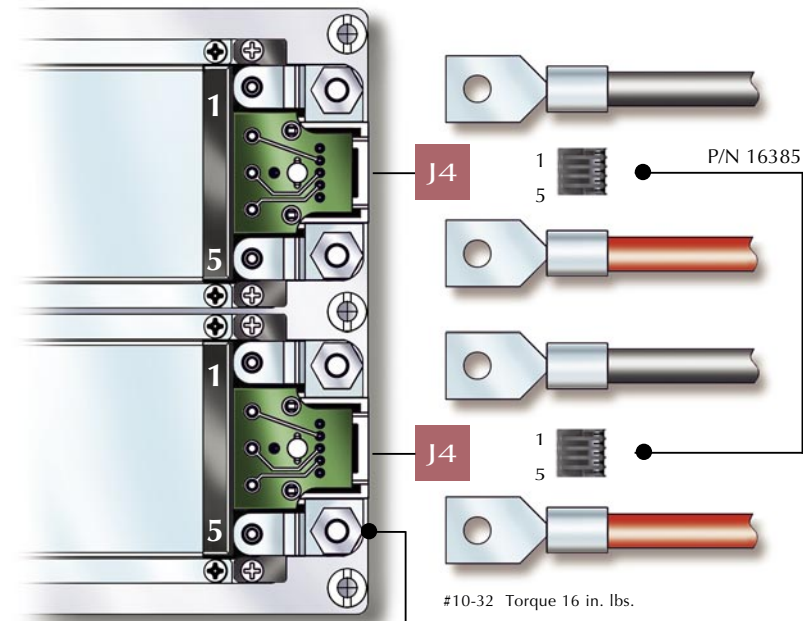


| Pin # | Conn. | Function          | Mating Conn. |
|-------|-------|-------------------|--------------|
| 1     |       | - Vout            |              |
|       | J4-1  | - Vout            | P/N 16385    |
|       | J4-2  | - Sense           |              |
|       | J4-3  | Secondary Control |              |
|       | J4-4  | + Sense           |              |
|       | J4-5  | + Vout            |              |
| 5     |       | + Vout            |              |

\*Removable jumper is factory installed for local sensing. See Pg 24 for details

# OUTPUT CONNECTION OPTIONS

**Parallel Output Configurations** Shown with the output of two modules connected in parallel using BUS BARS.

## LugMate (Factory Installed Option)


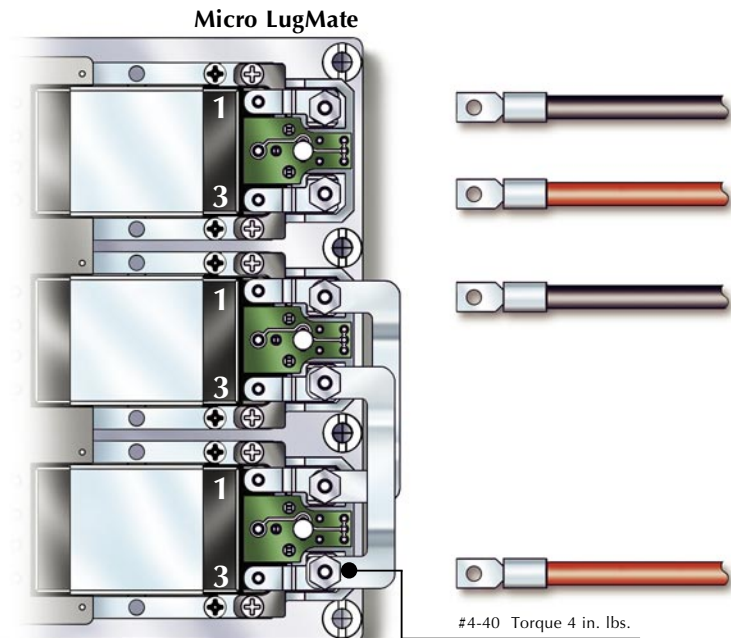


## Ring Lugs

## LugMate Pin Out

| Pin # | Solder Pad | Function          |
|-------|------------|-------------------|
| 1     |            | - Vout            |
|       | Rd         | Trim-Down         |
|       | SC         | Secondary Control |
|       | Ru         | Trim-Up           |
| 3     |            | + Vout            |

Micro LugMate - with Rd/Ru trim resistor solder pads. (Design calculator for trim resistors located at [vicorpower.com](http://vicorpower.com))

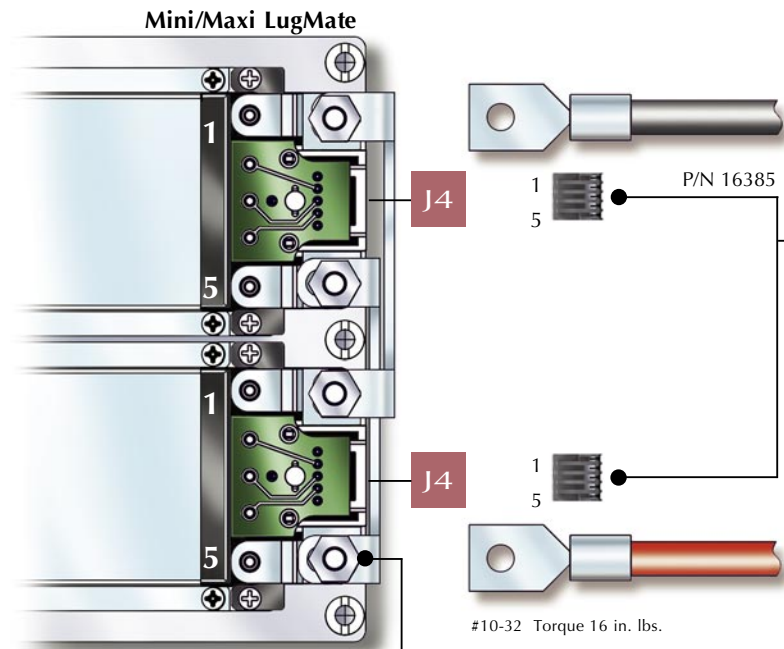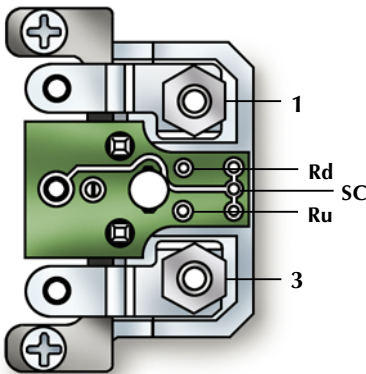

| Pin # | Conn. | Function          | Mating Conn. |
|-------|-------|-------------------|--------------|
| 1     |       | - Vout            |              |
|       | J4-1  | - Vout            | P/N 16385    |
|       | J4-2  | - Sense           |              |
|       | J4-3  | Secondary Control |              |
|       | J4-4  | + Sense           |              |
|       | J4-5  | + Vout            |              |
| 5     |       | + Vout            |              |


\*Removable jumper is factory installed for local sensing. In using 2 modules configured as a single output as illustrated, one module must be dedicated as a master, or the sense lines must be terminated to the same point physically to their respective output.

# OUTPUT CONNECTION OPTIONS

## PlugMate

(Factory Installed Option)

### Micro PlugMate

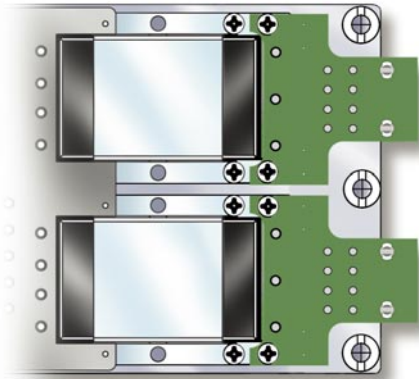

Vicor kit P/N 25073



## PlugMate Pin Out


(Looking into PlugMate)

|   |  |   |
|---|--|---|
| 1 |  | 4 |
| 5 |  | 8 |

| Pin # | Function | Pin # | Function |
|-------|----------|-------|----------|
| 1     | +Vout    | 5     | +Vout    |
| 2     | +Vout    | 6     | N/C      |
| 3     | -Vout    | 7     | SC       |
| 4     | -Vout    | 8     | -Vout    |

| Mating Connector | TE Connectivity P/N | Vicor P/N |
|------------------|---------------------|-----------|
| Housing          | TYC-794657-8        |           |
| Pin              | 1-106529-2          |           |
| Kit              |                     | 25073     |

### Mini PlugMate

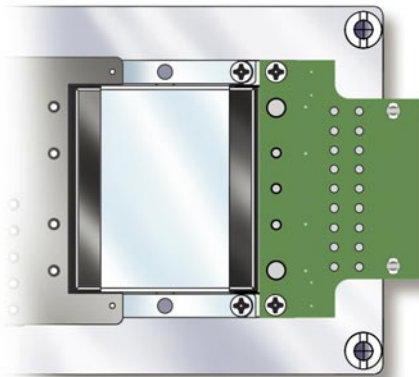

Vicor kit P/N 25067




|    |  |  |  |  |    |
|----|--|--|--|--|----|
| 1  |  |  |  |  | 9  |
| 10 |  |  |  |  | 18 |

| Pin # | Function | Pin # | Function |
|-------|----------|-------|----------|
| 1     | +Vout    | 10    | +Vout    |
| 2     | +Vout    | 11    | +Vout    |
| 3     | +Vout    | 12    | +Vout    |
| 4     | N/C      | 13    | +S       |
| 5     | N/C      | 14    | SC       |
| 6     | N/C      | 15    | -S       |
| 7     | -Vout    | 16    | -Vout    |
| 8     | -Vout    | 17    | -Vout    |
| 9     | -Vout    | 18    | -Vout    |

| Mating Connector | TE Connectivity P/N | Vicor P/N |
|------------------|---------------------|-----------|
| Housing          | TYC1-794657-8       |           |
| Pin              | 1-106529-2          |           |
| Kit              |                     | 25067     |

### Maxi PlugMate

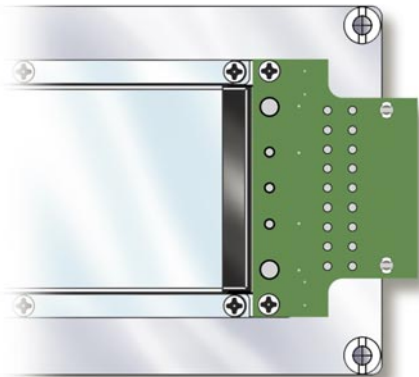

Vicor kit P/N 25061



|    |  |  |  |  |  |  |  |  |  |    |
|----|--|--|--|--|--|--|--|--|--|----|
| 1  |  |  |  |  |  |  |  |  |  | 12 |
| 13 |  |  |  |  |  |  |  |  |  | 24 |

| Pin # | Function | Pin # | Function |
|-------|----------|-------|----------|
| 1     | +Vout    | 13    | +Vout    |
| 2     | +Vout    | 14    | +Vout    |
| 3     | +Vout    | 15    | +Vout    |
| 4     | +Vout    | 16    | +Vout    |
| 5     | +Vout    | 17    | +Vout    |
| 6     | N/C      | 18    | +S       |
| 7     | SC       | 19    | -S       |
| 8     | -Vout    | 20    | -Vout    |
| 9     | -Vout    | 21    | -Vout    |
| 10    | -Vout    | 22    | -Vout    |
| 11    | -Vout    | 23    | -Vout    |
| 12    | -Vout    | 24    | -Vout    |

| Mating Connector | TE Connectivity P/N | Vicor P/N |
|------------------|---------------------|-----------|
| Housing          | TYC2-794657-4       |           |
| Pin              | 1-106529-2          |           |
| Kit              |                     | 25061     |

### Note:

VIPACs that contain multiple modules configured as a single output (paralleled for power or redundancy) **MUST** have their Outputs and Sense connected to each other at the load. **DO NOT OPERATE A PARALLEL CONFIGURATION WITH ONLY ONE MODULE CONNECTED.**

# CHASSIS CONFIGURATIONS

---



## VP-A

### 3 MICRO

- 4.96" x 6.8" (126,0 x 172,7 mm)
- Dual or Triple Output
- Up to 450 W
- Up to 75 A



## VP-C

### 2 MAXI

- 4.96" x 9.15" (126,0 x 232,4 mm)
- Single or Dual Output
- Up to 900 W
- Up to 160 A



## VP-B

### 2 MINI

- 4.96" x 6.8" (126,0 x 172,7 mm)
- Single or Dual Output
- Up to 500 W
- Up to 100 A



## VP-D

### 2 MICRO

- 3.15" x 6.8" (80,0 x 172,7 mm)
- Single or Dual Output
- Up to 300 W
- Up to 50 A


# CHASSIS CONFIGURATIONS



## VP-E

### 1 MINI


- 3.15" x 6.8" (80,0 x 172,7 mm)
- Single Output
- Up to 250 W

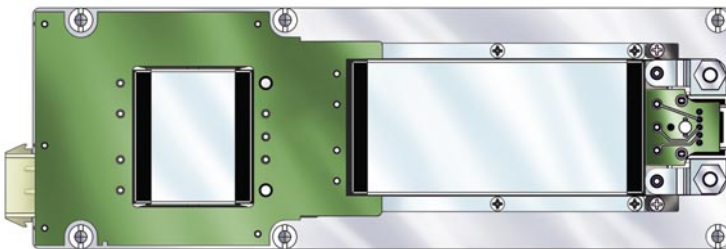

## VP-F

### 1 MAXI

- 3.15" x 9.15" (80,0 x 232,4 mm)
- Single Output
- Up to 500 W
- Up to 80 A

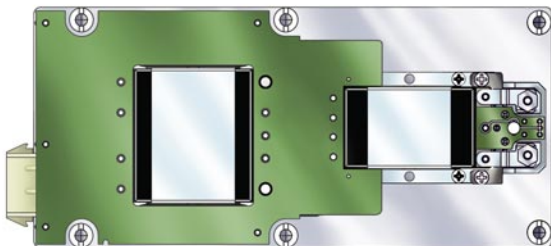


## VP-G

### 1 MICRO

- 3.15" x 6.8" (80,0 x 172,7 mm)
- Single Output
- Up to 150 W
- Up to 25 A


## Finned Chassis Configurations



Coldplate




Optional 0.5" Fin

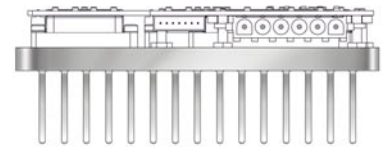

Optional 1" Fin




Longitudinal

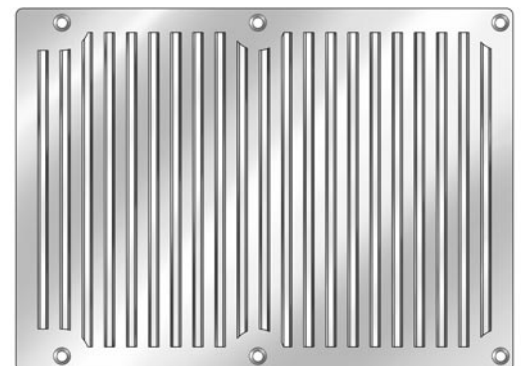


Transverse

# MOUNTING OPTIONS


## Thru Hole Mounting

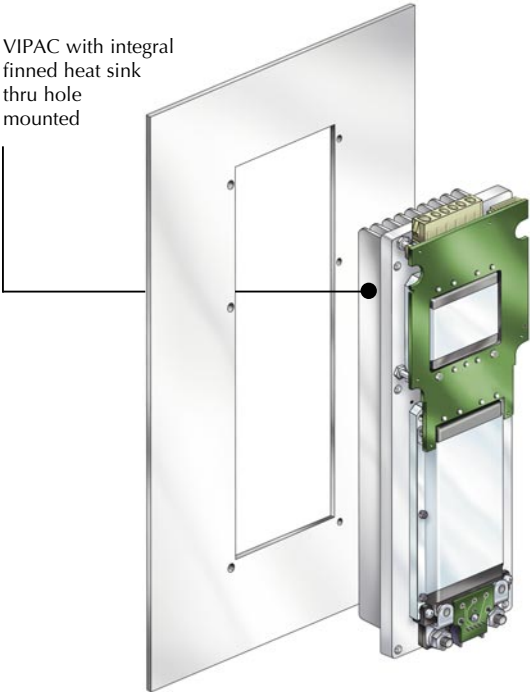

## Surface Mounting

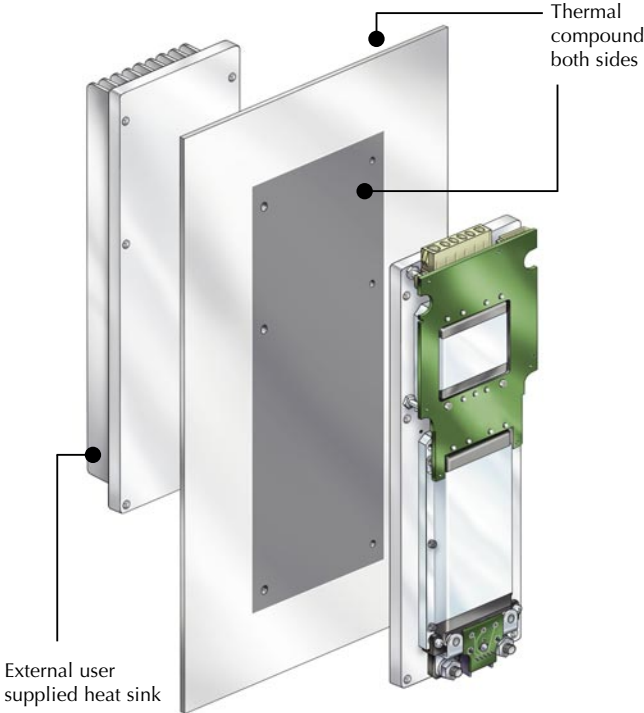



VIPAC with integral finned heat sink thru hole mounted

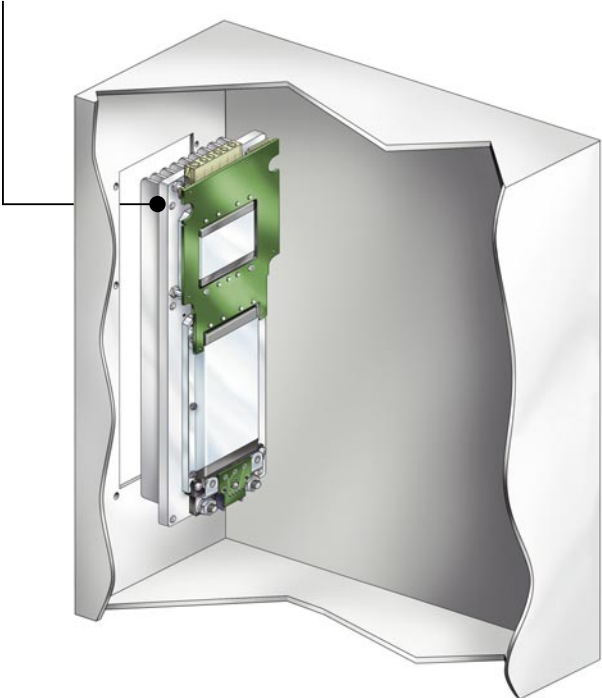

VIPAC with external user supplied heat sink




# MOUNTING OPTIONS

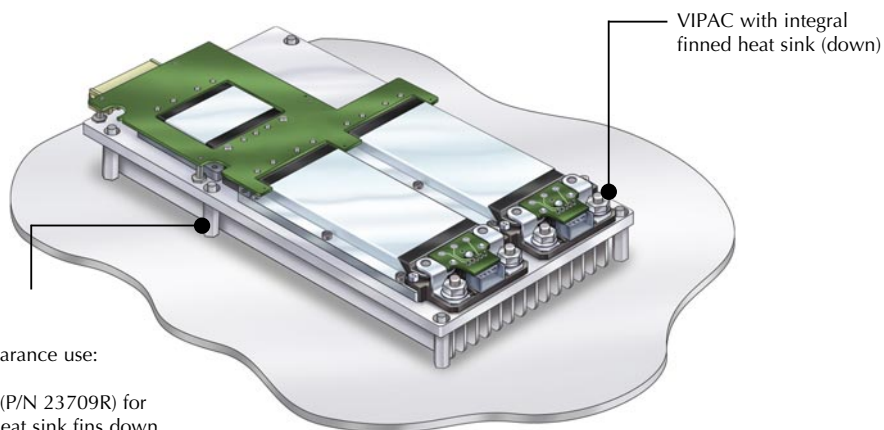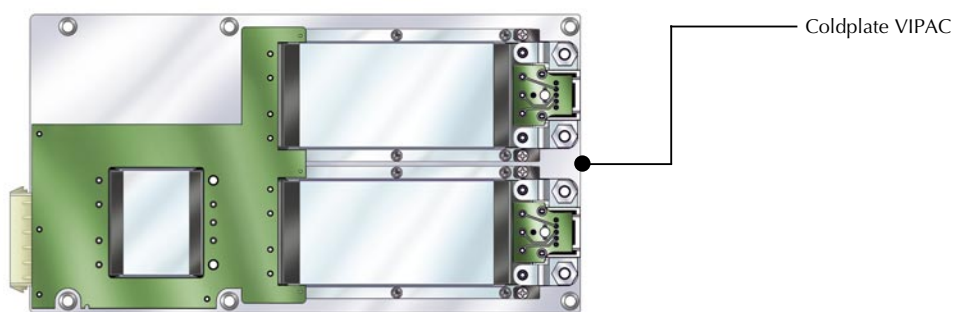

For proper clearance use:

Long standoff (P/N 23709R) for mounting 1" heat sink fins down.


Short standoff (P/N 23710R) for mounting 0.5" heat sink fins down or either heat sink fins up.

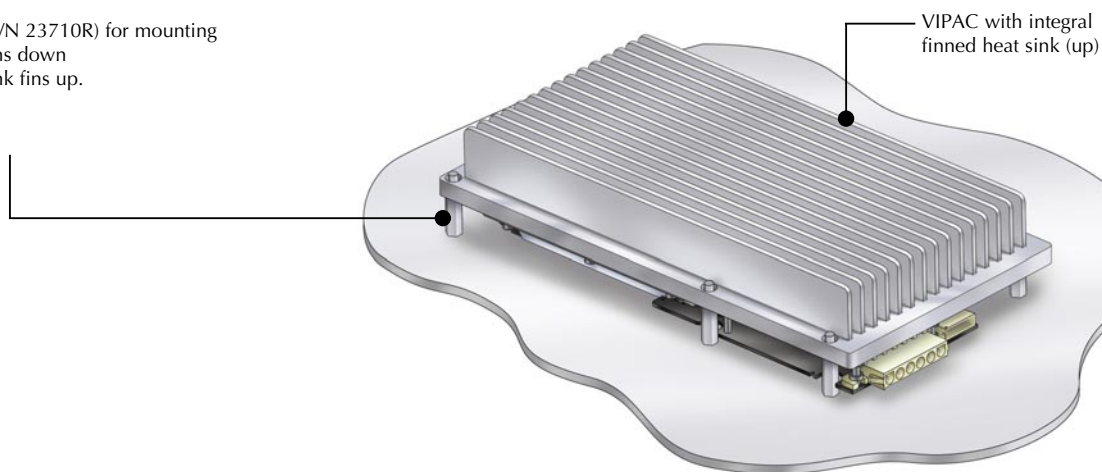


# MECHANICAL DRAWINGS



## Configuration VP-A

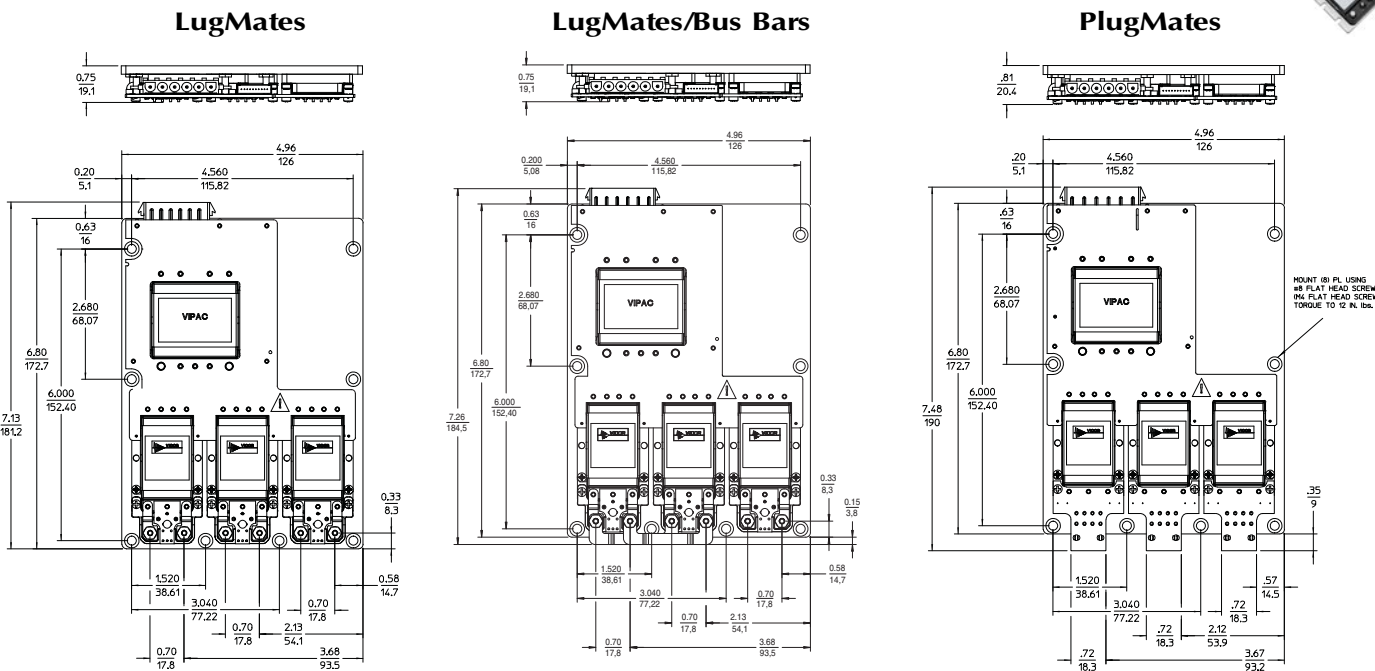

## Configuration VP-B

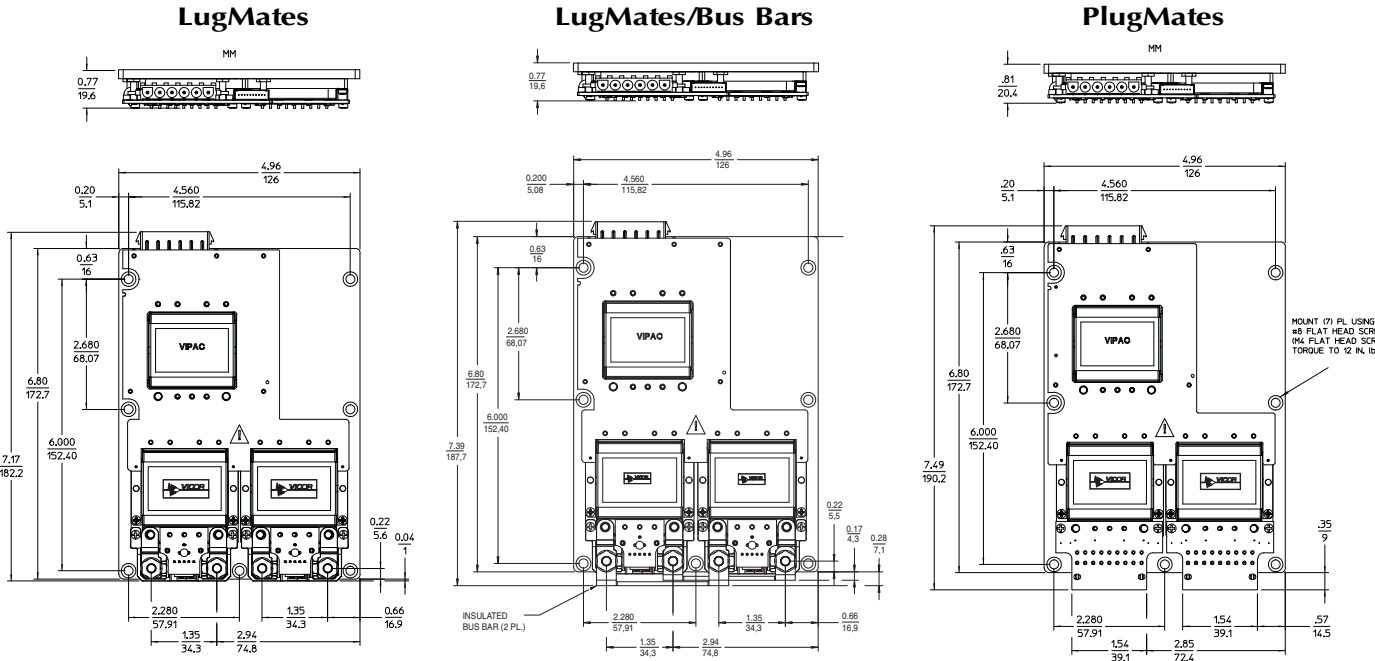


| Torque<br>in. / lbs. | Feature                                            | MOUNTING                  |                                          |                                                             | Max.<br>Chassis<br>Temp. |
|----------------------|----------------------------------------------------|---------------------------|------------------------------------------|-------------------------------------------------------------|--------------------------|
|                      |                                                    | Locations<br>indicated by | Type                                     | Quantity of holes provided for<br>VIPAC Model Configuration |                          |
| 12                   | Coldplate<br>(Thermal interface material required) | ⊙ ●                       | Clearance holes for<br>8-32 90 CS to .30 | 6 6 6 5 6 6 6<br>VP - A B C D E F G                         | 95°C                     |
|                      | Finned heat sink                                   | ⊙                         | threaded thru hole for 8-32              | 6 6 6 5 6 6 6<br>VP - A B C D E F G                         | 95°C                     |
| 4<br>16              | Micro Lugmate<br>Mini/Maxi Lugmates                |                           |                                          |                                                             |                          |


All dimensions are  $\frac{\text{in}}{\text{mm}}$

# MECHANICAL DRAWINGS

## Configuration VP-C

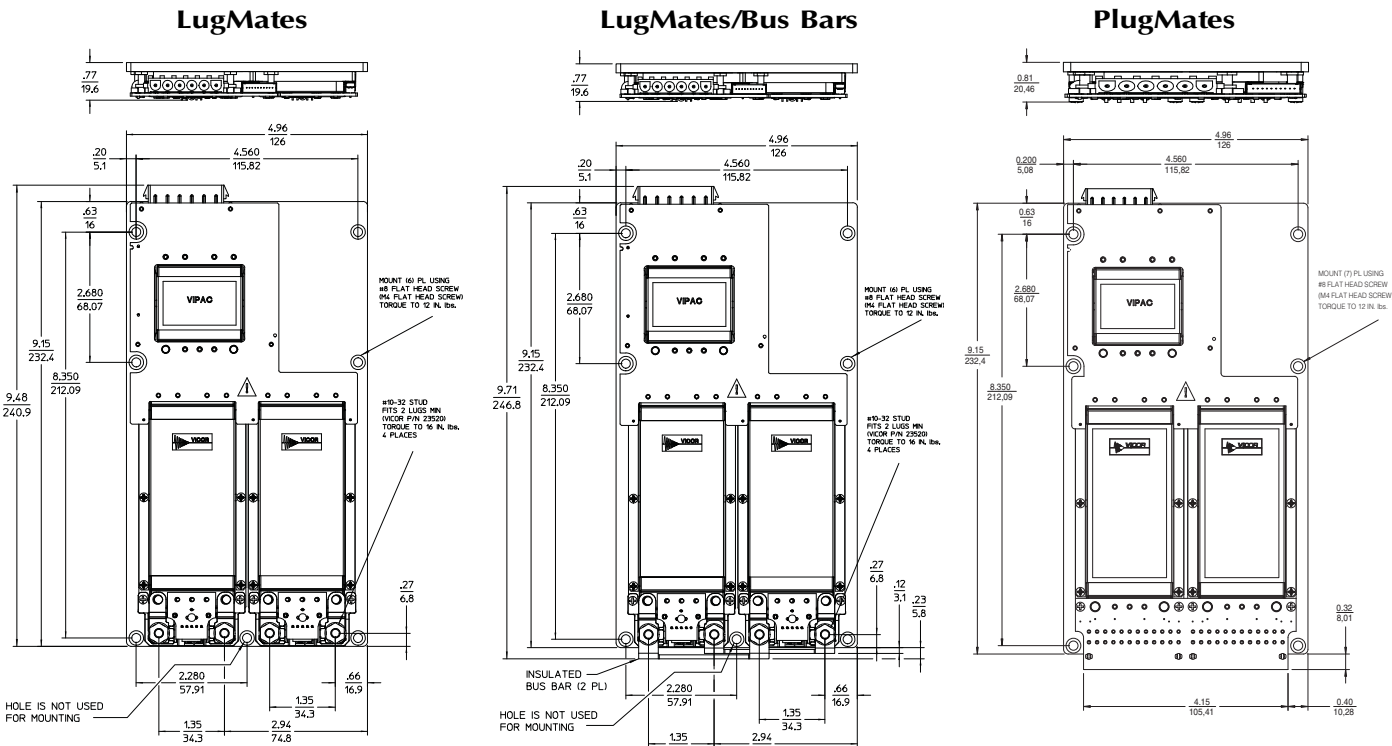

## Configuration VP-D

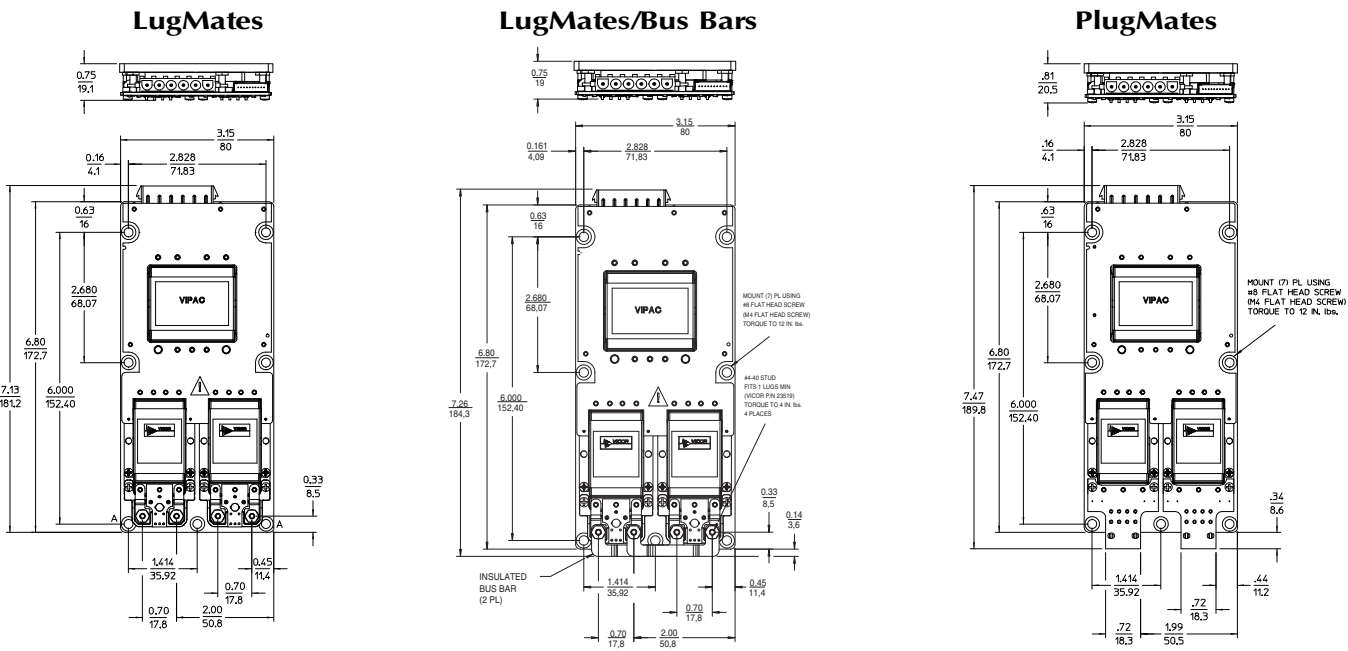



| Torque<br>in. / lbs. | Feature                                            | MOUNTING                  |                                          |                                                             | Max.<br>Chassis<br>Temp. |
|----------------------|----------------------------------------------------|---------------------------|------------------------------------------|-------------------------------------------------------------|--------------------------|
|                      |                                                    | Locations<br>indicated by | Type                                     | Quantity of holes provided for<br>VIPAC Model Configuration |                          |
|                      | Coldplate<br>(Thermal interface material required) | ⊙ ●                       | Clearance holes for<br>8-32 90 CS to .30 | VP - 6 6 6 5 6 6 6<br>A B C D E F G                         | 95°C                     |
| 12                   | Finned heat sink                                   | ⊙                         | threaded thru hole for 8-32              | VP - 6 6 6 5 6 6 6<br>A B C D E F G                         | 95°C                     |
| 4<br>16              | Micro Lugmate<br>Mini/Maxi Lugmates                |                           |                                          |                                                             |                          |

All dimensions are  $\frac{\text{in}}{\text{mm}}$



# MECHANICAL DRAWINGS



## Configuration VP-E

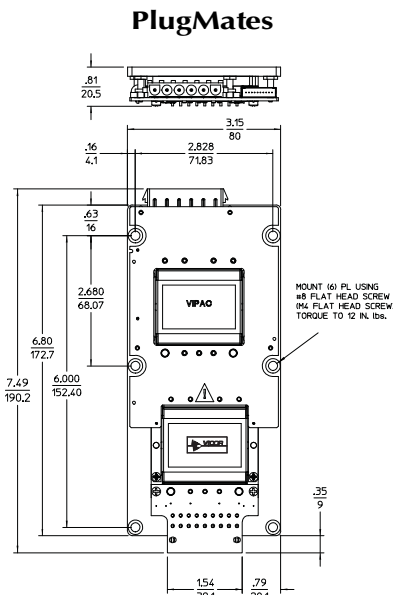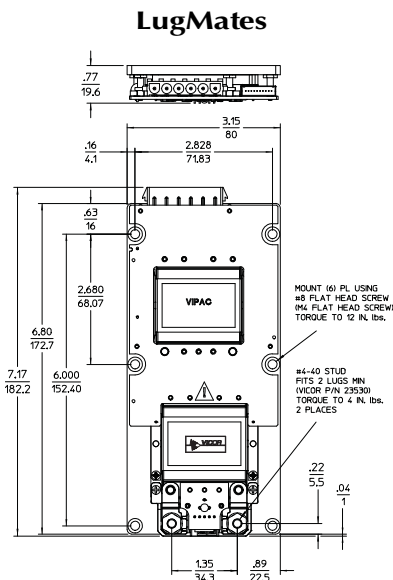

## Configuration VP-F

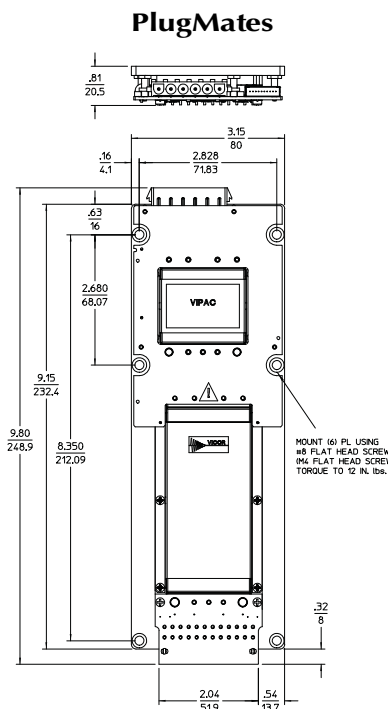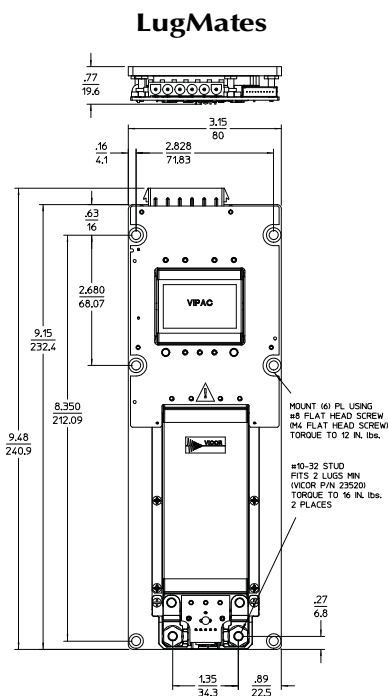

| Torque<br>in. / lbs. | Feature                                            | MOUNTING                  |                                          |                                                             | Max.<br>Chassis<br>Temp. |
|----------------------|----------------------------------------------------|---------------------------|------------------------------------------|-------------------------------------------------------------|--------------------------|
|                      |                                                    | Locations<br>indicated by | Type                                     | Quantity of holes provided for<br>VIPAC Model Configuration |                          |
|                      | Coldplate<br>(Thermal interface material required) | ⊙ ●                       | Clearance holes for<br>8-32 90 CS to .30 | VP - 6 6 6 5 6 6 6<br>A B C D E F G                         | 95°C                     |
| 12                   | Finned heat sink                                   | ⊙                         | threaded thru hole for 8-32              | VP - 6 6 6 5 6 6 6<br>A B C D E F G                         | 95°C                     |
| 4<br>16              | Micro Lugmate<br>Mini/Maxi Lugmates                |                           |                                          |                                                             |                          |

All dimensions are  $\frac{\text{in}}{\text{mm}}$

# MECHANICAL DRAWINGS


## Configuration VP-G



| Torque<br>in. / lbs. | Feature                                            | MOUNTING                  |                                          |                                                             | Max.<br>Chassis<br>Temp. |
|----------------------|----------------------------------------------------|---------------------------|------------------------------------------|-------------------------------------------------------------|--------------------------|
|                      |                                                    | Locations<br>indicated by | Type                                     | Quantity of holes provided for<br>VIPAC Model Configuration |                          |
|                      | Coldplate<br>(Thermal interface material required) | ⊙ ●                       | Clearance holes for<br>8-32 90 CS to .30 | VP - 6 6 6 5 6 6 6<br>A B C D E F G                         | 95°C                     |
| 12                   | Finned heat sink                                   | ⊙                         | threaded thru hole for 8-32              | VP - 6 6 6 5 6 6 6<br>A B C D E F G                         | 95°C                     |
| 4<br>16              | Micro Lugmate<br>Mini/Maxi Lugmates                |                           |                                          |                                                             |                          |

All dimensions are  $\frac{\text{in}}{\text{mm}}$

## Heat Sink Options

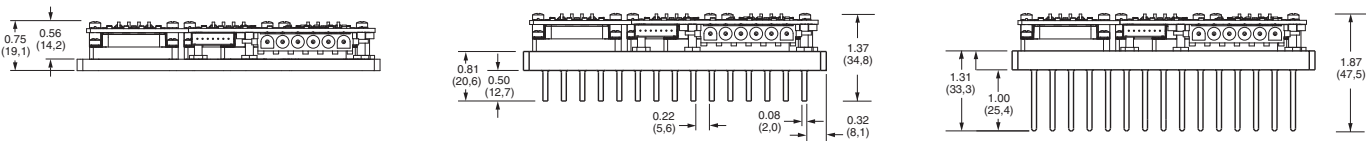

Coldplate

0.5" Fin Option

1" Fin Option  
Fin spacing and relief  
are the same for both Fin options.

# MECHANICAL INFORMATION



## VIPAC Product Weight

| VIPAC Model Prefix | Chassis Configuration | Chassis Configuration |       |           |       |         |       |
|--------------------|-----------------------|-----------------------|-------|-----------|-------|---------|-------|
|                    |                       | Coldplate             |       | 0.5" Fins |       | 1" Fins |       |
|                    |                       | Pounds                | Grams | Pounds    | Grams | Pounds  | Grams |
| VP-G               | 1 Micro               | 0.9                   | 411   | 1.4       | 640   | 1.6     | 731   |
| VP-D               | 2 Micro               | 1.0                   | 457   | 1.5       | 686   | 1.7     | 777   |
| VP-A               | 3 Micro               | 1.4                   | 640   | 2.2       | 1006  | 2.5     | 1143  |
| VP-E               | 1 Mini                | 1.0                   | 457   | 1.4       | 640   | 1.6     | 731   |
| VP-B               | 2 Mini                | 1.4                   | 640   | 2.2       | 1006  | 2.6     | 1189  |
| VP-F               | 1 Maxi                | 1.3                   | 594   | 2.0       | 914   | 2.3     | 1051  |
| VP-C               | 2 Maxi                | 2.2                   | 1006  | 3.0       | 1371  | 3.5     | 1600  |

## VIPAC Standoff Mounting Kits

| Vicor Kit P/N | Kit Description                | For use with:                       |
|---------------|--------------------------------|-------------------------------------|
| 23709R        | Qty. 6 – #23655 long standoff  | 1" finned heat sinks                |
| 23710R        | Qty. 6 – #23656 short standoff | 1/2" finned heat sinks or coldplate |

## Hold-up Box (HUB)



Top view, HUB



| Description* | Height<br>(Inches ±.06") (mm) |      | Weight |       | Part Number |
|--------------|-------------------------------|------|--------|-------|-------------|
|              |                               |      | Ounces | Grams |             |
| 820 µF       | 1.55                          | 39,4 | 3.95   | 112   | HUB820-S    |
| 1200 µF      | 1.75                          | 44,5 | 4.85   | 137   | HUB1200-S   |
| 1800 µF      | 2.14                          | 54,4 | 6.11   | 173   | HUB1800-S   |
| 2200 µF      | 2.85                          | 72,4 | 7.44   | 211   | HUB2200-S   |
| 2700 µF      | 3.52                          | 89,4 | 8.70   | 247   | HUB2700-S   |
| 3300 µF      | 3.52                          | 89,4 | 9.38   | 266   | HUB3300-S   |

\* Each HUB contains two (2) capacitors of the value shown.

Maximum cable length between the HUB and VIPAC ≤ 3'

# THERMAL MANAGEMENT

## Thermal Impedance Specifications (°C/W)

| VIPAC<br>Model Prefix | Chassis<br>Config. | Heat Sink | Airflow               |              |              |              |              |               |               |
|-----------------------|--------------------|-----------|-----------------------|--------------|--------------|--------------|--------------|---------------|---------------|
|                       |                    |           | Natural<br>Convection | 200<br>(LFM) | 400<br>(LFM) | 600<br>(LFM) | 800<br>(LFM) | 1000<br>(LFM) | 1200<br>(LFM) |
| VP-A                  | 3 Micro            | 0.5" L    | 1.98                  | 0.77         | 0.53         | 0.45         | 0.39         | 0.36          | 0.33          |
|                       |                    | 0.5" T    | 1.71                  | 0.68         | 0.48         | 0.40         | 0.36         | 0.33          | 0.30          |
|                       |                    | 1.0" L    | 1.68                  | 0.58         | 0.42         | 0.36         | 0.32         | 0.30          | 0.28          |
|                       |                    | 1.0" T    | 1.27                  | 0.46         | 0.33         | 0.28         | 0.25         | 0.23          | 0.21          |
| VP-B                  | 2 Mini             | 0.5" L    | 1.90                  | 0.77         | 0.53         | 0.44         | 0.39         | 0.36          | 0.33          |
|                       |                    | 0.5" T    | 1.67                  | 0.69         | 0.48         | 0.41         | 0.37         | 0.33          | 0.31          |
|                       |                    | 1.0" L    | 1.49                  | 0.54         | 0.39         | 0.34         | 0.31         | 0.28          | 0.27          |
|                       |                    | 1.0" T    | 1.22                  | 0.47         | 0.33         | 0.28         | 0.25         | 0.23          | 0.21          |
| VP-C                  | 2 Maxi             | 0.5" L    | 1.50                  | 0.62         | 0.42         | 0.35         | 0.31         | 0.28          | 0.25          |
|                       |                    | 0.5" T    | 1.19                  | 0.52         | 0.36         | 0.31         | 0.27         | 0.25          | 0.23          |
|                       |                    | 1.0" L    | 1.17                  | 0.43         | 0.31         | 0.27         | 0.24         | 0.22          | 0.20          |
|                       |                    | 1.0" T    | 0.86                  | 0.35         | 0.25         | 0.21         | 0.19         | 0.17          | 0.16          |
| VP-D                  | 2 Micro            | 0.5" L    | 3.13                  | 1.28         | 0.89         | 0.74         | 0.66         | 0.59          | 0.54          |
|                       |                    | 0.5" T    | 2.40                  | 1.02         | 0.73         | 0.63         | 0.56         | 0.51          | 0.47          |
|                       |                    | 1.0" L    | 2.81                  | 0.97         | 0.70         | 0.60         | 0.54         | 0.50          | 0.46          |
|                       |                    | 1.0" T    | 1.87                  | 0.75         | 0.55         | 0.47         | 0.42         | 0.39          | 0.35          |
| VP-E                  | 1 Mini             | 0.5" L    | 3.11                  | 1.26         | 0.88         | 0.74         | 0.65         | 0.59          | 0.54          |
|                       |                    | 0.5" T    | 2.39                  | 1.01         | 0.73         | 0.62         | 0.56         | 0.51          | 0.47          |
|                       |                    | 1.0" L    | 2.51                  | 0.87         | 0.64         | 0.56         | 0.51         | 0.48          | 0.45          |
|                       |                    | 1.0" T    | 1.76                  | 0.70         | 0.52         | 0.44         | 0.40         | 0.37          | 0.33          |
| VP-F                  | 1 Maxi             | 0.5" L    | 2.42                  | 1.02         | 0.69         | 0.57         | 0.50         | 0.45          | 0.41          |
|                       |                    | 0.5" T    | 1.72                  | 0.77         | 0.55         | 0.47         | 0.42         | 0.38          | 0.37          |
|                       |                    | 1.0" L    | 2.01                  | 0.72         | 0.52         | 0.45         | 0.41         | 0.38          | 0.36          |
|                       |                    | 1.0" T    | 1.26                  | 0.53         | 0.38         | 0.33         | 0.29         | 0.27          | 0.25          |
| VP-G                  | 1 Micro            | 0.5" L    | 3.13                  | 1.28         | 0.89         | 0.74         | 0.66         | 0.59          | 0.54          |
|                       |                    | 0.5" T    | 2.40                  | 1.02         | 0.73         | 0.63         | 0.56         | 0.51          | 0.47          |
|                       |                    | 1.0" L    | 2.81                  | 0.97         | 0.70         | 0.60         | 0.54         | 0.50          | 0.46          |
|                       |                    | 1.0" T    | 1.87                  | 0.75         | 0.55         | 0.47         | 0.42         | 0.39          | 0.35          |

# GENERAL INFORMATION



## Suggested Wire Gauge

| Function        | Wire Gauge | Application                                              |
|-----------------|------------|----------------------------------------------------------|
| AC Input Leads  | #14        | All AC and earth<br>GND ⊕ leads<br>(VIPAC power systems) |
| DC Output Leads | #20        | 0 A – 3 A                                                |
|                 | #18        | 4 A – 6 A                                                |
|                 | #16        | 7 A – 10 A                                               |
|                 | #14        | 11 A – 15 A                                              |
|                 | #12        | 16 A – 25 A                                              |
|                 | #10        | 26 A – 40 A                                              |
|                 | #8         | 41 A – 65 A                                              |
|                 | #6         | 66 A – 104 A                                             |
|                 | #4         | 105 A – 160 A                                            |

## Mating Connector Cross Reference

| Designator | Description                             | Manufacturer    | Part Number          |               |
|------------|-----------------------------------------|-----------------|----------------------|---------------|
|            |                                         |                 | Pin                  | Housing       |
| <b>J2</b>  | VIPAC AC Input - 6 Pin                  | TE Connectivity | 350551-1             | 640585-1      |
| <b>J3</b>  | VIPAC I/O Interface - 10 Pin            | JST             | 10ZR-3H or 10ZR-3H-P |               |
| <b>J4</b>  | VIPAC Output Control - 5 Pin            | TE Connectivity | MTA100-IDC644083-5   |               |
|            | HUB 820-S, 1200-S, 1800-S 3 Pin         | TE Connectivity | 770248-1             | 770018-1      |
|            | HUB 2200-S, 2700-S, 3300-S 3 Pin        | TE Connectivity | 193842-1             | 770018-1      |
|            | Micro PlugMate mating connector - 8 pin | TE Connectivity | 1-106529-2           | TYC-794657-8  |
|            | Mini PlugMate mating connector - 18 pin | TE Connectivity | 1-106529-2           | TYC1-794657-8 |
|            | Maxi PlugMate mating connector - 24 pin | TE Connectivity | 1-106529-2           | TYC2-794657-4 |

# APPLICATION TIPS

## Selecting Heat Sinks

VIPAC Power Systems are rated for a maximum chassis temperature of 95°C. Operation within these limits is essential for long life and users should select an appropriate thermal management system. The thermal performance of a particular VIPAC chassis configuration can be approximated from the thermal resistance of the chassis, ambient operating temperature and total power dissipation, using a few simple formulas shown below.

**Thermal Resistance:** Refer to pg 22

**Power Dissipation:** Calculated as:  $(P_{out} / \text{Efficiency}) - P_{out}$

### Example:

Verify a 500 W, 28 Vdc output VIPAC does not exceed 95°C chassis temperature ( $T_c$ ).

- VP-C chassis configuration with 1" transverse heat sink is selected and 200 lfm airflow is provided.
- Thermal resistance ( $\theta$ ) of 0.35°C/W is obtained from the chart on pg 22.
- Ambient operating temperature ( $T_A$ ) specified by the user is 40°C.
- VIPAC Power System efficiency ( $\eta$ ) is 80% overall.

### Formula:

$$\begin{aligned} T_c &= ((\frac{P_{out}}{\eta} - P_{out}) \times \theta) + T_A \\ &= ((\frac{500}{0.8} - 500) \times 0.35) + 40 \\ &= 83.75^\circ\text{C} \end{aligned}$$

### Conclusion:

This VIPAC will operate in the conditions specified and not exceed maximum chassis temperature.

### Comment:

Efficiency of a particular VIPAC will depend on the specific output voltages and operating load conditions. In general the efficiency of VIPACs with outputs of 5 Vdc or less is approximately 70% and those with outputs greater than 5 Vdc is 80%. A more accurate calculation can be derived by summing dissipation of each DC-DC converter module used in the VIPAC and the front-end section of the VIPAC (using 95% efficiency for the front-end).

## VIPAC Power System Dissipation

$$P_{diss} = \sum_{1-n} \frac{\frac{P_{out}(n)}{\eta(n)}}{0.95} - P_{out}(n)$$

### Remote Sense

A remote sense feature is provided on outputs configured with Mini or Maxi sized DC-DC converters. The output sense connections must be terminated either locally or remotely and may not be left open. **The sense lines for VIPACs configured with a single paralleled output must be terminated to the same point.** VIPACs provided with the optional LugMate connectors are configured for local sensing via removable jumpers installed at the factory. The jumpers will need to be removed if access to the secondary control function is made via mating connector P/N 16385 and connections will need to be established for local or remote sensing.

### Hold up Capacitors

Hold up capacitors can be located remotely with up to 3' of cable. Vicor applications engineering should be consulted for projects requiring greater separation.

### Wire Routing

Avoid routing wires over VIPAC Power System. Do not bundle Input and Output leads together.

### Crimping Tool

| Amp Hand Tool P/N | Die Set # | Wire Size |
|-------------------|-----------|-----------|
| 91508-1           |           | 20-18 AWG |
| 91506-1           |           | 16-14 AWG |
| 69710-1           | 58380-1   | 12 AWG    |
|                   | 58380-2   | 10 AWG    |

### Parallel Outputs

The VIPAC can be configured with parallel modules for increased power or redundancy. When used for increased power, short the SC pin to -Sense on one module. This configures the module as a Booster. The user must properly connect the output and sense terminals (See above).

**At no time operate a paralleled output with a load applied only to one module! (See Output Connection Options)**

# TECHNICAL SUPPORT CONTACTS

---

For a complete and updated list of contacts visit Vicor at:

[http://www.vicorpower.com/contact-us?selectedTab=%23contact\\_tab2](http://www.vicorpower.com/contact-us?selectedTab=%23contact_tab2)

---

*Information furnished by Vicor is believed to be accurate and reliable. However, no responsibility is assumed by Vicor for its use. No license is granted by implication or otherwise under any patent or patent rights of Vicor. Vicor components are not designed to be used in applications, such as life support systems, wherein a failure or malfunction could result in injury or death. All sales are subject to Vicor's Terms and Conditions of Sale, which are available upon request. No user serviceable components, contact Vicor to arrange for repair or replacement. **Specifications are subject to change without notice.***

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Vicor:

[VP-C2209316](#) [VP-F2839235](#) [VP-E2935648E](#) [VP-F2334010](#) [VP-D2935653E](#) [VP-C2104853](#) [VP-D2103629](#) [VP-F2417426E](#) [VP-G3236413E](#) [VP-D2927817](#) [VP-D1798791E](#) [VP-C2432694](#) [VP-A1432187E](#) [VP-D2469630E](#) [VP-E2272622E](#) [VP-C2715222](#) [VP-F1415375E](#) [VP-G2084219](#) [VP-D1782197](#) [VP-C3208827](#) [VP-F2445412](#) [VP-D2619045](#) [VP-D2757628](#) [VP-G2291118](#) [VP-D2802237E](#) [VP-A3210010](#) [VP-G2341213](#) [VP-D2635020](#) [VP-E3011216](#) [VP-E1907997](#) [VP-G2754210](#) [VP-A2655010E](#) [VP-A2864277E](#) [VP-B2539214E](#) [VP-A3080210](#) [VP-B2957011](#) [VP-B2749706E](#) [VP-G2523016](#) [VP-C2812451E](#) [VP-D2217414](#) [VP-D1968787](#) [VP-A2527027E](#) [VP-F2039586](#) [VP-F1845809](#) [VP-B3113839E](#) [VP-D2384256](#) [VP-B2384829E](#) [VP-E2164833](#) [VP-F1598600E](#) [VP-F2599124E](#) [VP-G1911988](#) [VP-C2913019E](#) [VP-D2767630E](#) [VP-E2777267E](#) [VP-E2089596](#) [VP-G2346282](#) [VP-A2556472](#) [VP-A2815415E](#) [VP-B2831230E](#) [VP-C2319622](#) [VP-F3008813E](#) [VP-A2308410E](#) [VP-D1925988](#) [VP-E2434907E](#) [VP-A3097438](#) [VP-A2286523](#) [VP-D2415428E](#) [VP-A2296491](#) [VP-G2989015E](#) [VP-A2776023E](#) [VP-D2098219](#) [VP-A2729221](#) [VP-F2415455](#) [VP-D3109427E](#) [VP-F1904992](#) [VP-F2296528](#) [VP-F1792383](#) [VP-C1762582E](#) [VP-E2454810](#) [VP-F2376239](#) [VP-D1722588](#) [VP-G2592763E](#) [VP-F3207617](#) [VP-B2881055](#) [VP-G2107622](#) [VP-C2863231](#) [VP-B1680391](#) [VP-C2629447](#) [VP-B2301059E](#) [VP-E3054419E](#) [VP-D2735227](#) [VP-C2135448](#) [VP-A2123840](#) [VP-E2305426E](#) [VP-C2596826](#) [VP-A2197011E](#) [VP-E2171064](#) [VP-F2610881E](#) [VP-E2094819E](#) [VP-D2863685E](#)

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9