



## IA\_KP-\*W Series

**1W/2W/3W, FIXED INPUT, ISOLATED & REGULATED  
DUAL OUTPUT DC-DC CONVERTER**

multi-country patent protection **RoHS**

### FEATURES

Low ripple  
Good dynamic feature  
1KVDC Isolation  
DIP Package  
Temperature Range: -40°C to +85°C  
UL94-V0 Package  
No Heatsink Required  
No External Component Required  
Internal SMD construction  
RoHS Compliance

### APPLICATIONS

The IA\_KP-3W & IA\_KP-2W & IA\_KP-1W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.

These products apply to:

- 1) Where the voltage of the input power supply is fixed (voltage variation  $\leq \pm 5\%$ );
- 2) Where isolation is necessary between input and output (isolation voltage  $\leq 1000\text{VDC}$ );
- 3) Where the regulation of the output voltage and the output ripple noise are demanded.

### PRODUCT PROGRAM

| Part Number   | Input         |           | Output        |              |     | Efficiency (% , Typ) |
|---------------|---------------|-----------|---------------|--------------|-----|----------------------|
|               | Voltage (VDC) |           | Voltage (VDC) | Current (mA) |     |                      |
|               | Nominal       | Range     |               | Max          | Min |                      |
| IA0512KP-1W   | 5             | 4.75-5.25 | ±12           | ±42          | ±5  | 64                   |
| IA0515KP-1W   |               |           | ±15           | ±33          | ±4  | 65                   |
| IA0509KP-2W * |               |           | ±9            | ±100         | ±10 | 62                   |
| IA0512KP-2W   |               |           | ±12           | ±83          | ±9  | 63                   |
| IA0515KP-2W   |               |           | ±15           | ±67          | ±7  | 64                   |
| IA0512KP-3W   |               |           | ±12           | ±100         | ±10 | 64                   |
| IA0515KP-3W   |               |           | ±15           | ±100         | ±10 | 62                   |
| IA1212KP-1W * | 12            | 11.4-12.6 | ±12           | ±42          | ±5  | 64                   |
| IA1215KP-1W * |               |           | ±15           | ±33          | ±4  | 65                   |
| IA1209KP-2W   |               |           | ±9            | ±100         | ±10 | 63                   |
| IA1212KP-2W   |               |           | ±12           | ±83          | ±9  | 65                   |
| IA1215KP-2W * |               |           | ±15           | ±67          | ±7  | 66                   |
| IA1212KP-3W * |               |           | ±12           | ±100         | ±10 | 65                   |
| IA1215KP-3W   |               |           | ±15           | ±100         | ±10 | 68                   |
| IA2412KP-1W * | 24            | 22.8-25.2 | ±12           | ±42          | ±5  | 64                   |
| IA2415KP-1W   |               |           | ±15           | ±33          | ±4  | 65                   |
| IA2409KP-2W * |               |           | ±9            | ±100         | ±10 | 63                   |
| IA2412KP-2W   |               |           | ±12           | ±83          | ±9  | 66                   |
| IA2415KP-2W   |               |           | ±15           | ±67          | ±7  | 67                   |
| IA2412KP-3W   |               |           | ±12           | ±100         | ±10 | 68                   |
| IA2415KP-3W * |               |           | ±15           | ±100         | ±10 | 69                   |

\* Designing.


\* Designing.

### ISOLATION SPECIFICATIONS

| Item                 | Test conditions                 | Min  | Typ | Max | Units |
|----------------------|---------------------------------|------|-----|-----|-------|
| Isolation voltage    | Tested for 1 minute and 1mA max | 1000 |     |     | VDC   |
| Isolation resistance | Test at 500VDC                  | 1000 |     |     | MΩ    |

### MODEL SELECTION

IA0512KP-3W

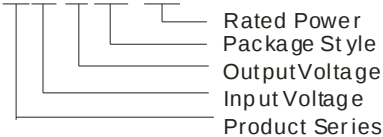

### OUTPUT SPECIFICATIONS

| Item                    | Test Conditions                          | Min | Typ | Max        | Units                 |
|-------------------------|------------------------------------------|-----|-----|------------|-----------------------|
| Line regulation         | For $V_{in}$ change of $\pm 5\%$ (1W&2W) |     |     | $\pm 0.25$ | %                     |
|                         | For $V_{in}$ change of $\pm 5\%$ (3W)    |     |     | $\pm 0.3$  |                       |
|                         | 10% to 100% full load                    |     |     | $\pm 1$    |                       |
| Output voltage accuracy | 100% full load                           |     |     | $\pm 3$    |                       |
| Temperature drift       | 100% full load                           |     |     | 0.03       | $\% / ^\circ\text{C}$ |
| Output ripple*          | 20MHz Bandwidth(1W)                      |     | 10  | 20         | mVp-p                 |
|                         | 20MHz Bandwidth(2W&3W)                   |     | 20  | 40         |                       |
| Output Noise*           | 20MHz Bandwidth(1W&2W)                   |     | 50  | 150        |                       |
|                         | 20MHz Bandwidth(3W)                      |     | 150 | 300        |                       |
| Switching frequency     | Full load, nominal input                 |     | 75  |            | KHz                   |

\*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.

Note:

1. All specifications measured at  $T_A = 25^\circ\text{C}$ , humidity  $< 75\%$ , nominal input voltage and rated output load unless otherwise specified.
2. See below recommended circuits for more details.

**MORNSUN Science& Technology co., Ltd.**


Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China  
Tel: 86-20-38601850  
Fax: 86-20-38601272  
<http://www.mornsun-power.com>

## COMMON SPECIFICATION


| Item                      | Test conditions                | Min                 | Typ | Max | Units   |
|---------------------------|--------------------------------|---------------------|-----|-----|---------|
| Storage humidity          |                                |                     |     | 95  | %       |
| Operating temperature     |                                | -40                 |     | 85  | °C      |
| Storage temperature       |                                | -55                 |     | 125 |         |
| Temp. rise at full load   |                                |                     | 20  | 30  |         |
| Lead temperature)         | 1.5mm from case for 10 seconds |                     |     | 300 |         |
| Short circuit protection* |                                |                     |     | 1   | s       |
| Cooling                   |                                | Free air convection |     |     |         |
| Case material             |                                | Plastic(UL94-V0)    |     |     |         |
| MTBF                      |                                | 3500                |     |     | K hours |
| Weight                    |                                |                     | 11  |     | g       |

\*Supply voltage must be discontinued at the end of short circuit duration.

## TYPICAL CHARACTERISTICS

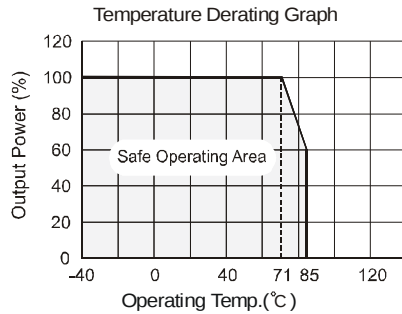


## OUTLINE DIMENSIONS & PIN CONNECTIONS

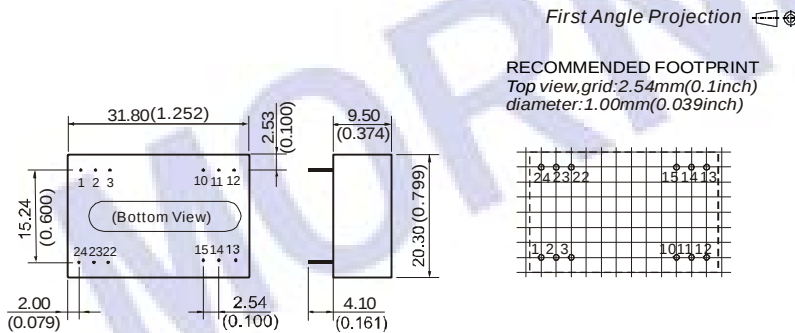

Note:  
Unit:mm(inch)  
Pin diameter:0.50mm(0.020inch)  
Pin diameter tolerances:±0.10mm(±0.004inch)  
General tolerances:±0.25mm(±0.010inch)

## Recommended circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).



(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).

EXTERNAL CAPACITOR TABLE (Table 1)

| Vin(VDC) | Cin(uF) | Vout(VDC) | Cout(uF) |
|----------|---------|-----------|----------|
| 5        | 4.7     | ±5        | 4.7      |
| 12       | 2.2     | ±9        | 2.2      |
| 24       | 1       | ±12       | 1        |
| -        | -       | ±15       | 0.47     |

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

## Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against over-current and short-circuits. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

## Input Over-voltage Protection Circuit

The simplest device for input over-voltage protection is a linear voltage regulator with overheat protection that is connected to the input end in series (Figure 2).



(Figure 2)

When the environment temperature is higher than 71°C, the product output power should be less than 60% of the rated power.

No parallel connection or plug and play.

## APPLICATION NOTE

### Requirement on output load

To ensure this module can operate efficiently and reliably, During operation, the minimum output load is not less than 10% of the full load, and that this product should **never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9