



## FEATURES

- Automatically restarts microprocessor after power failure
- Maintains reset for 350 ms after  $V_{CC}$  returns to an in-tolerance condition
- Accurate 5%, 10% or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface mount SOT-223 package
- Internal 5 k $\Omega$  pull-up resistor
- Compatible with Motorola 68XXX series and HC16 Microprocessors
- Operating temperature of -40°C to +85°C

## PIN ASSIGNMENT



BOTTOM VIEW  
TO-92 PACKAGE  
See Mech.  
Drawings Section  
On Website



TOP VIEW  
SOT-23 PACKAGE  
See Mech.  
Drawings Section  
On Website

## PIN DESCRIPTION

|       |                       |
|-------|-----------------------|
| PIN 1 | GROUND                |
| PIN 2 | RESET                 |
| PIN 3 | $V_{CC}$              |
| PIN 4 | GROUND (SOT-223 ONLY) |



## DESCRIPTION

The DS1233D EconoReset uses a precision temperature-compensated reference and comparator circuit to monitor the status of the power supply ( $V_{CC}$ ). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When  $V_{CC}$  returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350 ms to allow the power supply and processor to stabilize.

## OPERATION - POWER MONITOR

The DS1233D provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When  $V_{CC}$  is detected as out of tolerance as defined by the tolerance of the part selected, the  $\overline{RST}$  signal is asserted. On power-up,  $\overline{RST}$  is kept active for approximately 350 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before  $\overline{RST}$  is released.

**BLOCK DIAGRAM Figure 1****APPLICATION EXAMPLE Figure 2**

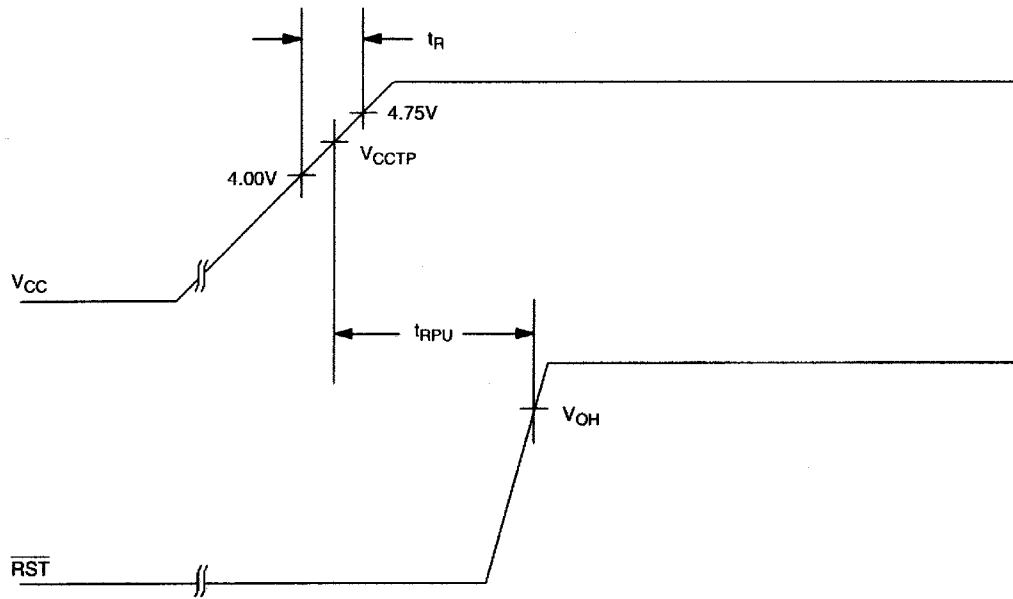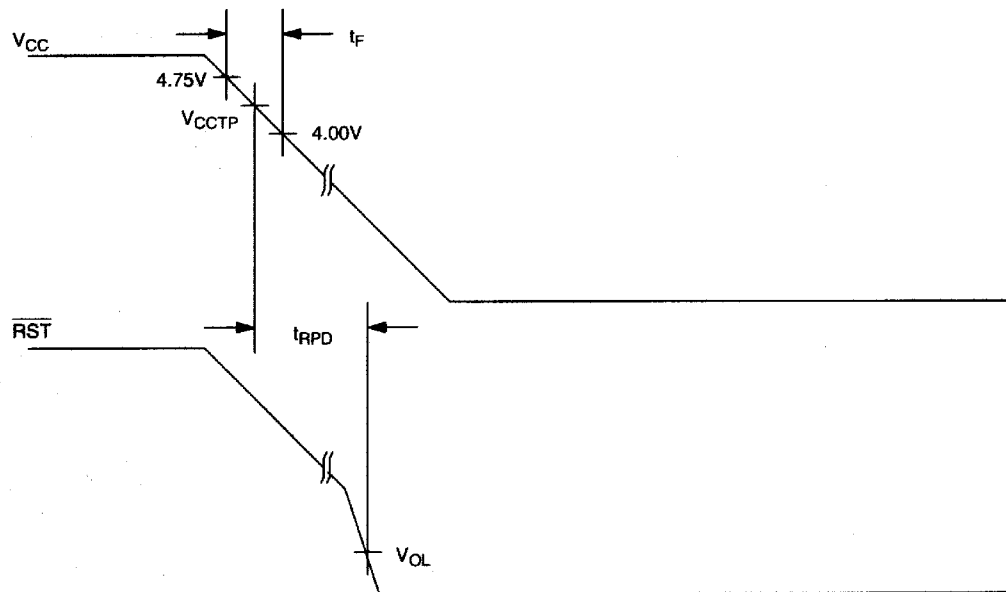**POWER UP Figure 3****POWER DOWN Figure 4**

**ABSOLUTE MAXIMUM RATINGS\***

|                                                   |                                |
|---------------------------------------------------|--------------------------------|
| Voltage on V <sub>CC</sub> Pin Relative to Ground | -0.5V to +7.0V                 |
| Voltage on I/O Relative to Ground                 | -0.5V to V <sub>CC</sub> +0.5V |
| Operating Temperature                             | -40°C to +85°C                 |
| Storage Temperature                               | -55°C to +125°C                |
| Soldering Temperature                             | 260°C for 10 seconds           |

- \* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

**RECOMMENDED DC OPERATING CONDITIONS** (-40°C to +85°C)

| PARAMETER      | SYMBOL          | MIN | TYP | MAX | UNITS | NOTES |
|----------------|-----------------|-----|-----|-----|-------|-------|
| Supply Voltage | V <sub>CC</sub> | 1.2 | 5.0 | 5.5 | V     | 1     |

**DC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C; V<sub>DD</sub>=5V ± 10%)

| PARAMETER                           | SYMBOL             | MIN  | TYP   | MAX  | UNITS | NOTES |
|-------------------------------------|--------------------|------|-------|------|-------|-------|
| Low Level @ $\overline{\text{RST}}$ | V <sub>OL</sub>    |      |       | 0.4  | V     | 1     |
| Output Current @ 0.4V               | I <sub>OL</sub>    | +8   |       |      | mA    | 2     |
| Operating Current                   | I <sub>CC</sub>    |      |       | 50   | μA    |       |
| V <sub>CC</sub> Trip Point 5%       | V <sub>CCTP1</sub> | 4.5  | 4.625 | 4.74 | V     | 1     |
| V <sub>CC</sub> Trip Point 10%      | V <sub>CCTP2</sub> | 4.25 | 4.375 | 4.49 | V     | 1     |
| V <sub>CC</sub> Trip Point 15%      | V <sub>CCTP3</sub> | 4.0  | 4.125 | 4.24 | V     | 1     |
| Output Capacitance                  | C <sub>OUT</sub>   |      |       | 10   | pF    |       |
| Internal Pull-Up Resistor           | R <sub>P</sub>     | 3.75 | 5     | 6.25 | kΩ    |       |

**AC ELECTRICAL CHARACTERISTICS** (-40°C to +85°C; V<sub>CC</sub>=5V ± 10%)

| PARAMETER                                         | SYMBOL           | MIN | TYP | MAX | UNITS | NOTES |
|---------------------------------------------------|------------------|-----|-----|-----|-------|-------|
| Reset Active Time                                 | t <sub>RST</sub> | 250 | 350 | 450 | ms    |       |
| V <sub>CC</sub> Detect to $\overline{\text{RST}}$ | t <sub>RPD</sub> |     |     | 100 | ns    |       |
| V <sub>CC</sub> Slew Rate (4.75V - 4.00V)         | t <sub>F</sub>   | 300 |     |     | μs    |       |
| V <sub>CC</sub> Slew Rate (4.00V - 4.75V)         | t <sub>R</sub>   | 0   |     |     | ns    |       |
| V <sub>CC</sub> Detect to RST                     | t <sub>RPU</sub> | 250 | 350 | 450 | ms    |       |

**NOTES:**

1. All voltages are referenced to ground.
2. A 1 kΩ external resistor may be required for proper operation of the microprocessor reset control circuit.

**ECONORESET SELECTION GUIDE**

|             |            | VCC TRIP POINT |       |      | PUSHBUTTON DETECT |     |     |
|-------------|------------|----------------|-------|------|-------------------|-----|-----|
|             |            | MIN            | TYP   | MAX  | MIN               | TYP | MAX |
| <b>5V</b>   | DS1233-15  | 4.0            | 4.125 | 4.24 | 2.4               | -   | 3.3 |
|             | DS1233-10  | 4.25           | 4.375 | 4.49 | 2.4               | -   | 3.3 |
|             | DS1233-5   | 4.5            | 4.625 | 4.75 | 2.4               | -   | 3.3 |
|             | DS1233D-15 | 4.0            | 4.125 | 4.24 | N/A               |     | N/A |
|             | DS1233D-10 | 4.25           | 4.375 | 4.49 | N/A               |     | N/A |
|             | DS1233D-5  | 4.5            | 4.625 | 4.75 | N/A               |     | N/A |
|             | DS1833-15  | 4.0            | 4.125 | 4.24 | N/A               |     | N/A |
|             | DS1833-10  | 4.25           | 4.375 | 4.49 | N/A               |     | N/A |
|             | DS1833-5   | 4.5            | 4.625 | 4.75 | N/A               |     | N/A |
| <b>3.3V</b> | DS1233A-15 | 2.64           | 2.72  | 2.80 | 1.8               | -   | 3.0 |
|             | DS1233A-10 | 2.8            | 2.88  | 2.97 | 1.8               | -   | 3.0 |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9