

## 47 $\mu$ F AC-Coupling Capacitor 4in-2out Video Driver with Isolation Amplifier

### ■GENERAL DESCRIPTION

**NJW1342** is 47 $\mu$ F AC-Coupling Capacitor 4in-2out Video Driver with Isolation Amplifier. It can remove common mode noise because internal Isolation amplifier. It can reduce (47 $\mu$ F) usual output capacitor by NJRC original "ASC(Advanced SAG Correction)", and contributes to space saving.

**NJW1342** is the best for the switch of the video signal of car AV.

### ■PACKAGE OUTLINE




**NJW1342V**


### ■FEATURES

- Operating Voltage 3.0 to 6.0V
- Small output coupling capacitor 47 $\mu$ F
- Internal Isolation Amplifier
- 4-input 2-output selector
- Internal 6dB Amplifier, 75ohm Driver
- I2C Bus Interface
- Bi-CMOS Technology
- Package Outline SSOP32

### ■BLOCK DIAGRAM

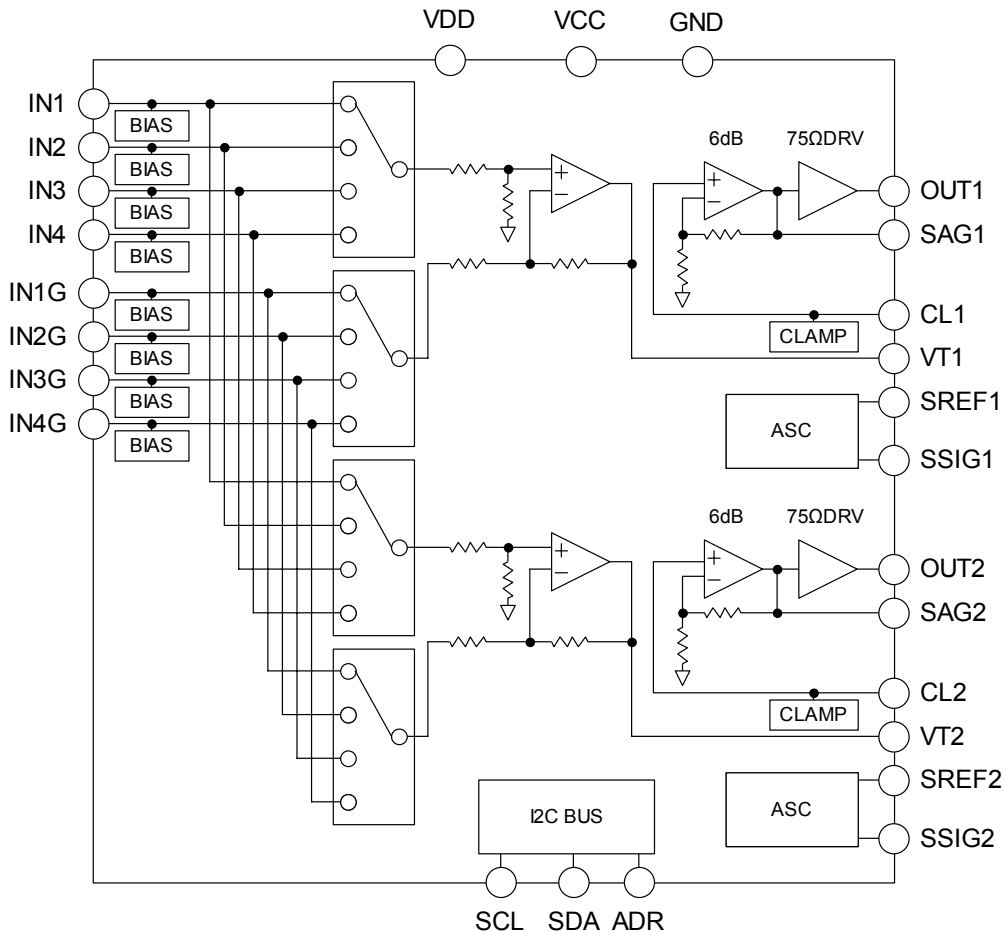

## ■PIN CONFIGURATION

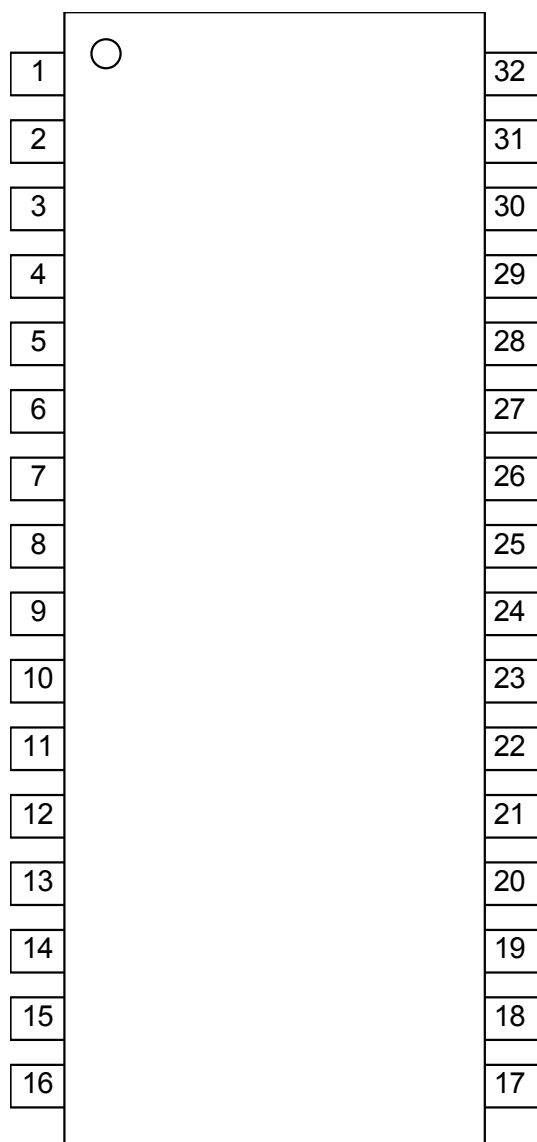

- |          |           |
|----------|-----------|
| 1. VCC   | 17. SDA   |
| 2. IN1   | 18. SCL   |
| 3. IN1G  | 19. SREF2 |
| 4. GND   | 20. SSIG2 |
| 5. IN2   | 21. SAG2  |
| 6. IN2G  | 22. OUT2  |
| 7. NC    | 23. CL2   |
| 8. IN3   | 24. VT2   |
| 9. IN3G  | 25. VCC   |
| 10. VCC  | 26. GND   |
| 11. IN4  | 27. VT1   |
| 12. IN4G | 28. CL1   |
| 13. NC   | 29. OUT1  |
| 14. VDD  | 30. SAG1  |
| 15. ADR  | 31. SSIG1 |
| 16. GND  | 32. SREF1 |

## ■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	7.0	V
Power Dissipation	P <sub>D</sub>	1100(note1)	mW
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-40 to +150	°C

(Note1) At on a board of EIA/JEDEC specification. (114.3 x 76.2 x 1.6mm Two layers, FR-4)

## ■RECCOMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating voltage	Vopr		3.0	-	5.5	V


## ■ELECTRICAL CHARACTERISTICS (VCC,VDD=5V, RL=150ohm, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	Icc1	No signal	-	60	100	mA
Supply Current	Icc2	OUT1:active, OUT2:power save	-	30	60	mA
Supply Current	Icc3	OUT1:power save, OUT2:active	-	30	60	mA
Supply Current	Icc4	VDD	-	0.5	1	mA
Supply Current at Power Save Mode	Isave	Power save mode	-	2	4	mA
Maximum Output Level	Vom	Vin=100kHz,sin-signal,THD=1%,	2.0	2.2	-	Vp-p
Voltage Gain	Gv	Vin=1MHz,1.0Vp-p sin-signal	5.5	6.0	6.5	dB
Frequency Characteristic	Gf	Vin=10MHz / 1MHz , 1.0Vpp sin-signal	-1.0	0	1.0	dB
Common Mode Noise Ratio	CMR	Vin=20KHz,Vin=1Vpp	-	-55	-	dB
Cross-talk	CT-1	Vin=4.43MHz, 1.0Vp-p sin-signal	-	-60	-	dB
Differential Gain	DG	Vin=1.0Vp-p 10step video-signal	-	0.5	-	%
Differential Phase	DP	Vin=1.0Vp-p 10step video-signal	-	0.5	-	deg

## ■PORT

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
ADR Input Voltage High Level	V <sub>ADRH</sub>		2.2		Vcc	
ADR Input Voltage Low Level	V <sub>ADRL</sub>		0	-	1.0	V

## ■TIMING on the I<sup>2</sup>C BUS (SDA, SCL)

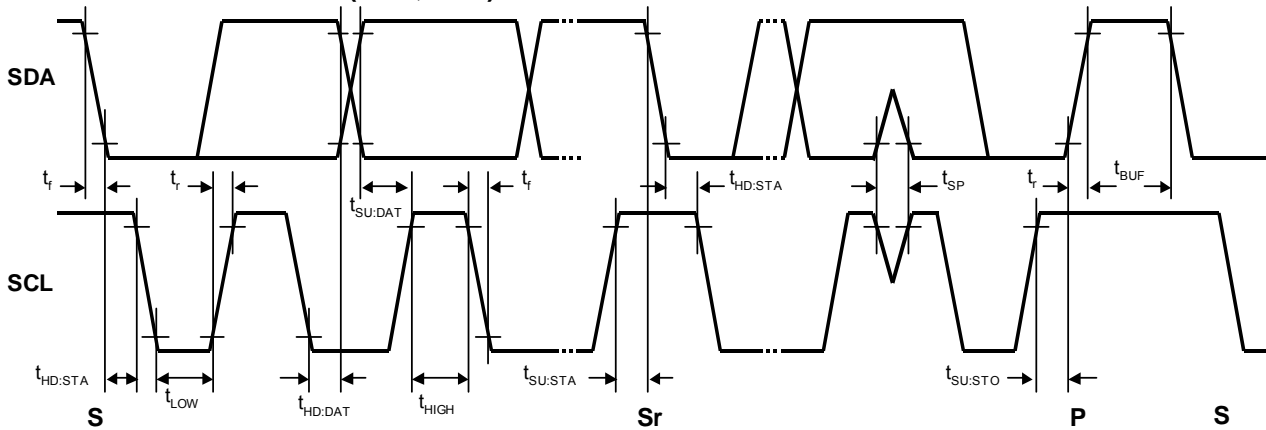

## ■CHARACTERISTICS OF BUS LINES (SDA, SCL) FOR I<sup>2</sup>C BUS DEVICES

I<sup>2</sup>C BUS Load Conditions

STANDARD MODE : Pull up resistance 4k $\Omega$  (Connected to +3.3V), Load capacitance 200pF (Connected to GND)

FAST MODE : Pull up resistance 4k $\Omega$  (Connected to +3.3V), Load capacitance 50pF (Connected to GND)


PARAMETER	SYM BOL	Standard mode			Fast mode			UNI T
		MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Low Level Input Voltage	V <sub>IL</sub>	0.0	-	1.2	0.0	-	1.2	V
High Level Input Voltage	V <sub>IH</sub>	2.4	-	5.0	2.4	-	5.0	V
Hysteresis of Schmitt Trigger Inputs	V <sub>hys</sub>	-	-	-	0.25	-	-	V
Low level Output Voltage (3mA at SDA pin)	V <sub>OL</sub>	0	-	0.4	0	-	0.4	V
Output Fall Time From V <sub>IHmin</sub> to V <sub>ILmax</sub> with a Bus Capacitance from 10pF to 400pF	t <sub>of</sub>	-	-	250	20 +0.1C <sub>b</sub>	-	250	ns
Pulse width of spikes which must be suppressed by the input filter	t <sub>SP</sub>	-	-	-	0	-	50	ns
Input Current each I/O pin with an Input Voltage between 0.1 and 0.9V <sub>DDmax</sub>	I <sub>i</sub>	-10	-	10	-10	-	10	$\mu$ A
Capacitance for each I/O pin	C <sub>i</sub>	-	-	10	-	-	10	pF
SCL Clock Frequency	f <sub>SCL</sub>	-	-	100	-	-	400	kHz
Data Transfer Start Minimum Waiting Time	t <sub>HD:STA</sub>	4.0	-	-	0.6	-	-	$\mu$ s
Low Level Clock Pulse Width	t <sub>LOW</sub>	4.7	-	-	1.3	-	-	$\mu$ s
High Level Clock Pulse Width	t <sub>HIGH</sub>	4.0	-	-	0.6	-	-	$\mu$ s
Minimum Start Preparation Waiting Time	t <sub>SU:STA</sub>	4.7	-	-	0.6	-	-	$\mu$ s
Minimum Data Hold Time <sup>(NOTE)</sup>	t <sub>HD:DAT</sub>	0.0	-	-	0.0	-	-	$\mu$ s
Minimum Data Preparation Time	t <sub>SU:DAT</sub>	250	-	-	100	-	-	ns
Rise Time	t <sub>r</sub>	-	-	1000	-	-	300	ns
Fall Time	t <sub>f</sub>	-	-	300	-	-	300	ns
Minimum Stop Preparation Waiting Time	t <sub>SU:STO</sub>	4.0	-	-	0.6	-	-	$\mu$ s
Data Change Minimum Waiting Time	t <sub>BUF</sub>	4.7	-	-	1.3	-	-	$\mu$ s
Capacitive load for each bus line	C <sub>b</sub>	-	-	400	-	-	400	pF
Noise Margin at the Low Level	V <sub>nL</sub>	0.5	-	-	0.5	-	-	V
Noise Margin at the High Level	V <sub>nH</sub>	1	-	-	1	-	-	V

C<sub>b</sub> ; total capacitance of one bus line in pF.

(NOTE). Please hold the Data Hold Time (t<sub>HD:DAT</sub>) to 300ns or more to avoid status of unstable at SCL falling edge.

## ■ DEFINITION OF I<sup>2</sup>C REGISTER

### ◆ I<sup>2</sup>C BUS FORMAT

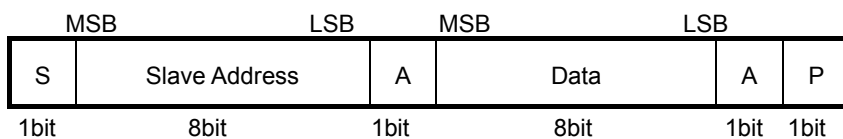

S: Starting Term

A: Acknowledge Bit

P: Ending Term

### ◆ SLAVE ADDRESS



R/W=0: Receive Only

R/W=1: Data is not transmitted.

ADR : Set the Slave Address by "ADR" terminal.

### ◆ CONTROL REGISTER DEFAULT VALUE

Control register default values are as follows :

	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
Data	0	0	0	0	0	0	0	0

### ◆ INSTRUCTION CODE

	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
Data	OUT1 MUTE	OUT1 Select		NOT USE:0	OUT2 MUTE	OUT2 Select		NOT USE:0

### ◆ MUTE TABLE

MUTE	OUT1
D7	
0	MUTE OFF
1	MUTE ON

MUTE	OUT2
D3	
0	MUTE OFF
1	MUTE ON

MUTE OFF: Active mode


MUTE ON: Power save mode

## ◆VOUT SELECT TABLE







OUT1 Select			OUT1
D6	D5	D4	
0	0	0	VIN1
0	1	0	VIN2
1	0	0	VIN3
1	1	0	VIN4

OUT2Select			OUT2
D2	D1	D0	
0	0	0	VIN1
0	1	0	VIN2
1	0	0	VIN3
1	1	0	VIN4

## TEST CIRCUIT






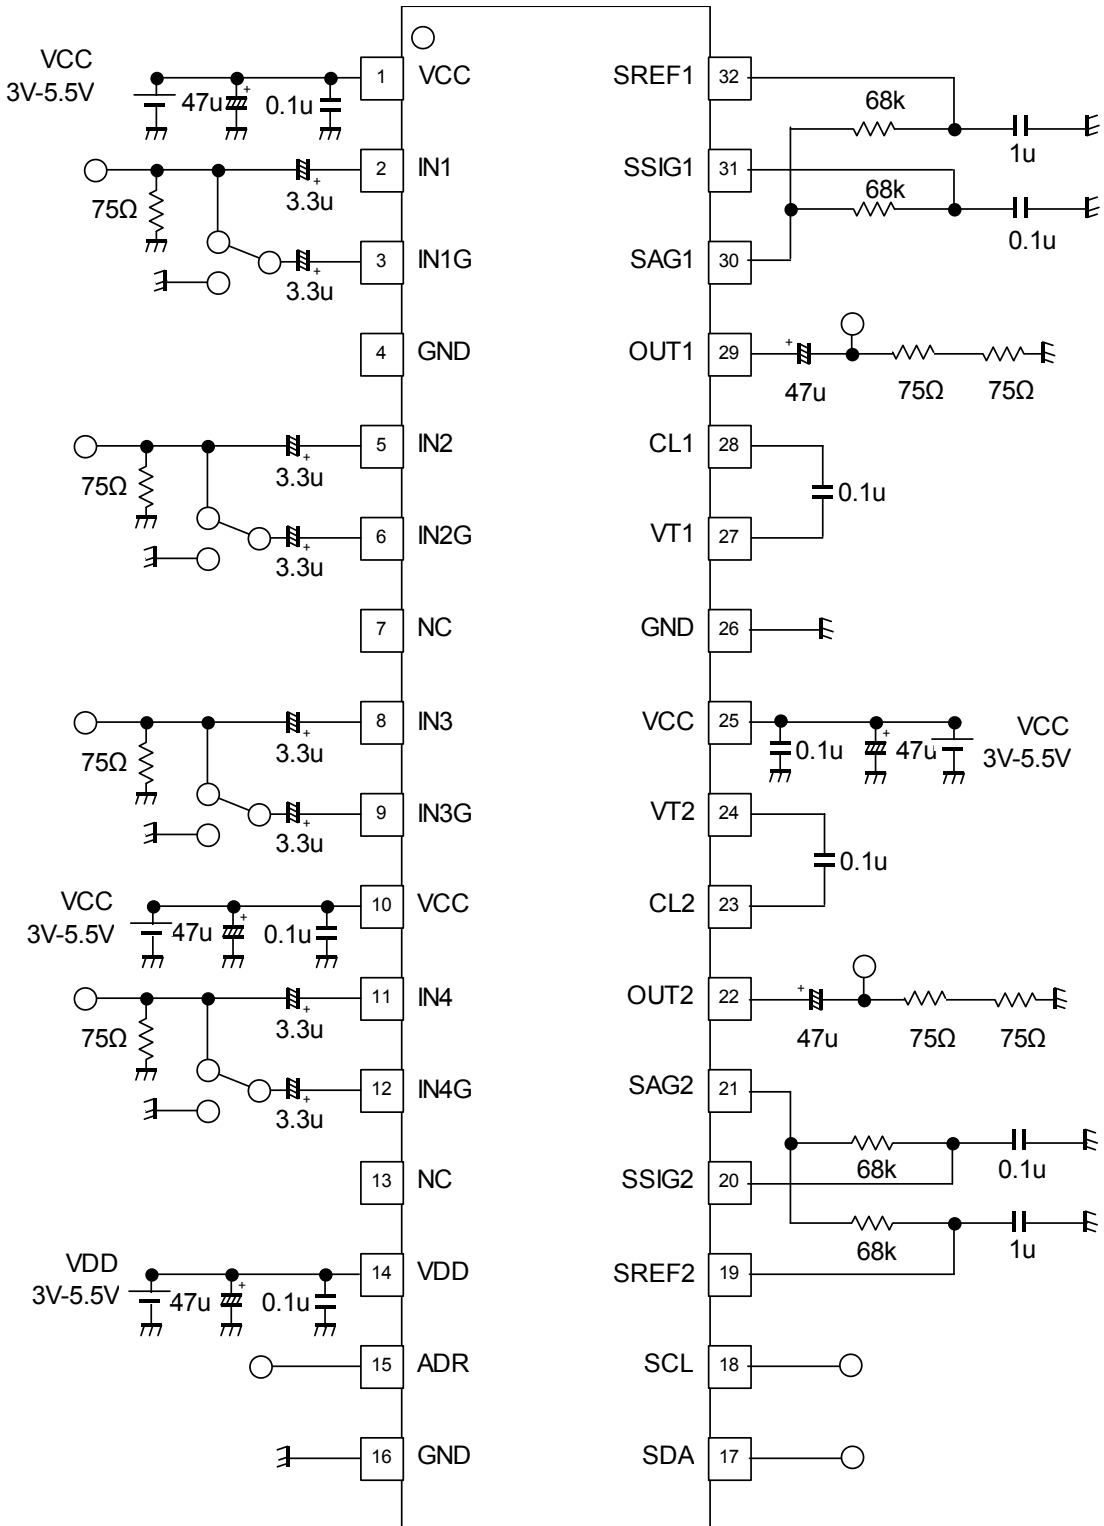


## TYPICAL CHARACTERISTICS

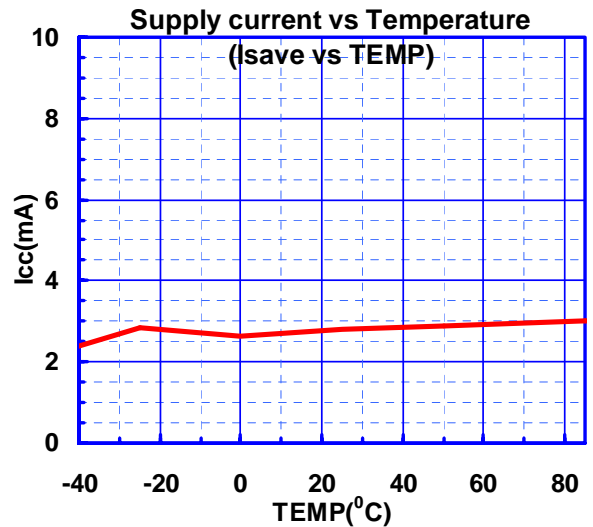
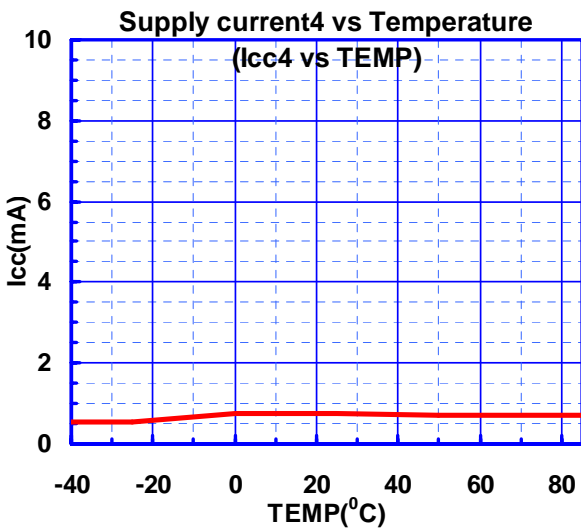
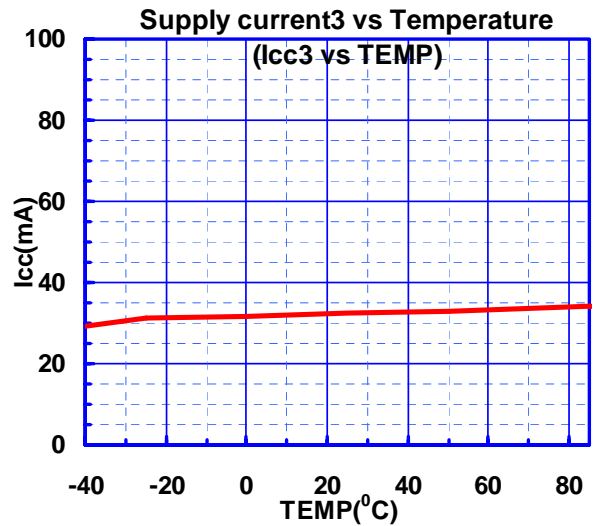
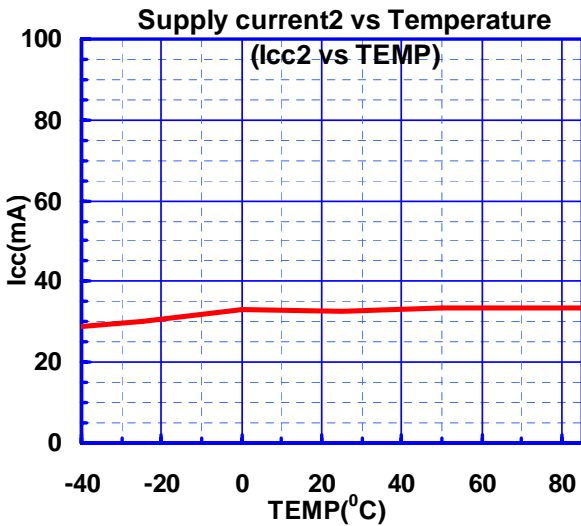
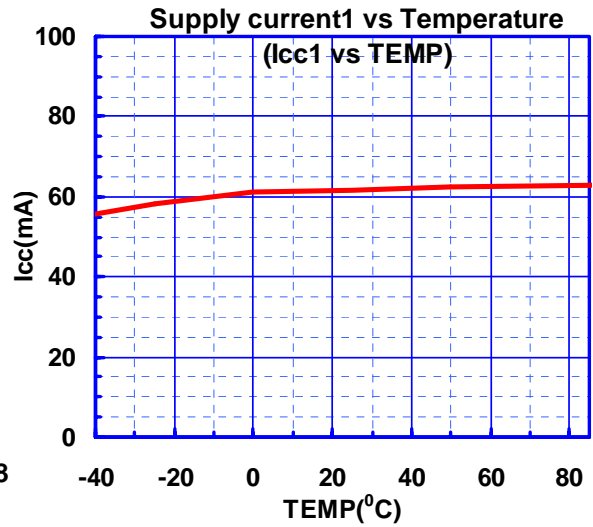
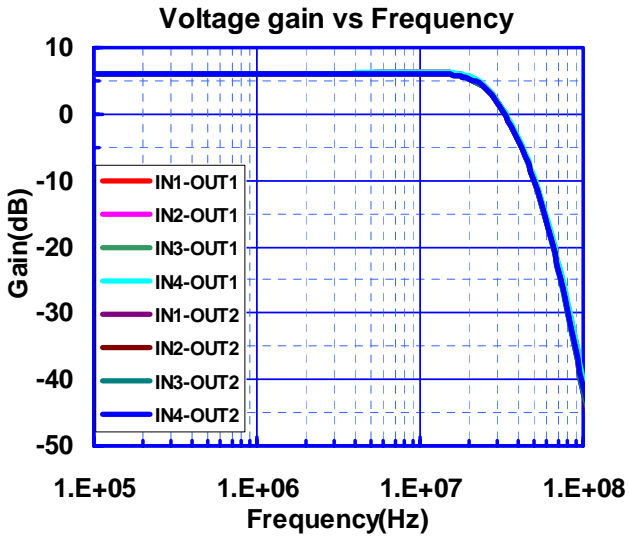










## TYPICAL CHARACTERISTICS

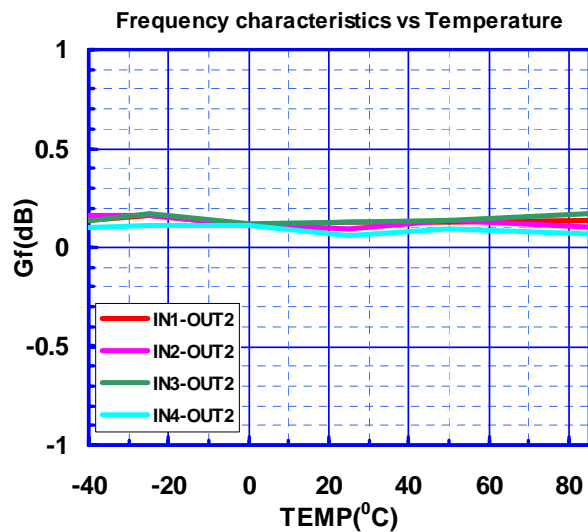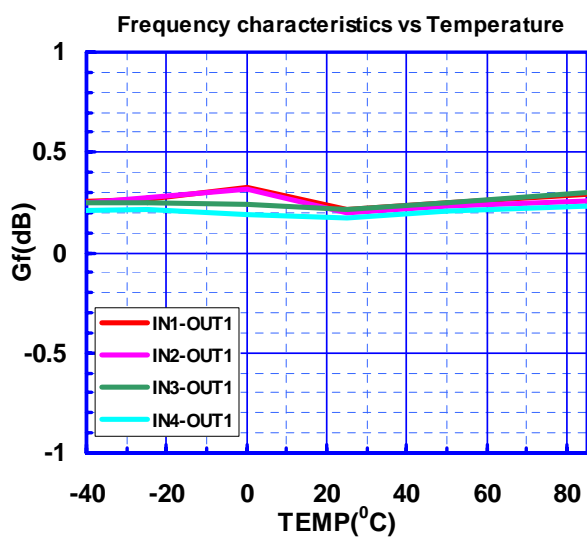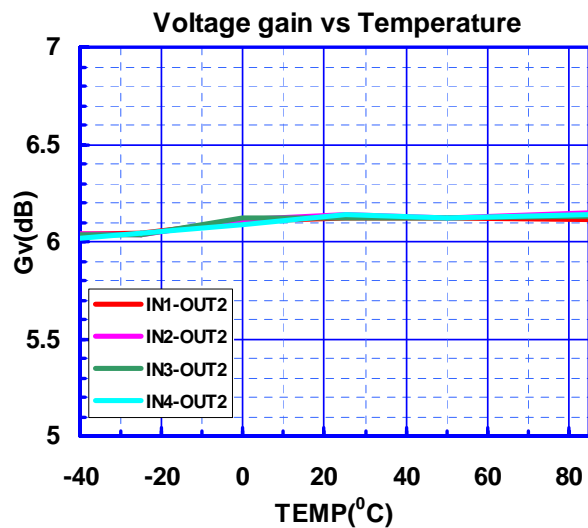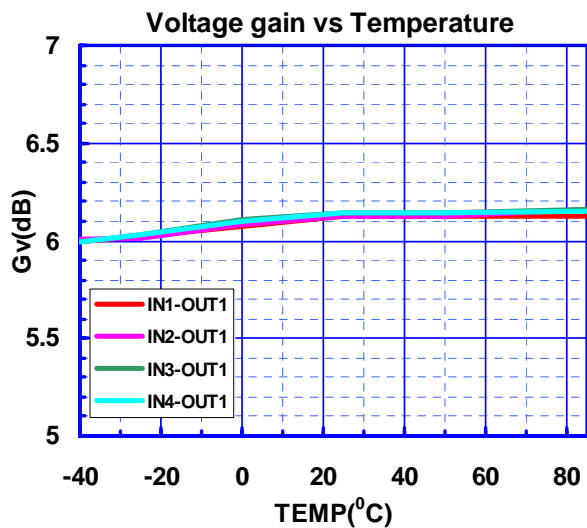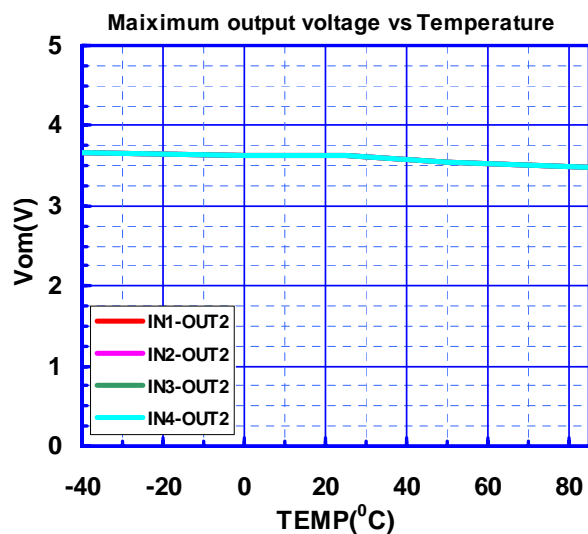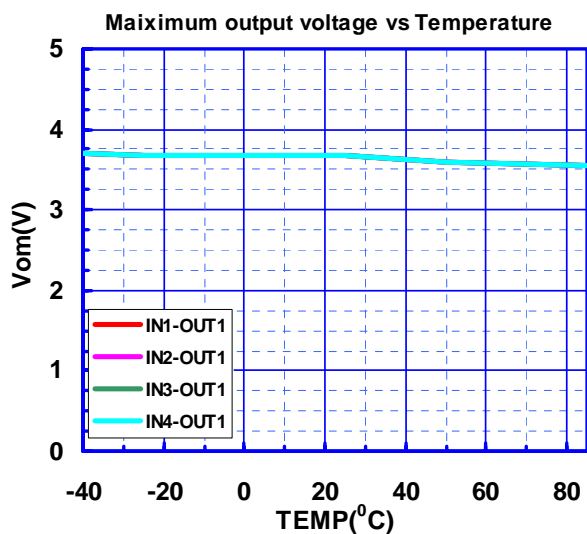





## TYPICAL CHARACTERISTICS

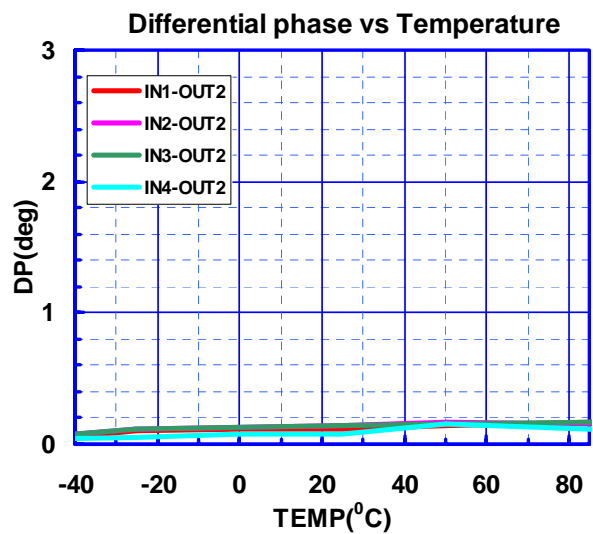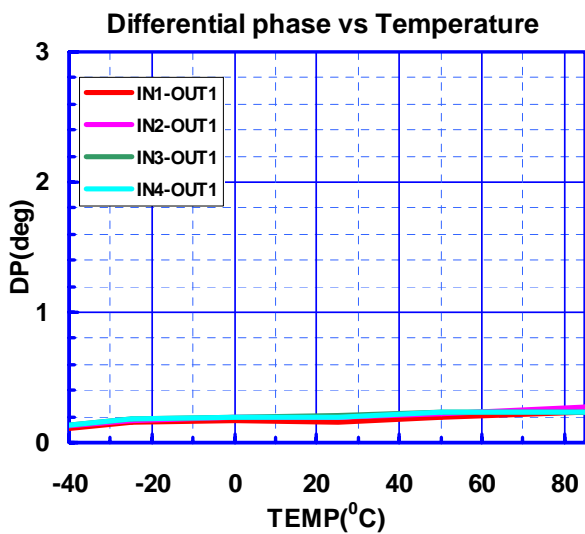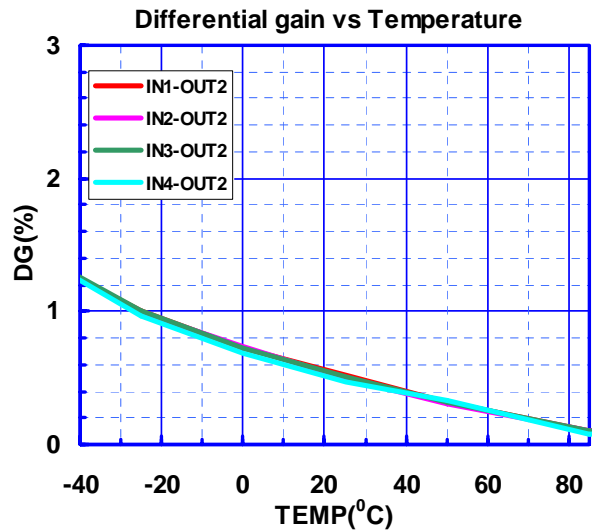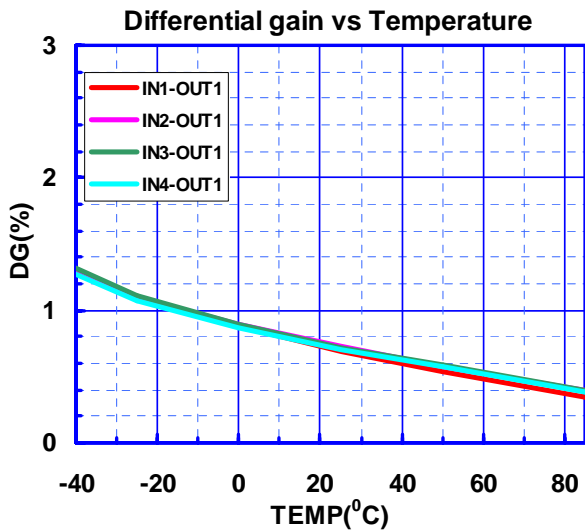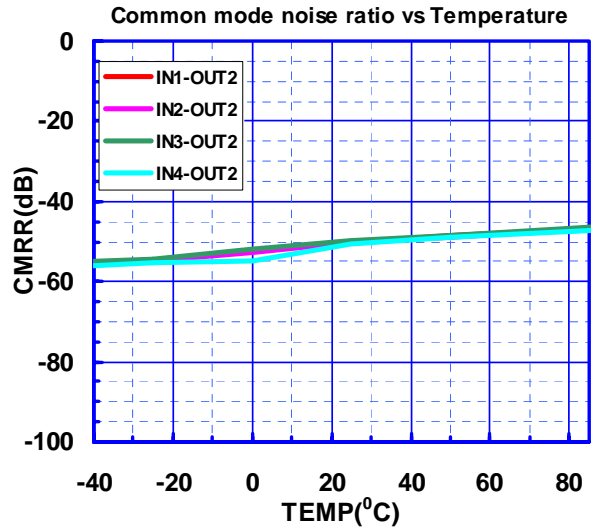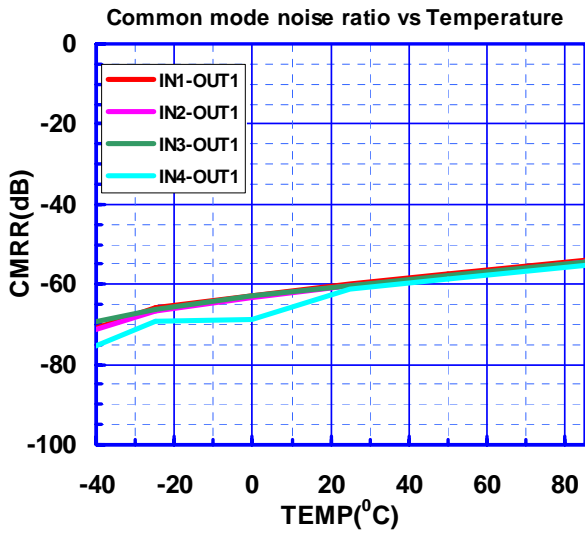






■ TYPICAL CHARACTERISTICS

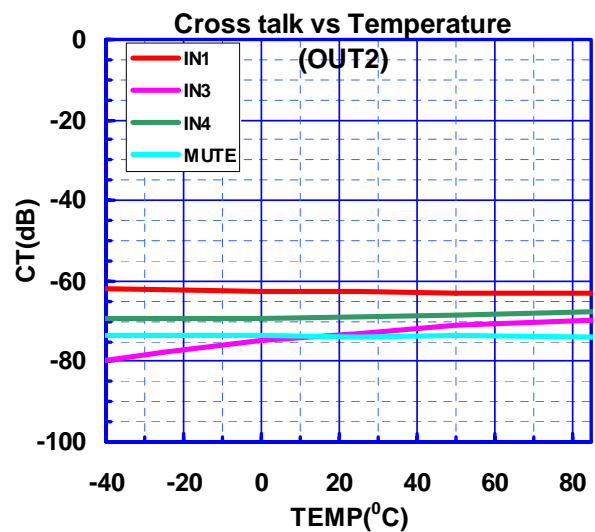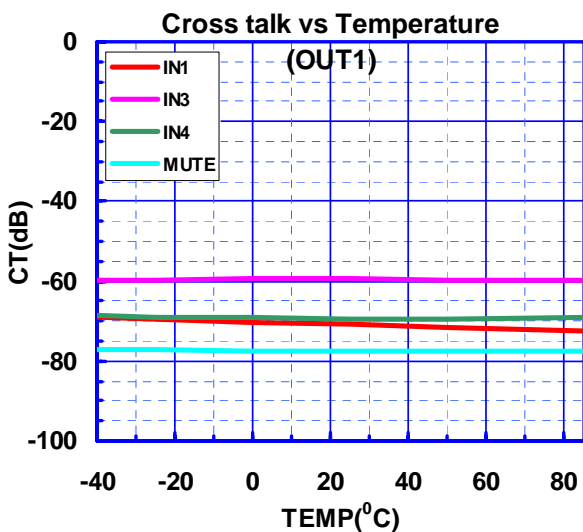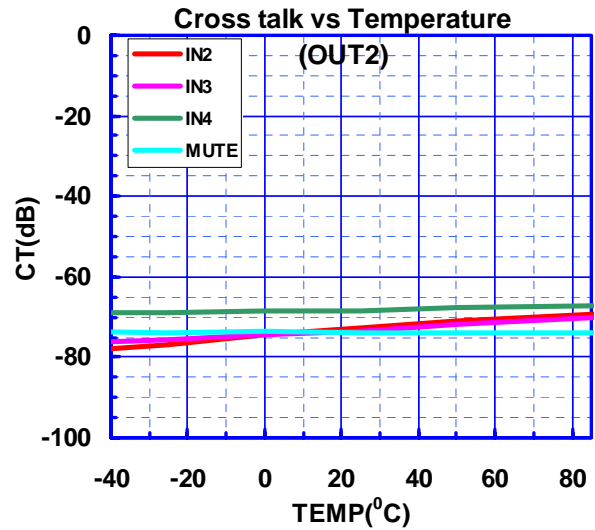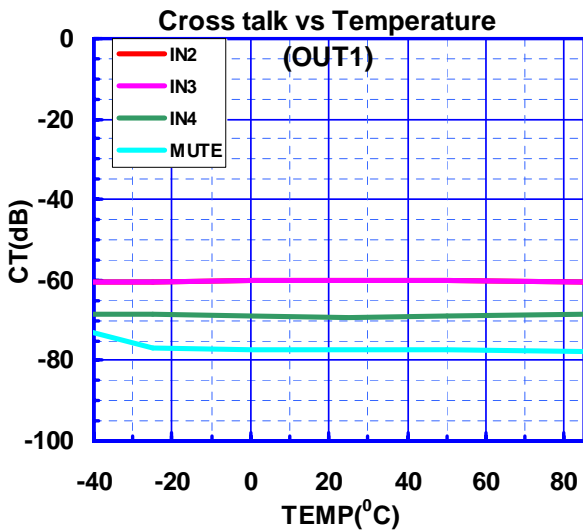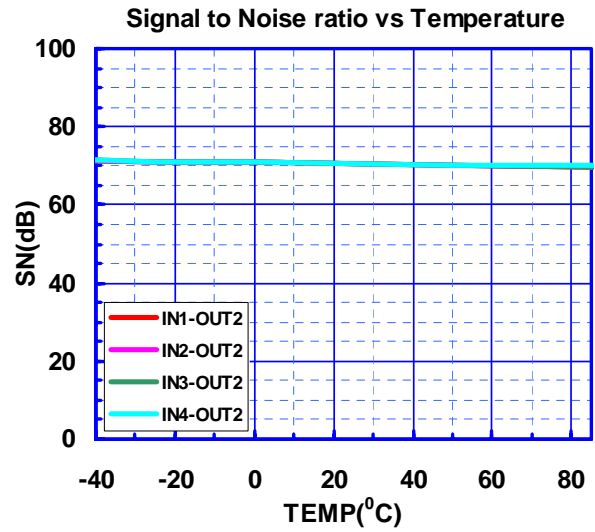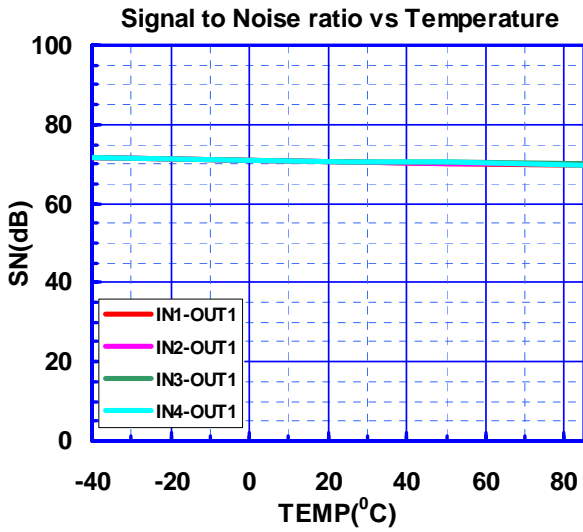







## TYPICAL CHARACTERISTICS

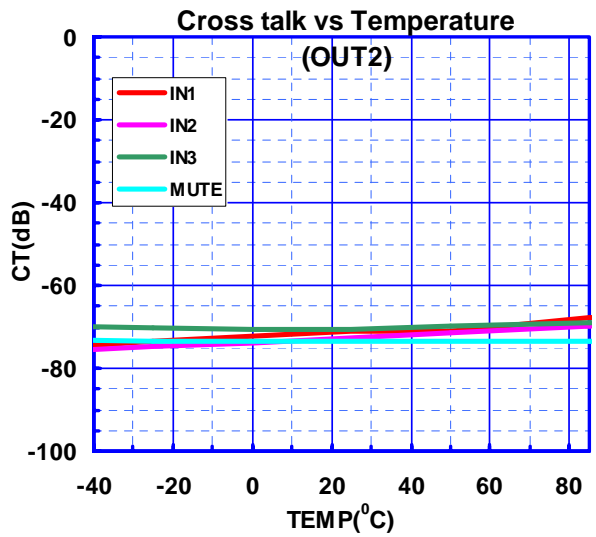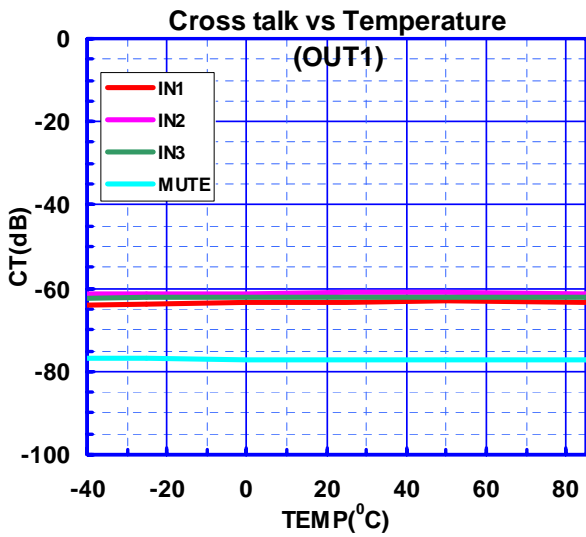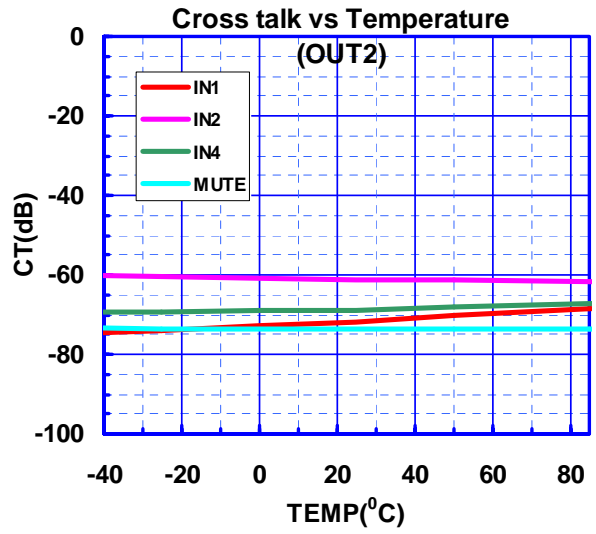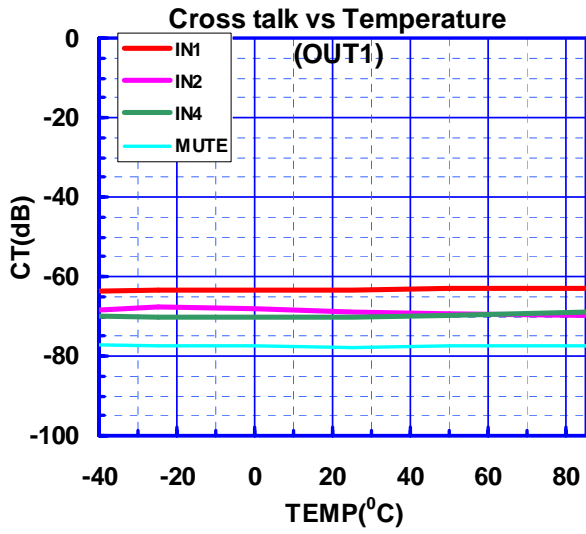







## TYPICAL CHARACTERISTICS

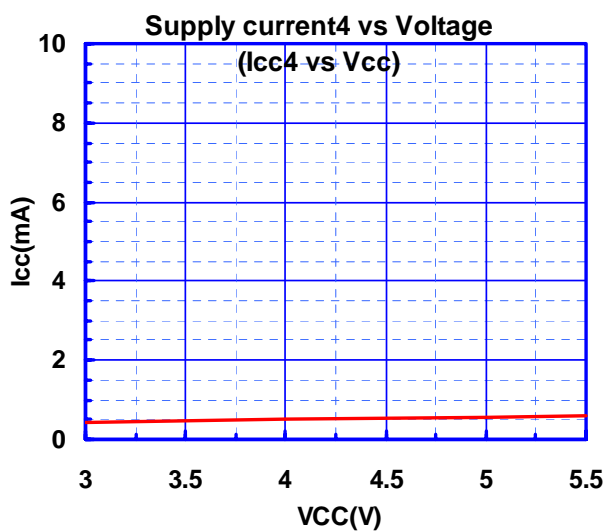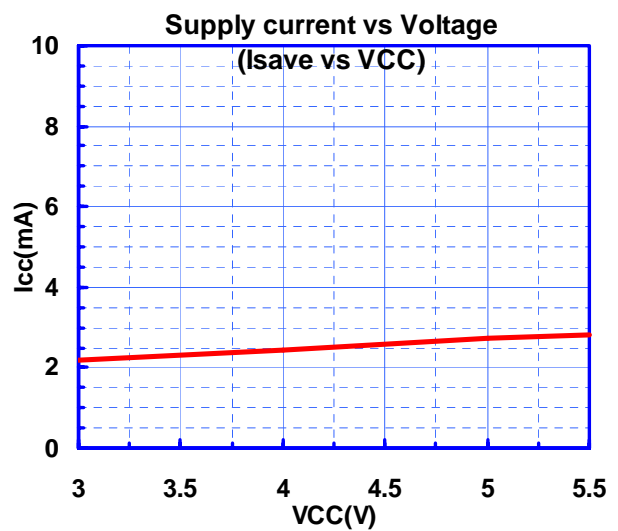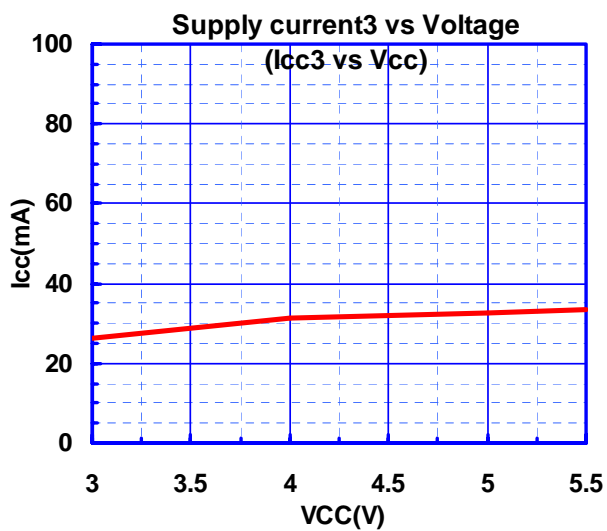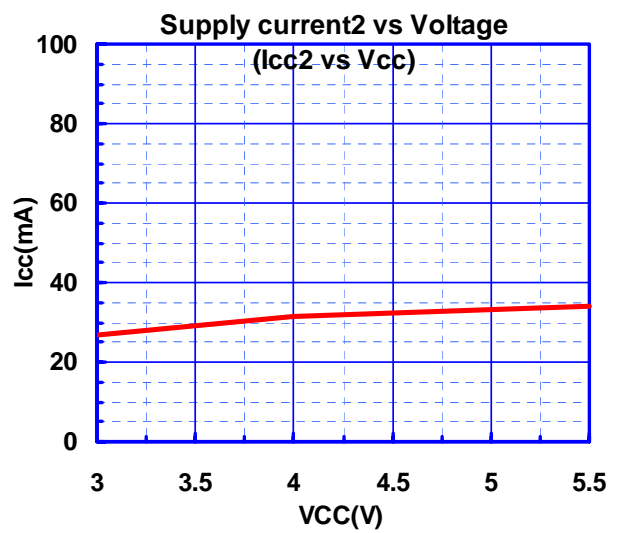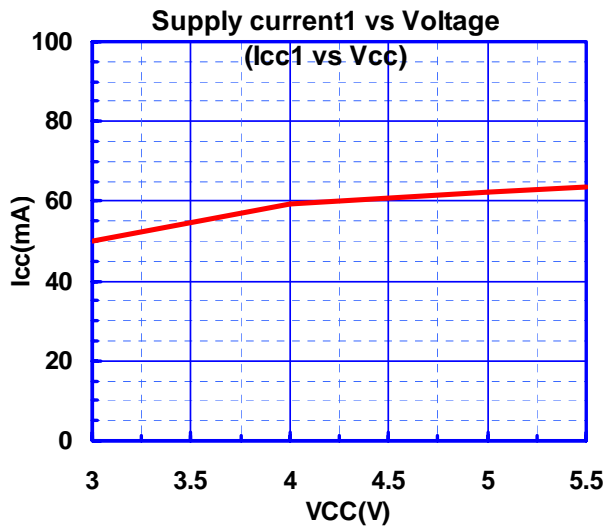







## TYPICAL CHARACTERISTICS

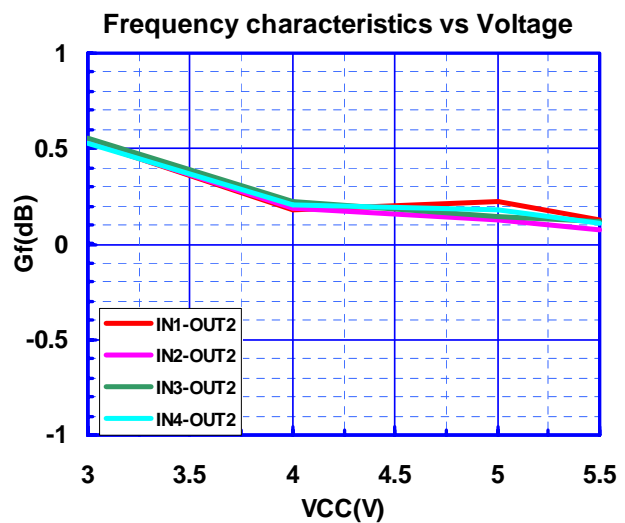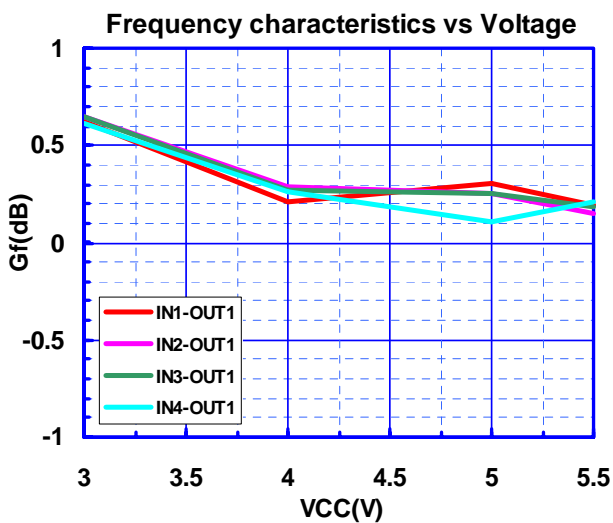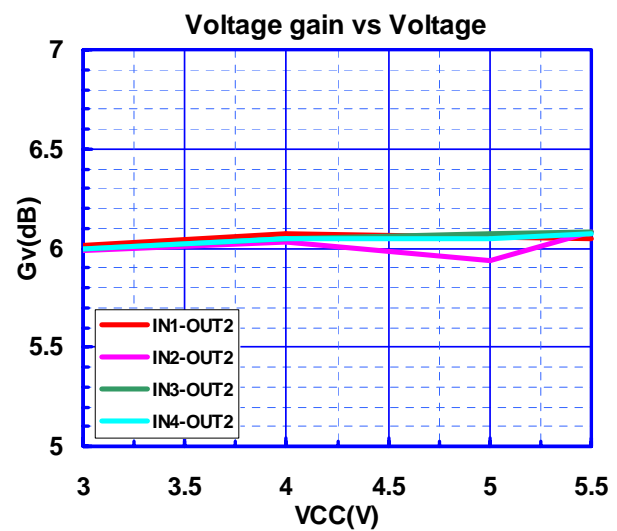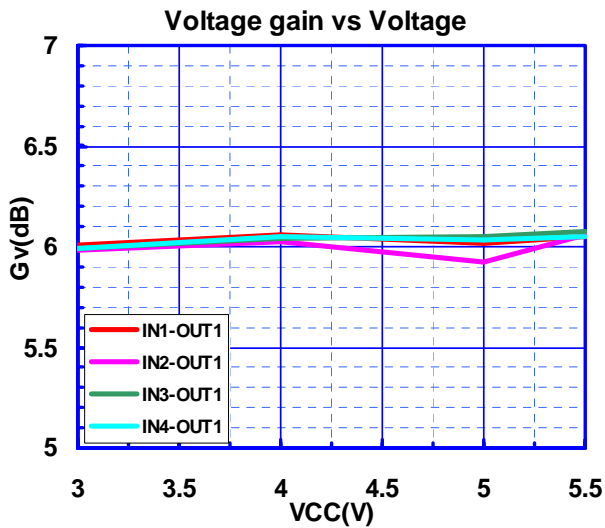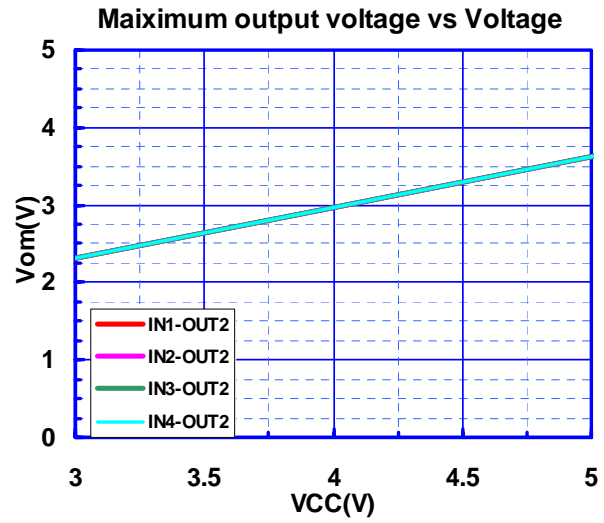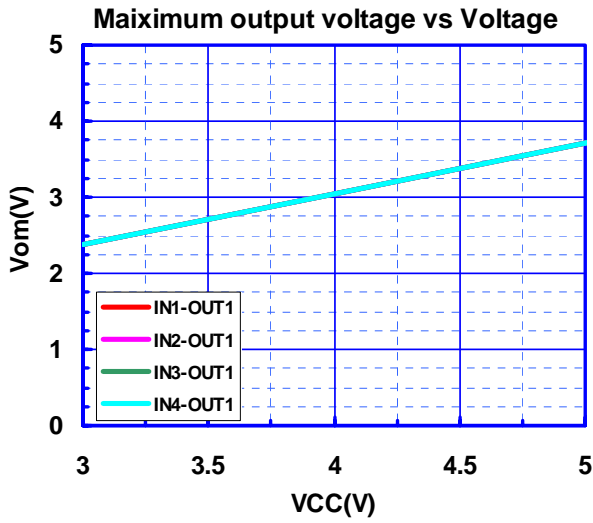

## TYPICAL CHARACTERISTICS

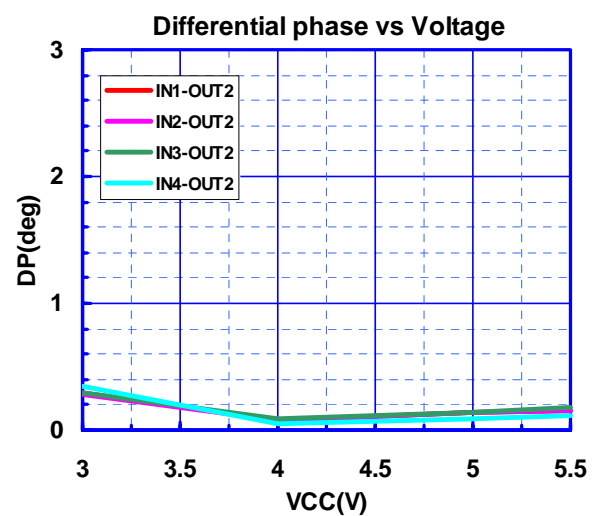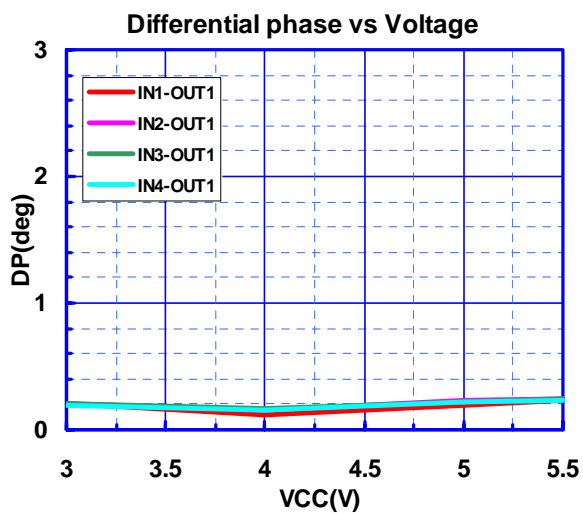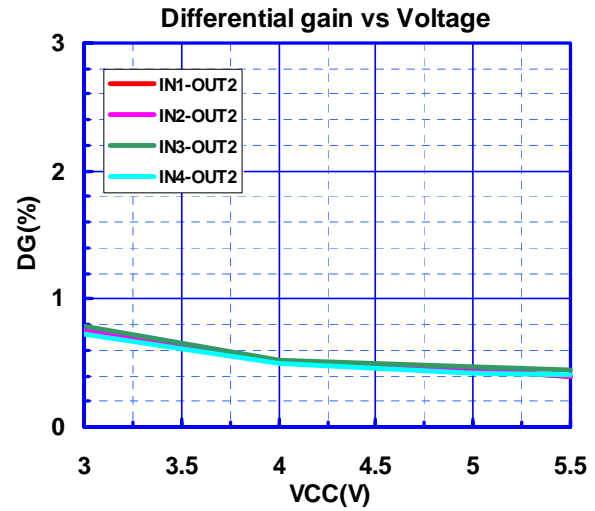
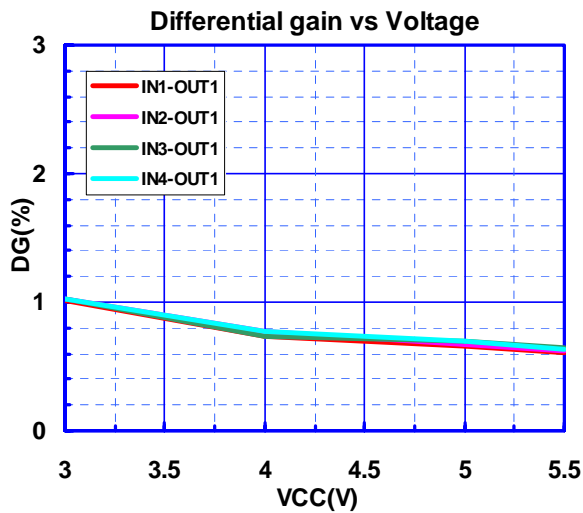
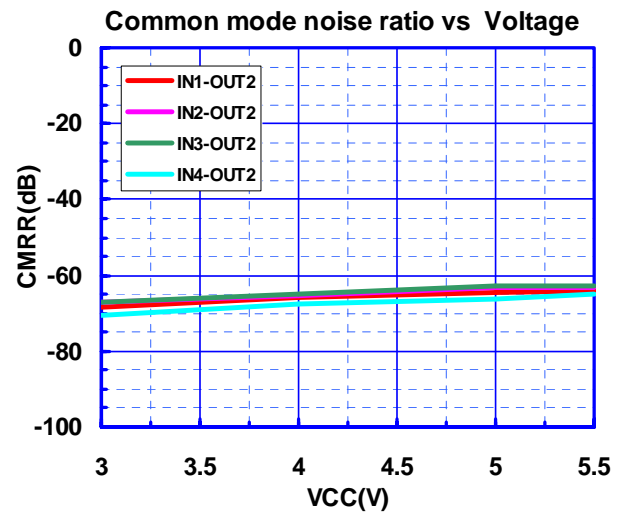
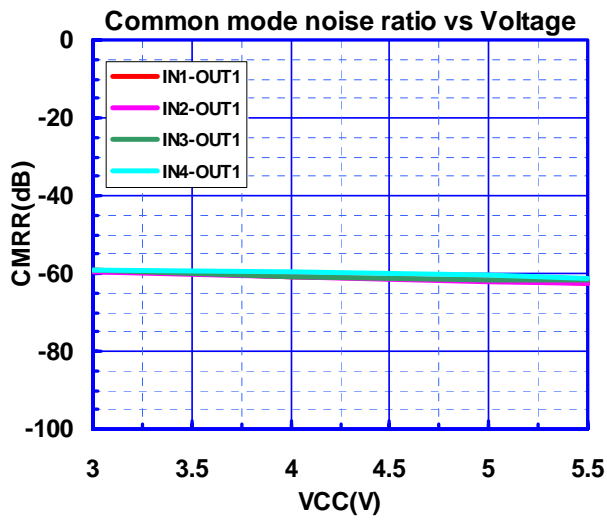


## TYPICAL CHARACTERISTICS

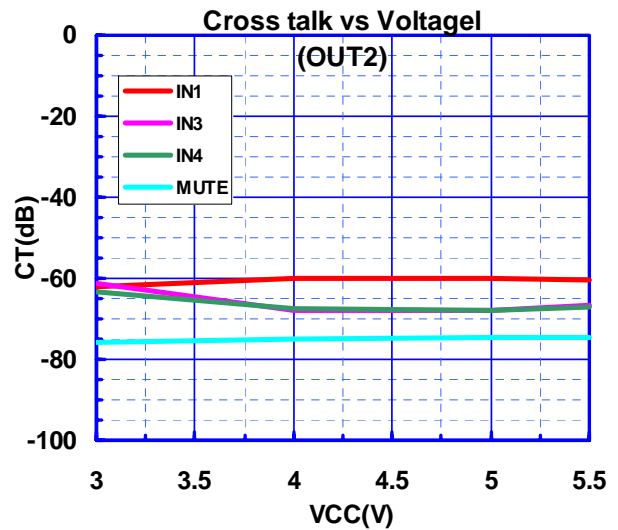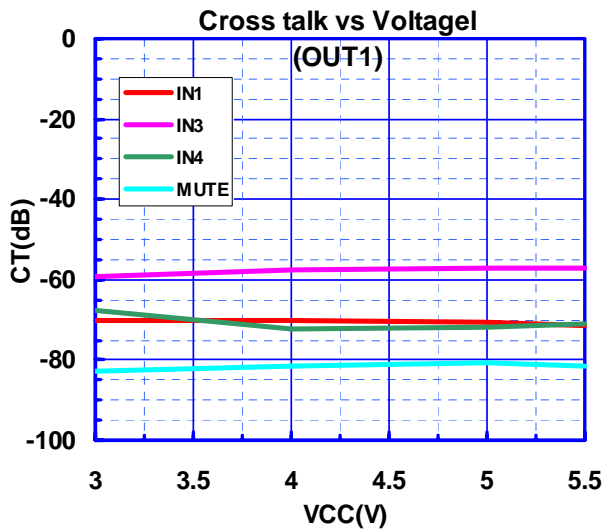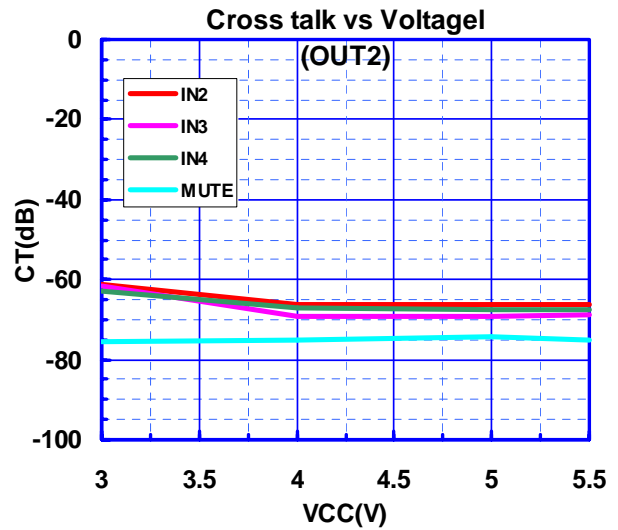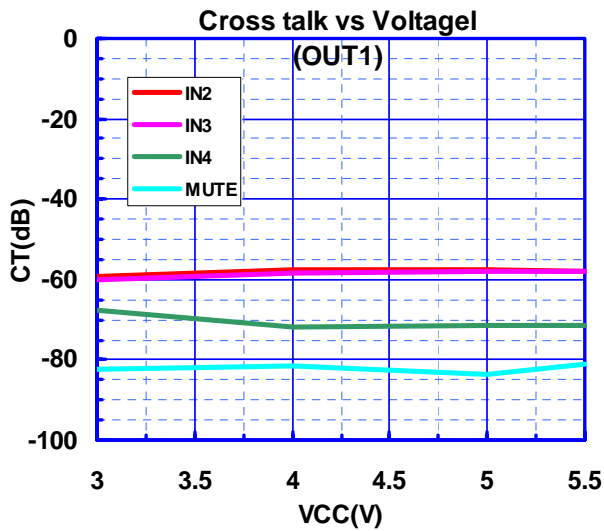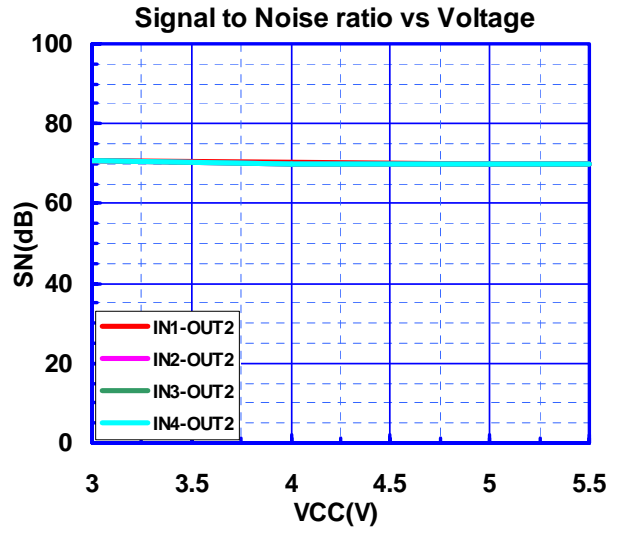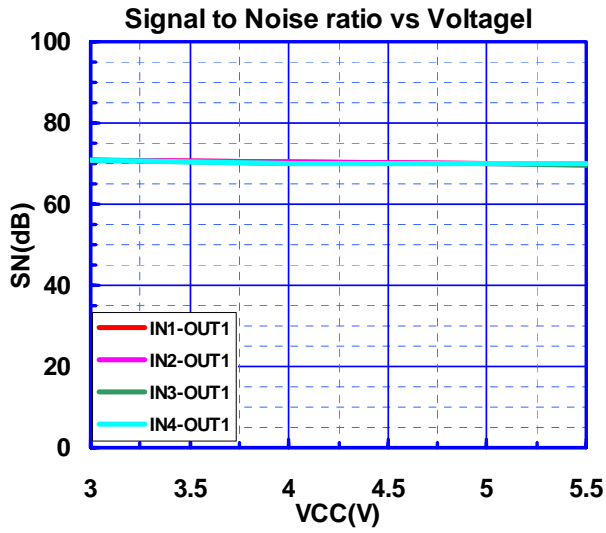



## TYPICAL CHARACTERISTICS

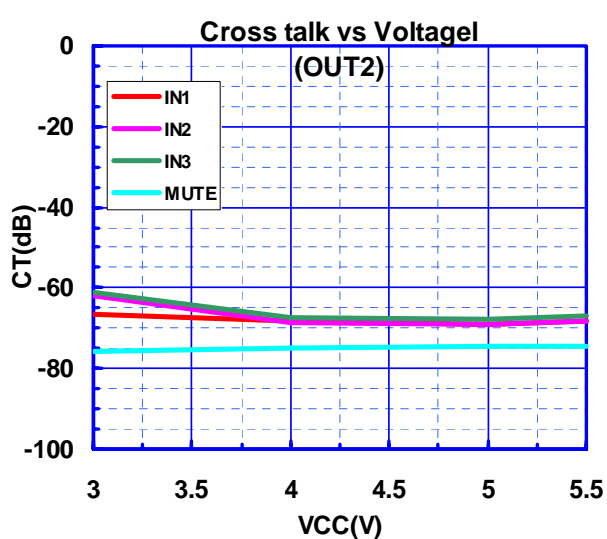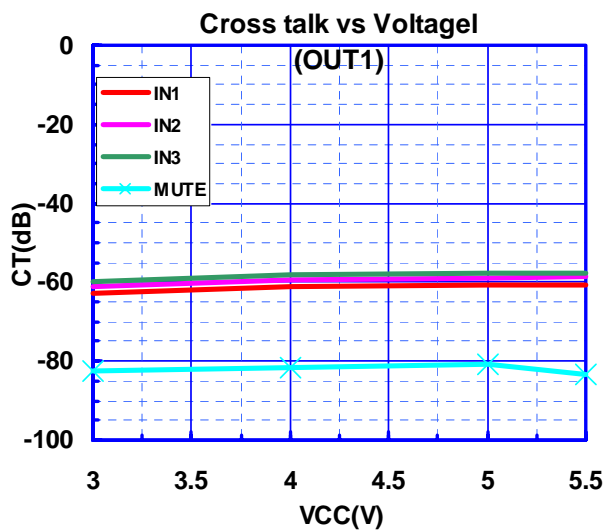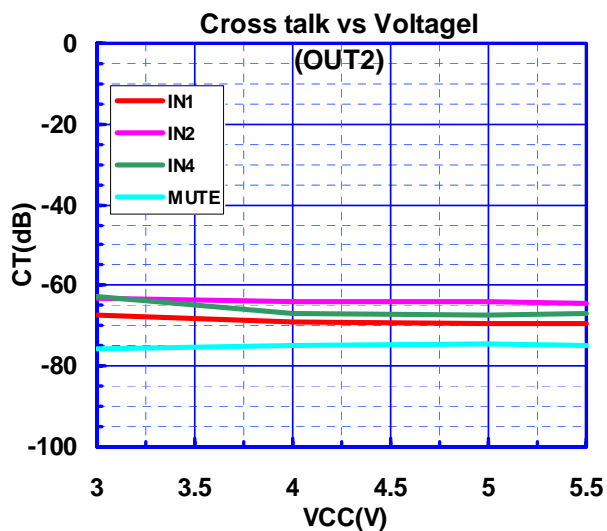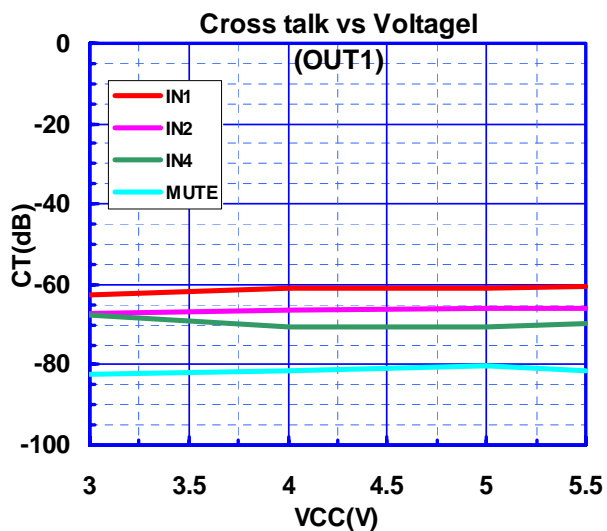

[CAUTION]  
 The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJW1342V-TE2](#)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9