


## Thunderbolt<sup>®</sup> High Speed NPT IGBT


The Thunderbolt HS<sup>™</sup> series is based on thin wafer non-punch through (NPT) technology similar to the Thunderbolt<sup>®</sup> series, but trades higher  $V_{CE(ON)}$  for significantly lower turn-on energy  $E_{off}$ . The low switching losses enable operation at switching frequencies over 100kHz, approaching power MOSFET performance but lower cost.

An extremely tight parameter distribution combined with a positive  $V_{CE(ON)}$  temperature coefficient make it easy to parallel Thunderbolts HS<sup>™</sup> IGBT's. Controlled slew rates result in very good noise and oscillation immunity and low EMI. The short circuit duration rating of 10 $\mu$ s make these IGBT's suitable for motor drive and inverter applications. Reliability is further enhanced by avalanche energy ruggedness. Combi versions are packaged with a high speed, soft recovery DQ series diode.

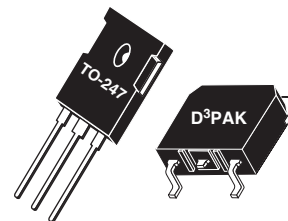


APT50GS60BR(G) APT50GS60SR(G)

### Features

- Fast Switching with low EMI
- Very Low  $E_{OFF}$  for Maximum Efficiency
- Short circuit rated
- Low Gate Charge
- Tight parameter distribution
- Easy paralleling
- RoHS Compliant 

### Typical Applications

- ZVS Phase Shifted and other Full Bridge
- Half Bridge
- High Power PFC Boost
- Welding
- Induction heating
- High Frequency SMPS



### Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
$I_{C1}$	Continuous Collector Current $T_C = @ 25^\circ C$	93	A
$I_{C1}$	Continuous Collector Current $T_C = @ 100^\circ C$	50	
$I_{CM}$	Pulsed Collector Current <sup>①</sup>	195	
$V_{GE}$	Gate-Emitter Voltage	$\pm 30V$	V
SSOA	Switching Safe Operating Area	195	
$E_{AS}$	Single Pulse Avalanche Energy <sup>②</sup>	280	mJ
$t_{SC}$	Short Circuit Withstand Time <sup>③</sup>	10	$\mu s$

### Thermal and Mechanical Characteristics

Symbol	Parameter	Min	Typ	Max	Unit
$P_D$	Total Power Dissipation $T_C = @ 25^\circ C$	-	-	415	W
$R_{\theta JC}$	Junction to Case Thermal Resistance	-	-	0.30	$^\circ C/W$
$R_{\theta CS}$	Case to Sink Thermal Resistance, Flat Greased Surface	-	0.11	-	
$T_J, T_{STG}$	Operating and Storage Junction Temperature Range	-55	-	150	$^\circ C$
$T_L$	Soldering Temperature for 10 Seconds (1.6mm from case)	-	-	300	
$W_T$	Package Weight	-	0.22	-	oz
		-	5.9	-	g
Torque	Mounting Torque (TO-247), 6-32 M3 Screw	-	-	10	in·lbf
		-	-	1.1	N·m



**CAUTION:** These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should be Followed.

Microsemi Website - <http://www.microsemi.com>

**Static Characteristics**
 **$T_J = 25^\circ\text{C}$  unless otherwise specified**
**APT50GS60B\_SR(G)**

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit	
$V_{BR(CES)}$	Collector-Emitter Breakdown Voltage	$V_{GE} = 0V, I_C = 250\mu A$	600	-	-	V	
$V_{BR(ECS)}$	Emitter-Collector Breakdown Voltage	$V_{GE} = 0V, I_C = 1A$	-	25	-		
$\Delta V_{BR(CES)}/\Delta T_J$	Breakdown Voltage Temperature Coeff	Reference to $25^\circ\text{C}$ , $I_C = 250\mu A$	-	0.60	-	$V/^\circ\text{C}$	
$V_{CE(ON)}$	Collector-Emitter On Voltage <sup>④</sup>	$V_{GE} = 15V$ $I_C = 50A$	$T_J = 25^\circ\text{C}$	-	2.8	3.15	V
			$T_J = 125^\circ\text{C}$	-	3.25	-	
$V_{EC}$	Diode Forward Voltage <sup>④</sup>	$I_C = 50A$	$T_J = 25^\circ\text{C}$	-	2.15	-	
			$T_J = 125^\circ\text{C}$	-	1.8	-	
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$V_{GE} = V_{CE}, I_C = 1mA$	3	4	5	$mV/^\circ\text{C}$	
$\Delta V_{GE(th)}/\Delta T_J$	Threshold Voltage Temp Coeff		-	6.7	-		
$I_{CES}$	Zero Gate Voltage Collector Current	$V_{CE} = 600V,$ $V_{GE} = 0V$	$T_J = 25^\circ\text{C}$	-	-	50	$\mu A$
			$T_J = 125^\circ\text{C}$	-	-	TBD	
$I_{GES}$	Gate-Emitter Leakage Current	$V_{GE} = \pm 20V$	-	-	$\pm 100$	nA	

**Dynamic Characteristics**
 **$T_J = 25^\circ\text{C}$  unless otherwise specified**

Symbols	Parameter	Test Conditions	Min	Typ	Max	Unit
$g_{fs}$	Forward Transconductance	$V_{CE} = 50V, I_C = 50A$	-	31	-	S
$C_{ies}$	Input Capacitance	$V_{GE} = 0V, V_{CE} = 25V$ $f = 1MHz$	-	2635	-	pF
$C_{oes}$	Output Capacitance		-	240	-	
$C_{res}$	Reverse Transfer Capacitance		-	145	-	
$C_{o(cr)}$	Reverse Transfer Capacitance Charge Related <sup>⑤</sup>	$V_{GE} = 0V$ $V_{CE} = 0$ to $400V$	-	115	-	
$C_{o(er)}$	Reverse Transfer Capacitance Current Related <sup>⑥</sup>		-	85	-	
$Q_g$	Total Gate Charge	$V_{GE} = 0$ to $15V$ $I_C = 50A, V_{CE} = 300V$	-	235	-	nC
$Q_{ge}$	Gate-Emitter Charge		-	18	-	
$G_{gc}$	Gate-Collector Charge		-	100	-	
$t_{d(on)}$	Turn-On Delay Time	Inductive Switching IGBT and Diode:  $T_J = 25^\circ\text{C}, V_{CC} = 400V,$ $I_C = 50A$ $R_G = 4.7\Omega$ <sup>⑦</sup> , $V_{GG} = 15V$	-	16	-	ns
$t_r$	Rise Time		-	33	-	
$t_{d(off)}$	Turn-Off Delay Time		-	225	-	
$t_f$	Fall Time		-	37	-	
$E_{on1}$	Turn-On Switching Energy <sup>⑧</sup>	Inductive Switching IGBT and Diode:  $T_J = 125^\circ\text{C}, V_{CC} = 400V,$ $I_C = 50A$ $R_G = 4.7\Omega$ <sup>⑦</sup> , $V_{GG} = 15V$	-	TBD	-	mJ
$E_{on2}$	Turn-On Switching Energy <sup>⑨</sup>		-	1.2	-	
$E_{off}$	Turn-Off Switching Energy <sup>⑩</sup>		-	0.755	-	
$t_{d(on)}$	Turn-On Delay Time	Inductive Switching IGBT and Diode:  $T_J = 125^\circ\text{C}, V_{CC} = 400V,$ $I_C = 50A$ $R_G = 4.7\Omega$ <sup>⑦</sup> , $V_{GG} = 15V$	-	33	-	ns
$t_r$	Rise Time		-	33	-	
$t_{d(off)}$	Turn-Off Delay Time		-	250	-	
$t_f$	Fall Time		-	23	-	
$E_{on1}$	Turn-On Switching Energy <sup>⑧</sup>	Inductive Switching IGBT and Diode:  $T_J = 125^\circ\text{C}, V_{CC} = 400V,$ $I_C = 50A$ $R_G = 4.7\Omega$ <sup>⑦</sup> , $V_{GG} = 15V$	-	TBD	-	mJ
$E_{on2}$	Turn-On Switching Energy <sup>⑨</sup>		-	1.7	-	
$E_{off}$	Turn-Off Switching Energy <sup>⑩</sup>		-	0.950	-	

# TYPICAL PERFORMANCE CURVES

APT50GS60B\_SR(G)

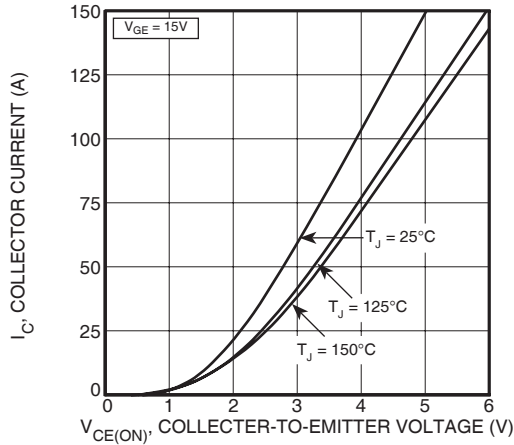


FIGURE 1, Output Characteristics

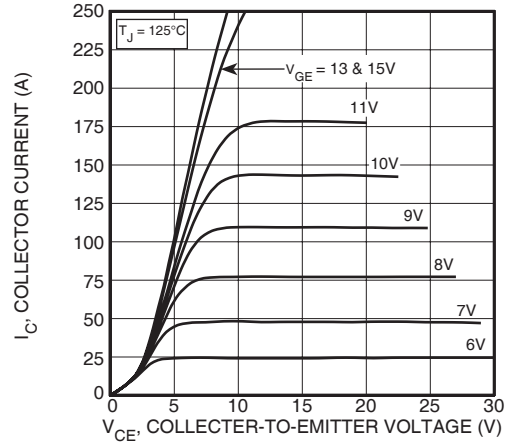


FIGURE 2, Output Characteristics

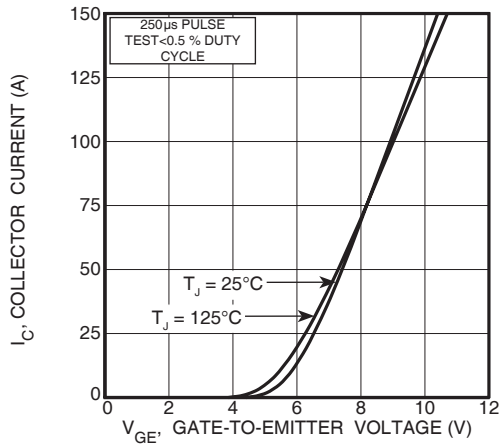


FIGURE 3, Transfer Characteristics

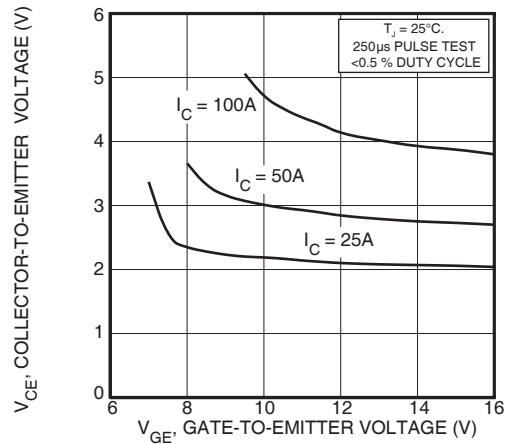


FIGURE 4, On State Voltage vs Gate-to-Emitter Voltage

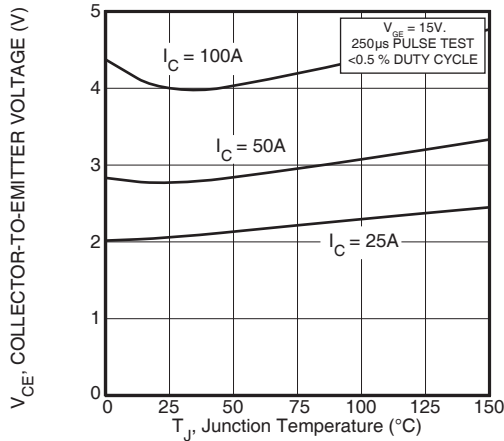


FIGURE 5, On State Voltage vs Junction Temperature

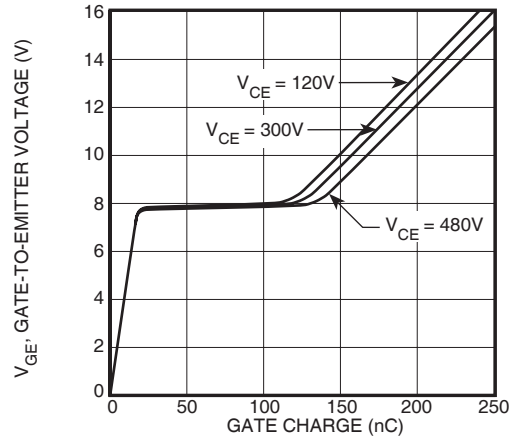


FIGURE 6, Gate Charge

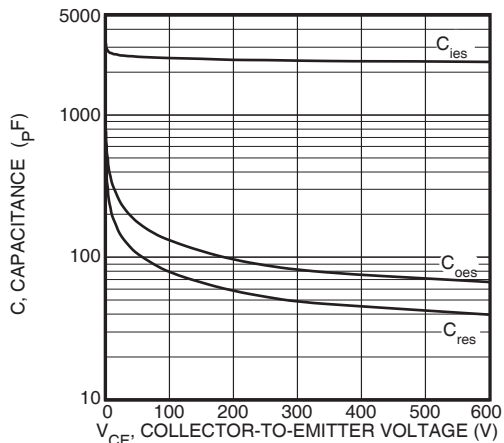


FIGURE 7, Capacitance vs Collector-To-Emitter Voltage

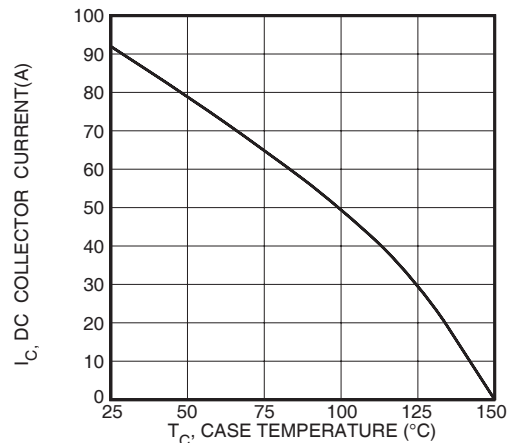


FIGURE 8, DC Collector Current vs Case Temperature

$I_C = 25A$   
 $T_J = 25^\circ C$

# TYPICAL PERFORMANCE CURVES

APT50GS60B\_SR(G)

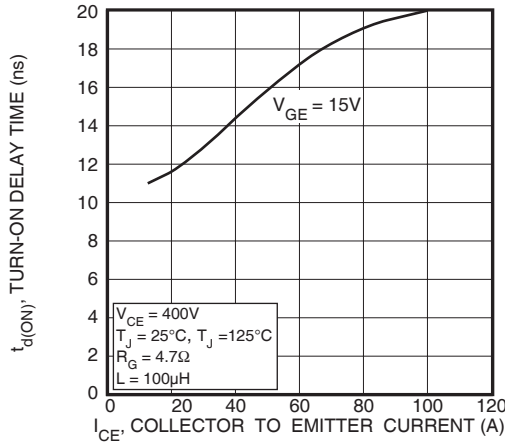


FIGURE 9, Turn-On Delay Time vs Collector Current

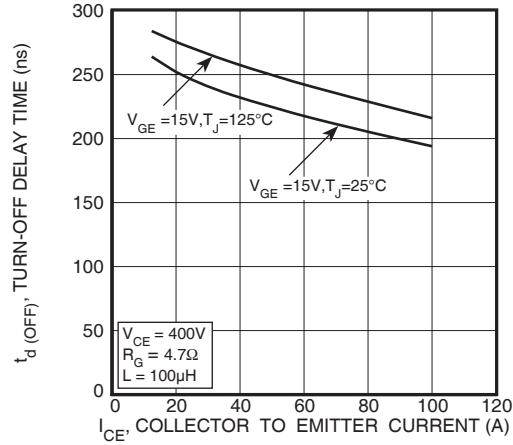


FIGURE 10, Turn-Off Delay Time vs Collector Current

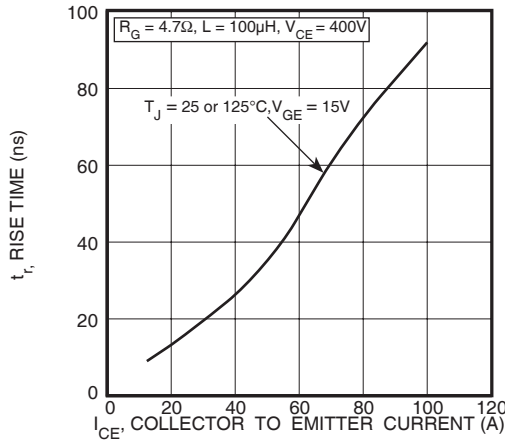


FIGURE 11, Current Rise Time vs Collector Current

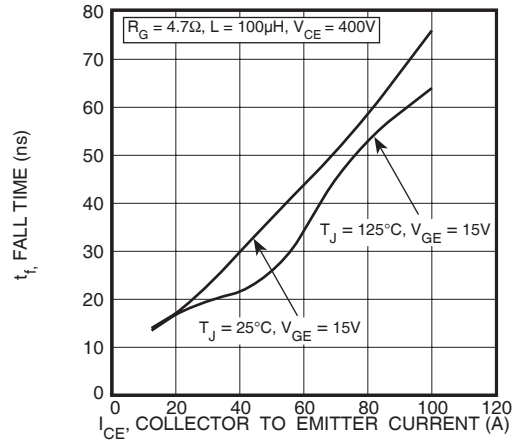


FIGURE 12, Current Fall Time vs Collector Current

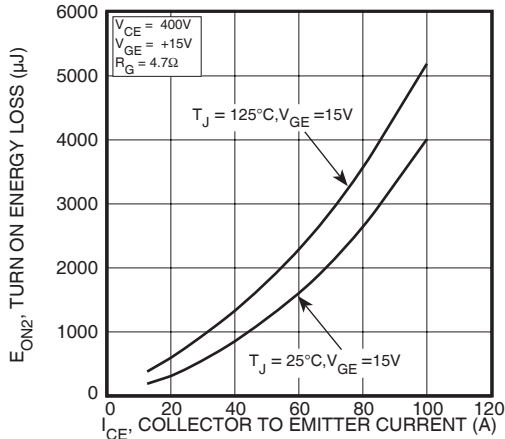


FIGURE 13, Turn-On Energy Loss vs Collector Current

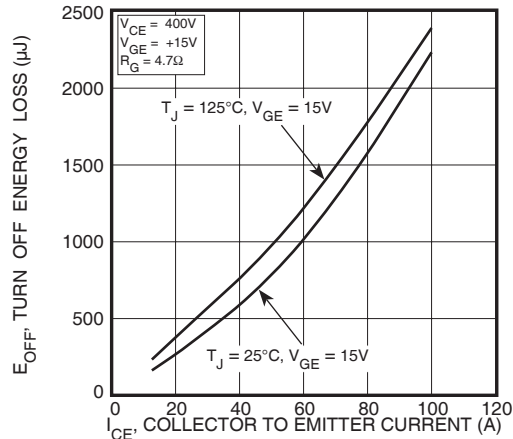


FIGURE 14, Turn Off Energy Loss vs Collector Current

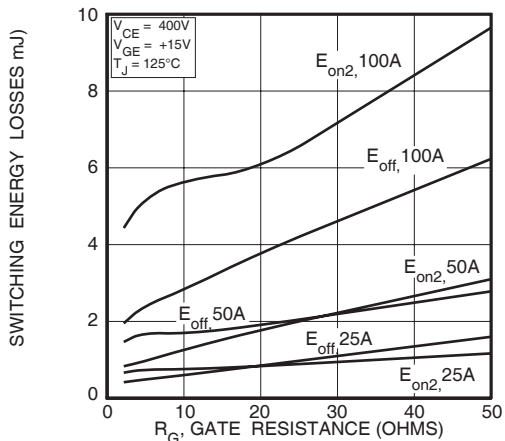


FIGURE 15, Switching Energy Losses vs. Gate Resistance

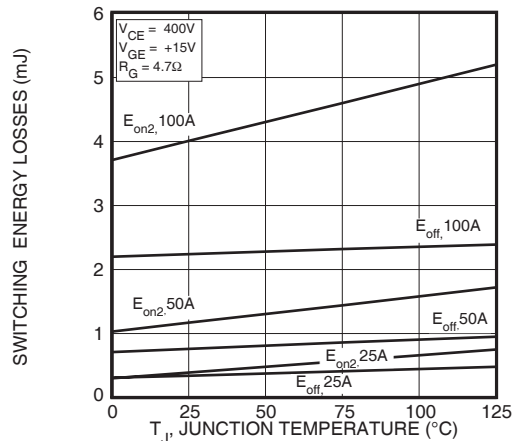
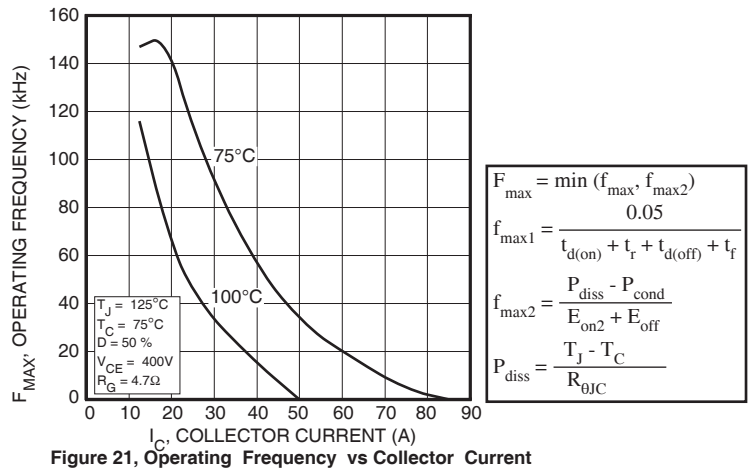
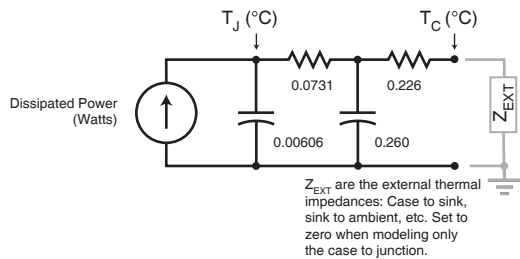
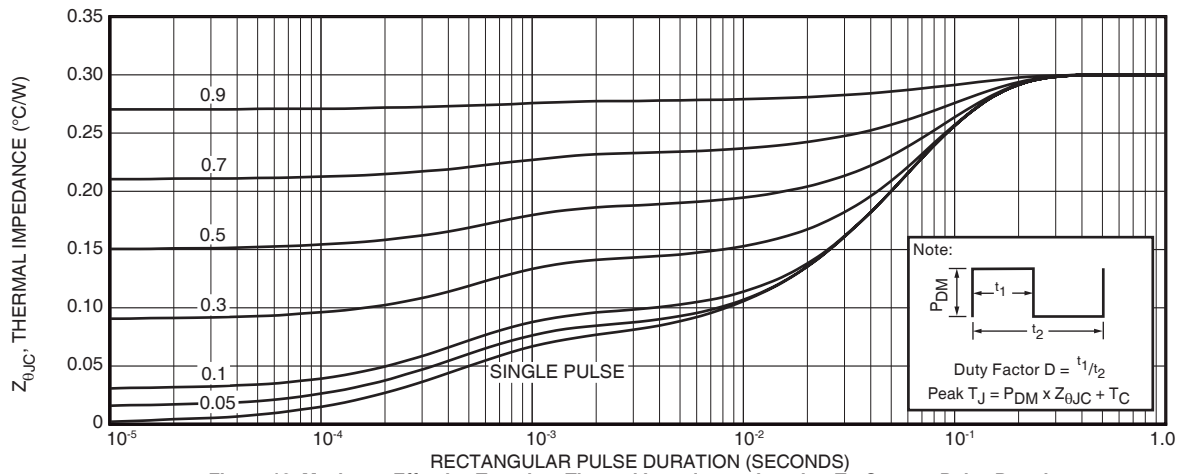
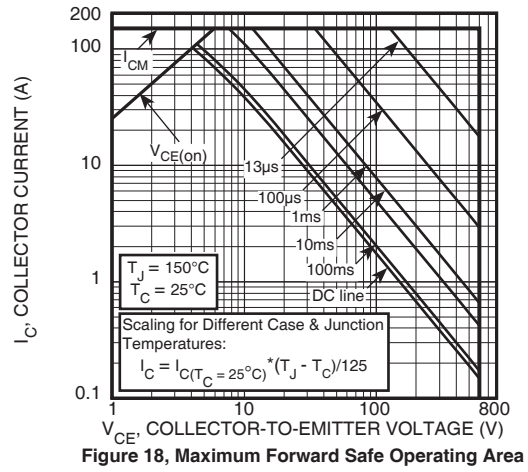
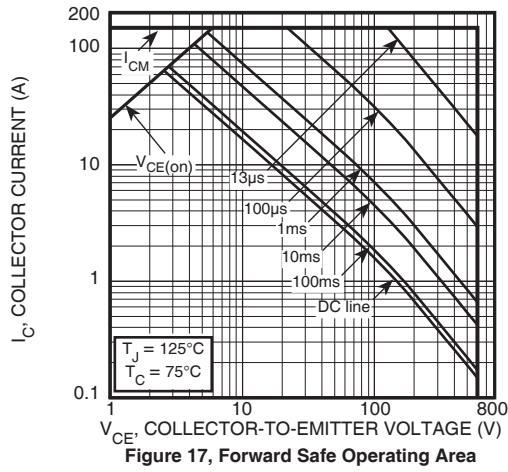


FIGURE 16, Switching Energy Losses vs Junction Temperature



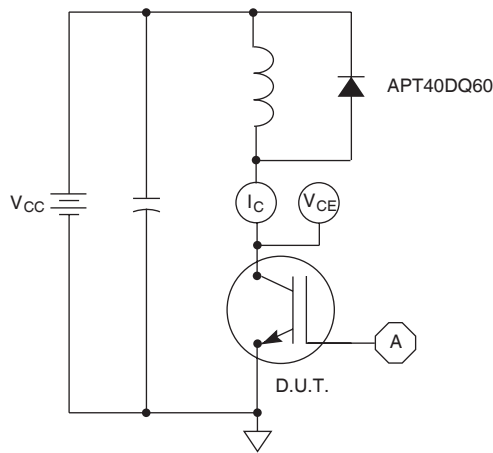


Figure 22, Inductive Switching Test Circuit

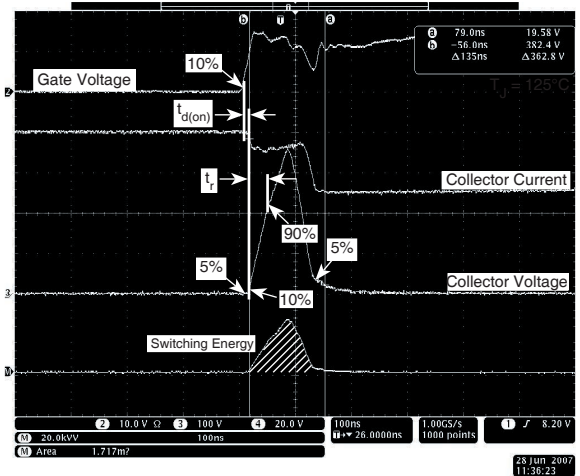


Figure 23, Turn-on Switching Waveforms and Definitions

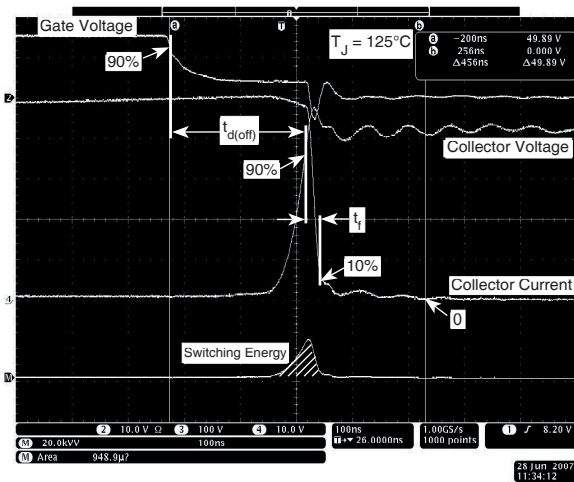


Figure 24, Turn-off Switching Waveforms and Definitions

FOOT NOTE:

- ① Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.
- ② Starting at  $T_J = 25^\circ\text{C}$ ,  $L = 224\mu\text{H}$ ,  $R_G = 25\Omega$ ,  $I_C = 50\text{A}$
- ③ Short circuit time:  $V_{GE} = 15\text{V}$ ,  $V_{CC} \leq 600\text{V}$ ,  $T_J \leq 150^\circ\text{C}$
- ④ Pulse test: Pulse width  $< 380\mu\text{s}$ , duty cycle  $< 2\%$
- ⑤  $C_{o(cr)}$  is defined as a fixed capacitance with the same stored charge as  $C_{oes}$  with  $V_{CE} = 67\%$  of  $V_{(BR)CES}$ .
- ⑥  $C_{o(er)}$  is defined as a fixed capacitance with the same stored energy as  $C_{oes}$  with  $V_{CE} = 67\%$  of  $V_{(BR)CES}$ . To calculate  $C_{o(er)}$  for any value of  $V_{CE}$  less than  $V_{(BR)CES}$ , use this equation:  $C_{o(er)} = 5.57E-8/V_{DS}^2 + 7.15E-8/V_{DS} + 2.75E-10$ .
- ⑦  $R_G$  is external gate resistance, not including internal gate resistance or gate driver impedance (MIC4452).
- ⑧  $E_{on1}$  is the inductive turn-on energy of the IGBT only, without the effect of a commutating diode reverse recovery current adding to the IGBT turn-on switching loss. It is measured by clamping the inductance with a Silicon Carbide Schottky diode.
- ⑨  $E_{on2}$  is the inductive turn-on energy that includes a commutating diode reverse recovery current in the IGBT turn-on energy.
- ⑩  $E_{off}$  is the clamped inductive turn-off energy measured in accordance with JEDEC standard JESD24-1.

Microsemi reserves the right to change, without notice, the specifications and information contained herein.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9