

G3VM-62J1

MOS FET Relays

MOS FET Relays Designed for Switching Minute Signals and Analog Signals. Two Channels and an 8-pin SOP Package in 60-V Load Voltage Series.


- Continuous load current of 400 mA.
- Dielectric strength of 1,500 Vrms between I/O.

RoHS compliant

Application Examples

- Semiconductor test equipment
- Test & Measurement equipment
- Communication equipment
- Data loggers

Terminal Arrangement/Internal Connections

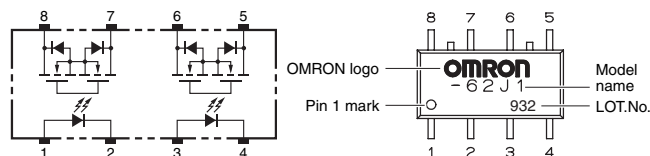

Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP8	2a (DPST-NO)	Surface-mounting Terminals	60 V	G3VM-62J1	50	-
				G3VM-62J1 (TR)	-	2,500

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	IF	50	mA
	Repetitive peak LED forward current	IFP	1	A
	LED forward current reduction rate	$\Delta I_F / ^\circ\text{C}$	-0.5	mA/°C
	LED reverse voltage	VR	5	V
	Connection temperature	TJ	125	°C
Output	Load voltage (AC peak/DC)	VOFF	60	V
	Continuous load current (AC peak/DC)	IO	400	mA
	ON current reduction rate	$\Delta I_O / ^\circ\text{C}$	-4.0	mA/°C
Dielectric strength between I/O (See note 1.)		VI-O	1500	Vrms
Ambient operating temperature		Ta	-40 to +85	°C
Ambient storage temperature		Tstg	-55 to +125	°C
Soldering temperature		-	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item	Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	VF	1.0	1.15	1.3	V
	Reverse current	IR	-	10	μA	IF = 10 mA
	Capacity between terminals	CT	-	30	pF	VR = 5 V
	Trigger LED forward current	IFT	-	1.6	3	mA
Output	Maximum resistance with output ON	RON	-	1.0	2.0	Ω
	Current leakage when the relay is open	ILEAK	-	1.0	μA	IF = 5 mA, IO = 400 mA
	Capacity between terminals	Coff	-	130	pF	VOFF = 60 V
	Capacity between I/O terminals	CI-O	-	0.8	pF	V = 0, f = 1 MHz
Insulation resistance between I/O terminals		RI-O	1000	-	-	MΩ
Turn-ON time		ton	-	0.8	2.0	ms
Turn-OFF time		toff	-	0.1	0.5	ms

Note: 2. Turn-ON and Turn-OFF Times




Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	-	48	V
Operating LED forward current	I_F	5	7.5	25	mA
Continuous load current (AC peak/DC)	I_O	-	-	400	mA
Ambient operating temperature	T_a	-20	-	65	°C

Engineering Data


LED forward current vs. Ambient temperature

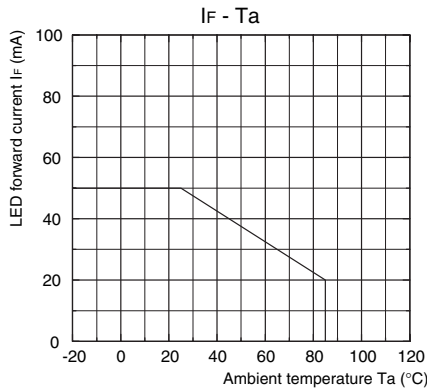


Continuous load current vs. Ambient temperature

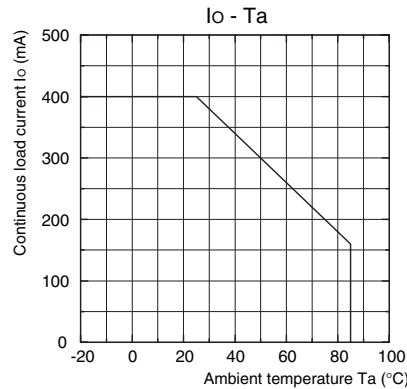


LED forward current vs. LED forward voltage

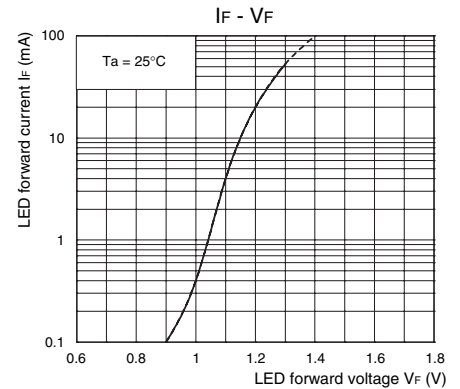


Continuous load current vs. On-state voltage

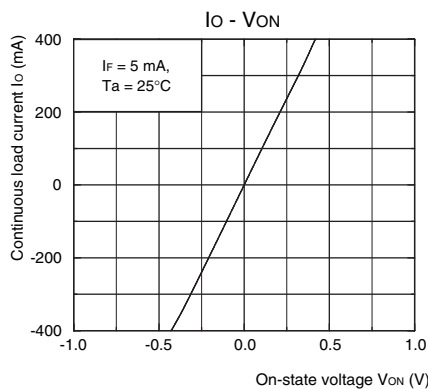


On-state resistance vs. Ambient temperature

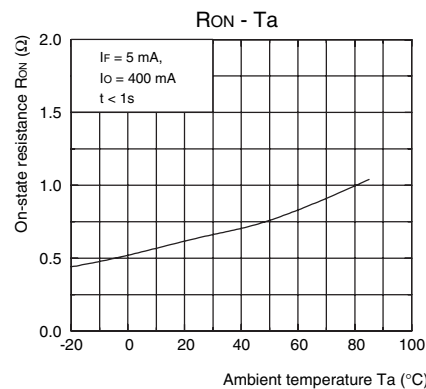


Trigger LED forward current vs. Ambient temperature

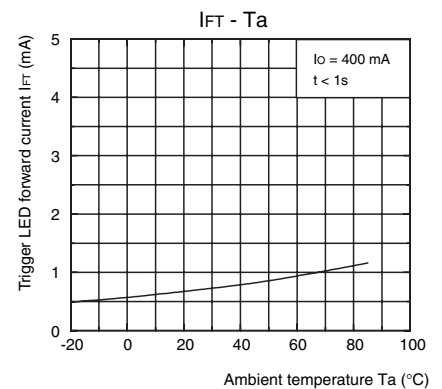


Turn ON, Turn OFF time vs. LED forward current

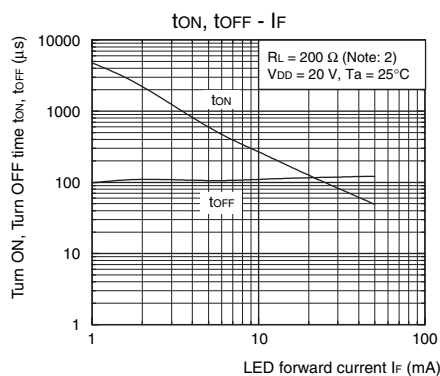

Turn ON, Turn OFF time vs. Ambient temperature

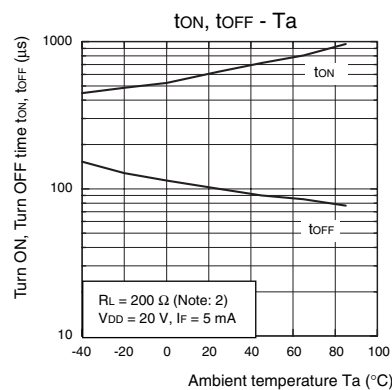

Current leakage vs. Ambient temperature

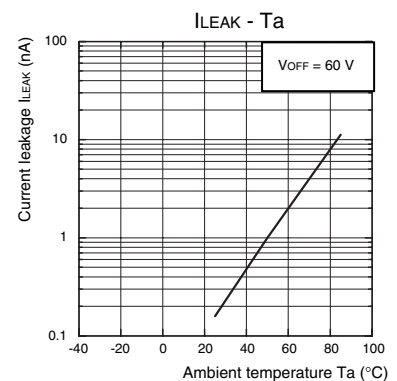


Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance


SOP (Small Outline Package) SOP8

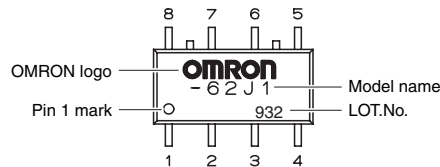

Note: The actual product is marked differently from the image shown here.


■ SOP8

(Unit: mm)




Surface-mounting Terminals

Weight: 0.2 g

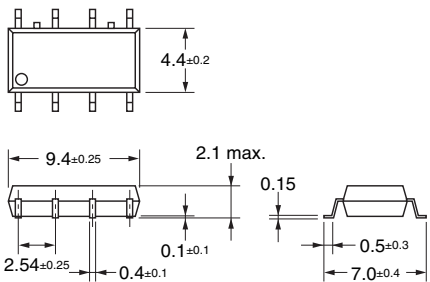

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. **K157-E1-01**
0412(0412)(O)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9