


RF1414D

**372.500 MHz
SAW Filter**



- **Ideal Front-End Filter for European Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Complies with Directive 2002/95/EC (RoHS)**

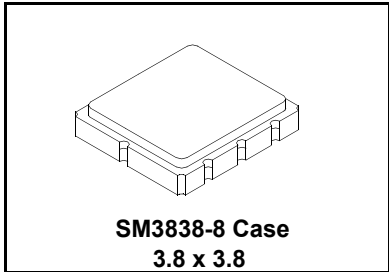

The RF1414D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 372.500 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

| Characteristic | Sym | Notes | Minimum | Typical | Maximum | Units |
|--|---------------------------------------|---------|------------------|---------|---------|---------------------|
| Center Frequency at 25°C Absolute Frequency | f_c | 1, 2, 3 | | 372.500 | | MHz |
| Insertion Loss | IL_{MIN} | 1, 3 | | 2.1 | 3.0 | dB |
| 3 dB Bandwidth | BW_3 | 1, 3 | 350 | | 500 | kHz |
| Rejection Attenuation: (relative to IL_{min}) | | | | | | |
| 10 - 354 MHz | | 1, 3 | 45 | 50 | | dB |
| 354 - 364 MHz | | | 35 | 40 | | |
| 364 - 369 MHz | | | 25 | 30 | | |
| 369 - 370 MHz | | | 14 | 15 | | |
| 374 - 378 MHz | | | 25 | 30 | | |
| 378 - 380 MHz | | | 15 | 20 | | |
| 380 - 382 MHz | | | 20 | 25 | | |
| 382 - 389 MHz | | | 25 | 28 | | |
| 389 - 550 MHz | | | 45 | 50 | | |
| 550 - 1000 MHz | | | 40 | 45 | | |
| Temperature Freq. Temp. Coefficient | FTC | | | 0.032 | | ppm/°C ² |
| Frequency Aging Absolute Value during the First Year | fA | 5 | | ≤10 | | ppm/yr |
| Impedance @ f_c | Input $Z_{IN} = R_{IN} C_{IN}$ | 1 | 27.8 // 2.3 pf | | | |
| | Output $Z_{OUT} = R_{OUT} C_{OUT}$ | | 41 // 2.3 pf | | | |
| Lid Symbolization (Y=year WW=week S=shift) | 528 // YWWS | | | | | |
| Standard Reel Quantity | Reel Size 7 Inch | 9 | 500 Pieces/Reel | | | |
| | Reel Size 13 Inch | | 3000 Pieces/Reel | | | |



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


NOTES:

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
2. The frequency f_c is defined as the midpoint between the 3dB frequencies.
3. Where noted specifications apply over the entire specified operating temperature range of -40°C to +90°C.
4. The turnover temperature, T_o , is the temperature of maximum (or turnover) frequency, f_o . The nominal frequency at any case temperature, T_c , may be calculated from:
 $f = f_o [1 - FTC (T_o - T_c)^2]$.
5. Frequency aging is the change in f_c with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
9. Tape and Reel Standard Per ANSI / EIA 481.


| Rating | Value | Units |
|----------------------------|------------------------------|--------|
| Input Power Level | 10 | dBm |
| DC Voltage | 12 | VDC |
| Storage Temperature | -40 to +125 | °C |
| Operable Temperature Range | -40 to +125 | °C |
| Soldering Temperature | (10 seconds / 5 cycles max.) | 260 °C |

Electrical Connections

| Pin | Connection |
|-----|---------------|
| 1 | Input |
| 2 | Input Ground |
| 3 | Ground |
| 4 | Case Ground |
| 5 | Output |
| 6 | Output Ground |
| 7 | Ground |
| 8 | Case Ground |

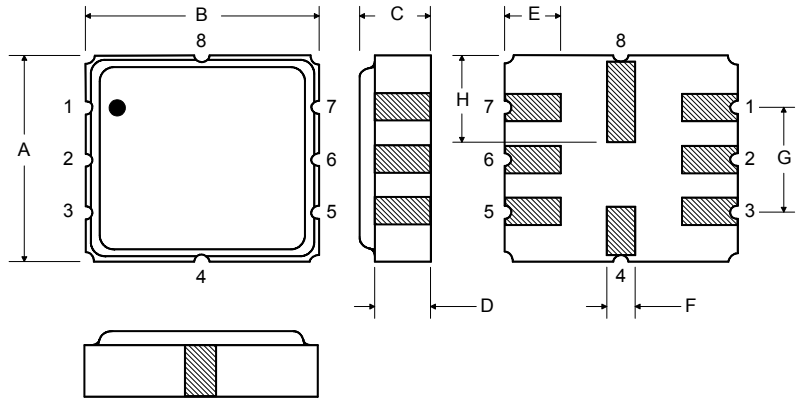

Matching Circuit to 50Ω

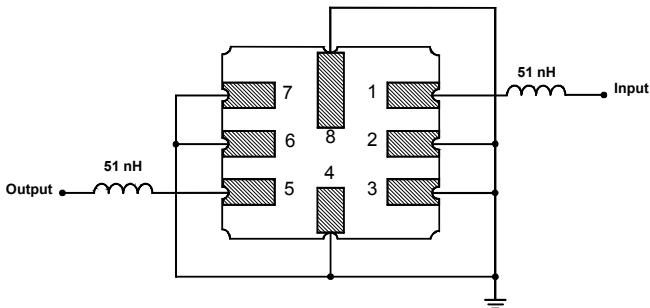

Case Dimensions


| Dimension | mm | | | Inches | | |
|-----------|------|------|------|--------|-------|-------|
| | Min | Nom | Max | Min | Nom | Max |
| A | 3.6 | 3.8 | 4.0 | 0.14 | 0.15 | 0.16 |
| B | 3.6 | 3.8 | 4.0 | 0.14 | 0.15 | 0.16 |
| C | 1.00 | 1.20 | 1.40 | 0.04 | 0.05 | 0.055 |
| D | 0.95 | 1.10 | 1.25 | 0.033 | 0.043 | 0.05 |
| E | 0.90 | 1.0 | 1.10 | 0.035 | 0.04 | 0.043 |
| F | 0.50 | 0.6 | 0.70 | 0.020 | 0.024 | 0.028 |
| G | 2.39 | 2.54 | 2.69 | 0.090 | 0.100 | 0.110 |
| H | 1.40 | 1.75 | 2.05 | 0.055 | 0.069 | 0.080 |

Optional

Electrical Connections

| Pin | Connection |
|-----|---------------|
| 1 | Input Ground |
| 2 | Input |
| 3 | Input Ground |
| 4 | Case Ground |
| 5 | Output Ground |
| 6 | Output |
| 7 | Output Ground |
| 8 | Case Ground |

Matching Circuit to 50Ω

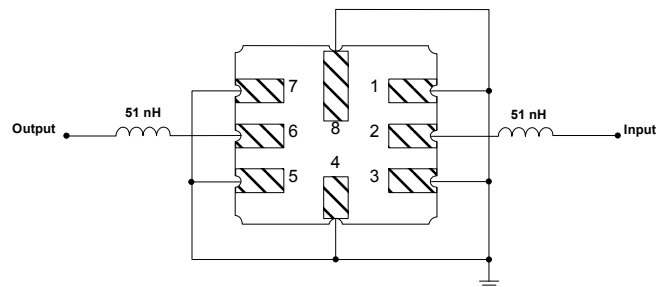

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9