


# 355 SERIES

## 3-phase voltage/phase monitor




## Wiring Diagram

TYPICAL WIRING DIAGRAM FOR MODEL 355 WITH MOTOR CONTROL

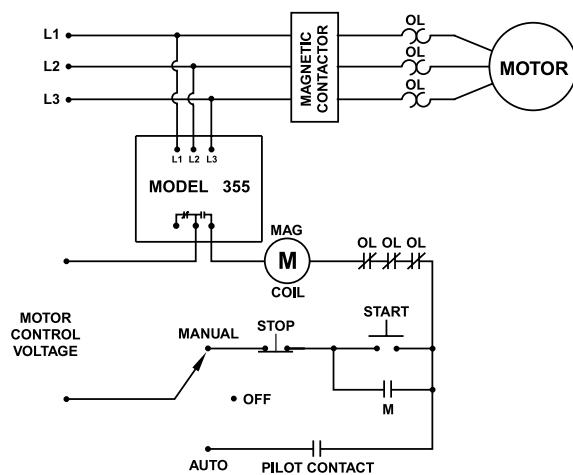

TYPICAL WIRING DIAGRAM FOR MODEL 355 WITH ALARM CONTROL

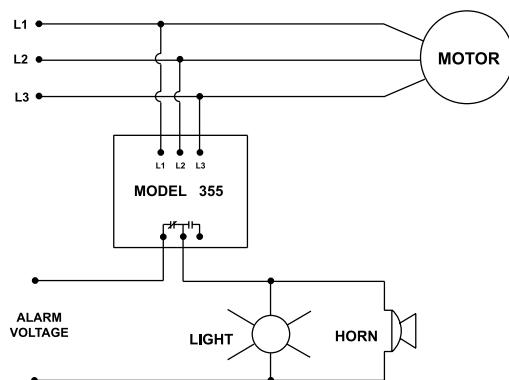

## Description

The 355 Series is a 3-phase voltage monitor with adjustable trip and restart delay, adjustable voltage unbalance and multiple diagnostic lights. It is perfect for heavy-duty applications that need both protection and simple user-friendly diagnostics. Applications include pump panels, commercial HVAC, oil rigs and others.

The 355 Series uses microcontroller technology to monitor incoming voltage and de-energize its output relay if power problems exist. The 355 Series can protect motors from damage caused by single-phasing, high and low voltage, phase reversal and voltage unbalance. It has four diagnostic LEDs that clearly show overvoltage, undervoltage, voltage unbalance, reverse-phase and normal conditions.

The 355200 is equipped with a heavy-duty 10A general purpose SPDT relay. The 355400 and 355600 are equipped with a 470VA @ 600VAC pilot duty SPDT relay. A high voltage (600V) DPDT relay output option is available with the 400V model.

## Features & Benefits

| FEATURES  | BENEFITS   |
|---|--|
| <b>Proprietary microcontroller based circuitry</b>        | Constantly monitors 3 phase voltage to protect against harmful line conditions, even before the motor is started   |
| <b>Advanced LED indication</b>                            | Provides diagnostics which can be used for troubleshooting and to determine relay status   |
| <b>Adjustable trip and restart delay settings</b>         | Prevent nuisance tripping due to rapidly fluctuating power line conditions and allows staggered start up of multiple motors, after a fault, to prevent a low voltage condition |
| <b>Combines protection and diagnostics</b>                | Perfect for heavy duty applications: pump panels, commercial HVAC, and oil rigs  |
| <b>600V rated relay contacts available on some models</b> | Eliminates the need for a control transformer to step voltage down to 120 - 240V for a control circuit   |

## Ordering Information

| MODEL   | LINE VOLTAGE | DESCRIPTION |
|---------|--------------|-------------|
| 355200  | 190-240VAC   | SPDT        |
| 355400  | 380-480VAC   | SPDT        |
| 3554005 | 380-480VAC   | DPDT        |
| 355600  | 475-600VAC   | SPDT        |

# 355 SERIES

## Specifications

### Input Characteristics

#### Line Voltage

|                         |            |
|-------------------------|------------|
| 355200                  | 190-240VAC |
| 355400                  | 380-480VAC |
| 355600                  | 475-600VAC |
| (Specify voltage range) |            |

#### Frequency

50\*/60Hz

### Functional Characteristics

#### Low Voltage (% of setpoint)

|       |         |
|-------|---------|
| Trip  | 90% ±1% |
| Reset | 93% ±1% |

#### High Voltage (% of setpoint)

|       |          |
|-------|----------|
| Trip  | 110% ±1% |
| Reset | 107% ±1% |

#### Voltage Unbalance (NEMA)

|       |                       |
|-------|-----------------------|
| Trip  | 2-8% adjustable       |
| Reset | Trip setting minus 1% |

#### Trip Delay Time:

|                                  |                         |
|----------------------------------|-------------------------|
| Low & High Voltage and Unbalance | 2-30 seconds adjustable |
| Single-phasing Faults (>25% UB)  |                         |

2 seconds

#### Restart Delay Time

|                             |                            |
|-----------------------------|----------------------------|
| After a Fault or Power Loss | Manual, 2-300 seconds adj. |
|-----------------------------|----------------------------|

### Output Characteristics

#### Output Contact Rating

|               |                 |
|---------------|-----------------|
| SPDT (355200) | 480VA at 240VAC |
| Pilot Duty    | 10A             |

#### General Purpose

|                       |                |
|-----------------------|----------------|
| SPDT (355400, 355600) | 470VA @ 600VAC |
| Pilot Duty            | 470VA @ 600VAC |

#### DPDT (-5 Option)

|            |                |
|------------|----------------|
| Pilot Duty | 470VA @ 600VAC |
|------------|----------------|

### General Characteristics

#### Temperature Range

-40° to 70°C (-40° to 158°F)

#### Operating

-40° to 80°C (-40° to 176°F)

#### Storage

±0.1%

#### Repeat Accuracy

6 W

#### Fixed Conditions

7 in.-lbs.

#### Maximum Input Power

12-18AWG

#### Terminal

2500V for 10 ms

#### Torque

UL508 (File #E68520)

#### Safety Marks

H 74.42 mm (2.93"); W 133.86 mm (5.27")

#### Dimensions

D 74.93 mm (2.95")

0.94 lb. (15.04 oz., 426.38 g)

#### Weight

#8 screws

#### Mounting Method

#### Special Options

#### Option 5 - DPDT Relay

\*Note: 50Hz will increase all delay times by 20%.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9