

# **Product Specification**

## 16GFC RoHS Compliant Long-Wavelength SFP+ Transceiver

## FTLF1429P3BCE

### **PRODUCT FEATURES**

- Up to 14.025 Gb/s bi-directional data links
- Hot-pluggable SFP+ footprint
- Built-in digital diagnostic functions
- 1310nm DFB laser transmitter
- Duplex LC connector
- RoHS compliant and Lead Free
- Up to 25 km on 9/125μm SMF
- Metal enclosure, for lower EMI
- 1W maximum power consumption with established link
- Single 3.3V power supply
- Extended operating temperature range: 0°C to 70°C



### **APPLICATIONS**

• Tri Rate 4.25 / 8.5 / 14.025 Gb/s Fibre Channel through Rate Select

Finisar's FTLF1429P3BNV SFP+ transceivers are designed for use in Fibre Channel links up to 14.025 Gb/s data rate and up to 25 km link length. They are compliant with FC-PI-5 Rev. 6.10<sup>1</sup> and SFF-8472 Rev 11.0<sup>3</sup>, and compatible with SFF-8432<sup>2</sup> and applicable portions of SFF-8431 Rev. 3.0<sup>4</sup>. The optical transceiver is compliant per the RoHS Directive 2011/65/EU<sup>5</sup>. See Finisar Application Note AN-2038 for more details<sup>6</sup>.

## PRODUCT SELECTION

FTLF1429P3BCE




## I. Pin Descriptions

Pin	Symbol	Name/Description	Ref.
1	$V_{\mathrm{EET}}$	Transmitter Ground (Common with Receiver Ground)	1
2	$T_{FAULT}$	Transmitter Fault.	2
3	$T_{ m DIS}$	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line (MOD-DEF2)	4
5	SCA	2-wire Serial Interface Clock (MOD-DEF1)	4
6	MOD_ABS	Module Absent, connected to V <sub>EET</sub> or V <sub>EER</sub>	4
7	RS0	Rx Rate Select:	5
		Open or Low = 4.25 or 8.5 Gb/s Fibre Channel (Low Bandwidth)	
		High = 14.025 Gb/s Fibre Channel (High Bandwidth)	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	6
9	RS1	Tx Rate Select:	5
		Open or Low = 4.25 or 8.5 Gb/s Fibre Channel (Low Bandwidth)	
		High = 14.025 Gb/s Fibre Channel (High Bandwidth)	
10	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
11	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	$V_{EER}$	Receiver Ground (Common with Transmitter Ground)	1
15	$V_{CCR}$	Receiver Power Supply	
16	V <sub>CCT</sub>	Transmitter Power Supply	
17	$V_{\mathrm{EET}}$	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	$V_{EET}$	Transmitter Ground (Common with Receiver Ground)	1

#### Notes:

- 1. Circuit ground is internally isolated from chassis ground.
- 2.  $T_{FAULT}$  is an open collector/drain output, which should be pulled up with a 4.7k-10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc+0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
- 3. Laser output disabled on  $T_{DIS} > 2.0 \text{V}$  or open, enabled on  $T_{DIS} < 0.8 \text{V}$ .
- 4. Should be pulled up with 4.7k 10kohms on host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
- 5. Rate select can also be set through the 2-wire bus in accordance with SFF-8472 v. 10.2. Rx Rate Select is set at Bit 3, Byte 110, Address A2h. Tx Rate Select is set at Bit 3, Byte 118, Address A2h. Note: writing a "1" selects maximum bandwidth operation. Rate select is the logic OR of the input state of Rate Select Pin and 2-wire bus.
- 6. LOS is open collector output. Should be pulled up with 4.7k 10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.





**Pinout of Connector Block on Host Board** 

## **II.** Absolute Maximum Ratings

Parameter	Symbol	Min	Тур	Max	Unit	Ref.
Maximum Supply Voltage	Vcc	-0.5		4.2	V	
Storage Temperature	$T_{S}$	-40		85	°C	
Case Operating Temperature	$T_{OP}$	0		70	°C	
Relative Humidity	RH	0		85	%	1

## III. Electrical Characteristics ( $T_{OP} = 0$ to 70 °C, $V_{CC} = 3.00$ to 3.60 Volts)

Parameter	Symbol	Min	Тур	Max	Unit	Ref.	
Supply Voltage	Vcc	3.15		3.45	V	2	
Supply Current	Icc		200	300	mA	2	
Transmitter	Transmitter						
Input differential impedance	R <sub>in</sub>		100		Ω	3	
Single ended data input swing	Vin,pp	90		350	mV		
Transmit Disable Voltage	$V_{\mathrm{D}}$	2		VccT+0.3	V		
Transmit Enable Voltage	$V_{EN}$	Vee		Vee+ 0.8	V	4	
Receiver							
Single ended data output swing	Vout,pp	185		425	mV	5	
Data output rise/fall time, 4.25 Gb/s	$t_{\rm r,}t_{\rm f}$			120	ps	6	
LOS Fault	V <sub>LOS fault</sub>	2		Vcc <sub>HOST</sub>	V	7	
LOS Normal	V <sub>LOS norm</sub>	Vee-0.3		Vee+0.4	V	7	
Power Supply Rejection	PSR	66			mVpp	8	

## Notes:

- 1. Non-condensing.
- 2. Module power consumption never exceeds 1W with established link.
- 3. AC coupled.
- 4. Or open circuit.
- 5. Into 100 ohm differential termination.
- 6. 20 80 %.
- 7. LOS is LVTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
- 8. All transceiver specifications are compliant with a power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the power supply filtering network shown on page 23 of the



- Small Form-factor Pluggable (SFP) Transceiver MultiSource Agreement (MSA)<sup>6</sup>, September 14, 2000. The Power Supply Rejection applies for a supply voltage range of 3.1 to 3.6 V.
- 9. Measured with DJ-free data input signal. In actual application, output DJ will be the sum of input DJ and  $\Delta$  DJ.
- For 14.025 and 8.5 Gb/s operation, Deterministic Jitter and Total Jitter are not specified per FC-PI-5 Rev 6.10. Jitter values for gamma T and gamma R are controlled by TDP and stressed receiver sensitivity.

## IV. Optical Characteristics ( $T_{OP} = 0$ to 70 °C, $V_{CC} = 3.15$ to 3.45 Volts)

Parameter	Symbol	Min	Тур	Max	Unit	Ref.	
Transmitter							
Output Opt. Power	Po	-2.0		+6.0	dBm	1	
Optical Wavelength	λ	1295		1325	nm		
Spectral Width	σ			1	nm	2	
Optical Modulation Amplitude	OMA	1260			μW	3	
Transmitter and Dispersion Penalty, 14.025 Gb/s	TDP			4.4	dB	4	
Transmitter and Dispersion Penalty, 8.5 Gb/s	TDP			3.2	dB	4	
Optical Rise/Fall Time, 4.25 Gb/s	$t_r/t_f$			90	ps	5	
RIN				-130	dB/Hz		
Receiver							
Unstressed Receiver OMA Sensitivity, 14.025 Gb/s	R <sub>SENSr</sub>			0.039	mW	6	
Unstressed Receiver OMA Sensitivity, 8.5 Gb/s	R <sub>SENSr</sub>			0.039	mW	7	
Unstressed Receiver OMA Sensitivity, 4.25 Gb/s	R <sub>SENS4</sub>			0.029	mW	7	
Average Received Power	Rx <sub>MAX</sub>	+3.0			dBm		
Optical Center Wavelength	$\lambda_{ m C}$	1260		1370	nm		
Return Loss		12			dB		
LOS De-Assert	LOS <sub>D</sub>			-19	dBm		
LOS Assert	LOSA	-30			dBm		
LOS Hysteresis		0.5			dB		
Parameter	Symbol	Min	Тур	Max	Unit	Ref.	

#### Notes:

- 1. Class 1 Laser Safety per FDA/CDRH and EN (IEC) 60825 regulations.
- 2. 20dB spectral width.
- 3. Equivalent extinction ratio specification for Fibre Channel. Allows smaller ER at higher average power.
- 4. For 14.025 and 8.5 Gb/s operation, Jitter values for gamma T and gamma R are controlled by TDP.
- 5. Unfiltered, 20-80%. Complies with IEEE 802.3 (Gig. E), FC 4x eye masks when filtered.
- 6. High Bandwidth Mode. Measured with PRBS 2<sup>31</sup>-1 at 10<sup>-12</sup> BER.
- 7. Low Bandwidth Mode. Measured with PRBS 2<sup>7</sup>-1 at 10-12 BER.

## V. General Specifications

Parameter	Symbol	Min	Тур	Max	Units	Ref.
Data Rate	BR	4.25		14.025	Gb/sec	1
Bit Error Rate	BER			10 <sup>-12</sup>		2
Supported Link Length on 9/125 μm SMF , 4.25, 8.5, 14.025 Gb/s	$L_{MAX}$	25			km	3

#### Notes:

- $\overline{1}$ . 4x/8x/16x Fibre Channel compliant.
- 2. Tested with a PRBS 2<sup>7</sup>-1 test pattern for 4.25 and 8.5Gb/s operation. Tested with a PRBS 2<sup>31</sup>-1 test pattern for 14.025Gb/s operation.
- 3. Based on 15dB link budget.

## VI. Environmental Specifications

These Finisar 1310nm Commercial Temperature SFP+ transceivers have an operating temperature range from 0°C to +70°C case temperature.

Parameter	Symbol	Min	Тур	Max	Units	Ref.
Case Operating Temperature	$T_{op}$	0		70	°C	
Storage Temperature	$T_{sto}$	-40		85	°C	

## VII. Regulatory Compliance

Finisar transceivers are Class 1 Laser Products and comply with US FDA regulations. These products are certified by TÜV and CSA to meet the Class 1 eye safety requirements of EN (IEC) 60825 and the electrical safety requirements of EN (IEC) 60950. Copies of certificates are available at Finisar Corporation upon request.

### **VIII.** Digital Diagnostic Functions

Finisar FTLF1429P3BNV SFP+ transceivers support the 2-wire serial communication protocol as defined in the SFP MSA<sup>6</sup>. It is very closely related to the E<sup>2</sup>PROM defined in the GBIC standard, with the same electrical specifications.

The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Finisar SFP transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in E<sup>2</sup>PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement. The complete interface is described in Finisar Application Note AN-2030: "Digital Diagnostics Monitoring Interface for SFP Optical Transceivers".

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E<sup>2</sup>PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

For more information, please see the SFP MSA documentation<sup>3,6</sup> or Finisar Application Note AN-2030.


FTLF1429P3BNV transceivers can be used in host systems that require either internally or externally calibrated digital diagnostics.

Please note that evaluation board FDB-1027 is available with Finisar ModDEMO software that allows simple to use communication over the 2-wire serial interface.



## IX. Mechanical Specifications

Finisar's FTLF1429P3BCE SFP+ transceivers are compatible with the SFF-8432<sup>2</sup> specification for improved pluggable form factor.

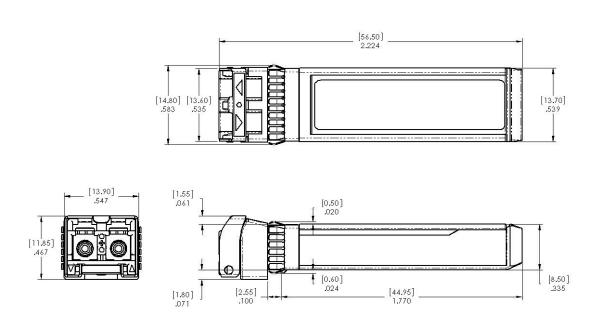



FTLF1429P3BCE




## X. PCB Layout and Bezel Recommendations

⚠atum and Basic Dimension Established by Customer ⚠Rads and Vias are Chassis Ground, 11 Places ⚠Through Holes are Unplated

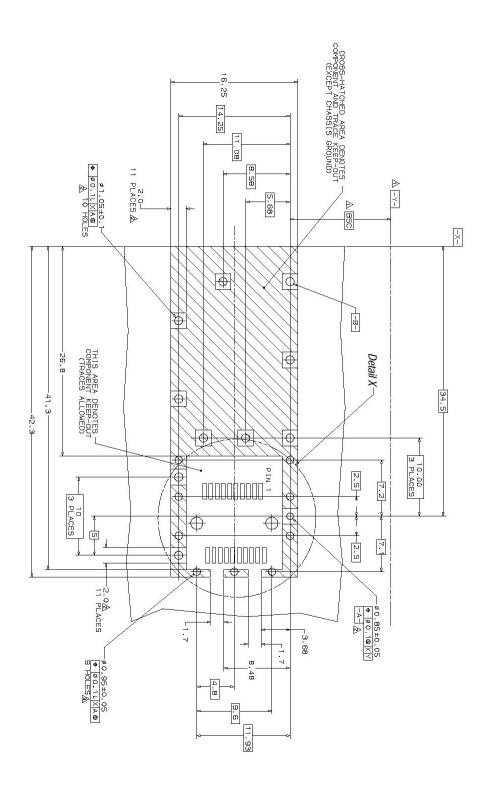

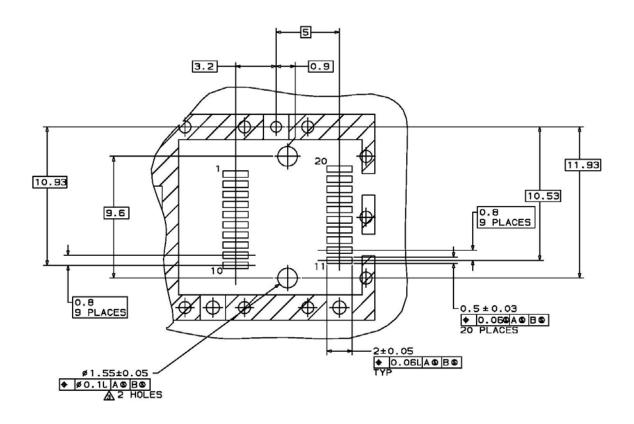

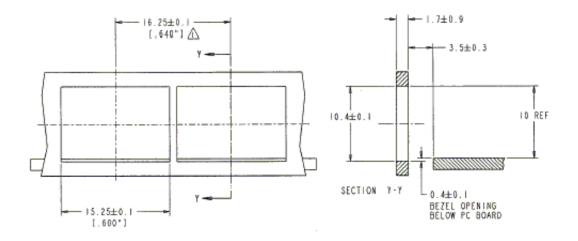

### NOTES:

ANINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS ARE FOR REFERENCE ONLY

2. NOT RECOMMENDED FOR PCI EXPANSION CARD APPLICATIONS

### XI. References

- 1. "Fibre Channel Physical Interface-5 Specification (FC-PI-5 Rev. 6.10)". American National Standard for Information Technology, January 11, 2011.
- 2. "Improved Pluggable Formfactor", SFF Document Number SFF-8432, Revision 5.0, July 16, 2007.
- 3. "Digital Monitoring Interface for Optical Transceivers", SFF Document Number SFF-8472, Revision 11.0, September 14, 2000.
- 4. "Enhanced Specification for 8.5 and 10 Gigabit Small Form Factor Pluggable Module 'SFP+ ", SFF Document Number SFF-8431, Revision 3.0, May 8, 2008.
- 5. Directive 2011/65/EU of the European Council Parliament and of the Council, "on the restriction of the use of certain hazardous substances in electrical and electronic equipment". Certain products may use one or more exemptions as allowed by the Directive.
- 6. "Application Note AN-2038: Finisar Implementation of RoHS Compliant Transceivers".
- 7. Small Form Factor Pluggable (SFP) Transceiver Multi-source Agreement (MSA), September 14, 2000.

### **XII.** For More Information

Finisar Corporation 1389 Moffett Park Drive Sunnyvale, CA 94089-1134 Tel. 1-408-548-1000 Fax 1-408-541-6138 sales@finisar.com www.finisar.com

## **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

## http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

## Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9