


Low Noise, Rail-to-Rail Input/Output Dual Operational Amplifier

■ GENERAL DESCRIPTION


The NJM2737 is a Rail-to-Rail Input/Output single supply dual operational amplifier featuring low voltage operation, low power and low noise. It is designed to offer a low voltage operating from 1.8V with a $5\text{nV}/\sqrt{\text{Hz}}$ low noise of the conventional low noise operational amplifiers such as the NJM4580 and NJM 5532.

The Combination of Rail-to-Rail Input/Output, low voltage operation and low noise makes the NJM2737 well-suited for single supply low voltage operation applications such as PC audio, portable audio and others. The NJM2737 is available in a wide variety packages 8-lead DIP, and 8-lead surface-mount packages of SOP (DMP), SSOP and MSOP (TVSP).

■ PACKAGE OUTLINE



NJM2737D
(DIP8)



NJM2737M
(DMP8)



NJM2737V
(SSOP8)




NJM2737RB1
(MSOP8 (TVSP8))

■ FEATURES

- Operating Voltage 1.8 to 6V
- Low Input Voltage Noise $5\text{nV}/\sqrt{\text{Hz}}$ typ.
- Gain Band Width product 3.1MHz typ. (at $V^+=5\text{V}$, $R_L=2\text{k}\Omega$)
- Slew Rate $0.7\text{V}/\mu\text{s}$ typ. (at $V^+=5\text{V}$, $R_L=2\text{k}\Omega$)
- Offset Voltage 5mV max
- Rail-to-Rail Input $V_{\text{ICM}}=0$ to 5V (at $V^+=5\text{V}$)
- Maximum Output Voltage1 $V_{\text{OH1}} \geq 4.9\text{V} / V_{\text{OL1}} \leq 0.15\text{V}$ (at $V^+=5\text{V}$, $R_L=20\text{k}\Omega$)
- Maximum Output Voltage2 $V_{\text{OH2}} \geq 4.75\text{V} / V_{\text{OL2}} \leq 0.25\text{V}$ (at $V^+=5\text{V}$, $R_L=2\text{k}\Omega$)
- Bipolar Technology
- Package Outline DIP8, DMP8, SSOP8, MSOP8 (TVSP8) MEET JEDEC MO-187-DA / THIN TYPE

■ PIN CONFIGURATION

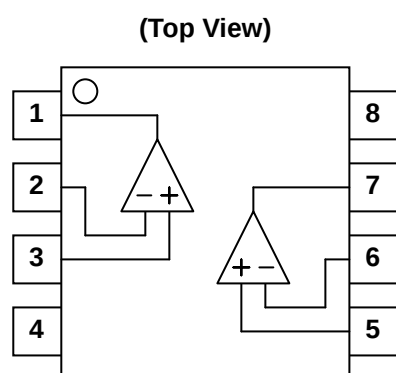

PIN CONFIGURATION

- 1.OUTPUT1
- 2.-INPUT1
- 3.+INPUT1
- 4.GND(V)
- 5.+INPUT2
- 6.-INPUT2
- 7.OUTPUT2
8. V^+

NJM2737

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)			
PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	7	V
Differential Input Voltage	V_{ID}	± 1	V
Input Common Mode Voltage Range	V_{ICM}	0 to 7	V
Power Dissipation	P_D	500(DIP8) 300(DMP8) 250(SSOP8) 320(MSOP8 (TVSP8))	mW
Operating Temperature Range	Topr	-40 to 85	°C
Storage Temperature Range	Tstg	-40 to 125	°C

(Note1) If the supply voltage (V^+) is less than 7V, the input voltage must not over the V^+ level through 7V is limit specified.

■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)			
PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V^+	1.8 to 6	V

■ ELECTRICAL CHARACTERISTICS

● DC CHARACTERISTICS

(V ⁺ =5V, Ta=25°C)						
PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I_{CC}	No Signal	-	1200	1600	μA
Input Offset Voltage	V_{IO}		-	1	5	mV
Input Bias Current	I_B		-	200	800	nA
Input Offset Current	I_{IO}		-	5	100	nA
Voltage Gain	A_V	$R_L=2k\Omega$	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: $2.5V \leq V_{CM} \leq 5V$, CMR-: $0 \leq V_{CM} \leq 2.5V$ (Note2)	55	70	-	dB
Supply Voltage Rejection Ratio	SVR	$V^+/GND = \pm 2$ to $\pm 3V$	70	85	-	dB
Maximum Output Voltage1	V_{OH1}	$R_L=20k\Omega$	4.9	4.95	-	V
	V_{OL1}	$R_L=20k\Omega$	-	0.1	0.15	
Maximum Output Voltage 2	V_{OH2}	$R_L=2k\Omega$	4.75	4.85	-	V
	V_{OL2}	$R_L=2k\Omega$	-	0.15	0.25	
Input Common Mode Voltage Range	V_{ICM}	CMR > 55dB	0	-	5	V

(Note2) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with $2.5V \leq V_{CM} \leq 5V$ and CMR- is measured with $0V \leq V_{CM} \leq 2.5V$.

● AC CHARACTERISTICS

(V ⁺ =5V, Ta=25°C)						
PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth Product	GBW	$R_L=2k\Omega$	-	3.1	-	MHz
Phase Margin	Φ_M	$R_L=2k\Omega$	-	85	-	Deg
Equivalent Input Noise Voltage	V_{NI}	f=1kHz	-	5	-	nV/√Hz

• TRANSIENT CHARACTERISTICS

(V⁺=5V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.7	-	V/μs

• DC CHARACTERISTICS

(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I _{CC}	No Signal	-	1000	1500	μA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	200	800	nA
Input Offset Current	I _{IO}		-	5	100	nA
Voltage Gain	A _V	R _L =2kΩ	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 1.5V ≤ V _{CM} ≤ 3V, CMR-: 0 ≤ V _{CM} ≤ 1.5V(Note3)	48	63	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /GND = ±1.2 to ±2V	68	83	-	dB
Maximum Output Voltage1	V _{OH1}	R _L =20kΩ	2.9	2.95	-	V
	V _{OL1}	R _L =20kΩ	-	0.1	0.15	
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	2.75	2.85	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	
Input Common Mode Voltage Range	V _{ICM}	CMR > 48dB	0	-	3	V

(Note3) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with 1.5V ≤ V_{CM} ≤ 3V and CMR- is measured with 0V ≤ V_{CM} ≤ 1.5V.

• AC CHARACTERISTICS

(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth Product	GBW	R _L =2kΩ	-	2.6	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	85	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	5	-	nV/√Hz

• TRANSIENT CHARACTERISTICS

(V⁺=3V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.6	-	V/μs

• DC CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I _{CC}	No Signal	-	1000	1500	μA
Input Offset Voltage	V _{IO}		-	1	5	mV
Input Bias Current	I _B		-	200	800	nA
Input Offset Current	I _{IO}		-	5	100	nA
Voltage Gain	A _V	R _L =2kΩ	60	85	-	dB
Common Mode Rejection Ratio	CMR	CMR+: 0.9V ≤ V _{CM} ≤ 1.8V, CMR-: 0 ≤ V _{CM} ≤ 0.9V(Note4)	40	55	-	dB
Supply Voltage Rejection Ratio	SVR	V ⁺ /GND = ±0.9 to ±1.2V	65	80	-	dB
Maximum Output Voltage1	V _{OH1}	R _L =20kΩ	1.7	1.75	-	V
	V _{OL1}	R _L =20kΩ	-	0.1	0.15	
Maximum Output Voltage 2	V _{OH2}	R _L =2kΩ	1.6	1.65	-	V
	V _{OL2}	R _L =2kΩ	-	0.15	0.25	
Input Common Mode Voltage Range	V _{ICM}	CMR > 40dB	0	-	1.8	V

(Note4) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with 0.9V ≤ V_{CM} ≤ 1.8V and CMR- is measured with 0V ≤ V_{CM} ≤ 0.9V .

• AC CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth Product	GBW	R _L =2kΩ	-	2.3	-	MHz
Phase Margin	Φ _M	R _L =2kΩ	-	85	-	Deg
Equivalent Input Noise Voltage	V _{NI}	f=1kHz	-	5	-	nV/√Hz

• TRANSIENT CHARACTERISTICS

(V⁺=1.8V, Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR	R _L =2kΩ	-	0.5	-	V/μs

■ TERMINAL CHARACTERISTICS


No.	Symbol	Equivalent Circuit	Typ.DC Voltage(V)	Function
3,5	+INPUT			non-inverting input
2,6	-INPUT			inverting input
1,7	VOUT			output

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage

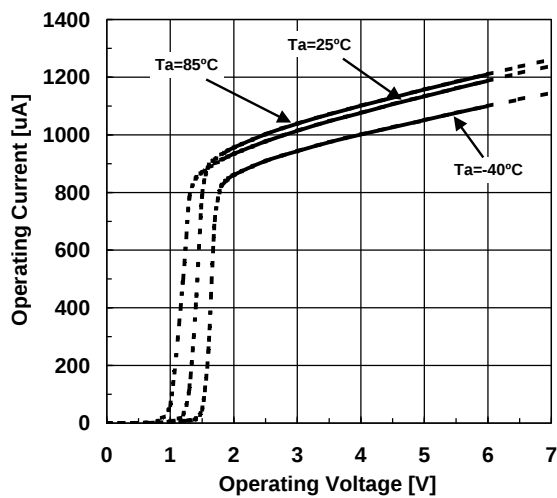


Operating Current vs. Temperature

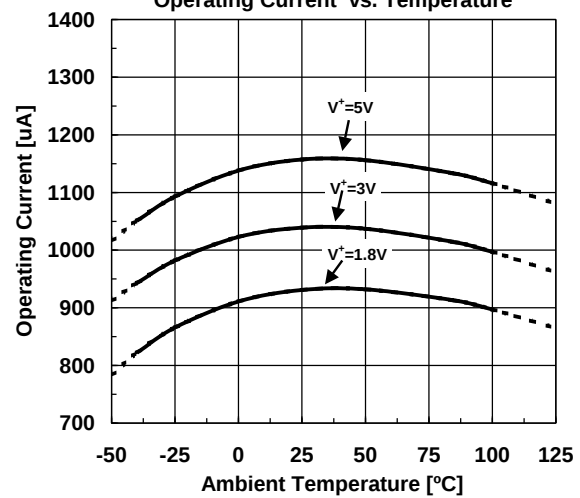


Input Offset Voltage vs. Temperature

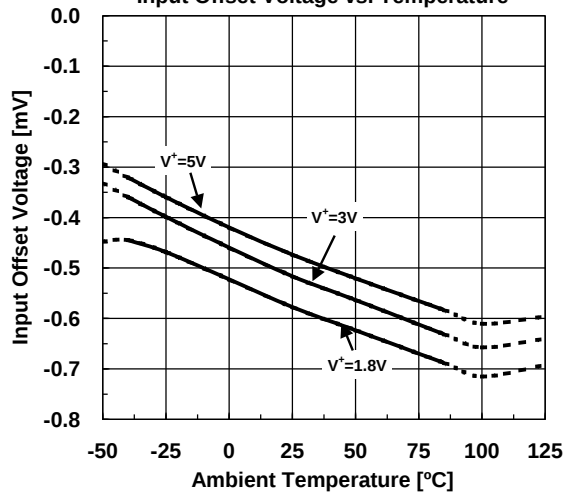


Input Offset Voltage vs. Common Mode Input Voltage

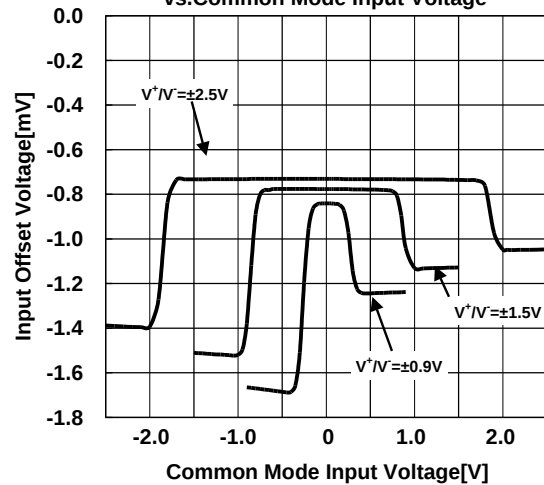

Input Offset Current vs. Temperature

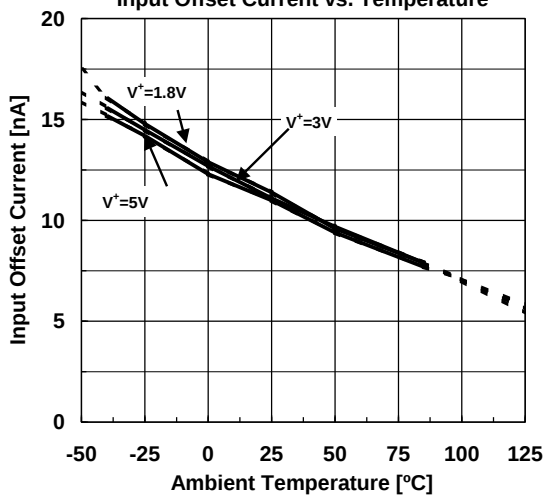


Input Bias Current vs. Temperature

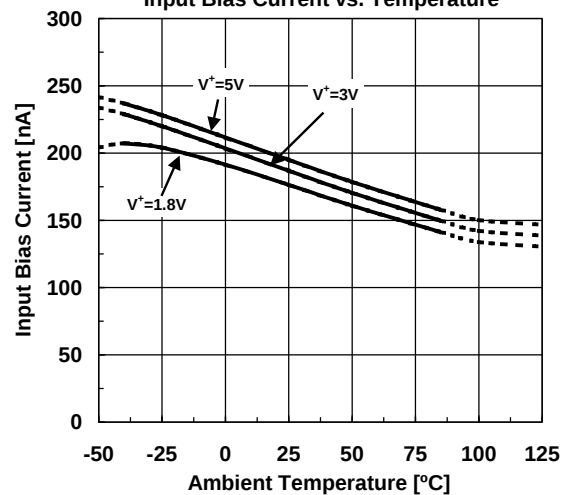


**Common Mode Rejection Ratio
vs. Temperature**

$V_{IC}=V^+, 0, V^-$

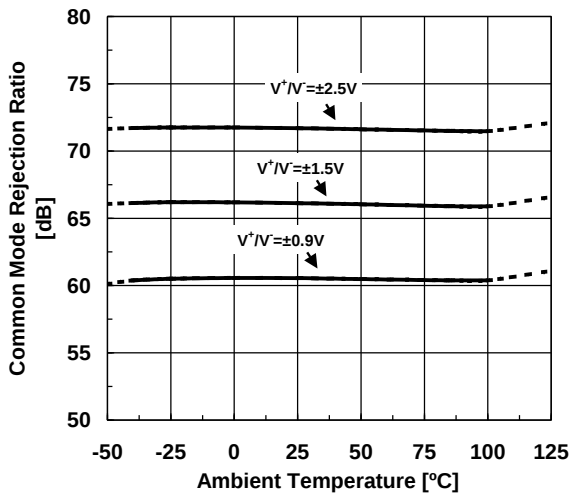


**Supply Voltage Rejection Ratio
vs. Temperature**

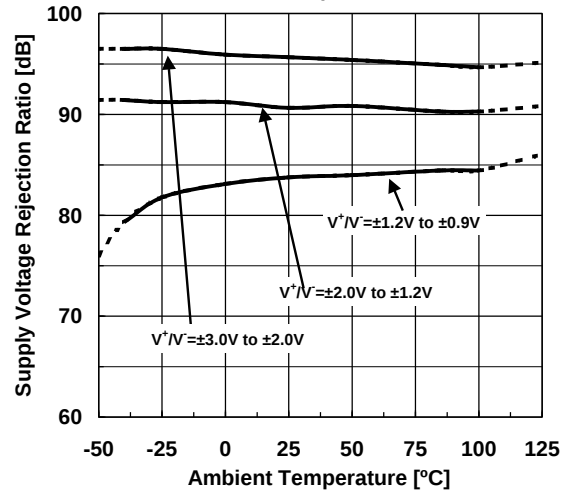


Voltage Gain vs. Temperature

$R_L=2k\Omega$

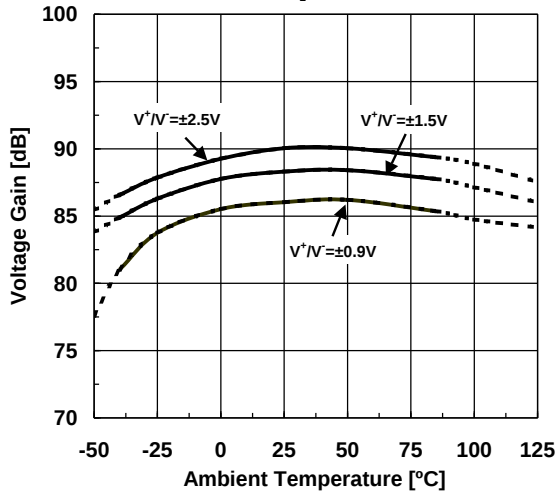


**Maximum Output Voltage vs.
Load Resistance**

$V^+/V^- = \pm 2.5V$, OPEN LOOP

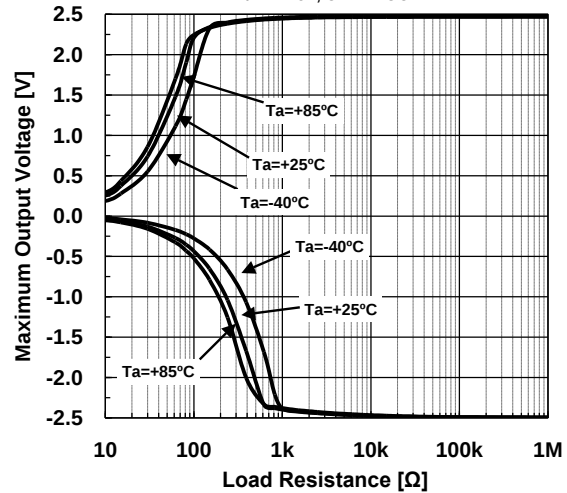


Maximum Output Voltage vs. Temperature

$V^+/V^- = \pm 2.5V$, $G_v=OPEN$

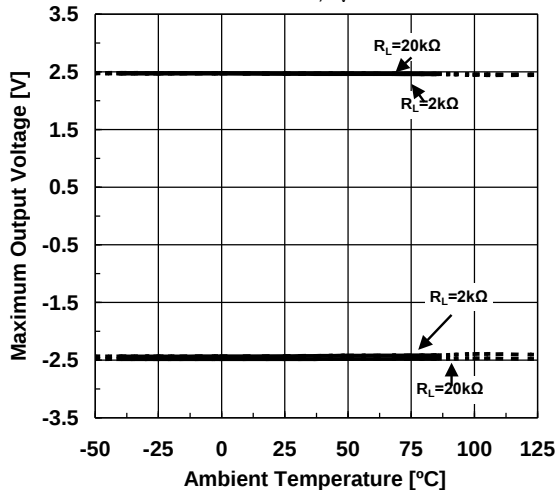


Maximum Output Voltage vs. Supply Voltage


OPEN LOOP, $R_L=2k\Omega$, $T_a=25^\circ C$

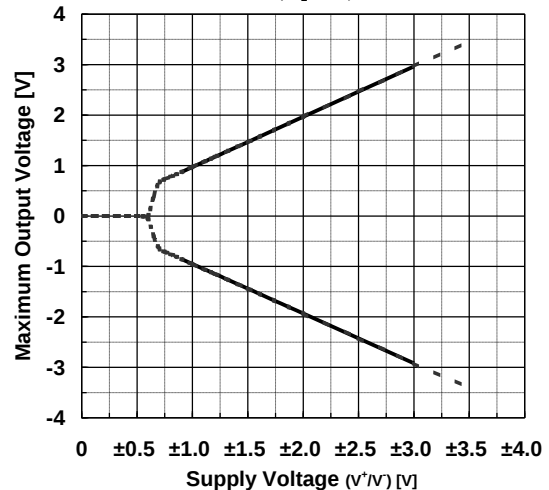

Maximum Output Voltage vs. Output Current
 $V^+/V^- = \pm 0.9V$, OPEN LOOP

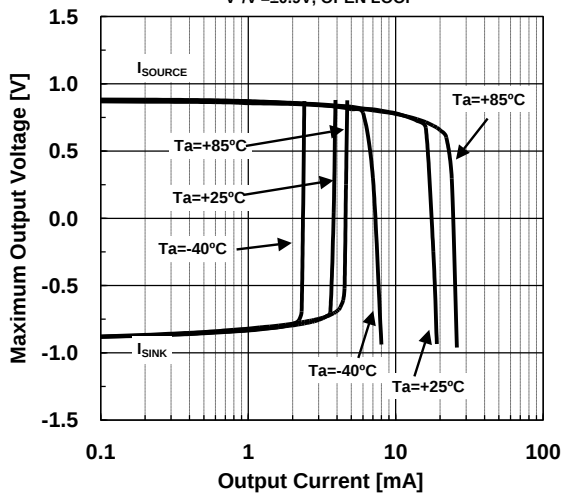


Maximum Output Voltage vs. Output Current
 $V^+/V^- = \pm 2.5V$, OPEN LOOP

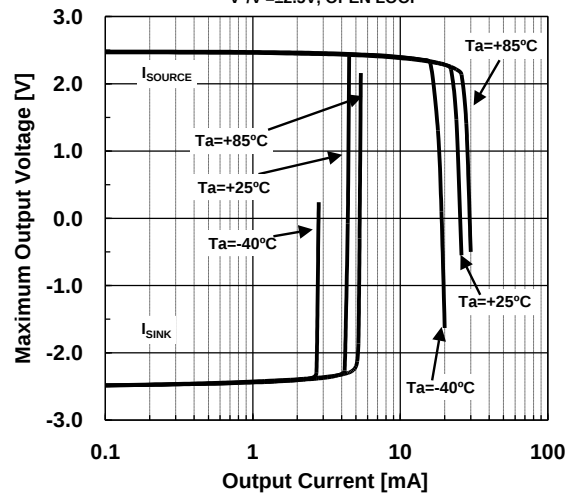


Voltage Gain • Phase vs. Frequency

$V^+/V^- = \pm 0.9V$, $G_V = 40dB$
 $R_F = 20\Omega$, $R_G = 2k\Omega$, $R_L = \infty$, $C_L = 0pF$

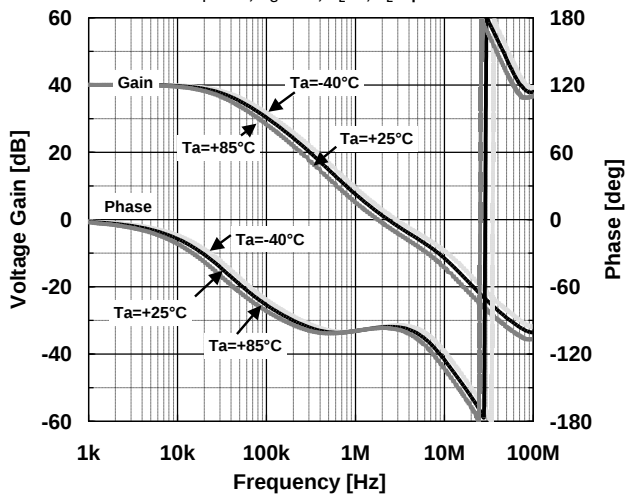


Voltage Gain • Phase vs. Frequency

$V^+/V^- = \pm 1.5V$, $G_V = 40dB$
 $R_F = 20\Omega$, $R_G = 2k\Omega$, $R_L = \infty$, $C_L = 0pF$

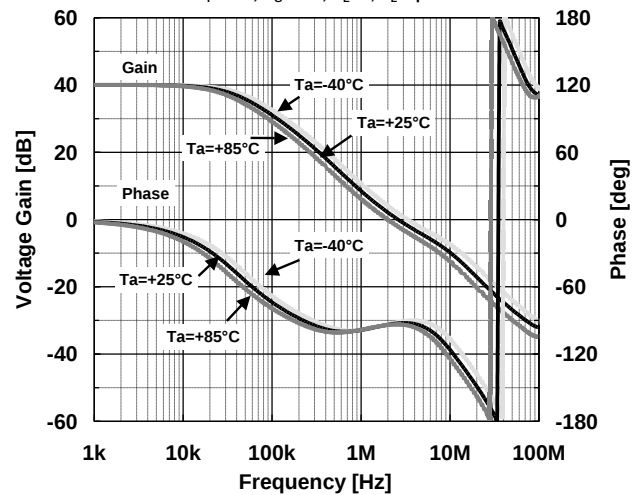


Voltage Gain • Phase vs. Frequency

$V^+/V^- = \pm 2.5V$, $G_V = 40dB$
 $R_F = 20\Omega$, $R_G = 2k\Omega$, $R_L = \infty$, $C_L = 0pF$

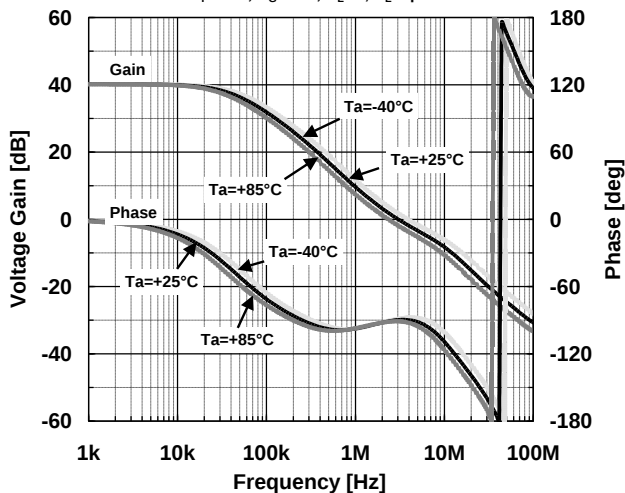


Peak Gain of Voltage Follower

$V^+/V^- = \pm 2.5V$, $G_V = 0dB$
 $R_S = 50\Omega$, $R_L = 2k\Omega$, $T_a = +25^\circ C$

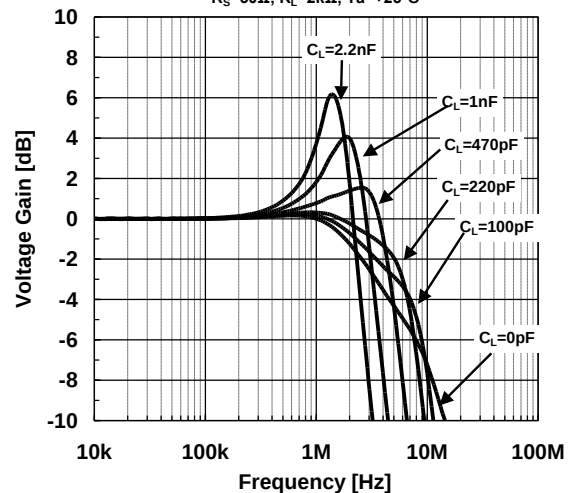


Input Voltage Noise Density vs. Frequency

$G_V=40\text{dB}$, $R_S=50\Omega$, $R_G=20\Omega$,
 $R_F=2\text{k}\Omega$, $C_L=0\text{pF}$, $T_a=25^\circ\text{C}$

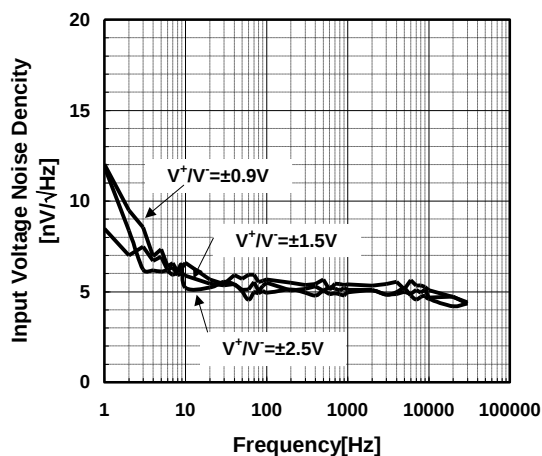


TOTAL HARMONIC DISTORTION + NOISE
vs OUTPUT AMPLITUDE

(Voltage Follower)
 $V^+/V^-=\pm 2.5\text{V}$, $G_V=20\text{dB}$
 $R_L=2\text{k}\Omega$, $T_a=25^\circ\text{C}$

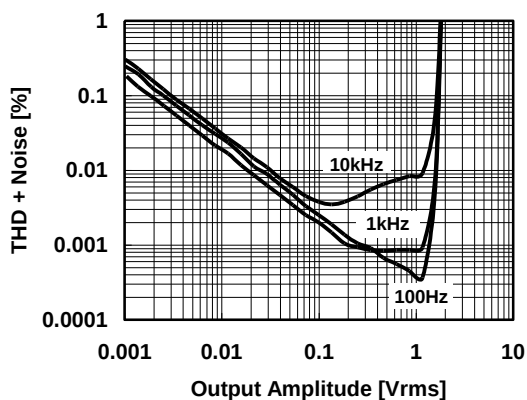


TOTAL HARMONIC DISTORTION + NOISE
vs OUTPUT AMPLITUDE


($\times 10$ Amplifier)
 $V^+/V^-=\pm 2.5\text{V}$, $G_V=20\text{dB}$
 $R_L=2\text{k}\Omega$, $T_a=25^\circ\text{C}$

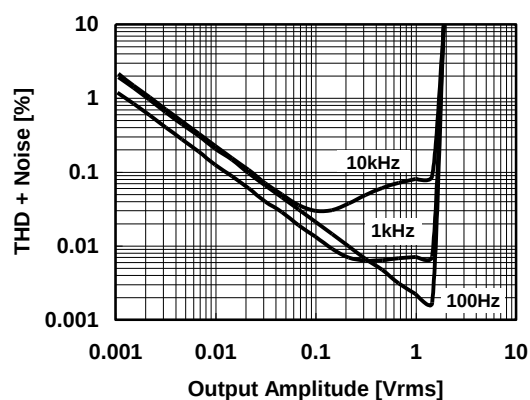


Positive Transient Response
 $V^*/V = \pm 0.9V, GV=0dB, f=10kHz, V_{IN}=0.5V_{PP}$
 $R_S=50\Omega, R_L=2k\Omega, CL=0pF, Ta=+25^\circ C$

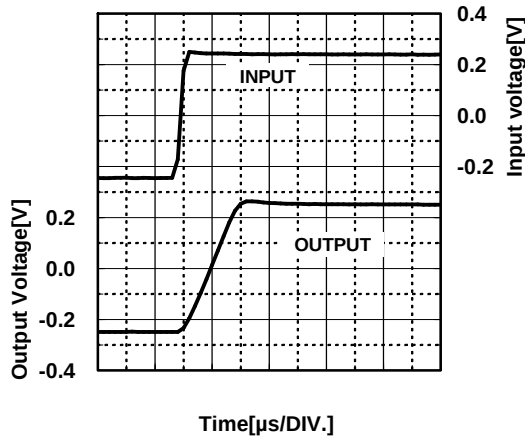


Negative Transient Response
 $V^*/V = \pm 0.9V, GV=0dB, f=10kHz, V_{IN}=0.5V_{PP}$
 $R_S=50\Omega, R_L=2k\Omega, CL=0pF, Ta=+25^\circ C$

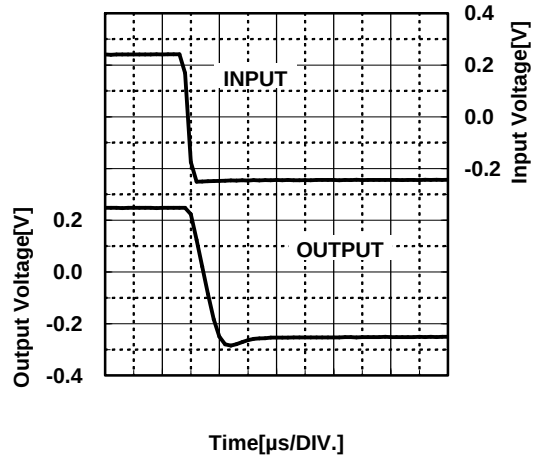

Positive Transient Response
 $V^*/V = \pm 1.5V, GV=0dB, f=10kHz, V_{IN}=1V_{PP}$
 $R_S=50\Omega, R_L=2k\Omega, CL=0pF, Ta=+25^\circ C$

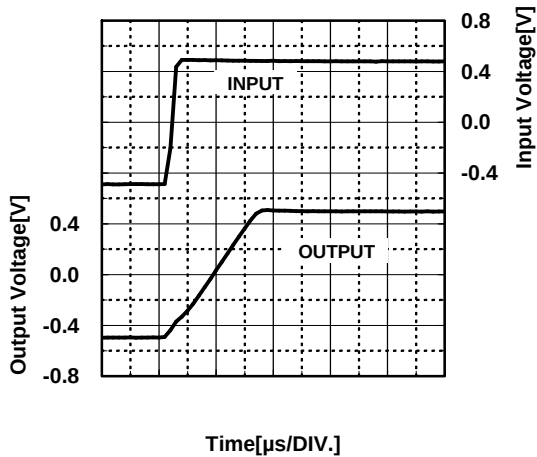

Negative Transient Response
 $V^*/V = \pm 1.5V, GV=0dB, f=10kHz, V_{IN}=1V_{PP}$
 $R_S=50\Omega, R_L=2k\Omega, CL=0pF, Ta=+25^\circ C$

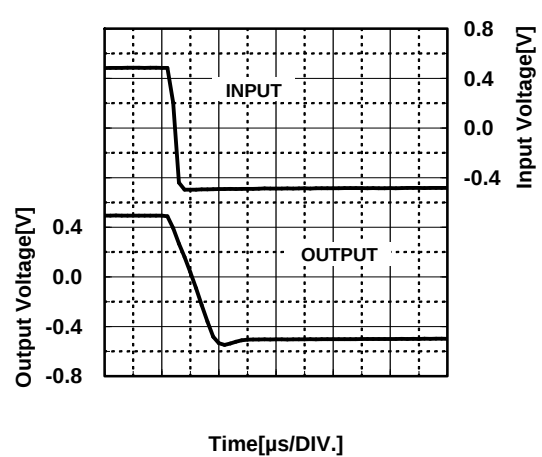

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2737V-TE1](#) [NJM2737D](#) [NJM2737M](#) [NJM2737RB1-TE1](#) [NJM2737M-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9