

120 WATT

FLEX ATX TYPE WITH ACTIVE PFC

FXA120-W-F SERIES



GENERAL SPECIFICATION

This specification describes the performance characteristics of a grounded, with active PFC function, single phase, 120 watts, 5 output level power supply with ATX form factor. In addition, it defines a worldwide safety requirement and electromagnetic compatibility requirement for FLEX ATX Power Supply

1) INPUT

Description	Min.	Typical	Max.	Condition
Input Voltage	90VAC	115/230V	264VAC	Full Range; 50/60Hz
Input Current(RMS)	2 Amps maximum (excluding output current) at 115 VAC input voltage 1 Amps maximum (excluding output current) at 230 VAC input voltage			
Line Frequency	47Hz	50/60Hz	63Hz	-
INRUSH CURRENT	30 Amps peak max. for one half cycle of AC 115V (cold start) 60 Amps peak max. for one half cycle of AC 230V (cold start)			
Efficiency	The power supply efficiency should not be less than 65% at the Maximum load of paragraph 3.1 with the AC input at any nominal low range of high range voltage specific in paragraph 2.1			
Power Factor Correction >0.95 at Full Load				

2) OUTPUT

2.1) STATIC DC LOAD

NOMINAL	LOAD CURRENT		REGULATION
VOLTAGE (DC)	MIN.	MAX.	(%)
+3.3 Volt	0.5 A	7 A	+/- 5
+5 Volt	1 A	12 A	+/- 5
+12 Volt	0.5 A	5 A	+/- 5
-12 Volt	0 A	0.3 A	+/- 10
+5 Vsb	0 A	1.5 A	+/- 5

NOTE: Regulation shows the percentage of absolute value of nominal output voltage. The total output should be 120W max. +3.3V & +5V combined output should not exceed 70W.

2.2) REMOTE ON/OFF CONTROL

As logic level is LOW: Output voltage is enabled

As logic level is HIGH or floating: Output voltage is disabled.

Note: Logic high level: 3.5-5.25 V, Logic low level: 0-0.5 V

2.3) RIPPLE AND NOISE

The ripple and noise of the outputs should be measured at the full load

Output Voltage	Ripple & Noise(p-p)
+3.3 Volts	50 mV
+5 Volts	60 mV
+12 Volts	120 mV
-12 Volts	120 mV
+5sb Volts	100 MV

NOTE; 20MHz bandwidth ripple & noise is measured by using 0.1uF C.C& 10uF/50V E.C bypassed at the output connector.

2.4) HOLD UP TIME

The power supply unit should maintain its proper output voltage within voltage specifications for at least 20 milliseconds after losing input power under the condition of 95 VAC input with full loading.

3) OVERSHOOT AT TURN-ON/TURN-OFF

Any overshoots during turn-on/turn-off should be less than +/-5% of the nominal output voltage values. No voltage of opposite polarity shall be present on any output during turn-on or turn-off.

4) TEMPERATURE COEFFICIENT

The temperature coefficient of all outputs is +/-0.05% per degree C maximum.

5)PROTECTION:

5.1)OVER VOLTAGE PROTECTION(OVP)

If any over voltage fault occur, the power supply should latch off before any output exceeds its limit below.

NOMINAL VOLTAGE(V)	OVERVOLTAGE RANGE(V)	
	FROM	TO
+3.3	3.7	4.1
+5	5.6	6.5
+12	13.3	14.3

The power supply will not be automatically recovered after the over voltage fault being removed. A manual power reset is necessary.

**ETA-USA**

HIGH QUALITY SWITCHING POWER SUPPLIES

ETA-USA Tel: 408-778-2793 Fax: 408-779-2753 e-mail: sales@eta-usa.com

5.2) **SHORT CIRCUIT PROTECTION**

Any short circuit occurred on any DC output should not cause any damage to the power supply, but will shut down the power supply. The power supply will not be automatically recovered after the short circuit being removed. A manual power reset is necessary.

5.3) **OVERLOAD PROTECTION**


An over load protection will be affected when either of the loadings: +5V, +3.3V & +12V exceeds +110% to 160%. The power supply won't be automatically recovered after the overload being removed. It needs to do the input power reset.

6) **RISE TIME:**

After turning on, less than 20 mS will be needed for the rise of +5V output voltage(measured from 10% point to 95% point on the waveform) to reach its peak.

7) **POWER GOOD SIGNAL:**

After power-on with nominal AC input, there might be a turn-on delay (between 100 mS to 500mS) before the Power Good Signal is issued, which occurs before +5V output reaches its minimum sense level of +4.75V. When turn-off, the Power Good Signal shall go to a lower level for at least 1 mS before +5V falls under the regulation limit described in paragraph 3.1

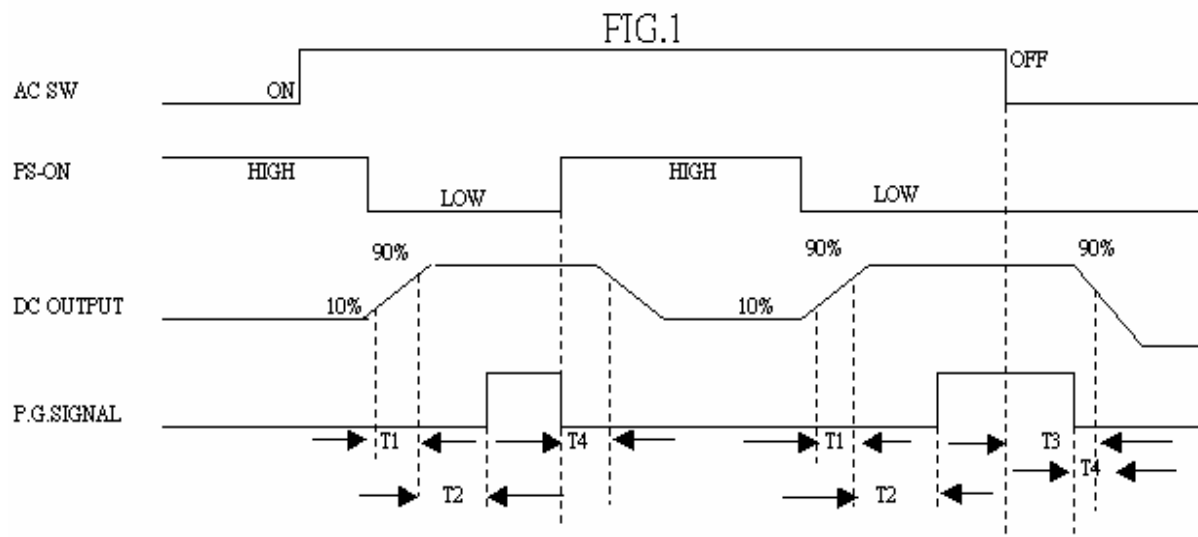

T1: RISE TIME < 20mS

T2: POWER GOOD DELAY TIME 100mS-500mS

T3: HOLD-UP TIME

T4: POWER FAIL DELAY TIME > 1mS

8) SAFETY PROVIDED:

UL60950-1 CSA22.2 60950-1 TUV EN60950 CB IEC60950-1

FCC Class "B" CE EN55022 class "B" EN61000-3-2 class "D" CE CISPR22 Class B

8.1) DIELECTRIC WITHSTAND

- Primary to Secondary : 3000 VAC for 60 Sec
- Primary to Frame Ground : 1500 VAC for 60 Sec.

8.2) INSULATION RESISTANCE

- Primary to Secondary : 20 Meg. Ohms Min. 500 VDC.
- Primary to Frame Ground : 20 Meg. Ohms Min. 500 VDC.
- Secondary to Frame Ground : 10 Meg. Ohms Min. 500 VDC.

9) ENVIRONMENT

9.1) OPERATING

Temperature	0 to 40 degree centigrade
Relative Humidity	10 to 90 percent, non-condensing

9.2) SHIPPING AND STORAGE

Temperature	-40 to +70 degree centigrade
Relative Humidity	5 to 95 percent, non-condensing


10) WARRANTY: One Year (MTBF 80,000 Hrs, DC fan not guaranteed)

11) DIMENSION

Case dimension: 150(L) X 83(W) X 41.5(H)mm

12) PIN ASSIGNMENT

Flex ATX Main Power Supply Connector

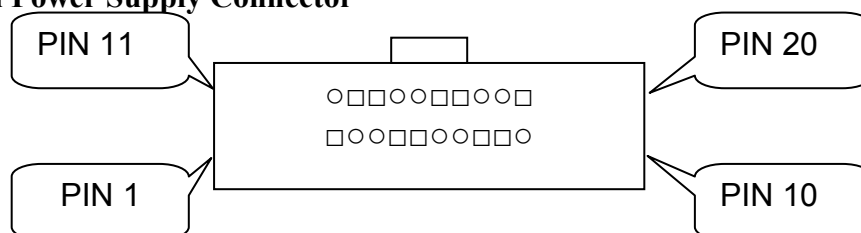

Pin	Signal	Wire	
1	+3.3 VDC	Orange	20AWG
2	+3.3 VDC	Orange	20AWG
3	COM	Black	20AWG
4	+5 VDC	Red	20AWG
5	COM	Black	20AWG
6	+5 VDC	Red	20AWG
7	COM	Black	20AWG
8	POK	Gray	22AWG
9	+5 VSB	Purple	22AWG
10	+12 VDC	Yellow	20AWG

Pin	Signal	Wire	
11	+3.3V VDC	Orange	20AWG
12	-12 VDC	Blue	22AWG
13	COM	Black	20AWG
14	PS-ON	Green	22AWG
15	COM	Black	20AWG
16	COM	Black	20AWG
17	COM	Black	20AWG
18	NC	-	-
19	+5 VDC	Red	20AWG
20	+5 VDC	Red	20AWG

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9