


High Frequency Wire Wound Transformers

EFD15 Platforms - SMT

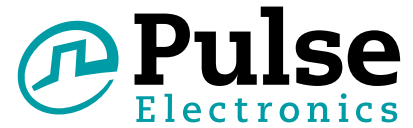

- Power Range:** Up to 40W
- Height:** 8.4mm Max
- Footprint:** 22.2mm x 17.2mm Max
- Topology:** Forward and Flyback

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA0476NL	Pri. Inductance	(1,2-3,4)	9.85μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	0.15μH MAX	
	DCR	(1-3)	47mΩ MAX	
		(2-4)	47mΩ MAX	
		(5-6)	87mΩ MAX	
		(12,11,10-7,8,9)	8mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA0691NL	Pri. Inductance	(3-5)	170.3μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	2.4μH MAX	
	DCR	(3-5)	600mΩ MAX	
		(2-1)	2000mΩ MAX	
		(12,11-10,9)	20mΩ MAX	
		(8-7)	720mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA1039NL	Pri. Inductance	(3-5)	157.5μH ±10%	FLYBACK TRANSFORMER (Note: Height of PA1039NL is 8.9mm Max)
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	2μH MAX	
	DCR	(3-5)	500mΩ MAX	
		(2-1)	1300mΩ MAX	
		(12,11-10,9)	25mΩ MAX	
		(8-7)	760mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA1067NL	Pri. Inductance	(3-4)	113μH ±30%	FORWARD TRANSFORMER
	Lk. Inductance	(3-4) with (12,11,10,9,8,7) shorted	1μH MAX	
	DCR	(1-2)	70mΩ MAX	
		(3-4)	70mΩ MAX	
		(5-6)	70mΩ MAX	
		(12,11,10-9,8,7)	6mΩ MAX	
	Hi-Pot	Pri-Sec	500Vrms	
PA1169NL	Pri. Inductance	(2-5)	38.2μH ±30%	FORWARD TRANSFORMER
	Lk. Inductance	(2-5) with (11,9,7) shorted	0.5μH MAX	
	DCR	(2-5)	27mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		95.2	
PA1275NL	Pri. Inductance	(3-5)	100.7μH ±10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	2μH MAX	
	DCR	(3-5)	485mΩ MAX	
		(2-1)	1500mΩ MAX	
		(12,11-10,9)	16mΩ MAX	
		(8-7)	575mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vdc	
	K1 Factor		1678.3	

High Frequency Wire Wound Transformers

EFD15 Platforms - SMT



Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA1424NL	Pri. Inductance	(3-4)	62μH ±12%	
	Lk. Inductance	(3-4) with (10,9,8,7) shorted	1μH MAX	
	DCR	(3-4)	250mΩ MAX	
		(10-9)	30mΩ MAX	
		(7-8)	20mΩ MAX	
		(2-1)	400mΩ MAX	
		(12-11)	2400mΩ MAX	
Hi-Pot	Pri-Sec	1500Vrms		
K1 Factor	1878.8			
PA1627NL	Pri. Inductance	(3-5)	100.7μH ±12%	
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3μH MAX	
	DCR	(3-5)	485mΩ MAX	
		(2-1)	1850mΩ MAX	
		(12,11-10,9)	16mΩ MAX	
	Hi-Pot	Pri-Sec	2150Vdc	
K1 Factor	1678.3			
PA1646NL	Pri. Inductance	(3-5)	100.7μH ±5%	
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3μH MAX	
	DCR	(3-5)	485mΩ MAX	
		(2-1)	1150mΩ MAX	
		(12,11-10,9)	25mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	1678.3			
PA1706NL	Pri. Inductance	(3-5)	170.1μH ±12%	
	Lk. Inductance	(3-5) with (12,11,10,9,8,7) shorted	3.5μH MAX	
	DCR	(3-5)	643mΩ MAX	
		(12,11-10,9)	6mΩ MAX	
		(8-7)	60mΩ MAX	
		(2-1)	123mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
K1 Factor	2520.0			
PA1741NL	Pri. Inductance	(1-3)	144μH ±10%	
	Lk. Inductance	(1-3) with (12,11,10,9,8,7) shorted	1μH MAX	
	DCR	(1-3)	150mΩ MAX	
		(12,11-10,9)	18mΩ MAX	
		(8-7)	60mΩ MAX	
	Hi-Pot	Pri-Sec	1800Vrms	
K1 Factor	27.8			
PA1745NL	Pri. Inductance	(2-5)	37.1μH ±10%	
	Lk. Inductance	(2-5) with (8,9,10,11) shorted	1μH MAX	
	DCR	(2-5)	78mΩ MAX	
		(11-10)	34mΩ MAX	
		(8-7)	38mΩ MAX	
	Hi-Pot	Pri-Sec	600Vrms	
K1 Factor	1177.8			

High Frequency Wire Wound Transformers

EFD15 Platforms - SMT



Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA1994NL	Pri. Inductance	(3-5)	170.1μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3.5μH MAX	
	DCR	(3-5)	850mΩ MAX	
		(2-1)	145mΩ MAX	
		(12,11-10,9)	75mΩ MAX	
		(8-7)	55mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA1995NL	Pri. Inductance	(3-5)	170.1μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3.5μH MAX	
	DCR	(3-5)	850mΩ MAX	
		(2-1)	145mΩ MAX	
		(12,11-10,9)	70mΩ MAX	
		(8-7)	55mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA1996NL	Pri. Inductance	(3-5)	170.1μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3.5μH MAX	
	DCR	(3-5)	850mΩ MAX	
		(2-1)	145mΩ MAX	
		(12,11-10,9)	37mΩ MAX	
		(8-7)	55mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA1997NL	Pri. Inductance	(3-5)	170.1μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	3.5μH MAX	
	DCR	(3-5)	850mΩ MAX	
		(2-1)	150mΩ MAX	
		(12,11-10,9)	15mΩ MAX	
		(8-7)	65mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
PA2026NL	Pri. Inductance	(3-5)	25.2μH ±12%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,9,10,12) shorted	1μH MAX	
	DCR	(3-5)	150mΩ MAX	
		(12-10)	26mΩ MAX	
		(9-7)	28mΩ MAX	
		(2-1)	245mΩ MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor		840.0	

High Frequency Wire Wound Transf


EFD15 Platforms - SMT

Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C⁵

PA2069NL	Pri. Inductance	(1,2-3,4)	40 μ H $\pm$ 13%	FLYBACK TRANSFORMER
	Lk. Inductance	(1,2-3,4) with (5,6,7,8,9,10,11,12) shorted	0.825 μ H MAX	
	DCR	(1,2-3,4)	130m Ω MAX	
		(5-6)	315m Ω MAX	
		(12,11,10-9,8,7)	3.5m Ω MAX	
	Hi-Pot	Pri-Sec	1650Vrms	
	K1 Factor	1111.1		
PA2196NL	Pri. Inductance	(3-5)	70 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(3-5) with (7,8,9,10,11,12) shorted	1.2 μ H MAX	
	DCR	(3-5)	183m Ω MAX	
		(2-1)	1100m Ω MAX	
		(12,11-10,9)	14m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	1555.6		
PA2265NL	Pri. Inductance	(1,2-12,11)	122.5 μ H $\pm$ 10%	FLYBACK TRANSFORMER
	Lk. Inductance	(1,2-12,11) with (5,6,8,7,3,10) shorted	2 μ H MAX	
	DCR	(1,2-12,11)	270m Ω MAX	
		(7,8,9-10,11,12)	63m Ω MAX	
		(5,6-8,7)	310m Ω MAX	
	Hi-Pot	Pri-Sec	1500Vrms	
	K1 Factor	2333.3		

High Frequency Wire Wound Transformers

EFD15 Platforms - SMT

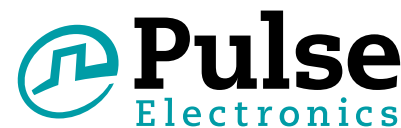


Notes

1. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.
2. The above transformers and inductors have been tested and approved by Pulse's power IC partners and are sited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC partners are matched with the above Pulse part numbers please consult the IC Cross Reference on the Pulse website.
3. For flyback topology applications, it is necessary to ensure that the transformer will not saturate in the application. The peak flux density (Bpk) should remain below 2700Gauss. To calculate the peak flux density use the following formula:
$$B_{pk} (\text{Gauss}) = K1_Factor * I_{pk}(A)$$
4. In high volt-μsec applications, it is important to calculate the core loss of the transformer. Approximate transformer core loss can be calculated as:
$$\text{CoreLoss (W)} = 4.6E-14 * (\text{Freq_kHz})^{1.63} * (\Delta B_Gauss)^{2.63}$$

where ΔB can be calculated as:
For Flyback Topology: $\Delta B = K1_Factor * \Delta(A)$
For Forward Topology: $\Delta B = K1_Factor * \text{Volt-}\mu\text{sec}$
5. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PA0476NL becomes PA0476NL_T). Pulse complies with industry standard tape and reel specification EIA481. The tape and reel for this product has a width (W=44mm), pitch (Po=32mm) and depth (Ko=11.78mm).
6. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.

Mechanical

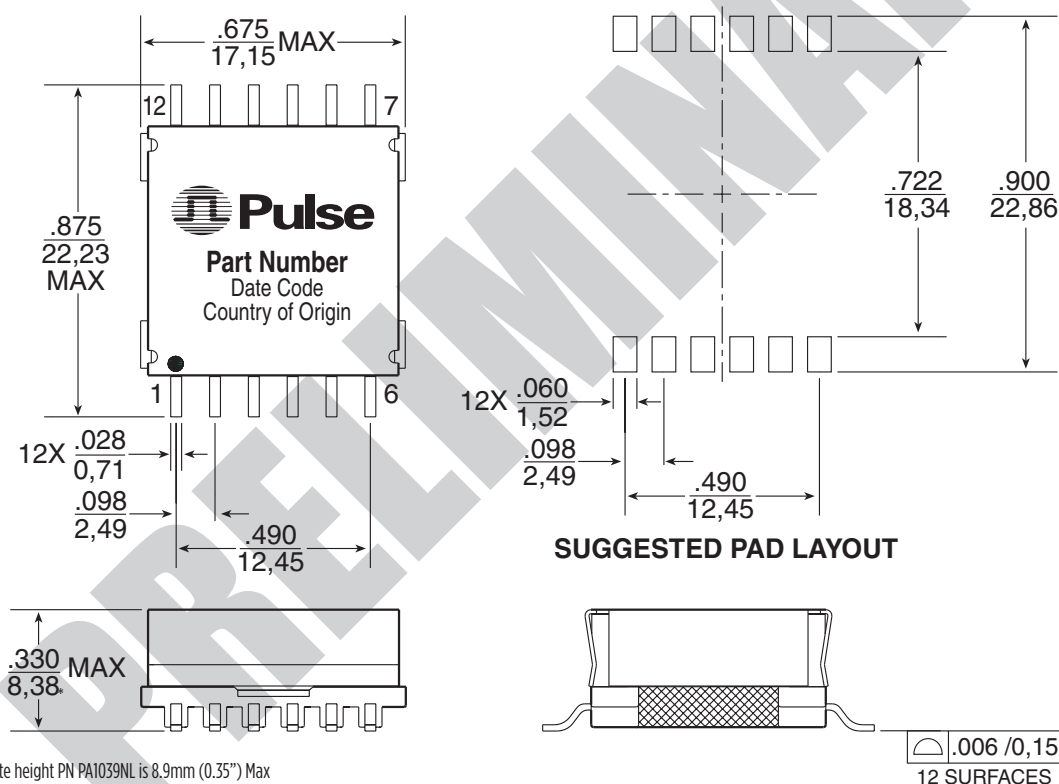

For More Information

Pulse Worldwide Headquarters

12220 World Trade Drive
San Diego, CA 92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Zeppelinstrasse 15
71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 12

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China

Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia

135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia

3F No. 198, Zhongyuan Road
Zhongli City
Taoyuan County (32068)
Taiwan

Tel: 886 3 4356768
Fax: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9