





Oscilloscope Probes and Probe Accessories

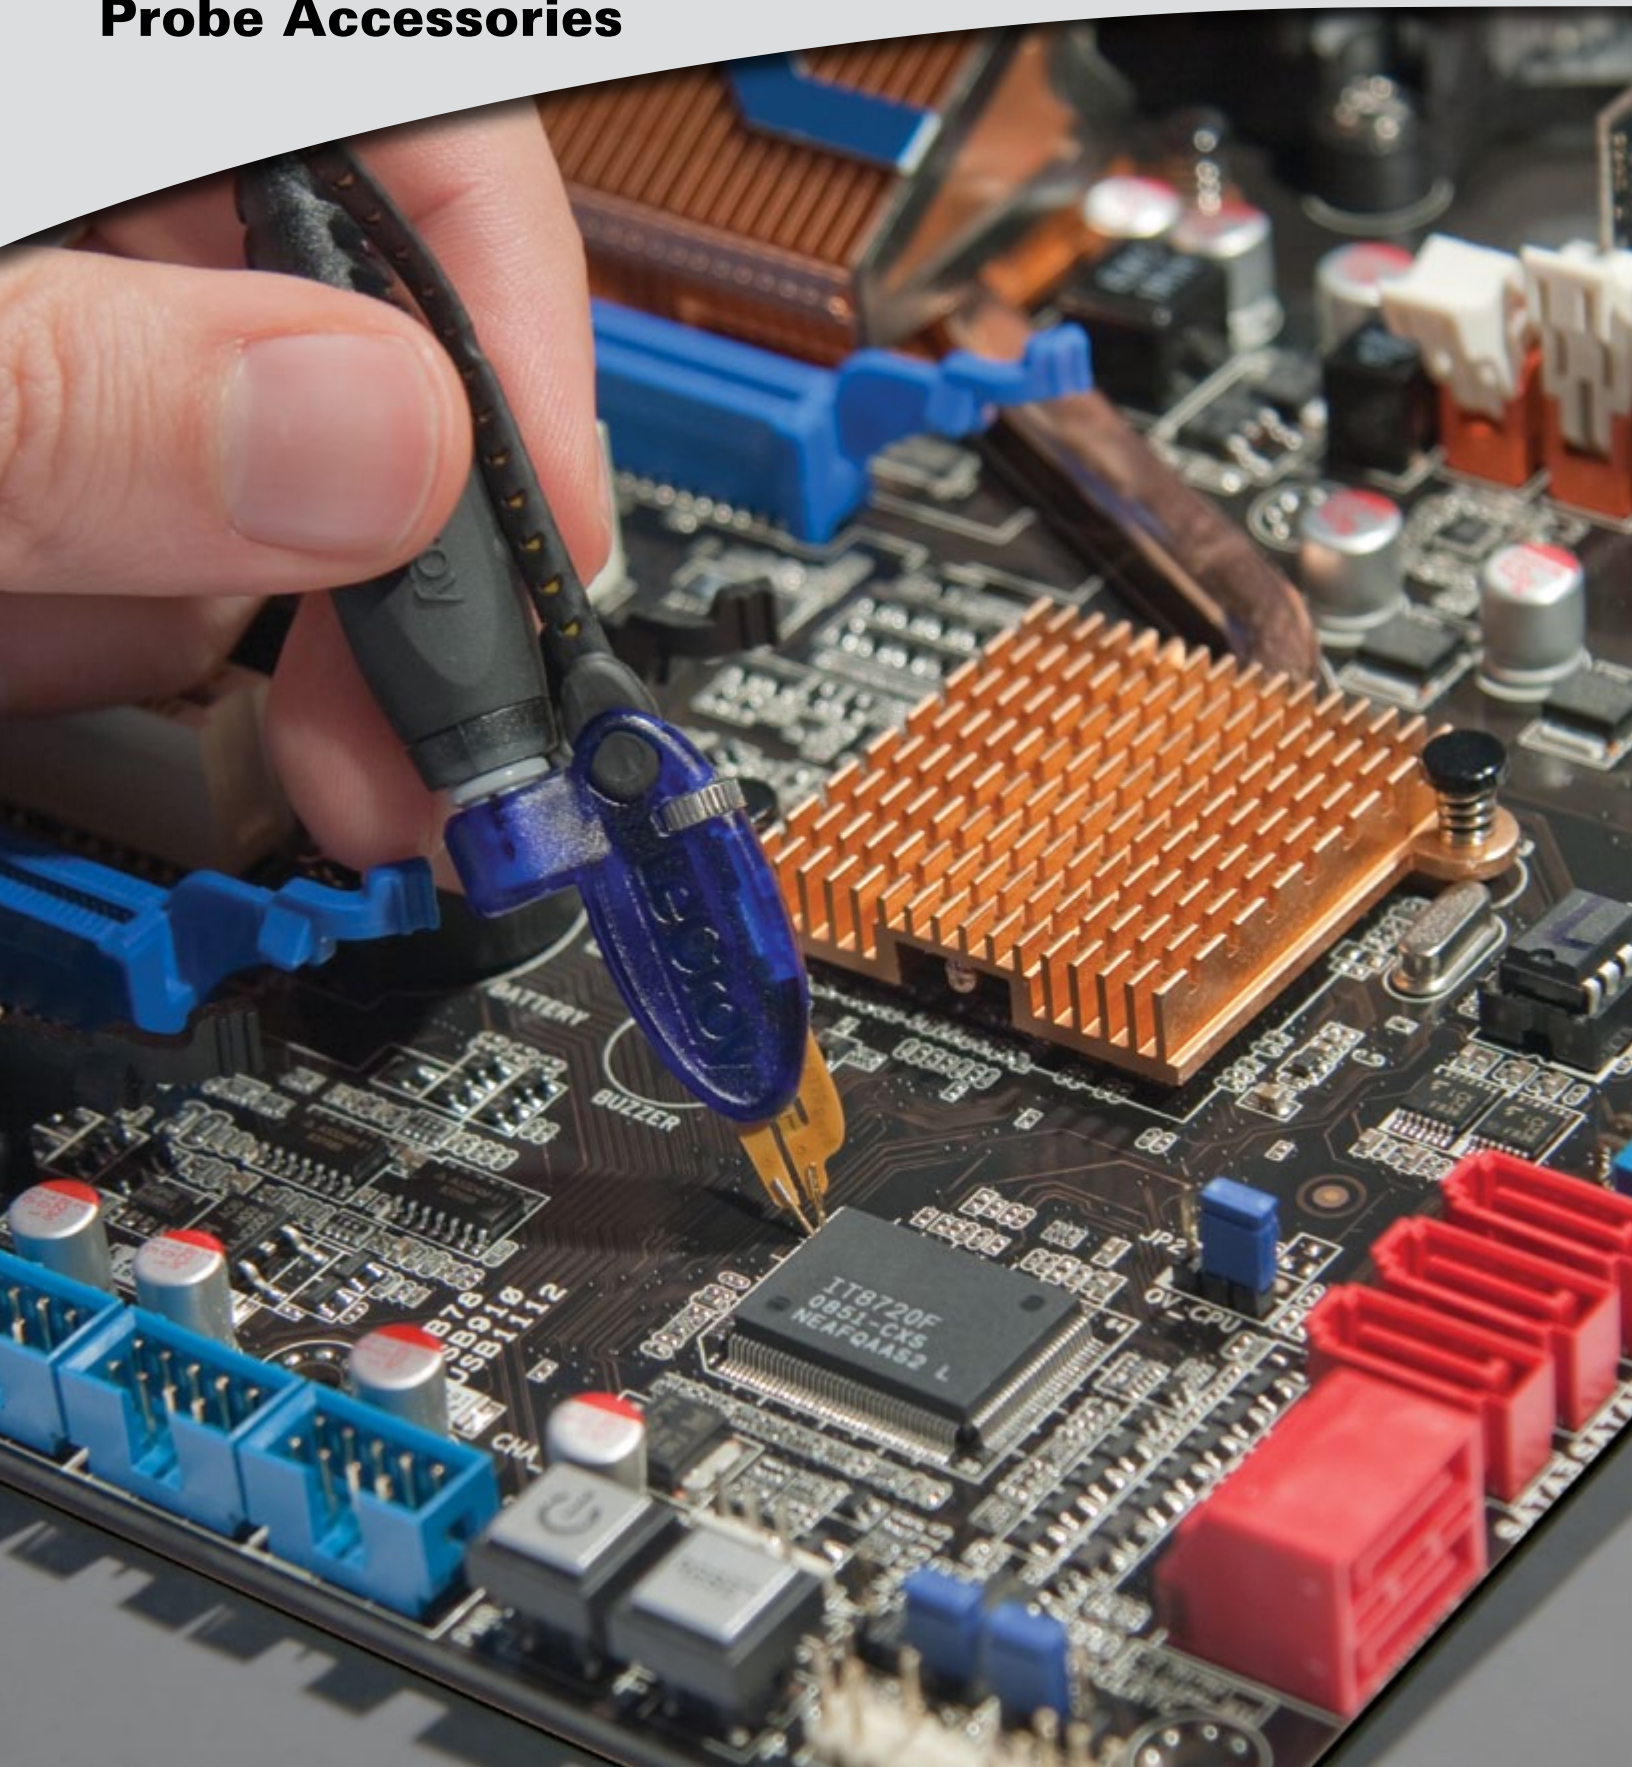

PROBE SELECTION GUIDE


LeCroy has a wide variety of world class probes and amplifiers to compliment its product line. From the ZS high impedance active probes to the WaveLink differential probing system which offers bandwidths up to 25 GHz, LeCroy probes and probe accessories provide optimum mechanical connections for signal measurement.

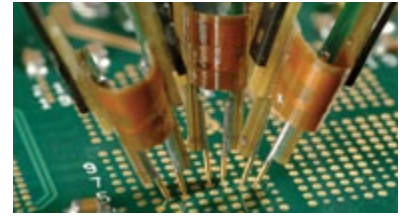

Front Cover:

Dxx10-PT Differential Positioner Tip for the WaveLink 4-6 GHz Probes.

| | WaveAce Oscilloscopes | WaveJet 300A Oscilloscopes | WaveSurfer MIXs-B / MSO MIXs-B Oscilloscopes | HRO 12-bit Oscilloscopes | WaveRunner 6 Zi Oscilloscopes | WaveRunner Xi-A / MIXi-A Oscilloscopes | Vehicle Bus Analyzers | WavePro/SDA/DDA/7 Zi/7 Zi-A Oscilloscopes | WaveMaster/SDA/DDA/8 Zi/8 Zi-A Oscilloscopes | LabMaster 9 Zi-A Oscilloscopes | LabMaster 10 Zi Oscilloscopes |
|---|-----------------------|----------------------------|--|--------------------------|-------------------------------|--|-----------------------|---|--|--------------------------------|-------------------------------|
| Active Voltage Probes - p. 4 - 7 | | | | | | | | | | | |
| ZS1000 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| ZS1500 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| ZS2500 | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Current Probes - p. 8 - 11 | | | | | | | | | | | |
| AP015 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| CP030 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| CP031 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| CP150 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| CP500 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| Differential Probes - p. 12 - 23 | | | | | | | | | | | |
| ZD200 | | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| ZD500 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| ZD1000 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| ZD1500 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| AP033 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| AP034 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| D410 | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| D410-PT | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| D420 | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| D420-PT | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| D500PT | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | |
| D300A-AT | | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| D600A-AT | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | |
| D610 | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | |
| D610-PT | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | |
| D620 | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | |
| D620-PT | | | | ✓ | | | ✓ | ✓ | ✓ | ✓ | |
| Dxx05-PT-KIT | | | | | | | | ✓ | ✓ | ✓ | |
| D830 | | | | | | | | ✓ | ✓ | ✓ | |
| D830-PS | | | | | | | | ✓ | ✓ | ✓ | |
| D1030 | | | | | | | | ✓ | ✓ | ✓ | |
| D1030-PS | | | | | | | | ✓ | ✓ | ✓ | |
| D1330 | | | | | | | | ✓ | ✓ | ✓ | |
| D1330-PS | | | | | | | | ✓ | ✓ | ✓ | |
| WL-PLink-A | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| LPA-2.92 | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| WL-2.92MM | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| D1305-A | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| D1305-A-PS | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| D1605-A | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| D1605-A-PS | | | | | | | | ✓ | ✓ | ✓ | ✓ |
| D2005-A | | | | | | | | ✓ | ✓ | ✓ | ✓ |

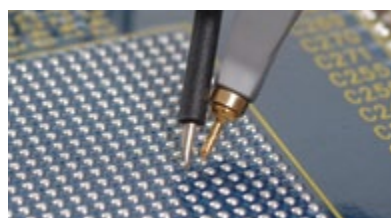


WaveAce Oscilloscopes
WaveJet 300A Oscilloscopes
WaveSurfer MXs-B / MSO
MXs-B Oscilloscopes
HRO 12-bit Oscilloscopes
WaveRunner 6 Zi
Oscilloscopes
WaveRunner Xi-A / MXi-A
Oscilloscopes
Vehicle Bus Analyzers
WavePro/SDA/DDA/7 Zi/7 Zi-A
Oscilloscopes
WaveMaster/SDA/DDA/8 Zi/8 Zi-A
Oscilloscopes
LabMaster 9 Zi-A Oscilloscopes
LabMaster 10 Zi Oscilloscopes

| Differential Probes - p. 12 - 23 (cont'd) | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| D2005-A-PS | | | | | | | | | ✓ | ✓ |
| D2505-A | | | | | | | | | ✓ | ✓ |
| D2505-A-PS | | | | | | | | | ✓ | ✓ |
| High Voltage Differential Probes - p. 24 - 27 | | | | | | | | | | |
| ADP300 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ADP305 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| AP031 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Differential Amplifiers - p. 28 - 31 | | | | | | | | | | |
| DXC200 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DA101 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DA1855A | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DA1855A-PR2 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DA1855A-PR2-RM | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DA1855A-RM | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DXC-5100 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| DXC100A | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| High Voltage Probes - p. 32 - 35 | | | | | | | | | | |
| PPE1.2KV | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PPE20KV | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PPE2KV | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PPE4KV | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PPE5KV | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PPE6KV | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Optical Probes - p. 36 - 39 | | | | | | | | | | |
| OE425 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| OE455 | | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| OE525 | | | | | | | | ✓ | ✓ | ✓ |
| OE555 | | | | | | | | ✓ | ✓ | ✓ |
| OE695G | | | | | | | | | ✓ | ✓ |
| Passive Probes - p. 40 - 43 | | | | | | | | | | |
| PP005A | | | | | | | | ✓ | | |
| PP006A | | ✓ | | | | | | | | |
| PP-007-WR-1 | | | | | | ✓ | | | | |
| PP008-1 | | | | ✓ | ✓ | | | | | |
| PP009-1 | | | ✓ | ✓ | ✓ | | | | | |
| PP010-1 | | ✓ | | | | | | | | |
| PP011-1 | | | ✓ | | | | | | | |
| PP016 | ✓ | | | | | | | | | |
| Transmission Line Probes - p. 44 - 47 | | | | | | | | | | |
| PP065 | | | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| PP066 | | | | | | | | ✓ | ✓ | ✓ |

Note: Some probes require purchase of the amplifier and platform/cable assembly separately – Reference detailed literature for more information.

ACTIVE VOLTAGE PROBES

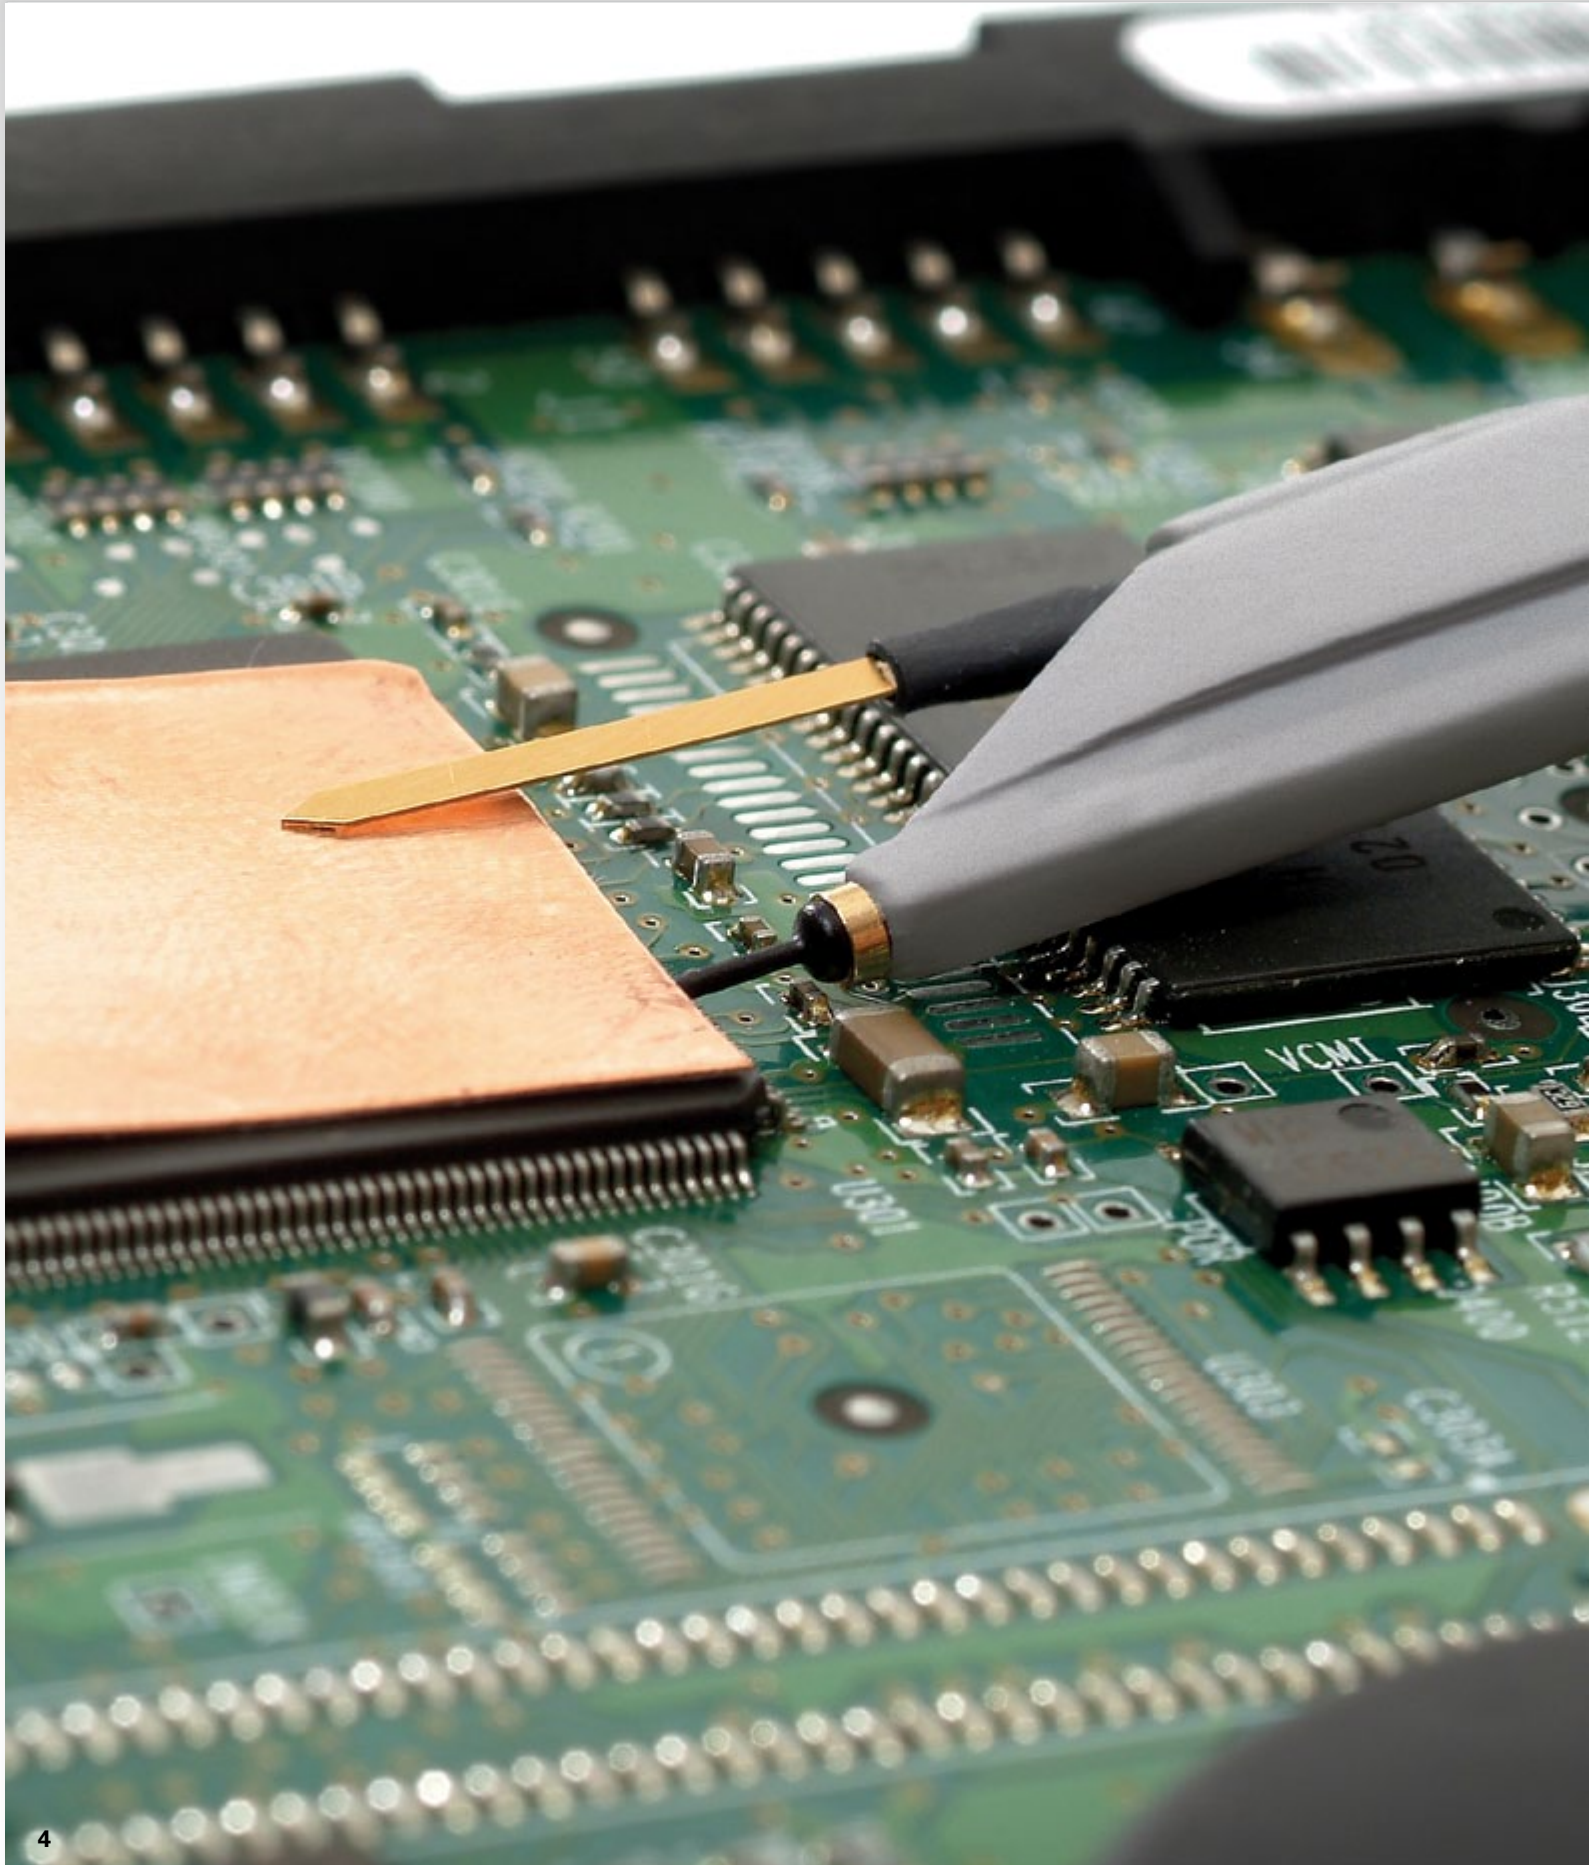

ACTIVE VOLTAGE PROBES

Engineers must commonly probe high-frequency signals with high signal fidelity. Typical passive probes with high input R and C provide good response at lower frequencies, but inappropriately load the circuit, and distort signals, at higher frequencies. Active voltage probes feature both high input R and low input C to reduce circuit loading across the entire probe/oscilloscope bandwidth. With low circuit loading, and a form factor that allows probing in confined areas, the active voltage probe becomes the everyday probe for all different types of signals and connection points.

LeCroy Active
Voltage Probes
Model Numbers:

ZS1000

ZS1500

ZS2500

*Opposite page:
ZS Series High Impedance Active Probe*

ZS SERIES ACTIVE PROBES



LeCroy
Active Voltage Probe
Model Numbers:

ZS1000


ZS1500

ZS2500

The ZS Series probes provide high impedance and an extensive set of probe tips and ground accessories to handle a wide range of probing scenarios. The high 1 M Ω input resistance and low 0.9 pF input capacitance mean this probe is ideal for all frequencies. The ZS Series probes provide full system bandwidth for all LeCroy oscilloscopes having bandwidths of 2 GHz and lower.

High Impedance Reduces Circuit Loading Across Full Oscilloscope Bandwidth

Engineers must commonly probe high frequency signals with high signal fidelity. Typical passive probes with high input R and C provide good response at lower frequencies, but inappropriately load the circuit, and distort signals, at higher frequencies. The ZS Series features both high input R (1 M Ω and low input C (0.9 pF) to reduce circuit loading across the entire probe/oscilloscope bandwidth. With low circuit loading, and a form factor that allows probing in confined areas, the ZS Series becomes the everyday probe for all different types of signals and connection points. The ZS1000 is ideal for 200–600 MHz oscilloscopes. The ZS1500 is ideal for 1 GHz oscilloscopes and the ZS2500 is ideal for 2 GHz oscilloscopes.

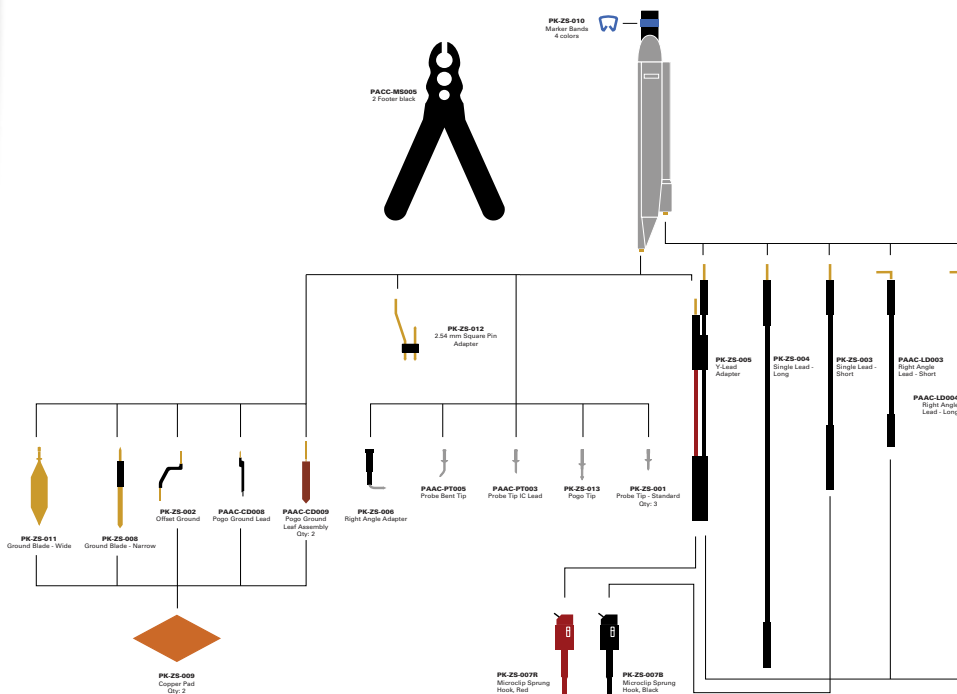

ZS SERIES ACTIVE PROBES

Specifications

ZS1000

ZS1500

ZS2500

Electrical Characteristics

| | | | |
|------------------------|--|--|--|
| Bandwidth (Probe Only) | 1 GHz | 1.5 GHz | 2.5 GHz |
| Bandwidth (System) | 600 MHz at probe tip with 600 MHz oscilloscope | 1 GHz at probe tip with 1 GHz oscilloscope | 2 GHz at probe tip with 2 GHz oscilloscope |
| Input Capacitance | 0.9 pF | | |
| DC Input Resistance | 1 MΩ | | |
| Probe Offset Range | N/A | ±12 V | |
| Attenuation | ÷10 | | |
| Input Dynamic Range | ±8 V | | |
| Non-destruct Voltage | 20 V | | |

General Characteristics

| | |
|--------------|-------|
| Cable Length | 1.3 m |
|--------------|-------|

Ordering Information

Product Description

Product Code

| | |
|---|----------------|
| Set of 4 ZS2500, 2.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probes | ZS2500-QUADPAK |
| Set of 4 ZS1500, 1.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probes | ZS1500-QUADPAK |
| Set of 4 ZS1000, 1 GHz, 0.9 pF, 1 M Ω High Impedance Active Probes | ZS1000-QUADPAK |
| 2.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probe | ZS2500 |
| 1.5 GHz, 0.9 pF, 1 M Ω High Impedance Active Probe | ZS1500 |
| 1 GHz, 0.9 pF, 1 M Ω High Impedance Active Probe | ZS1000 |

Included with Standard Configuration

| | |
|--------------------------------------|---------------------------|
| Instruction Manual, English | |
| Certificate of Calibration | |
| 1-Year Warranty | |
| Straight Pin Lead – Short (Qty 1) | PK-ZS-003 |
| Straight Pin Lead – Long (Qty 1) | PACC-LD004 |
| Right Angle Pin Lead – Short (Qty 1) | PACC-LD003 |
| Right Angle Pin Lead – Long (Qty 1) | PACC-LD004 |
| Y Lead Adapter (Qty 1) | PK-ZS-005 |
| Micro-Grabber Pair | PK-ZS-007R and PK-ZS-007B |
| Ground Blade – Wide | PK-ZS-011 |
| Probe Tip – Standard (Qty 3) | PK-ZS-001 |
| Right Angle Socket (Qty 1) | PK-ZS-006 |
| Offset Ground – Z lead (Qty 1) | PK-ZS-002 |
| Ground Blade – Narrow (Qty 1) | PK-ZS-008 |

Product Description

Product Code

Included with Standard Configuration (cont'd)

| | |
|------------------------------------|------------|
| Copper Tape (Qty 2) | PK-ZS-009 |
| Pogo Tip (Qty 1) | PK-ZS-013 |
| 2.54mm Square Pin Adapter | PK-ZS-012 |
| Channel ID Clips (Set of 4 Colors) | PK-ZS-010 |
| Freehand Probe Holder | PACC-MS005 |
| Bent Tip (Qty 1) | PACC-PT005 |
| IC Tip (Qty 1) | PACC-PT003 |
| Pogo Ground Lead (Qty 1) | PACC-CD008 |
| Pogo Leaf Ground Assembly (Qty 2) | PACC-CD009 |

Available Accessories

| | |
|--------------------------|------------|
| Discrete SMD Tip | PACC-PT004 |
| Solder-In Ground | PACC-CD007 |
| Ground Spring Hook | PACC-LD001 |
| Square Pin Ground Spring | PACC-LD002 |

CURRENT PROBES



Measuring AC and DC Currents

LeCroy current probes do not require the breaking of a circuit or the insertion of a shunt to make accurate and reliable current measurements. Based on a combination of Hall effect and transformer technology, LeCroy current probes are ideal for making accurate AC, DC, and impulse current measurements.

Fully Integrated with Oscilloscope

Many current probes require external power supplies or amplifiers to display a waveform on the oscilloscope screen. All LeCroy current probes are powered through the LeCroy ProBus connection and require no additional hardware. Along with providing power, the ProBus connection allows the current probe and oscilloscope to communicate, resulting in current waveforms automatically displayed on screen in Amps, and calculated power traces scaled correctly in Watts. This full integration also allows for Degauss and Autozero functions to be done directly from the oscilloscope with a single button press.

Applications

LeCroy current probes are available in a wide range of models for a wide range of applications. The full range of LeCroy current probes includes models with bandwidths up to 100 MHz, peak currents up to 700 A and sensitivities to 10 mA/div. Multiple current probes can be used together to make measurements on three-phase systems, or a single current probe can be used with a voltage probe to make accurate instantaneous power measurements. LeCroy current probes are often used in applications such as the design and test of switching power supplies, motor drives, electric vehicles, and uninterruptible power supplies.

LeCroy
Current Probes
Model Numbers:

AP015

CP030

CP031

CP150

CP500

*Opposite page:
CP031, 30A, 100 MHz Current Probe.*

CURRENT PROBES



LeCroy Current Probes
Model Numbers:

CP031
CP030
AP015 / DCS015
CP150
CP500



CP031 – 30A, 100 MHz

The CP031 is LeCroy's highest bandwidth current probe. Along with the high 100 MHz bandwidth the CP031 can probe continuous currents of 30 A_{rms} and peak currents up to 50 A. The CP031 features a small form factor making it easier to probe on a crowded, compact board.



CP030 – 30 A, 50 MHz

The CP030 was designed with a small form factor for today's crowded boards. The small jaw can probe currents in tight spaces and still clamp onto conductors up to 5 mm in diameter. Continuous currents of 30 A_{rms} and peak currents of 50 A can be measured by the CP030, which also features a 50 MHz bandwidth.



AP015 – 30 A, 50 MHz

The AP015 current probe can measure continuous current of 30 A_{rms} and peak pulses of up to 50 A for durations up to 10 seconds. This probe also features an over-heating protection circuit, which will display an on-screen warning to the user to prevent damage. A probe unlock detection feature is also built in to the AP015 to ensure accurate measurements.



DCS015 – Deskew Calibration Source for AP015

The DCS015 calibration source has both voltage and current time-aligned signals, which enables the precise deskew of voltage and current probes. Most voltage probes along with the CP031, CP030 and AP015 are compatible with the DCS015.

CURRENT PROBES



CP150 – 150 A, 10 MHz

Features:

- 150 Arms continuous current
- 500 A_{peak}
- 10 MHz bandwidth

CP500 – 500 A, 2 MHz

Features:

- 500 Arms continuous current
- 700 A_{peak}
- 2 MHz bandwidth

Specifications

| | CP031 ^{††} | CP030 ^{††} | AP015 | CP150 | CP500 |
|-----------------------------------|---------------------|---------------------|-------------|---------------|----------|
| Electrical Characteristics | | | | | |
| Max. Continuous Input Current | 30 A | | | 150A | 500 A |
| Bandwidth | 100 MHz | 50 MHz | 50 MHz | 10 MHz | 2 MHz |
| Max. Peak Current at Pulse Width | 50 A ≤ 10 μs | | 50 A ≤ 10 s | 500 A ≤ 30 μs | 700 A |
| Rise Time (typical) | ≤ 3.5 ns | ≤ 7 ns | | < 35 ns | < 175 ns |
| Minimum Sensitivity | 20 mA/div | | 10 mA/div | 20 0mA/div | |
| Max. In-Phase Current | - | | | 500 A | 1150 A |
| Low-Frequency Accuracy | 1% | | | | |
| AC Noise | ≤ 2.5 mA | | - | ≤ 25 mA | 25 mA |
| Coupling | AC, DC, GND | | | | |

General Characteristics

| | | | | |
|---------------------------------------|--------------------------------|------------|-------|--------------------------|
| Cable Length | 1.5 m | 2 m | 6 m | |
| Weight | 240 g | 300 g | 500 g | 630 g |
| Max. Conductor Size (diameter) | 5 mm | | 20 mm | |
| Interface | ProBus, 1 MΩ only [‡] | | | |
| Usage Environment | Indoor | | | |
| Operating Temperature | 0° C to 40° C | | | |
| Max. Relative Humidity | 80% | | | |
| Max. Altitude | 2000 m | | | |
| Maximum Insulated Wire Voltage | 300 VCAT I, 150 V CAT II | 300 VCAT I | | 600 VCAT I, 300 V CAT II |

* Guaranteed at 23 °C ±3 °C


† The CP031 and CP030 are compatible with LeCroy X-Stream oscilloscopes running firmware version 4.3.1.1 or greater.

‡ Requires AP-1M for use with 50 Ω input only oscilloscopes

Ordering Information

| Product Description | Product Code | Product Description | Product Code |
|---|--------------|---|--------------|
| 30 A; 100 MHz Current Probe - AC/DC; 30 A _{rms} ; 50 A _{peak} Pulse | CP031 | 150 A; 10 MHz Current Probe - AC/DC; 150 A _{rms} ; 500 A _{peak} Pulse | CP150 |
| 30 A; 50 MHz Current Probe - AC/DC; 30 A _{rms} ; 50 A _{peak} Pulse | CP030 | 500 A; 2 MHz Current Probe - AC/DC; 500 A _{rms} ; 700 A _{peak} Pulse | CP500 |
| 30 A; 50 MHz Current Probe - AC/DC; 30 A _{rms} ; 50 A _{peak} Pulse | AP015 | Deskew Calibration Source for AP015 | DCS015 |

DIFFERENTIAL PROBES

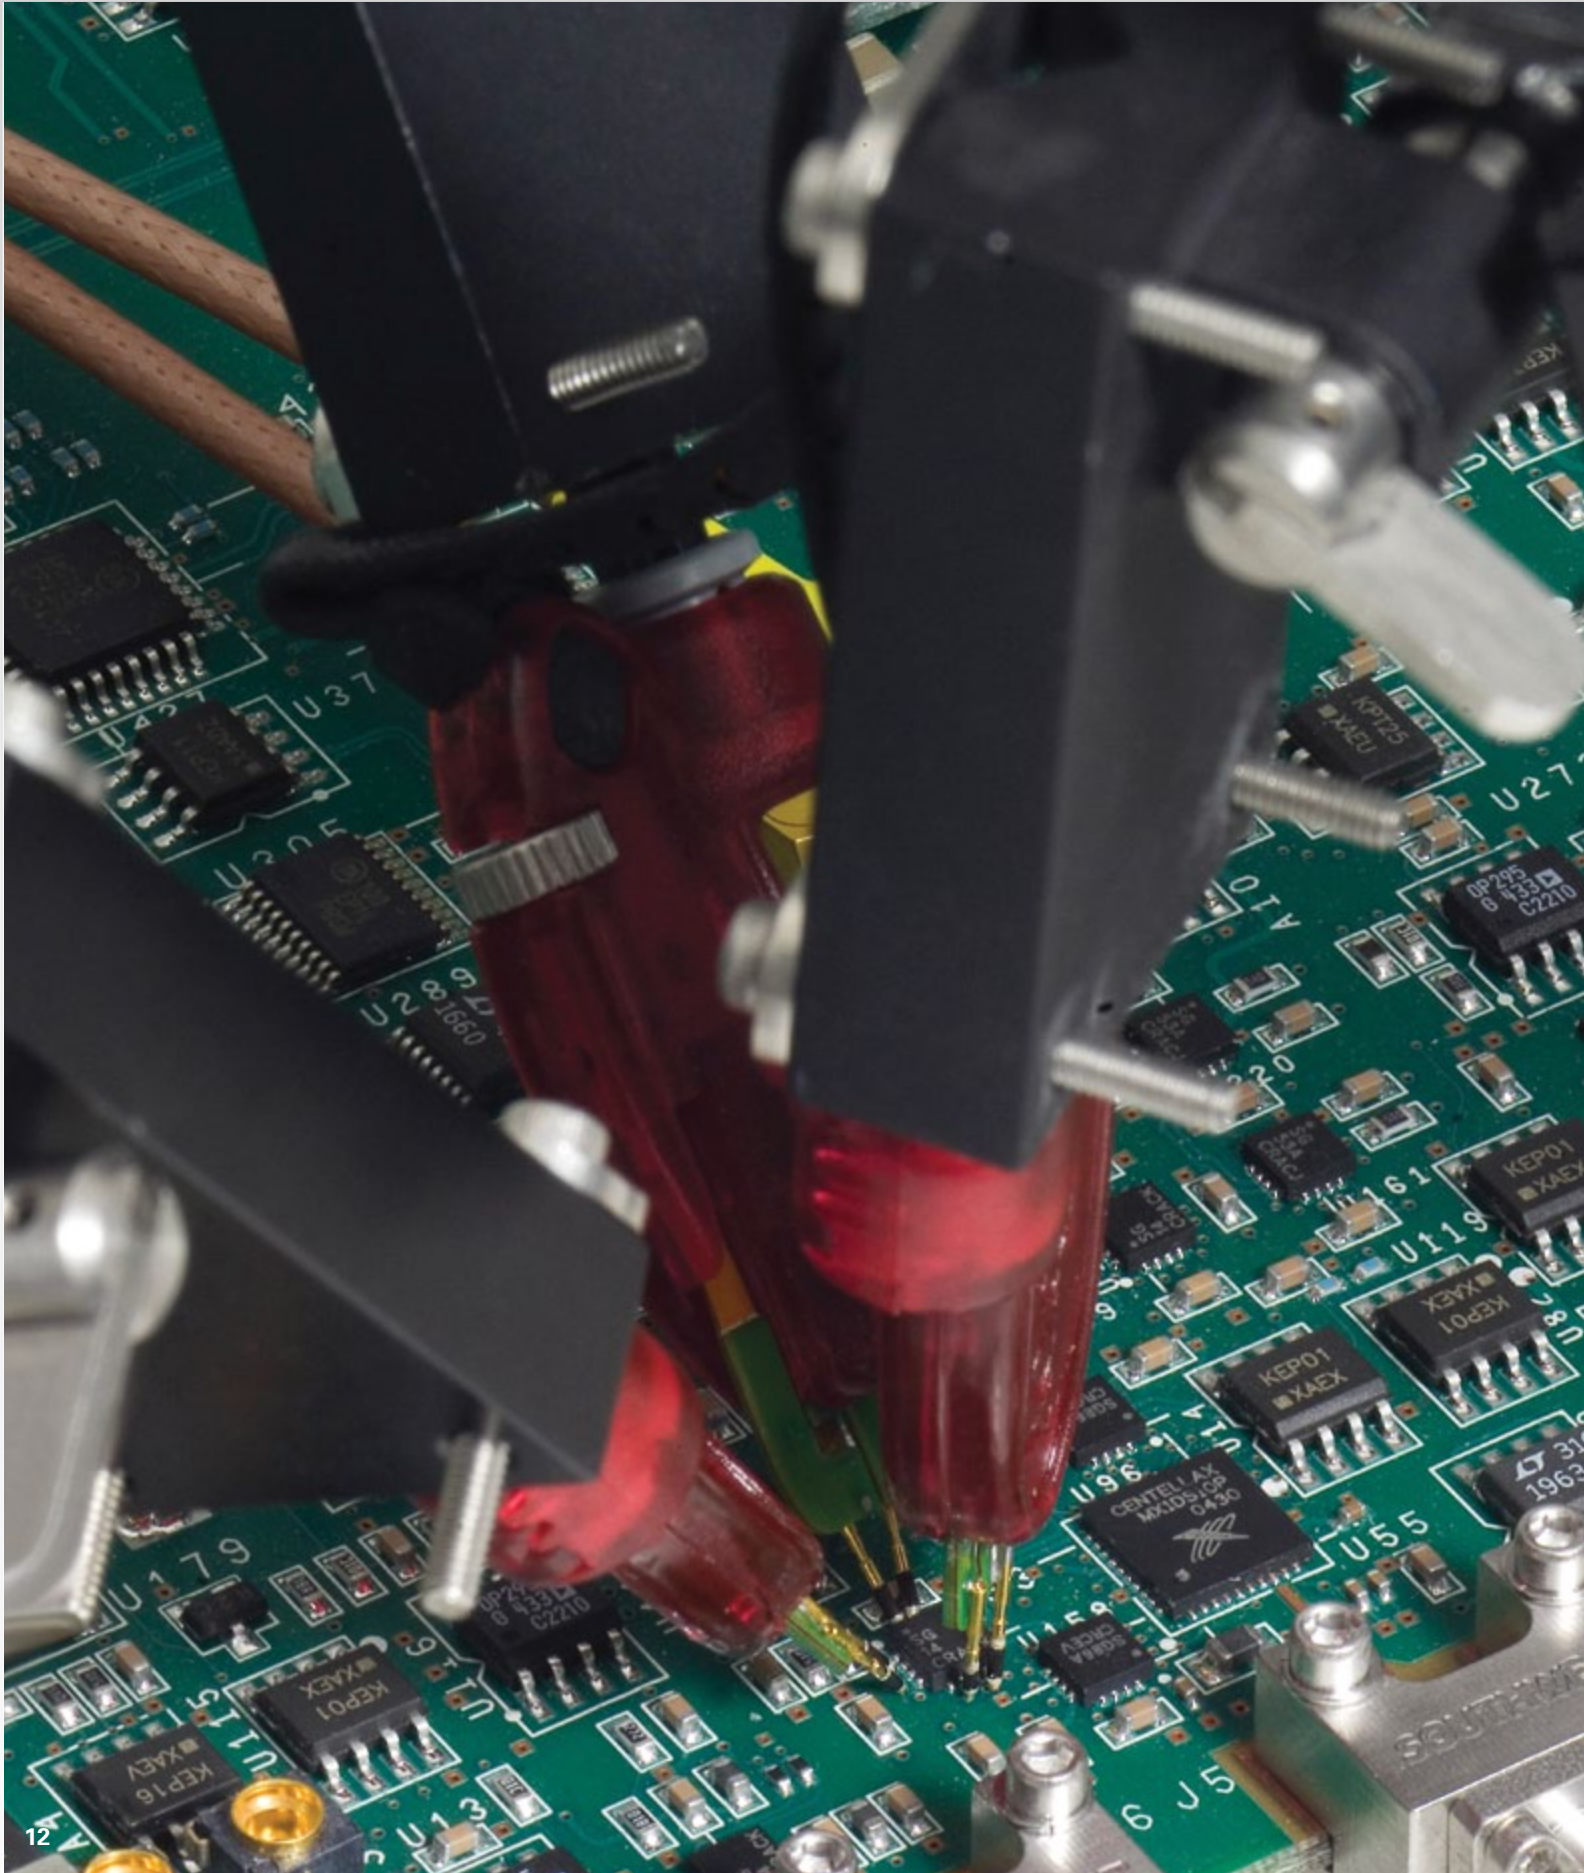

DIFFERENTIAL PROBES

Differential active probes are like two probes in one. Instead of measuring a test point in relation to a ground point (like single-ended active probes), differential probes measure the difference in voltage of a test point in relation to another test point.

LeCroy
Differential Probes
Model Numbers:

200 MHz - 1.5 GHz

ZD200

ZD500

ZD1000

ZD1500

AP033

AP034

3 GHz - 6 GHz

D300A-AT

D410

D420

D500PT

D600A-AT

D610

D620

8 GHz - 13 GHz

D830

D1030

D1330

11 GHz - 25 GHz

D1305-A

D1605-A

D2005-A

D2505-A

*Opposite page:
WaveLink® High Bandwidth Differential Probing System
(13 GHz – 25 GHz)*

ZD SERIES DIFFERENTIAL PROBES



LeCroy
Differential Probe
Model Numbers:

ZD200
ZD500
ZD1000
ZD1500

The ZD Series probes provide wide dynamic range, excellent noise and loading performance and an extensive set of probe tips, leads, and ground accessories to handle a wide range of probing scenarios. The low 1 pF capacitance means this probe is ideal for all frequencies. The ZD Series differential probes provide full system bandwidth for all LeCroy Oscilloscopes 1.5 GHz and lower.

Fully Integrated


With the ProBus interface, the ZD500, 1000, and 1500 becomes an integral part of the oscilloscope. All probe gain and offset controls are transparent to the user, making it easier to probe the circuit without concern for which gain setting to choose. When used with a LeCroy digital oscilloscope, no external power supply is required.

Wide Dynamic Range

The ZD500, 1000, 1500 probes provides transparent probe attenuation so signals are always optimized for the display. The differential range is 18 V_{p-p} with a differential offset of ± 8 and common mode range of ± 10 V, making this versatile for every probing application.

Wide Applications

The wide dynamic range of 16 V_{p-p} and offset range of ± 8 suit this probe to a wide range of applications and signal types. The ZD differential probes are ideally suited for Automotive, Serial Data, power, and general purpose use.

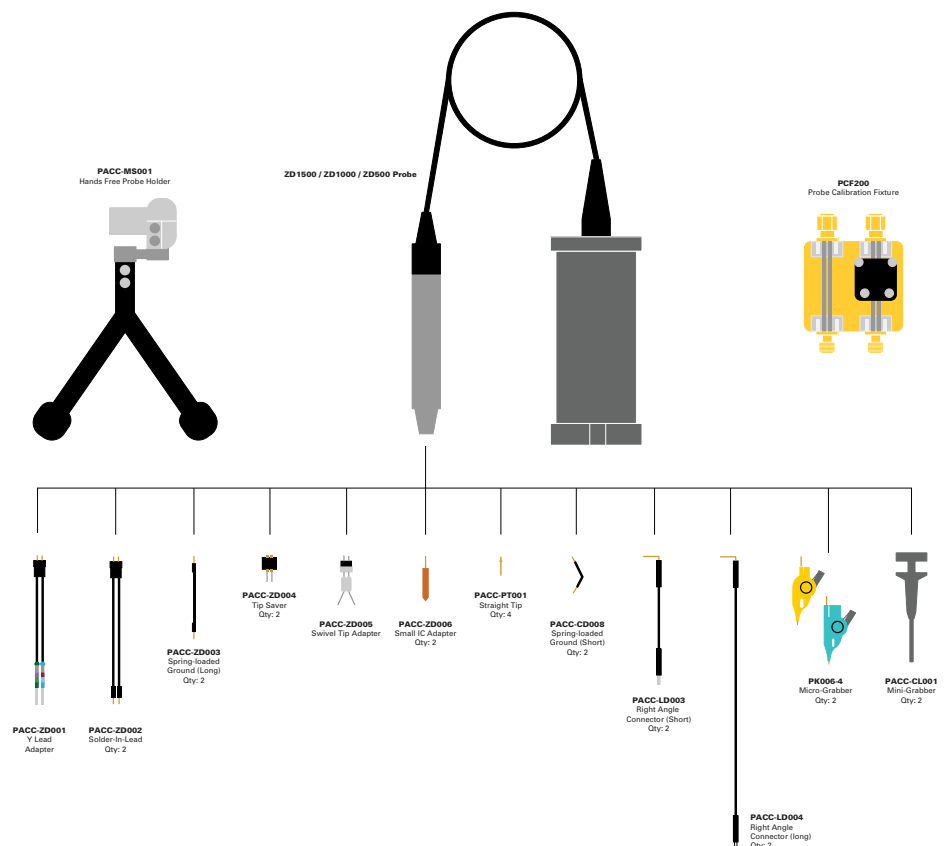

ZD SERIES DIFFERENTIAL PROBES

Specifications

ZD1500

ZD1000

ZD500

ZD200

Electrical Characteristics

| | | | | |
|---|--|--|---|--|
| Bandwidth (Warranted) | 1500 MHz | 1000 MHz | 500 MHz | 200 MHz |
| Bandwidth (Typical) | 1700 MHz | 1200 MHz | 650 MHz | - |
| Risetime 10–90% (Typical) | 270 ps | 375 ps | 650 ps | 1.75 ns |
| Risetime 20–80% (Typical) | 200 ps | 280 ps | 500 ps | - |
| LF Attenuation Accuracy (Warranted) | 2% | | | 1% |
| Zero Offset (Typical) (within 15 minutes after autozero) | 5 mV | | | - |
| System Noise (Typical) | 1.75 mV _{rms} | 1.75 mV _{rms} | 1.3 mV _{rms} | - |
| Probe Noise Density (Typical) | 38 nV/rt (Hz) | | | 3 mV _{rms} |
| Input Differential Range (Nominal) | ±8 V (16 V _{p-p}) | | | ± 20 V |
| Differential Offset Range (Nominal) | ±18 V | | | - |
| Offset Gain Accuracy (Typical) | 2% | | | - |
| Common Mode Range (Nominal) | ±10 V | | | ± 60 V |
| Maximum Non-destruct Voltage (Nominal) | 30 V | | | - |
| CMRR (Typical) | 60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1500 MHz | 60 dB 50/60 Hz 30 dB 20 MHz 25 dB @ 1000 MHz | 60 dB 50/60 Hz 30 dB 20 MHz 25 dB 500 MHz | 80 dB @ 60 Hz 50 dB@10 MHz |
| DC Input Resistance (Nominal) | 50 kΩ (Common Mode) 120 kΩ (Differential Mode) | | | 250 kΩ (Common Mode) 1 MΩ (Differential Mode) |
| Differential Input Capacitance (Typical) | < 1.0 pF | | | 3.5 pF |

Ordering Information

Product Description

Product Code

| | |
|---|--------|
| 200 MHz, 3.5 pF, 1 MΩ Active Differential Probe | ZD200 |
| 500 MHz, 1.0 pF, 1 MΩ Active Differential Probe | ZD500 |
| 1 GHz, 1.0 pF, 1 MΩ Active Differential Probe | ZD1000 |
| 1.5 GHz, 1.0 pF, 1 MΩ Active Differential Probe | ZD1500 |

Standard Accessories

| | |
|---|------------|
| Y Lead Adapter, Qty 1 | PACC-ZD001 |
| Solder-In Lead, Qty 2 | PACC-ZD002 |
| Long Spring Loaded Bendable Ground, Qty 2 | PACC-ZD003 |
| Tip Saver, Qty 2 | PACC-ZD004 |
| Swivel Tip Adapter | PACC-ZD005 |
| Small IC Adapter, Qty 2 | PACC-ZD006 |
| Replacement Accessory Kit for ZD200 | PACC-ZD007 |
| Replacement Leadset for ZD200 | PACC-ZD008 |
| Straight Tip, Qty 4 | PACC-PT001 |
| Right Angle Connector Short, Qty 2 | PACC-LD003 |

Product Description

Product Code

| | |
|--|------------|
| Right Angle Connector Long, Qty 2 | PACC-LD004 |
| Micrograbber, Qty 2 | PK006-4 |
| Minigrabber, Qty 2 | PACC-CL001 |
| Short Spring Loaded Bendable Ground, Qty 2 | PACC-CD008 |
| Probe Calibration Fixture, Qty 1 | PCF200 |
| ZD Replacement Kit | PK111 |
| Hands Free Probe Holder, Qty1 | PACC-MS001 |

WAVELINK LOW BANDWIDTH DIFFERENTIAL PROBES



LeCroy WaveLink Low Bandwidth Differential Probe and Accessory Model Numbers:

D410

D410-PT

D420

D420-PT

D500PT

D300A-AT

D600A-AT

D610

D610-PT

D620

D620-PT

WL-PBus

WL-PLink


WaveLink® probes provide industry leading technology for wideband signal connection to test instruments. The first differential probes to employ SiGe technology, they deliver full system bandwidth when used with WaveRunner®, WavePro®, WaveMaster® DDA and SDA oscilloscopes up to 6 GHz.

WaveLink probes:


- Maintain good loading characteristics across the frequency span
- Optimized for gain, noise and bandwidth for optimal performance
- Offer broad range of dynamic range and noise over gain settings by incorporating automatic probe attenuation changes

WaveLink is the first differential probe to use a unique calibration process to achieve superb waveform fidelity for routine voltage measurements. Calibration coefficients “fine tune” the frequency response of each WaveLink probe and are individually determined during factory calibration and programmed into the probe. The SDA, DDA, WaveMaster, WaveRunner, or WavePro Series oscilloscopes read this data and use it to digitally compensate the entire system response for superior fidelity.

4 GHz–6 GHz WaveLink configurations
(compatible with oscilloscopes
from 4 GHz to 6 GHz)

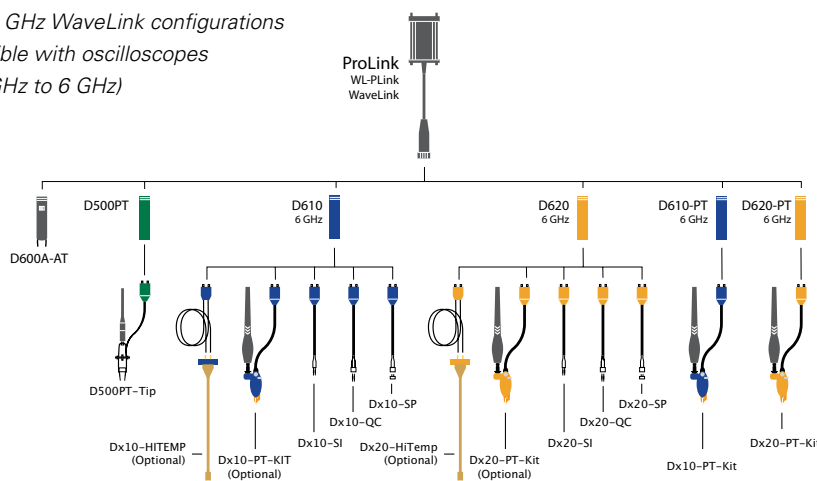

≤ 4 GHz WaveLink configurations
(compatible with oscilloscopes
up to and including 4 GHz)

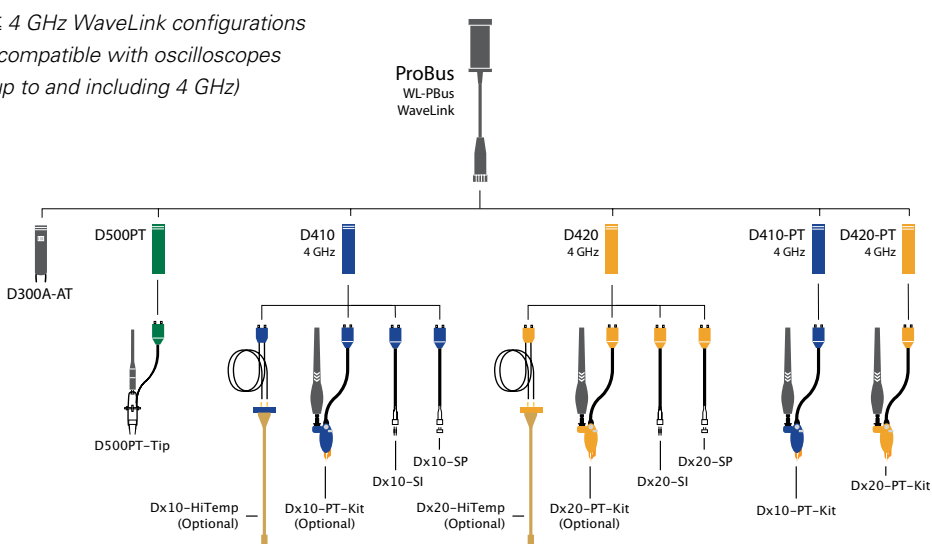

WAVELINK LOW BANDWIDTH DIFFERENTIAL PROBES

| Specifications | D610 | D620 | D410 | D420 | D600A-AT | D300A-AT | D500PT |
|--|---|--|---|--|--|---|---|
| Bandwidth, System DC to -3 dB | | | | | | | |
| PT Positioner Lead | 6 GHz ¹ | | 4 GHz ¹ | | 6 GHz | 3 GHz | 5 GHz |
| SI Solder-In Lead | 6 GHz ¹ | | 4 GHz ¹ | | | N/A | |
| QC Interconnect Lead | 4 GHz | | | | N/A | | |
| SP Interconnect Lead | | 3 GHz | | | | N/A | |
| HiTemp Solder-In Lead | 6 GHz | | 4 GHz | | N/A | N/A | N/A |
| Rise Time (10–90) | | | | | | | |
| PT Positioner Lead | < 75 ps | | < 112 ps | | < 75 ps ¹ | < 130 ps ¹ | < 90 ps ¹ |
| SI Solder-In Lead | < 75 ps | | < 112 ps | | | N/A | |
| QC Interconnect Lead | < 122.5 ps | | | | N/A | | |
| SP Interconnect Lead | | < 150 ps | | | | N/A | |
| HiTemp Solder-In Lead | < 75 ps | | < 112 ps | | N/A | N/A | N/A |
| LF Attenuation Accuracy ¹ | 2% < 1.25 V _{pp} 5% 1.25 V _{pp} to 2.5 V _{pp} | 2% < 2.25 V _{pp} 5% 2.5 V _{pp} to 5 V _{pp} | 2% < 1.25 V _{pp} 5% 1.25 V _{pp} to 2.5 V _{pp} | 2% < 2.25 V _{pp} 5% 2.5 V _{pp} to 5 V _{pp} | 2% 0±1.2 V (with 0 V common mode) 5% ±1.2 V ±2.4 V (with 0 V common mode) | | |
| Zero Offset (within 15 minutes after autozero) | < 2.5 mV ¹ | < 5 mV ¹ | < 2.5 mV ¹ | < 5 mV ¹ | | < 10 mV ¹ | |
| Offset Gain Accuracy | | 1% of offset value ¹ | | | | N/A | |
| Input Differential Range | 2.5 V _{pp} | 5 V _{pp} | 2.5 V _{pp} | 5 V _{pp} | | 4.8 V _{pp} | |
| Differential Offset Range | | ±3 V | | | | 0 V | |
| Common Mode Range (max. peak voltage either input to ground) | | ±4 V | | | | ±2.4 V | |
| DC Input Resistance | | 100 kΩ differential 50 kΩ single-ended | | | | 4 kΩ differential 2 kΩ single-ended | |
| AC Loading (differential Z _{min}) | 200 Ω | 200 Ω | 200 Ω | 200 Ω | 120 Ω | 600 Ω | 200 Ω |
| CMRR | | > 30 dB@10 MHz > 26 dB@6 GHz | | > 30 dB@10 MHz > 26 dB@3.5 GHz | | > 40 dB@1 MHz > 30 dB@3 GHz > 20 dB@6 GHz (D600A-AT only) | > 25 dB@1 GHz > 19 dB@3 GHz > 16 dB@5 GHz |
| Differential Input Capacitance@1 GHz | | | | | | | |
| SI Solder-In Lead | 210 fF | 120 fF | 210 fF | 120 fF | | N/A | |
| PT Positioner Lead | 290 fF | 290 fF | 290 fF | 290 fF | | 170 fF | |
| QC Interconnect Lead | 550 fF | 530 fF | 550 fF | 530 fF | | N/A | |
| SP Interconnect Lead | 980 fF | 980 fF | 980 fF | 980 fF | | N/A | |
| HiTemp Solder-In Lead | 210 fF | 120 fF | 210 fF | 120 fF | | N/A | |
| Noise (System referred to probe input) | 2.8 mV _{rms} | 4.8 mV _{rms} | 2.3 mV _{rms} | 4.3 mV _{rms} | 5.8 mV _{rms} | 5.0 mV _{rms} | 5.8 mV _{rms} |

¹ Warranted specification.

Ordering Information

| Product Description | Product Code | Product Description | Product Code |
|---|--------------|--|--------------|
| Probe Tip Modules | | Probe Leads and Accessories | |
| WaveLink 6 GHz 2.5 V _{p-p} Differential Amplifier Small Tip Module | D610* | Differential Positioner Tip with Accessories (for use with D610 or D410) | Dx10-PT-Kit |
| WaveLink 4 GHz 2.5 V _{p-p} Differential Amplifier Small Tip Module | D410* | Differential Positioner Tip with Accessories (for use with D620 or D420) | Dx20-PT-Kit |
| WaveLink 6 GHz 5 V _{p-p} Differential Amplifier Small Tip Module | D620* | WaveLink Temperature Extension Cables for Dx10. Includes (1) Set of Matched 30" High Temperature Cables, (1) Solder-In Lead Set | Dx10-HiTemp |
| WaveLink 4 GHz 5 V _{p-p} Differential Amplifier Small Tip Module | D420* | WaveLink Temperature extension cables for Dx20. Includes (1) Set of Matched 30" High Temperature Cables, (1) Solder-In Lead Set | Dx20-HiTemp |
| WaveLink 6 GHz Differential Amplifier Module with Adjustable Tip | D600A-AT* | | |
| WaveLink 3 GHz Differential Amplifier Module with Adjustable Tip | D300A-AT* | | |
| WaveLink 5 GHz Differential Amplifier Module with Positioner Tip | D500PT* | | |
| WaveLink 6 GHz, 2.5 V _{p-p} Differential Positioner Tip | D610-PT* | | |
| WaveLink 6 GHz, 5 V _{p-p} Differential Positioner Tip | D620-PT* | | |
| WaveLink 4 GHz, 2.5 V _{p-p} Differential Positioner Tip | D410-PT* | | |
| WaveLink 4 GHz, 5 V _{p-p} Differential Positioner Tip | D420-PT* | | |
| * For a complete probe, order a WL-PLink, or WL-PBus Platform/Cable Assembly with the probe tip module. | | Service Options NIST Traceable Calibration with Test Data* (one module) D600A-AT-CCNIST † CCNIST NIST traceable calibration with test data is an available option for D610, D620, D410, D420, D500PT, D600A-AT, or D300A-AT only when ordered with either a WL-PLink or WL-PBus. D300A-AT-CCNIST D500PT-CCNIST D610-CCNIST D620-CCNIST D410-CCNIST D420-CCNIST | |
| WaveLink ProLink Platform/Cable Assembly (4 – 6 GHz) | WL-PLink | | |
| WaveLink ProBus Platform/Cable Assembly (4 GHz) | WL-PBus | | |

WAVELINK MEDIUM BANDWIDTH DIFFERENTIAL PROBES



LeCroy WaveLink
Medium Bandwidth Differential
Probe and Accessory
Model Numbers:

D830

D1030

D1330

Dxx30-PT-KIT

Dxx30-SMA-SMP-LEADS


WL-PLINK-CASE

General Purpose Probe with Range of Capabilities

LeCroy's WaveLink 8-13 GHz Differential Probes are a medium bandwidth, general purpose probing solution with high input dynamic range and offset range capability. These probes support solder-in, positioner (browser), square pin and SMA/SMP cabled tip/lead connections. The range of capabilities is ideal for a variety of high speed DDR signals where high dynamic range and large offset requirements are common.

Features and Benefits

- Choice of 8, 10, or 13 GHz bandwidth models
- 3.5 Vpk-pk dynamic range
- ± 4 V offset range
- Ideal for DDR3, DDR4, LPDDR3
- Deluxe soft carrying case
- Wide variety of tips and leads
 - Solder-In Lead
 - Positioner (Browser) Tip
 - SMA/SMP Lead
 - Square Pin Lead
- SMA/SMP lead set accessory does not require purchase of a different amplifier
- Deluxe Soft Carrying Case

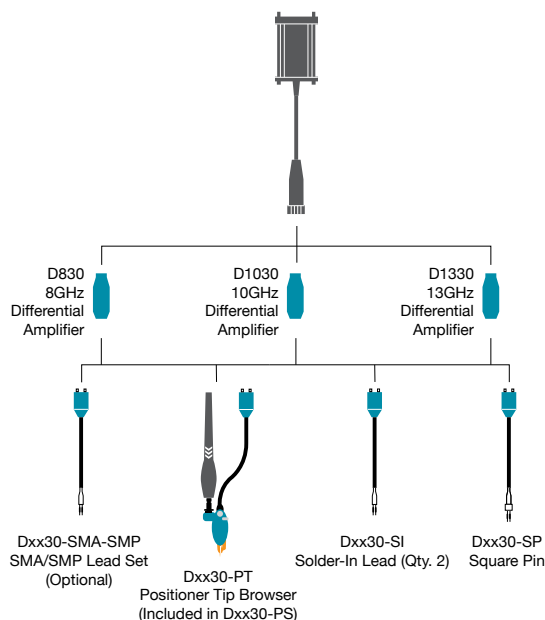

WAVELINK MEDIUM BANDWIDTH DIFFERENTIAL PROBES

Specifications

| | D830, D830-PS | D1030, D1030-PS | D1330, D1330-PS |
|---------------------------|--|--|--|
| Bandwidth | Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 8 GHz (probe only, guaranteed) 8 GHz (system bandwidth, when used with 808Zi/Zi-A, typical) Dxx30-SP Tip 3 GHz (probe only, guaranteed) 3 GHz (system bandwidth, when used with 808Zi/Zi-A, typical) | Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 10 GHz (probe only, guaranteed) 10 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) Dxx30-SP Tip 3 GHz (probe only, guaranteed) 3 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) | Dxx30-SI and Dxx30-SMA-SMP Tips 13 GHz (probe only, guaranteed) 13 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) Dxx30-PT Tip 10 GHz (probe only, guaranteed) 10 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) Dxx30-SP Tip 3 GHz (probe only, guaranteed) 3 GHz (system bandwidth, when used with 813Zi/Zi-A, typical) |
| Rise Time (10–90%) | Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 50 ps (typical) System rise time measured with ≥8 GHz oscilloscope Dxx30-SP Tip 132 ps (typical) System rise time measured with ≥8 GHz oscilloscope | Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 40 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 132 ps (typical) System rise time measured with ≥13 GHz oscilloscope | Dxx30-SI and Dxx30-SMA-SMP Tips 35 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-PT Tip 40 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 132 ps (typical) System rise time measured with ≥13 GHz oscilloscope |
| Rise Time (20–80%) | Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 37.5 ps (typical) System rise time measured with ≥8 GHz oscilloscope Dxx30-SP Tip 100 ps (typical) System rise time measured with ≥8 GHz oscilloscope | Dxx30-SI, Dxx30-SMA-SMP, and Dxx30-PT Tips 30 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 100 ps (typical) System rise time measured with ≥13 GHz oscilloscope | Dxx30-SI and Dxx30-SMA-SMP Tips 26 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-PT Tip 30 ps (typical) System rise time measured with ≥13 GHz oscilloscope Dxx30-SP Tip 100 ps (typical) System rise time measured with ≥13 GHz oscilloscope |
| Noise (Probe) | <48 nV/√Hz (4.3 mVrms) (typical) Referred to input, 8 GHz bandwidth. | <48 nV/√Hz (4.8 mVrms) (typical) Referred to input, 10 GHz bandwidth. | <48 nV/√Hz (5.5 mVrms) (typical) Referred to input, 13 GHz bandwidth. |
| Noise (System) | <52 nV/√Hz (4.6 mVrms) (typical) Referred to input, 8 GHz bandwidth. | <52 nV/√Hz (5.2 mVrms) (typical) Referred to input, 10 GHz bandwidth. | <52 nV/√Hz (5.9 mVrms) (typical) Referred to input, 13 GHz bandwidth. |

Input

| | |
|--|---|
| Input Dynamic Range | 3.5Vpk-pk, ±1.75V (nominal) |
| Input Common Mode Voltage Range | ±5 V (nominal) |
| Input Offset Voltage Range | ±4 V Differential (nominal) |
| Non-destructive Input Range | ±15 V (nominal) |
| Attenuation | 3.75x (nominal) |
| DC Input Resistance (nominal) | 200 kΩ Differential, 50 kΩ Common mode |
| Impedance (Zmin, typical) | >250 Ω Differential through entire frequency range using SI tip |

Product Description

Complete Probe Systems

| | |
|---|----------|
| 8 GHz Complete Probe System with Dxx30-SI Solder-In Tip (Qty. 2), Dxx30-SP Square Pin (Qty. 1), and Dxx30-PT-KIT Positioner Tip Browser (Qty. 1) | D830-PS |
| 10 GHz Complete Probe System with Dxx30-SI Solder-In Tip (Qty. 2), Dxx30-SP Square Pin (Qty. 1), and Dxx30-PT-KIT Positioner Tip Browser (Qty. 1) | D1030-PS |
| 13 GHz Complete Probe System with Dxx30-SI Solder-In Tip (Qty. 2), Dxx30-SP Square Pin (Qty. 1), and Dxx30-PT-KIT Positioner Tip Browser (Qty. 1) | D1330-PS |

Amplifier and Probe Tip Modules

| | |
|--|-------|
| WaveLink D830 8 GHz/3.5V _{p-p} Differential Probe Amplifier with Dxx30-SI Solder-In Tip (Qty. 2) and Dxx30-SP Square Pin (Qty. 1) | D830 |
| WaveLink D1030 10 GHz/3.5V _{p-p} Differential Probe Amplifier with Dxx30-SI Solder-In Tip (Qty. 2) and Dxx30-SP Square Pin (Qty. 1) | D1030 |
| WaveLink D1330 13 GHz/3.5V _{p-p} Differential Probe Amplifier with Dxx30-SI Solder-In Tip (Qty. 2) and Dxx30-SP Square Pin (Qty. 1) | D1330 |

Positioner Tip (Browser) Kits

| | |
|---|--------------|
| WaveLink Dxx30-PT (up to 10 GHz rating) Adjustable Positioner Tip Kit. For use with Dxx30 amplifiers. | Dxx30-PT-KIT |
|---|--------------|

Probe Platform/Cable Assemblies and Adapters

| | |
|--|---------------|
| WaveLink ProLink Platform/Cable Assembly Kit with complete soft carrying case for all probe items. | WL-PLink-CASE |
|--|---------------|

Product Description

SMA/SMP Lead Set

| | |
|---|---------------------|
| Lead set for use with Dxx30 amplifiers. | Dxx30-SMA-SMP-LEADS |
|---|---------------------|

Accessories

| | |
|---|----------|
| Cascade Microtech EZ-Probe Positioner | EZ PROBE |
| Probe Deskew and Calibration Test Fixture | TF-DSQ |

Calibration Options

| | |
|---|--------------|
| NIST Calibration for D830. Includes test data. | D830-CCNIST |
| NIST Calibration for D1030. Includes test data. | D1030-CCNIST |
| NIST Calibration for D1330. Includes test data. | D1330-CCNIST |

Replacement Parts

| | |
|--|--------------------|
| Replacement Dxx30-SI 8-13 GHz Solder-In Lead with Qty. 5 Spare Resistors. | Dxx30-SI |
| Replacement SI Resistor Kit for Dxx05-SI and Dxx30-SI Solder-In Tip - Kit of 5 | Dxx05-SI-RESISTORS |
| Quantity 4 Replacement Pogo Pin Tips and Qty. 2 Replacement Sockets for Dx10-PT, Dx20-PT, and Dxx30-PT Adjustable Positioner Tips. | Dxx0-PT-TIPS |
| Replacement Probe Tip Holder Kit | PK600ST-3 |
| Replacement Platform/Cable Assembly Mounting Kit | PK600ST-4 |
| Quantity 1 Package of Black Adhesive Pads (10/pkg) and Quantity 1 Package of White Adhesive Pads (10/pkg) | Dxx0-PT-TAPE |
| Quantity 1 Package of Adhesive Probe Connection Guides (200 individual guides/package) | Dxx05-PT-GUIDES |

WAVELINK HIGH BANDWIDTH DIFFERENTIAL PROBES



LeCroy WaveLink
High Bandwidth Differential
Probe and Accessory
Model Numbers:


D1305-A
D1605-A
D2005-A
D2505-A
LPA-2.92
WL-2.92MM
WL-PLINK-A

Ultra-wideband Architecture for Superior Signal Fidelity

LeCroy's WaveLink® high bandwidth differential probes utilize advanced differential traveling wave (distributed) amplifier architecture to achieve superior high frequency true analog broadband performance. Traveling wave (distributed) amplifiers are commonly used in ultra high frequency broadband amplifiers. This multi-stage amplifier architecture maximizes gain per stage and minimizes probe attenuation, which provides very low probe noise and fast rise times.

Features & Benefits

- Up to 25 GHz bandwidth (probe + oscilloscope)
- System rise time as fast as 13 ps (20–80%)
- Highest bandwidth Solder-In solution (25 GHz)
- Ultra-compact browsertip (22 GHz)
- Superior probe impedance minimizes AC loading on device under test (DUT)
- Carbon-composite browser tips optimize signal fidelity and loading
- Probe noise as low as 14 nV/ $\sqrt{\text{Hz}}$ (1.6 Vrms)
- Low probe attenuation
- Large operating voltage range
 - ±4 V common mode range
 - ±2.5 V offset range
 - 2.0 V_{pk-pk} dynamic range
- Long length Solder-In tip with field replaceable resistors

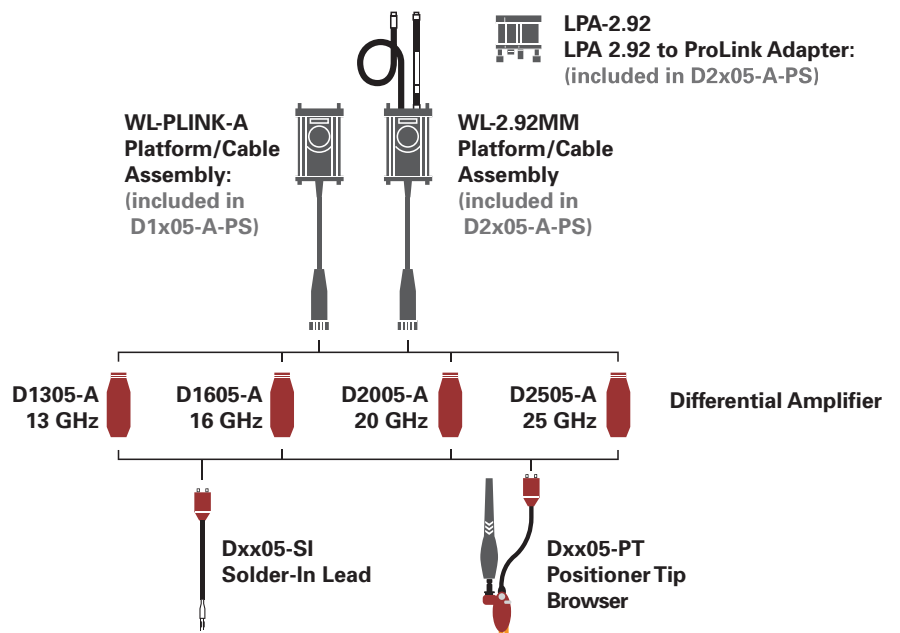

WAVELINK HIGH BANDWIDTH DIFFERENTIAL PROBES

| Specifications | D1305-A, D1305-A-PS | D1605-A, D1605-A-PS | D2005-A, D2005-A-PS | D2505-A, D2505-A-PS |
|---------------------------|--|--|--|---|
| Bandwidth | Dxx05-SI and Dxx05-PT Tips 13 GHz (probe only, guaranteed) 13 GHz (system bandwidth, when used with 813Zi, typical) | Dxx05-SI and Dxx05-PT Tips 16 GHz (probe only, guaranteed) 16 GHz (system bandwidth, when used with 816Zi, typical) | Dxx05-SI and Dxx05-PT Tips 20 GHz (probe only, guaranteed) 20 GHz (system bandwidth, when used with 820Zi, typical) | Dxx05-SI Lead 25 GHz (probe only, guaranteed) 25 GHz (system bandwidth, when used with 825Zi, typical) Dxx05-PT Tip 22 GHz (system bandwidth, when used with 825Zi, typical) 20 GHz (probe only, guaranteed) |
| Rise Time (10–90%) | Dxx05-SI and Dxx05-PT Tips 32.5 ps (typical) System rise time measured with ≥ 13 GHz oscilloscope | Dxx05-SI and Dxx05-PT Tips 28 ps (typical) System rise time, measured with ≥ 16 GHz oscilloscope | Dxx05-SI and Dxx05-PT Tips 20 ps (typical) System rise time measured with ≥ 20 GHz oscilloscope | Dxx05-SI Lead 17.5 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope Dxx05-PT Tip 19 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope |
| Rise Time (20–80%) | Dxx05-SI and Dxx05-PT Tips 24.5 ps (typical) System rise time measured with ≥ 13 GHz oscilloscope | Dxx05-SI and Dxx05-PT Tips 21 ps (typical) System rise time measured with ≥ 16 GHz oscilloscope | Dxx05-SI and Dxx05-PT Tips 15 ps (typical) System rise time measured with ≥ 20 GHz oscilloscope | Dxx05-SI Lead 13 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope Dxx05-PT Tip 14 ps (typical) System rise time measured with ≥ 25 GHz oscilloscope |
| Noise (Probe) | < 14 nV/ $\sqrt{\text{Hz}}$ (1.6 mV _{rms}) (typical) Referred to input, 13 GHz bandwidth | < 14 nV/ $\sqrt{\text{Hz}}$ (1.8 mV _{rms}) (typical) Referred to input, 16 GHz bandwidth | < 18 nV/ $\sqrt{\text{Hz}}$ (2.5 mV _{rms}) (typical) Referred to input, 20 GHz bandwidth | < 18 nV/ $\sqrt{\text{Hz}}$ (2.8 mV _{rms}) (typical) Referred to input, 25 GHz bandwidth |
| Noise (System) | < 23 nV/ $\sqrt{\text{Hz}}$ (2.7 mV _{rms}) (typical) Referred to input, 13 GHz bandwidth | < 23 nV/ $\sqrt{\text{Hz}}$ (2.9 mV _{rms}) (typical) Referred to input, 16 GHz bandwidth | < 28 nV/ $\sqrt{\text{Hz}}$ (4.0 mV _{rms}) (typical) Referred to input, 20 GHz bandwidth | < 28 nV/ $\sqrt{\text{Hz}}$ (4.5 mV _{rms}) (typical) Referred to input, 25 GHz bandwidth |

| | |
|--|---|
| Input | |
| Input Dynamic Range | 2.0 V _{pk-pk} , ± 1 V (nominal) |
| Input Common Mode Voltage Range | ± 4 V (nominal) |
| Input Offset Voltage Range | ± 2.5 V Differential (nominal) |
| Non-destructive Input Range | ± 10 V (nominal) |
| Attenuation | 3.5x (nominal) 4.5x (nominal) |
| DC Input Resistance (nominal) | 1.1 k Ω Differential 100 k Ω Common mode |

Product Description Product Code

Complete Probe Systems

| | |
|--|------------|
| 13 GHz Complete Probe System with Solder-In Tip (13 GHz) and Positioner Tip Browser (13 GHz) | D1305-A-PS |
| 16 GHz Complete Probe System with Solder-In Tip (16 GHz) and Positioner Tip Browser (16 GHz) | D1605-A-PS |
| 20 GHz Complete Probe System with Solder-In Tip (20 GHz) and Positioner Tip Browser (20 GHz) | D2005-A-PS |
| 25 GHz Complete Probe System with Solder-In Tip (25 GHz) and Positioner Tip Browser (22 GHz) | D2505-A-PS |

Amplifier and Probe Tip Modules

| | |
|--|---------|
| WaveLink D1305 13 GHz/1.6 V _{pk-pk} Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2) | D1305-A |
| WaveLink D1605 16 GHz/1.6 V _{pk-pk} Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2) | D1605-A |
| WaveLink D2005 20 GHz/1.6 V _{pk-pk} Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2) | D2005-A |
| WaveLink D2505 25 GHz/1.6 V _{pk-p} Differential Probe Amplifier with Dxx05-SI Solder-In Tip (Qty. 2) | D2505-A |

Probe Platform/Cable Assemblies and Adapters

| | |
|--|------------|
| WaveLink ProLink Platform/Cable Assembly Kit for ≥ 13 GHz WaveLink Probes | WL-PLINK-A |
| WaveLink 2.92 mm Platform/Cable Assembly Kit for ≥ 20 GHz WaveLink Probes | WL-2.92MM |
| ProLink to 2.92 mm Adapter with Probe Power and Communication Pass Through | LPA-2.92 |

Product Description Product Code

Positioner Tip (Browser) Kits

| | |
|--|--------------|
| WaveLink Dxx05-PT (Up to 22 GHz Rating) Adjustable Positioner Tip Kit. For use with Dxx05 Amplifiers | Dxx05-PT-KIT |
|--|--------------|

Accessories

| | |
|---|----------|
| Cascade Microtech EZ-Probe Positioner | EZ PROBE |
| Probe Deskew and Calibration Test Fixture | TF-DSQ |

Calibration Options

| | |
|--|----------------|
| NIST Calibration for D1305. Includes Test Data | D1305-A-CCNIST |
| NIST Calibration for D1605. Includes Test Data | D1605-A-CCNIST |
| NIST Calibration for D2005. Includes Test Data | D2005-A-CCNIST |
| NIST Calibration for D2505. Includes Test Data | D2505-A-CCNIST |

Replacement Parts

| | |
|---|--------------------|
| Replacement Dxx05-SI 13–25 GHz Solder-In Lead with Qty. 5 Spare Resistors | Dxx05-SI |
| Replacement SI Resistor Kit for Dxx05-SI Solder-In Tip | Dxx05-SI-RESISTORS |
| Replacement Dxx05-PT Positioner Tip | Dxx05-PT |
| Qty. 4 Replacement Carbon Composite Pogo-pin Tips | Dxx05-PT-TIPS |
| Replacement Probe Tip Holder Kit | PK600ST-3 |
| Replacement Platform/Cable Assembly Mounting Kit | PK600ST-4 |
| Qty. 1 Package of Black Adhesive Pads (10/pkg.) and Qty. 1 Package of White Adhesive Pads (10/pkg.) | Dxx05-PT-TAPE |
| Qty. 1 Package of Adhesive Probe Connection Guides (200 individual guides/package) | Dxx05-PT-GUIDES |

DIFFERENTIAL PROBES

LeCroy
Differential Probes
Model Numbers:

AP033

AP034



AP033



AP034

AP033 and AP034

High bandwidth, excellent common-mode rejection ratio (CMRR) and low noise make these active differential probes ideal for applications such as disk drive design and failure analysis, as well as wireless and data communication design. With the ProBus interface, the AP034 and AP033 become an integral part of the oscilloscope, allowing sensitivity, offset and common-mode range to be displayed on the scope screen. Common mode sensing and input protection capabilities of the AP033 add additional functionality.

Features for both probes:

- 500 MHz bandwidth (AP033)
- 1 GHz bandwidth (AP034)
- x10 gain to ÷ 10 attenuation range (AP033)
- 10,000:1 DC CMRR
- Low 9 nV/ $\sqrt{\text{Hz}}$ noise (AP033)
- 1.5 pF/side input C (AP034)
- 200 $\mu\text{V}/\text{div}$ (AP033)
- Input ESD protection
- Autozero feature

DIFFERENTIAL PROBES

Specifications

| | AP034 | AP033 |
|-------------------------|--|---|
| Bandwidth | 1 GHz | 500 MHz |
| Gain | x1 ($\div 10$ and $\div 20$ with plug-on attenuators) | x10, x1, $\div 10$ ($\div 100$ with plug-on $\div 10$ attenuator) |
| DC Accuracy | 2% typical (probe only) | 1% in x1 without external attenuator |
| Input Resistance | 1 M Ω 1.5 pF each input to ground 2 M Ω 0.85 pF between inputs | 1 M Ω each input to ground 2 M Ω differential between inputs |
| Differential Mode Range | ± 400 mV (x1) ± 4 V ($\div 10$) ± 8 V ($\div 20$) | ± 400 mV (x1) ± 40 mV (x10) ± 4 V ($\div 10$) ± 40 V ($\div 100$) |
| Offset Range | ± 1.6 V (x1) ± 16 V (± 10) ± 32 V (± 20) | ± 400 mV (x1, x10) ± 4 V (± 10) ± 40 V (± 100) |
| Common-Mode Range | ± 16 V (x1) ± 42 V (± 10) $+42$ V (± 20) | ± 42 V peak (± 10) $+4.2$ V peak (± 100) |
| CMRR | 70 Hz 10,000:1 (80 dB) 1 MHz 100:1 (40 dB) 100 MHz 18.1 (25 dB) 500 MHz 9:1 (19 dB) | 70 Hz 10,000:1 (80 dB) 100 kHz 10,000:1 (80 dB) 1 MHz 1000:1 (60 dB) 10 MHz 100:1 (40 dB) 250 MHz 5:1 (14 dB) |

Ordering Information

| Product Description | Product Code |
|----------------------------|--------------|
| 500 MHz Differential Probe | AP033 |
| 1 GHz Differential Probe | AP034 |

HIGH VOLTAGE DIFFERENTIAL PROBES



HIGH VOLTAGE DIFFERENTIAL PROBES

Differential active probes are like two probes in one. Instead of measuring a test point in relation to a ground point (like single-ended active probes), differential probes measure the difference in voltage of a test point in relation to another test point.

LeCroy
High Voltage
Differential Probe
Model Numbers:

AP031
ADP300
ADP305

*Opposite page:
ADP305 High Voltage Differential Probe*

HIGH VOLTAGE DIFFERENTIAL PROBES



LeCroy
High Voltage
Differential Probes
Model Numbers:

AP031
ADP300
ADP305

The AP031 is a low cost, battery operated active differential probe intended for measuring higher voltages. The differential techniques employed permit measurements to be taken at two points in a circuit without reference to the ground, allowing the oscilloscope to be safely grounded without the use of opto-isolators or isolating transformers.

Features

- Safe floating measurements
- 15 MHz bandwidth
- 700 V maximum input voltage
- Works with any 1 M Ω input oscilloscope

AP031 Specifications

| | |
|-------------------------|--|
| Attenuation | $\div 10 / \div 100$ |
| Bandwidth | 15 MHz |
| Input R | 4 M Ω |
| Differential Mode Range | $\pm 70 \text{ V} / \pm 700 \text{ V DC} + \text{Peak AC}$ |
| Common Mode Range | $\pm 700 \text{ V DC} + \text{Peak AC}$ |
| CMRR | 86 dB @ 50 Hz 56 dB @ 200 kHz |

Power Requirements: four AA batteries

HIGH VOLTAGE DIFFERENTIAL PROBES

ADP30X high-voltage active probes are safe, easy-to-use, and ideally suited for measuring power electronics. The ADP300 is designed for troubleshooting low-frequency power devices and other circuits where the reference potential is elevated from the ground or the location of the ground is unknown. The ADP305 is designed for measuring the high-speed floating voltages found in today's power electronics.

Features

- 20 MHz and 100 MHz bandwidth
- 1,000 V rms common mode voltage
- 1,400 V peak differential voltage
- EN 61010 CAT III
- 80 dB CMRR at 50/60 Hz
- ProBus system
- Full remote control

ADP30X Specifications

Electrical Characteristics

| | |
|--------------------------------------|--|
| Bandwidth | 20 MHz (ADP300) |
| | 100 MHz (ADP305) |
| Differential Voltage | 1,400 V peak |
| Common Mode Voltage | 1,000 V rms CAT III |
| Low-Frequency Accuracy (probe only) | 1% of Reading |
| CMRR | 50/60 Hz 80 dB (10,000:1) |
| | 100 kHz 50 dB (300:1) |
| Max. Slew Rate (referenced to input) | 60,000 V/ μ s (ADP300) |
| | 300,000 V/ μ s (ADP305) |
| AC Noise (referenced to input) | 50 mV rms |
| Attenuation | $\div 100/\div 1000$ (automatically selected by scope) |
| Input Impedance | Between inputs 8 M Ω , 6 pF |
| | Each input to ground 4 M Ω , 1 pF |
| Sensitivity | 1 V/div to 350 V/div (ADP300) |
| | 200 mV/div to 350 V/div (ADP305) |
| Interface | ProBus, 1 M Ω * |

General Characteristics

| | |
|-----------------------|---------------------------|
| Overall Length | 2 m |
| Input Connectors | 4 mm Shrouded Banana Plug |
| Operating Temperature | 0 °C to 50 °C |
| Warranty | 1 year |

*Requires AP-1M for oscilloscopes with 50 Ω only inputs

Ordering Information

Product Description

| | |
|---|-------|
| 700 V, 15 MHz Differential Probe ($\div 10$, $\div 100$) | AP031 |
| 1,400 V, 100 MHz High-Voltage Differential Probe | AP305 |
| 1,400 V, 20 MHz High-Voltage Differential Probe | AP300 |



DIFFERENTIAL AMPLIFIERS



DIFFERENTIAL AMPLIFIERS

Differential amplifiers are intended to act as signal conditioning preamplifiers for oscilloscopes and network and spectrum analyzers, providing differential measurement capability to instruments having only a single-ended input. The "-PR2" version of each amplifier is a dual channel unit. The DXC series differential input cables are matched to the characteristics of the amplifier.

LeCroy
Differential Amplifier
and Accessory
Model Numbers:

DA1855A
DA1855-PR2
DA1855A-PR2-RM
DA1855A-RM
DSC5100
DXC100A
DXC200
DA101

*Opposite page:
The DA1855A Differential Amplifier can be
used for a complete PowerMeasure System.*

DIFFERENTIAL AMPLIFIERS

LeCroy
Differential Amplifier
and Accessory
Model Numbers:

DA1855A
DA1855-PR2
DA1855A-PR2-RM
DA1855A-RM
DSC5100
DXC100A
DXC200
DA101



DXC-5100

$\div 100$, 2.5KV Passive High Voltage
Probe Pair. Requires DA101 for full
performance



DXC100A

$\div 100$ or $\div 10$ Selectable, 250 MHz
Passive Differential Probe Pair

- DC to 100 MHz Bandwidth with DA1855A DC to 10 MHz Bandwidth with DA1822
- Max Input Voltage 500 V
- Selectable 10 or 100 Attenuation Factor
- 1.2 Meter Cable Length



DXC200

$\div 1$, 50 MHz, Passive Differential
Probe Pair

- DC to 50 MHz with DA1855A DC to 10MHz with DA1822A
- Max Input Voltage 500 V (Limited to Amplifier Max Input Voltage)
- x1 Differential Probe Pair
- 0.7 Meter Cable Length



DA101

$\div 10$, 1MOhm Passive
Attenuator for DXC series
probes

DIFFERENTIAL AMPLIFIERS



DA1855A

The DA1855A is a stand-alone, high-performance 100 MHz differential amplifier. It is intended to act as a signal conditioning preamplifier for oscilloscopes, digitizers and spectrum analyzers, providing differential measurement capability to instruments having only a single-ended input. When used with a DA1855A, oscilloscopes can obtain Common Mode Rejection Ratio (CMRR) and overdrive recovery performance levels previously unobtainable.

Amplifier gain can be set to 1 or 10. A built-in input attenuator can be separately set to attenuate signals by a factor of 10, providing gains of 10, 1, or 0.1 and common mode dynamic range of ± 15.5 V ($\div 1$) or ± 155 V ($\div 10$). Optional probes increase the maximum input signal and common mode ranges in proportion to their attenuation ratio but do not exceed their maximum input voltage rating.

Effective gain of the DA1855A, including probe attenuation, amplifier gain and attenuator settings, is automatically displayed.

DA1855A-PR2


2 Ch, 100 MHz Differential Amplifier with fast over drive recovery, calibrated offset, and selectable LP filters.

Ordering Information

| Product Description | Product Code |
|--|----------------|
| 1 Ch, 100 MHz Differential Amplifier with Precision Voltage Source | DA1855A |
| $\div 100$ or $\div 10$ Selectable, 250 MHz Passive Differential Probe Pair | DXC100A* |
| $\div 1$, 50 MHz Passive Differential Probe Pair | DXC200* |
| $\div 100$, 250 MHz 2.5kv, High Voltage Probe Pair (requires DA101 for full performance) | DXC-5100* |
| $\div 10$ 1 M Ω Passive Attenuator for DXC Series Probes | DA101* |
| 2 Ch, 100 MHz Differential Amplifier with Precision Voltage Source | DA1855A-PR2 |
| DA1855A with Rackmount | DA1855A-RM |
| DA1855A with Rackmount (must be ordered at time of purchase, no retrofit) | DA1855A-PR2-RM |

**Must be used with DA Series Differential Amplifiers*

HIGH VOLTAGE PROBES

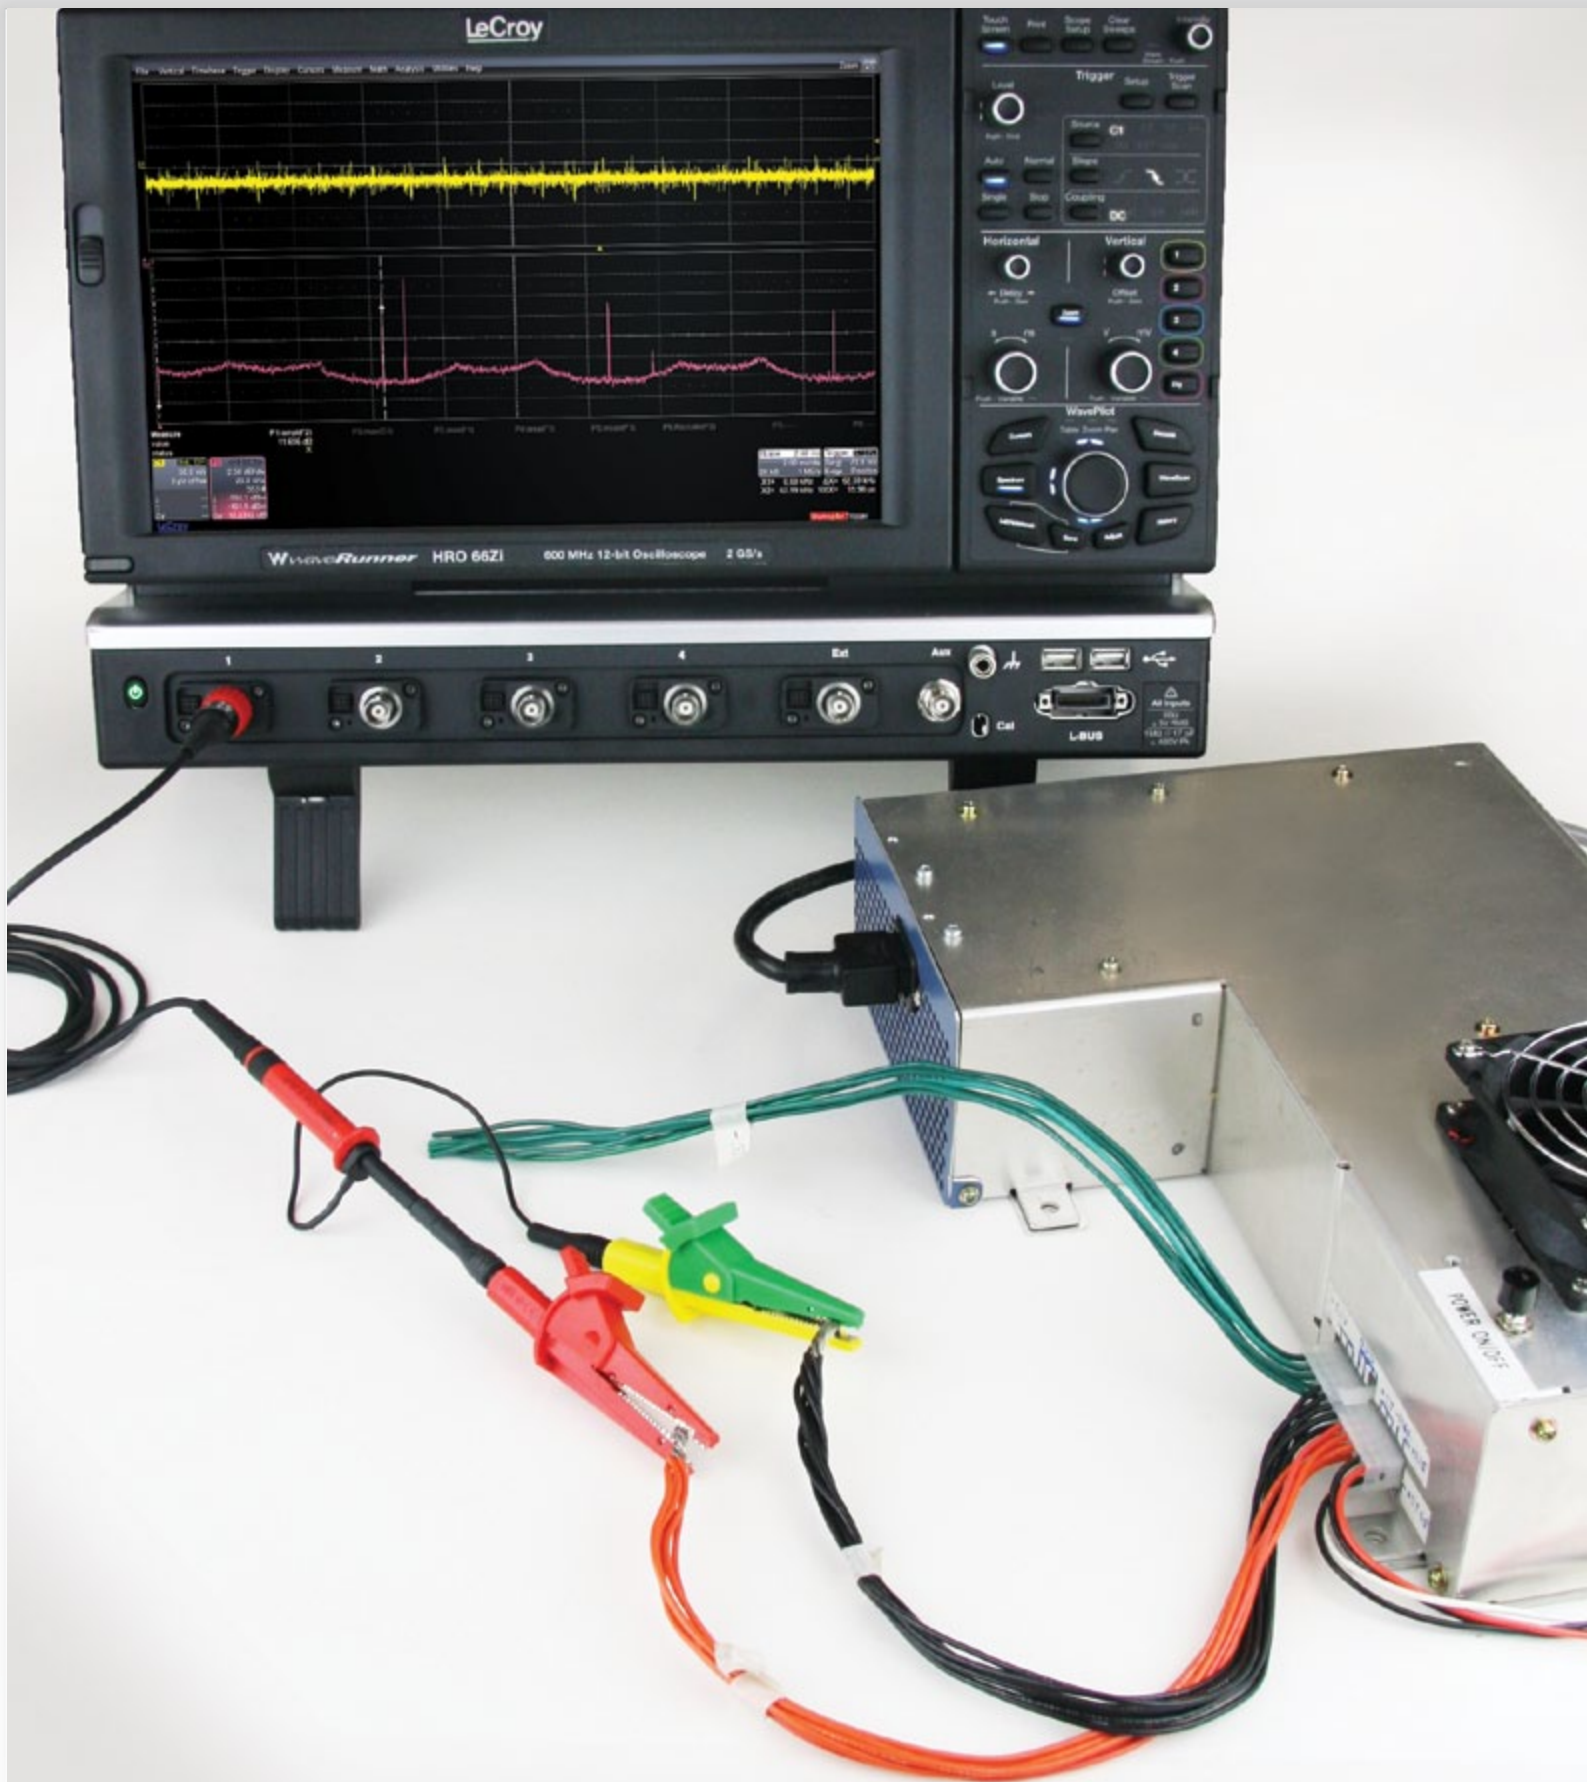

HIGH VOLTAGE PROBES

The PPE series of probes are suitable for a wide range of applications where high-voltage measurements must be made safely and accurately. There are five fixed-attenuation probes covering a range from 2 kV to 20 kV, and one switchable probe providing $\div 10/\div 100$ attenuation for voltage inputs up to 1.2 kV.

New technology which utilizes hybrid circuitry (and switch reading for probes with switchable gain/attenuation) minimizes ringing and overshoot to provide a precise response.

LeCroy
High Voltage Probe
Model Numbers:

PPE1.2KV

PPE2KV

PPE4KV

PPE5KV

PPE6KV

PPE20KV

*Opposite page:
PPE Series High Voltage Probe*

HIGH VOLTAGE PROBES



LeCroy
High Voltage Probe
Model Numbers:

- PPE1.2KV
- PPE2KV
- PPE4KV
- PPE5KV
- PPE6KV
- PPE20KV


The PPE series includes five fixed-attenuation probes covering a range from 2 kV to 20 kV, and one switchable probe providing $\div 10/\div 100$ attenuation for voltage inputs up to 1.2 kV. All fixed-attenuation, standard probes automatically rescale compatible LeCroy oscilloscopes for the appropriate attenuation of the probe.

Features

- Safe, accurate high-voltage measurement
- 1.2 kV to 20 kV

High-Voltage Probes Selection Guide Specifications

| Types | Bandwidth (MHz) | Input R (Ω) | Input C (pF) | Attenuation | Maximum Voltage | Probe Encoding | Cable |
|----------------------|--------------------|-------------------------|-----------------|----------------------|-----------------------|-------------------|-------|
| PPE1.2kV* | 400 | 50 M | < 6 | $\div 10 / \div 100$ | 600 V/1.2 kV | No | 2 m |
| PPE2kV* | 400 | 50 M | < 6 | $\div 100$ | 2 kV | Yes | 2 m |
| PPE4kV* | 400 | 50 M | < 6 | $\div 100$ | 4 kV | Yes | 2 m |
| PPE5kV* | 400 | 50 M | < 6 | $\div 100$ | 5 kV | Yes | 2 m |
| PPE6kV* | 400 | 50 M | < 6 | $\div 1000$ | 6 kV | Yes | 2 m |
| PPE20kV [†] | 100 | 50 M | < 2 | $\div 1000$ | 20 kV (40 kV peak) | Yes | 3 m |

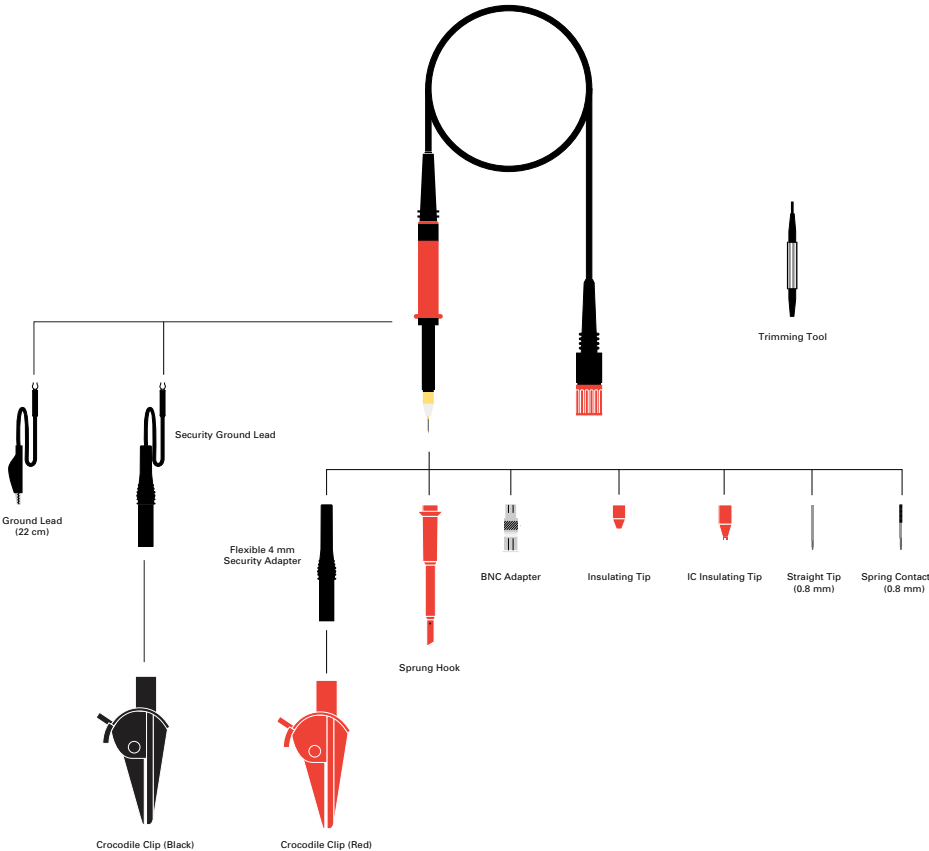

HIGH VOLTAGE PROBES

Ordering Information

| Product Description | Product Code |
|---|--------------|
| ÷10/÷100; 200/300 MHz; 5 MΩ/50 MΩ High-Voltage Probe 600 V/1.2 kV max. Voltage DC | PPE1.2KV |
| ÷1000; 100 MHz; 50 MΩ High-Voltage Probe 20 kV (40 kV Peak) max. Voltage DC and Peak AC | PPE20KV |
| ÷100; 400 MHz; 50 MΩ High-Voltage Probe | PPE2KV |
| 2 kV max. Voltage DC and Peak AC | |
| ÷100; 400 MHz; 50 MΩ High-Voltage Probe | PPE4KV |
| 4 kV max. Voltage DC and Peak AC | |
| ÷100; 400 MHz; 50 MΩ High-Voltage Probe | PPE5KV |
| 5 kV max. Voltage DC and Peak AC | |
| ÷1000; 400 MHz; 50 MΩ High-Voltage Probe | PPE6KV |
| 6 kV max. Voltage DC and Peak AC | |
| Accessory Kit for PPE1.2kV, 2kV, 4kV, 5kV, and 6kV | PK103 |
| Standard Probe Accessory Kit for PPE20kV | PK104 |
| Ground Lead (15 cm) | PK104-1 |
| Hook | PK104-2 |
| Standard Probe Accessory Kit for PPE1.2kV, PPE2kV | PK103 |
| Sprung Hook (red) | PK103-1 |
| Ground Lead (22 cm) | PP005-G22 |
| Crocodile Clip | PK30x-2 |
| Probe Tip to BNC Adapter | PP005-BNC |
| IC Insulating Tip | |
| Screw Driver | |
| Probe Tip to Banana Plug Adapter | |
| Ground Lead with Banana Plug | |
| Spring Tip (0.8 mm) | PP005-ST8 |
| Rigid Tip V2A | PP005-RT |

Standard Accessory Kit for PPE20KV


| | |
|---------------------|---------|
| Ground Lead (15 cm) | PK104-1 |
| Hook | PK104-2 |

Supplied with probe:

*Probe Kit: Trimming tool, ground lead, rigid tip, IC insulator, BNC adapter, tip insulator, sprung hook, red crocodile clip.
4 mm safety ground lead, and green/yellow crocodile clip.

† Probe Kit: trimming tool, and ground lead with a crocodile clip.

OPTICAL PROBES

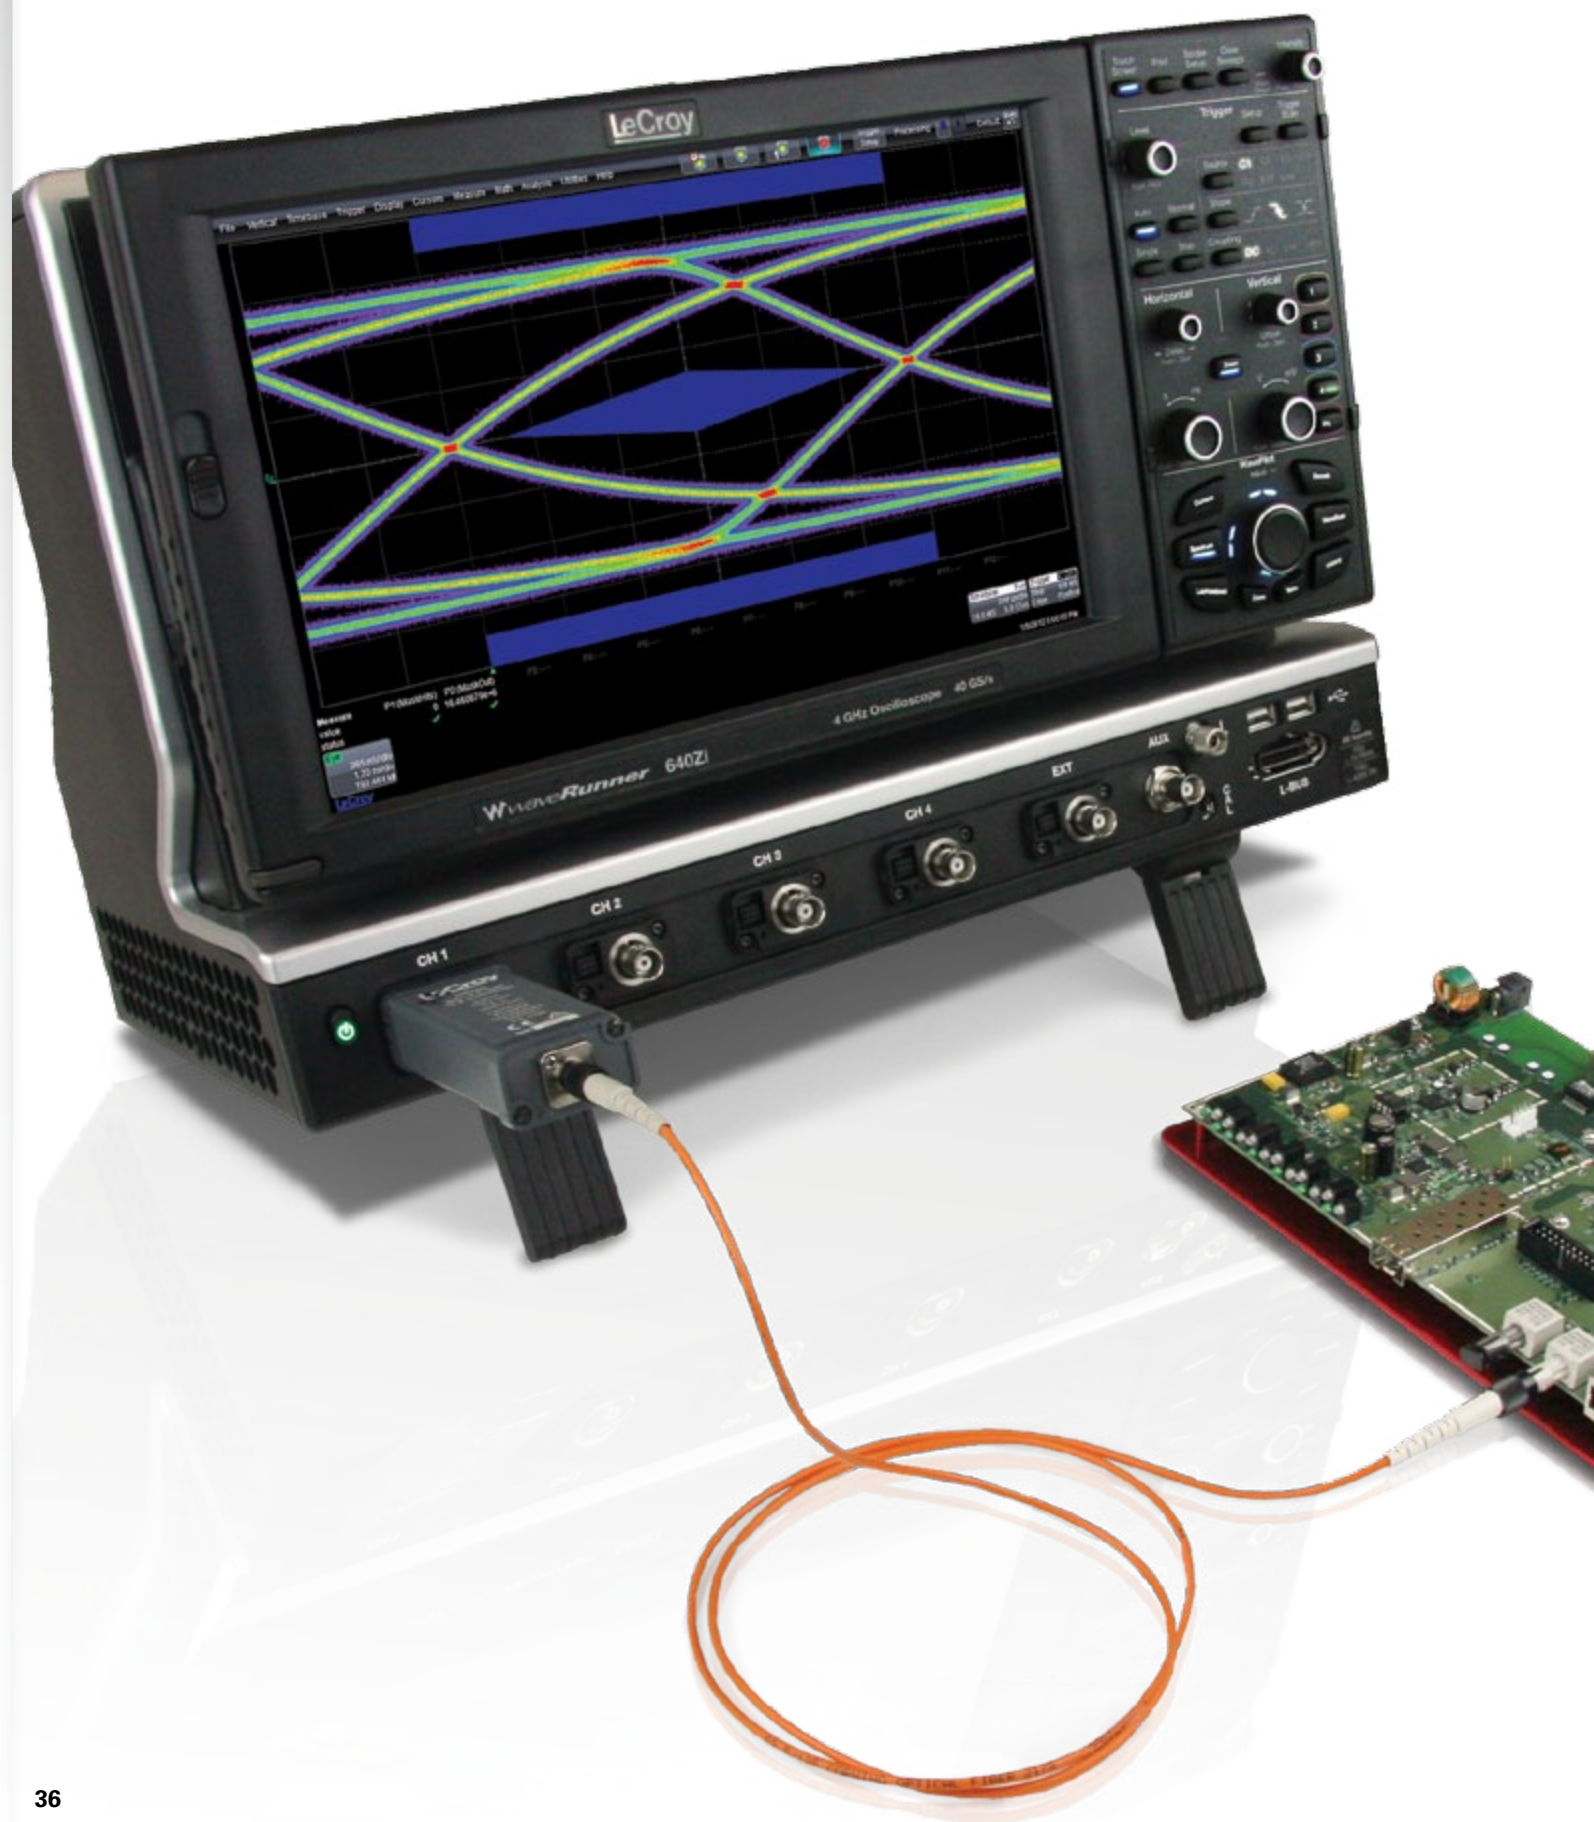

LeCroy's wide-band multi-mode optical-to-electrical converters are designed for measuring optical communications signals. Their broad wavelength range and multi-mode input optics make these devices ideal for applications including Gigabit Ethernet, Fibre Channel, and ITU telecom standards.

The OE695G is compatible with WaveMaster 8 Zi/Zi-A, LabMaster 9 Zi-A, and LabMaster 10 Zi oscilloscopes. Connection to a real-time LeCroy oscilloscope is through the 2.92mm interface, with a provided adapter to connect to ProLink interfaces.

The OE425 and OE455 are ProBus modules compatible with WaveRunner Xi/Xi-A, WaveRunner 6 Zi, WavePro 7 Zi/Zi-A oscilloscopes, as well as WaveMaster 8 Zi/Zi-A and LabMaster 9 Zi-A when used with an LPA-BNC adapter. The OE525 and OE555 are ProLink modules compatible with WavePro 7 Zi/Zi-A, WaveMaster 8 Zi/Zi-A, and LabMaster 9 Zi-A oscilloscopes.

LeCroy
Optical Probe
Model Numbers:

OE695G
OE425
OE455
OE525
OE555

*Opposite page:
OE455 Optical Probe.*

OPTICAL PROBES



LeCroy
Optical Probe
Model Numbers:

- OE695G
- OE425
- OE455
- OE525
- OE555

OE695G

LeCroy's OE695G wide-band optical-to-electrical converter is ideal for measuring optical datacom and telecom signals with data rates from 622 Mb/s to 12.5+ Gb/s. Connection to a real-time LeCroy oscilloscope is through the 2.92mm interface, with a provided adapter to connect to ProLink interfaces.

Features

- Compatible with LeCroy WaveMaster 8 Zi/Zi-A, LabMaster 9 Zi-A, and LabMaster 10 Zi oscilloscopes
- Frequency range DC to 9.5 GHz (electrical, -3 dB)
- Reference receiver support from 8GFC to 10GFC FEC, or Custom (<12.5Gb/s)
- Full bandwidth mode (no reference receiver applied)
- 62.5/125 μ m multi-mode or single-mode fiber input
- +7 dBm (5 mW) max peak optical power
- Low noise (as low as 25 pW/ $\sqrt{\text{Hz}}$)
- Ideal for Eye Mask, Extinction Ratio, and Optical Modulation Amplitude (OMA) testing

Specifications

| | |
|---|---|
| Optical Wavelength Range | 780 to 1550 nm (calibrated range) 750 to 1650 nm (usable range) |
| Maximum Modulation Bandwidth | DC to 8.625 GHz (-3 dBe, electrical) DC to 11.64 GHz (-3 dBo, optical) (Reference Receiver Applied) DC to 9.5 GHz (-3 dBe) DC to 12 GHz (-6 dBe) DC to 17 GHz (-14 dBe) (+/-1 dBe passband variations typical, no Reference Receiver Applied) |
| Reference Receiver Uncertainty | ± 1.6 dBe up to $f_{\text{ref}} = 0.75 \times \text{bit rate}$ ± 4 dBe 2*bit rate setting (typical) ± 0.85 dBe up to $f_{\text{ref}} = 0.75 \times \text{bit rate}$ ± 4 dBe 2*bit rate setting (on matched oscilloscope input channel 4 with 11, 17, 20, 30, 39, 50, 75, 90, or 100 mV/div gain ranges) with purchase of OE695G-REFCAL) |
| Reference Receiver Settings | 8GFC, OC192/STM64, 10GBASE-W, 10GBASE-R, 10GFC, ITU-T G.975 FEC, ITU-T G.709 FEC, 10GbE FEC, 10GFC FEC, Custom (622 Mb/s to 12.5 Gb/s), None (Maximum Bandwidth) |
| Noise Equivalent Power | 25 pW/ $\sqrt{\text{Hz}}$ @ 1310 nm (typical) 50 pW/ $\sqrt{\text{Hz}}$ @ 850 nm (typical) Average noise spectral density 0-10 GHz using most sensitive vertical scale |
| Rise Time (10-90%) | 33 ps (typical, no reference receiver applied) |
| Connector Type | FC/PC, compatible with 62.5/125 μ m Multi-Mode fiber, or mechanically compatible Single-Mode fiber |
| Maximum Optical Linear Input (1 dB compression point) | -2 dBm (typical), -3 dBm (minimum) at 1550/1310 nm +4 dBm (typical), +3 dBm (minimum) at 850 nm |
| Maximum Optical Power | +7 dBm (5 mW) Peak |

OE425/OE455/OE525/OE555

The O/E converters contain calibration data that can be used to create optical reference receivers for SONET/SDH (up to OC48/STM16), Fibre Channel, Gigabit Ethernet, and other optical standards. This feature is available when the O/E is used on a supported oscilloscope. The universal reference receiver supports any data rate up to 3 GHz and remains calibrated on any channel of the oscilloscope.

Features

- Frequency range to 5 GHz (6 GHz optical)
- 62.5 μm or narrower multi-mode or single-mode fiber input
- Broad wavelength range:
 - 500–870 nm (OE425, OE525)
 - 950–1630 nm (OE455, OE555)
- High responsivity
- Low noise
- Included Accessories:
 - Multi-mode optical fiber jumper FC-FC
 - FC to ST adapter
 - FC to SC adapter



Specifications

| | OE425/OE525 | OE455/OE555 |
|---|--|--|
| Wavelength Range | 500 – 870 nm 460 – 870 nm (0.1 V/mW) | 950 – 1630 nm 800 – 1630 nm (0.1 V/mW) |
| Conversion Gain | 0.5 V/mW | 1.1 V/mW |
| Bandwidth | 5 GHz (6 GHz optical) | 3.5 GHz (4.5 GHz optical) |
| Equivalent Noise | 2.2 μW rms | 1.0 μW rms |
| Maximum Optical Power (at 5% saturation) | 2.2 mW | 1.0 mW |
| Rise Time | 90 ps | 108 ps |
| Maximum Safe Input | 5.5 mW | 2.5 mW |
| Temperature Drift | 0.00275 dB / $^{\circ}\text{C}$ | 0.00275 dB / $^{\circ}\text{C}$ |
| Frequency Response Ripple | 1.1 dB | 1.1 dB |
| Connector Type | FC/PC | FC/PC |


Ordering Information

Product Description

Product Code

| | |
|---|--------|
| Optical-to-Electrical Converter, 785 to 1550 nm, 2.92 mm connector with ProLink adapter | OE695G |
| Optical-to-Electrical Converter, 500–870 nm ProBus BNC Connector | OE425 |
| Optical-to-Electrical Converter, 950–1630 nm ProBus BNC Connector | OE455 |
| Optical-to-Electrical Converter, 500–870 nm ProLink BMA Connector | OE525 |
| Optical-to-Electrical Converter, 950–1630 nm ProLink BMA Connector | OE555 |

PASSIVE PROBES

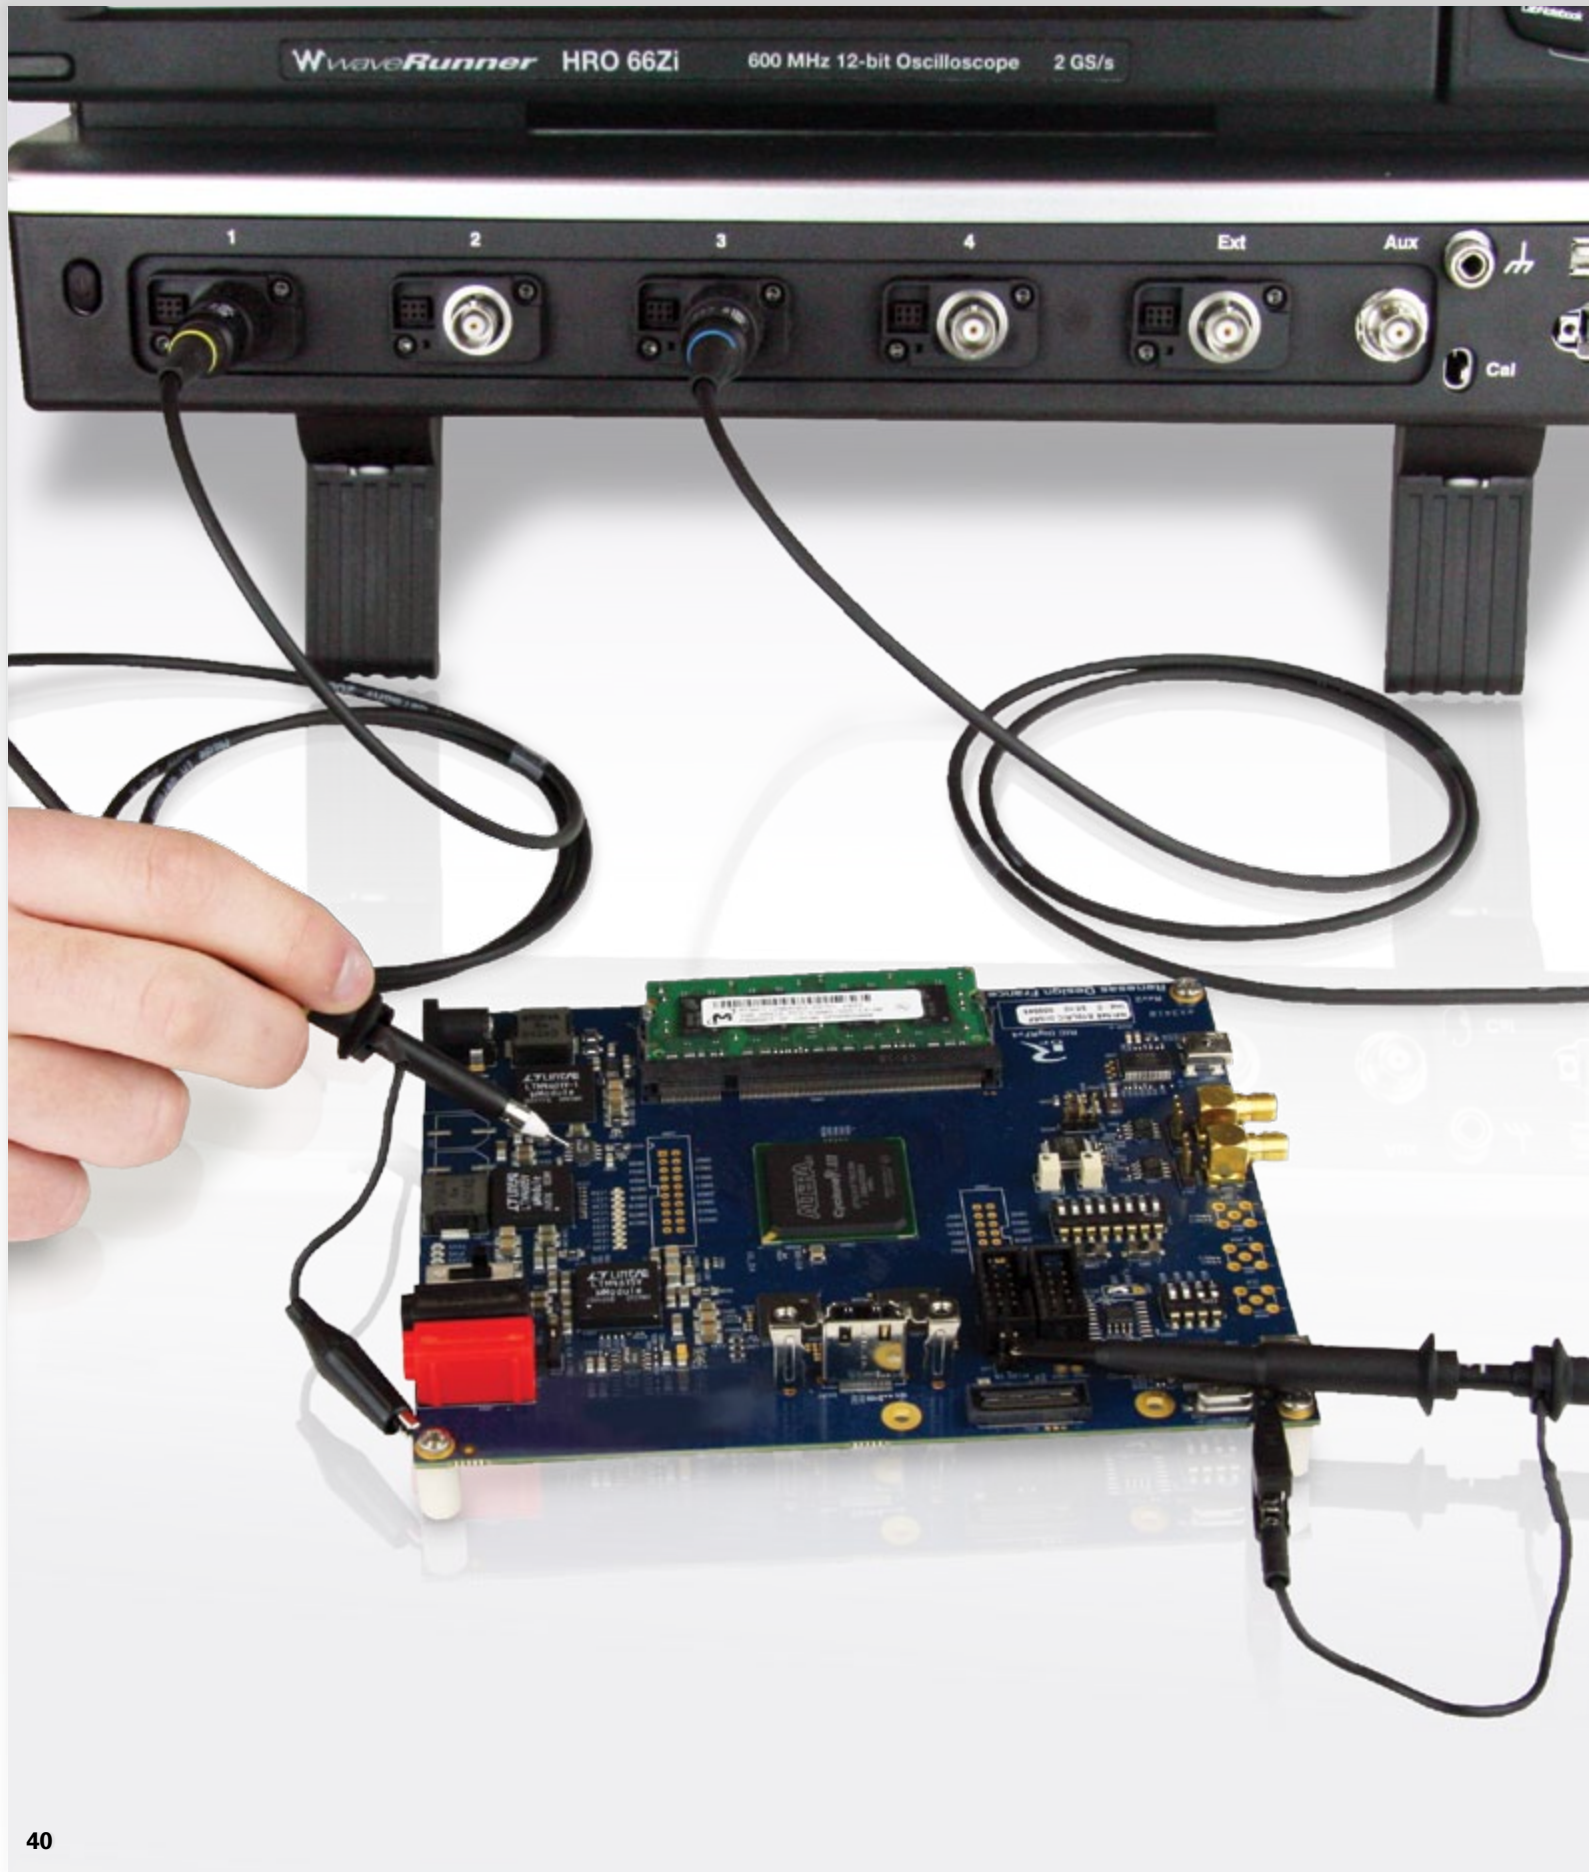

PASSIVE PROBES

Passive probes are the standard probe provided with most oscilloscopes. Typical passive probes provide a $\times 10$ attenuation and feature a high input resistance of 10 M Ω . This high input resistance means that passive probes are the ideal tool for low frequency signals since circuit loading at these frequencies is minimized. Passive probes are designed to handle voltages of at least 400 V, some as high as 600 V. LeCroy passive probes feature an attenuation sense pin which tells the oscilloscope to scale the waveforms automatically requiring no user input.

LeCroy
Passive Probe
Model Numbers:

PP005A
PP006A
PP007-WR-1
PP008-1
PP009-1
PP010-1
PP011-1
PP016

PASSIVE PROBES



LeCroy
Passive Probe
Model Numbers:

- PP005A
- PP006A
- PP007-WR-1
- PP008-1
- PP009-1
- PP010-1
- PP011-1
- PP016

Each passive probe is recommended for a certain oscilloscope, using the right passive probe with the right oscilloscope means that the probe can be properly compensated across the entire bandwidth. Using probes with a different oscilloscope will only let you compensate for low frequencies.

Features

- Bandwidth from 200 MHz to 500 MHz
- Probe encoding ring for automatic scale factor readout on LeCroy oscilloscopes

Passive Probes Selection Guide Specifications


| Types | Bandwidth (MHz) | Input R (Ω) | Input C (pF) | Attenuation | Maximum Voltage | Diameter (mm) |
|------------|--------------------|---------------------------------|-----------------|-------------------------|--------------------|------------------|
| PP005A | 500 | 10 M | 11 | $\div 10$ | 500 V | 5 |
| PP006A | 500 | 10 M | 12 | $\div 10$ | 600 V | 5 |
| PP007-WR-1 | 500 | 10 M | 9.5 | $\div 10$ | 400 V | 2.5 |
| PP008-1 | 500 | 10 M | 9.5 | $\div 10$ | 400 V | 2.5 |
| PP009-1 | 500 | 10 M | 9.5 | $\div 10$ | 400 V | 2.5 |
| PP010-1 | 500 | 10 M | 9.5 | $\div 10$ | 400 V | 2.5 |
| PP011-1 | 50 | 10 M | 9.5 | $\div 10$ | 400 V | 5 |
| PP016 | 300 MHz/ 10 MHz | 10 M Ω / 1 M Ω | 12 pF/ 46 pF | $\div 10$ / $\div 1$ | 600 V | 5 mm |

Ordering Information


| Product Description | Product Code |
|---|--------------|
| $\div 10$, 500 MHz 10 M Ω Passive Probe | PP005A |
| $\div 10$, 500 MHz 10 M Ω Passive Probe | PP006A |
| $\div 10$, 500 MHz 10 M Ω Passive Probe | PP007-WR-1 |
| $\div 10$, 500 MHz 10 M Ω Passive Probe | PP008-1 |
| $\div 10$, 500 MHz 10 M Ω Passive Probe | PP009-1 |
| $\div 10$, 200 MHz 10 M Ω Passive Probe | PP010-1 |
| $\div 10$, 500 MHz 10 M Ω Passive Probe | PP011-1 |
| $\div 10$, 300 MHz 10 M Ω Passive Probe | PP016 |

PASSIVE PROBES


Passive Probe Accessories for PP005, PP009, and PP011 Series

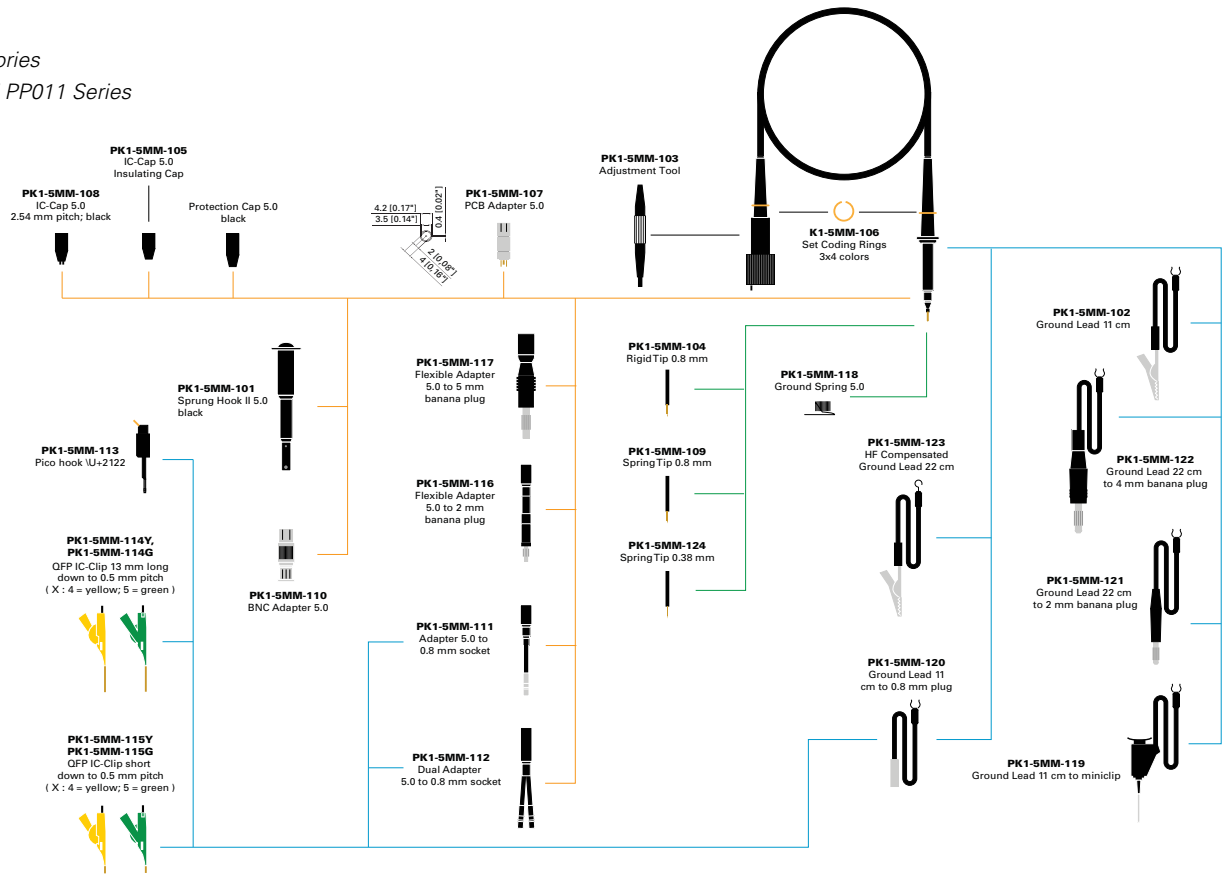

Passive Probe Accessories for PP007 and PP008 Series

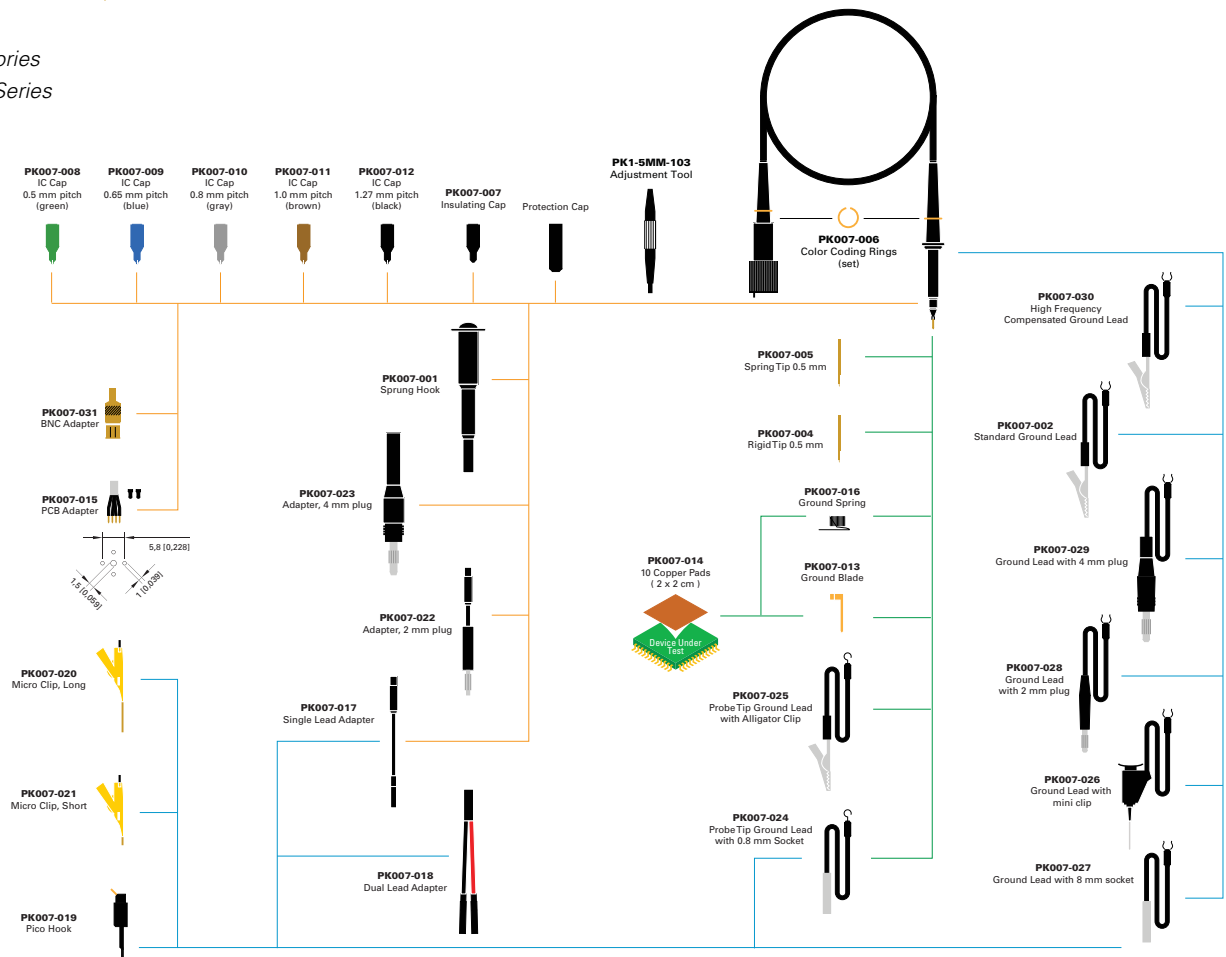

TRANSMISSION LINE PROBES

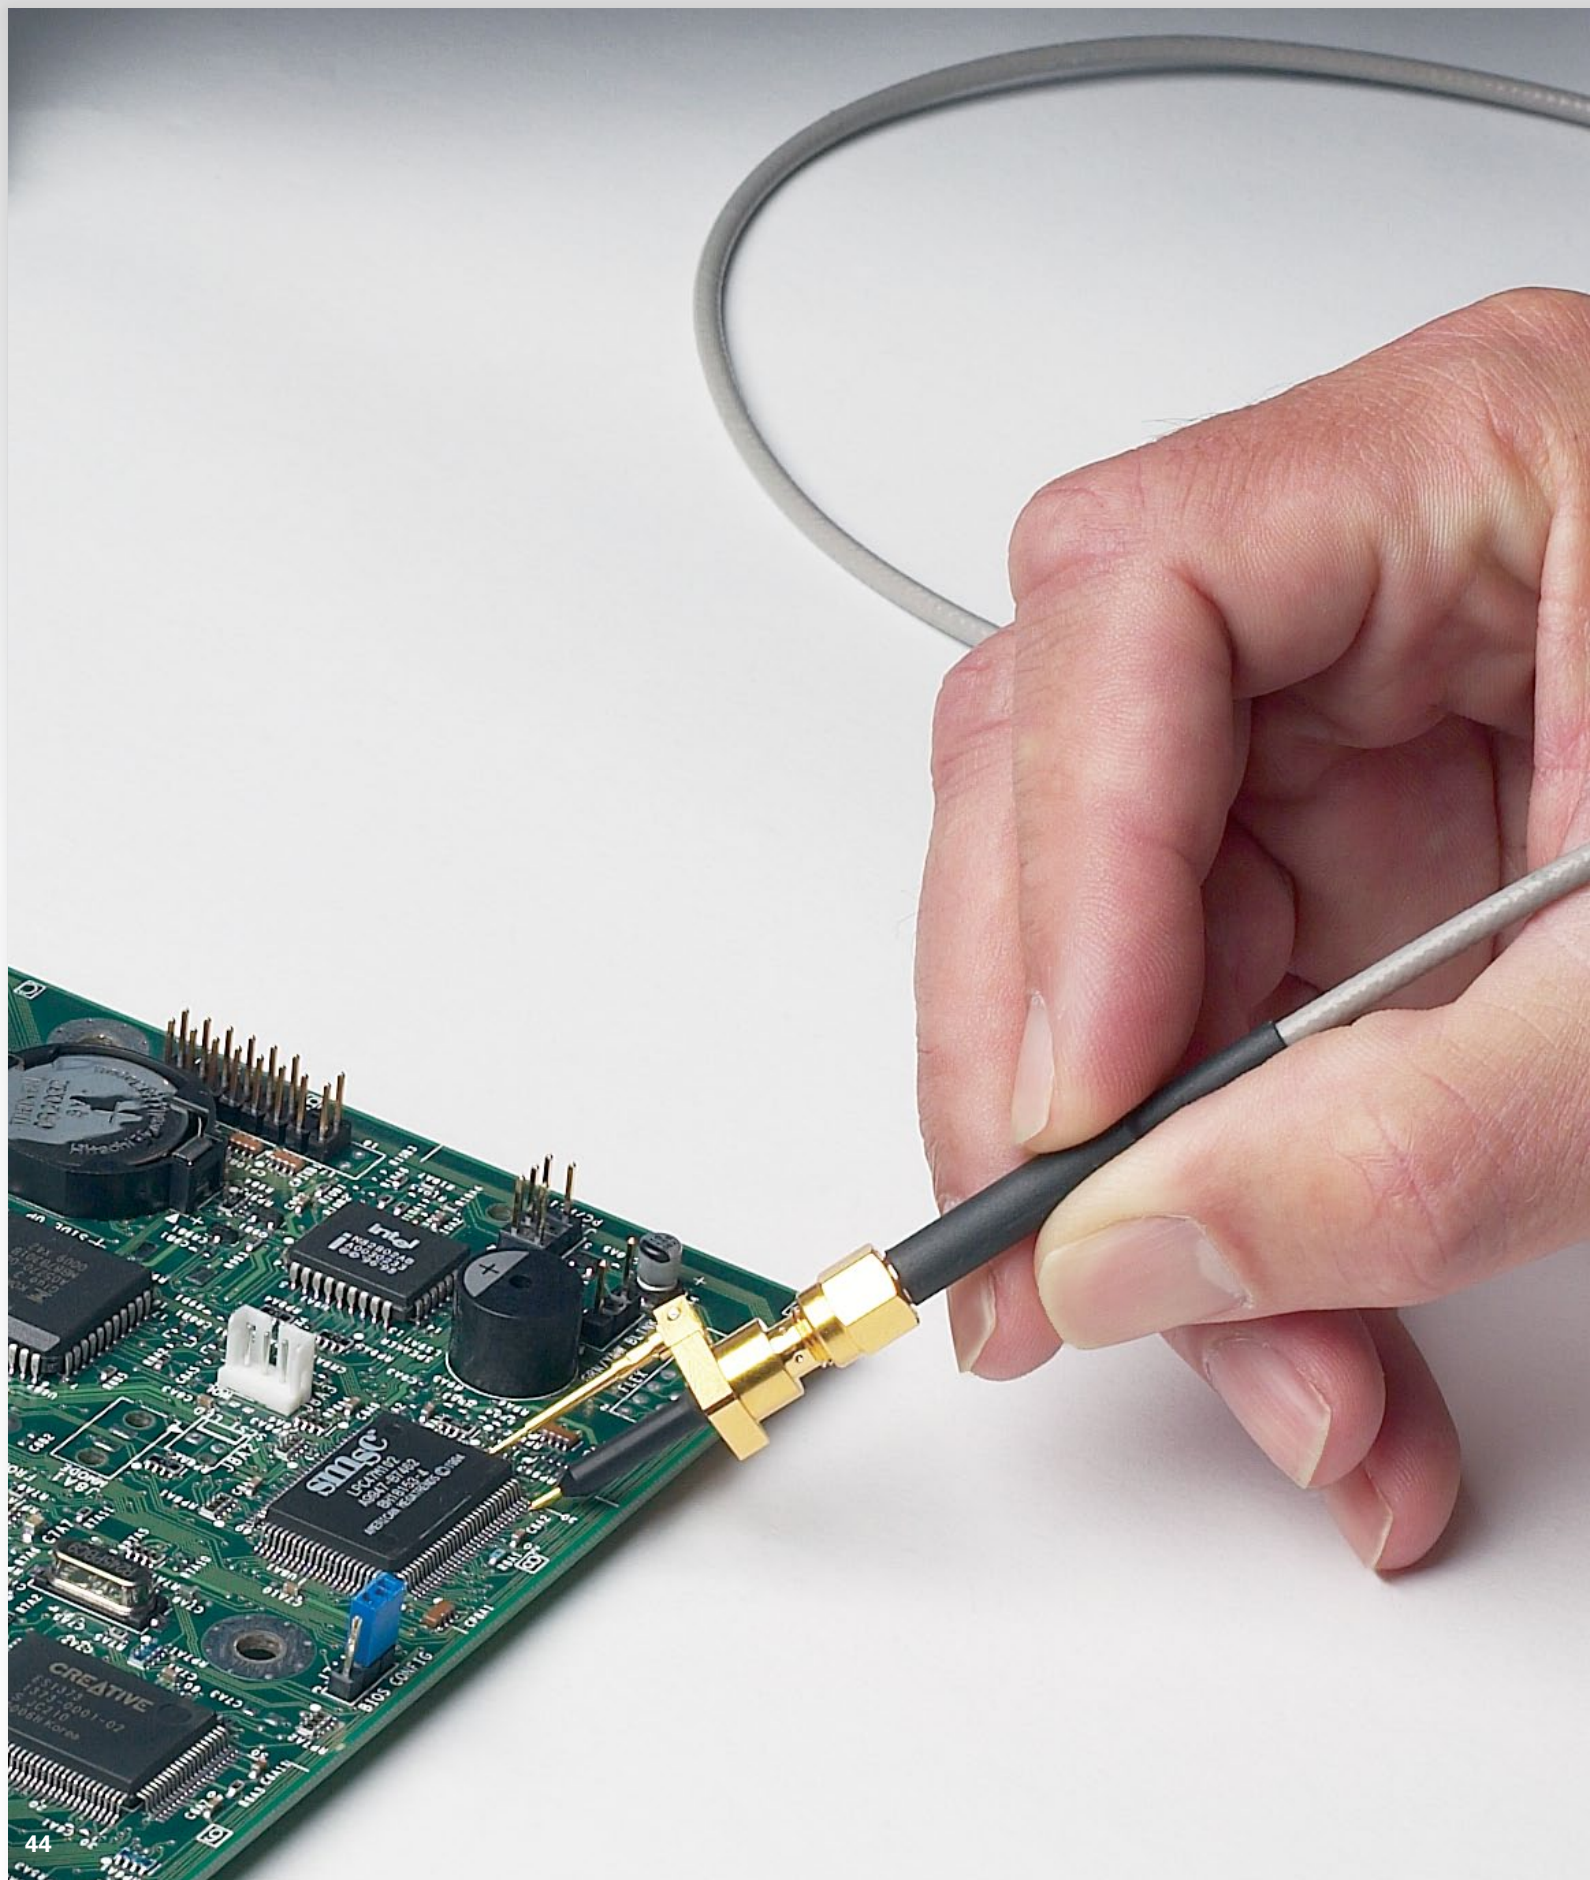

TRANSMISSION LINE PROBES

LeCroy
Transmission Line Probe
Model Numbers:

PP066
PP065

Transmission line probes are a special type of passive probe designed for use at very high frequencies. They replace the high impedance probe cable found in a traditional passive probe with a precision transmission line, with a characteristic impedance that matches the oscilloscope input ($50\ \Omega$). This greatly reduces the input capacitance to a fraction of a picofarad, minimizing the loading of high frequency signals. A matching network at the tip increases the DC input resistance. While they have lower DC input resistance than a traditional passive probe (usually $500\ \Omega$) to $5\ \text{k}\Omega$), the input impedance of these probes remains nearly constant over their entire frequency range. A traditional $\div 10$ passive probe will have a $10\ \text{M}\Omega$ input impedance at DC, however this impedance drops rapidly with frequency, passing below the input impedance of a transmission line probe at less than 100 MHz.

In some applications, transmission line probes offer advantages over active probes. In addition to being less expensive, their passive design is more robust to over voltage and ESD exposure. They are useful in applications producing fast rising, narrow pulses with amplitudes which exceed the dynamic range of active probes. They also tend to have less parasitic effects on frequency response. A high BW transmission line probe driving a sampling oscilloscope can be used as a "golden standard" in situations when the response of an active probe measurement is questioned.

*Opposite page:
PP066 Transmission Line Probe*

TRANSMISSION LINE PROBES

LeCroy
Transmission Line Probe
Model Numbers:

PP066
PP065



PP066

The PP066 is a high-bandwidth passive probe designed for use with the WaveMaster and other high-bandwidth oscilloscopes with 50 Ω input termination. This very low capacitance probe provides an excellent solution for higher frequency applications, especially the probing of transmission lines with 20–100 Ω impedance. The PP066 accommodates a wide range of applications, including probing of analog and digital ICs commonly found in computer, communications, data storage, and other high-speed designs.

Features:

- Interchangeable attenuator tips
- Signal integrity at high bandwidth
- Standard SMA cable connection
- Ultra low capacitance

PP066 Specifications

Electrical Characteristics

| | |
|-------------------|---|
| Bandwidth | DC to 7.5 GHz |
| Risetime | < 47 ps |
| Input Capacitance | < 0.20 pF |
| Input Resistance | 500 Ω (\div 10 cartridge) 1000 Ω (\div 20 cartridge) |
| Maximum Voltage | 15 V rms |
| Cable Length | 1 m |

Included with PP0066

PACC-AD001
SMA to BNC Adapter

TRANSMISSION LINE PROBES



PP065

The PP065 is a transmission line probe designed for use at very high frequencies. The probe's input impedance remains nearly constant over its entire frequency range. Robust to over voltage and ESD exposure, it is particularly useful in applications producing fast rising, narrow pulses with amplitudes, which exceed the dynamic range of active probes.

Features:

- 1 GHz
- Low capacitance
- $\div 100$ 1 GHz 5 k passive probe

PP065 Specifications

| | |
|-------------------|--------------|
| Bandwidth | 1 GHz |
| Input Capacitance | 1.5 pF |
| Input Resistance | 500 Ω |
| Maximum Voltage | 22 V |
| Attenuation | $\div 100$ |

Ordering Information

| Product Description | Product Code |
|--|--------------|
| 7.5 GHz Low Capacitance Passive Probe ($\div 10$, 1 k Ω ; $\div 20$, 500 Ω) | PP066 |
| 1 GHz Low Capacitance Passive Probe ($\div 10$, 5 k Ω) | PP065 |



1-800-5-LeCroy
www.lecroy.com

**Local sales offices are located throughout the world.
Visit our website to find the most convenient location.**

© 2012 by LeCroy Corporation. All rights reserved. Specifications, prices, availability, and delivery subject to change without notice. Product or brand names are trademarks or requested trademarks of their respective holders.

ProbeCatalog-13july12
PDF

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9