



BCP56H series

80 V, 1 A NPN medium power transistors

Rev. 1 — 23 November 2016

Product data sheet

1. Product profile

1.1 General description

NPN medium power transistors in a medium power SOT223 (SC-73) Surface-Mounted Device (SMD) plastic package.

Table 1. Product overview

Type number	Package			PNP complement
	Nexperia	JEITA	JEDEC	
BCP56H	SOT223	SC-73	-	BCP53H
BCP56-10H				BCP53-10H
BCP56-16H				BCP53-16H

1.2 Features and benefits

- High collector current capability I_C and I_{CM}
- Three current gain selections
- High power dissipation capability
- High-temperature applications up to 175 °C
- AEC-Q101 qualified

1.3 Applications

- Linear voltage regulators
- MOSFET drivers
- Low-side switches
- Power management
- Amplifiers

1.4 Quick reference data

Table 2. Quick reference data

$T_{amb} = 25\text{ °C}$ unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{CEO}	collector-emitter voltage	open base	-	-	80	V
I_C	collector current		-	-	1	A
I_{CM}	peak collector current	single pulse; $t_p \leq 1\text{ ms}$	-	-	2	A



Table 2. Quick reference data ...continued
T_{amb} = 25 °C unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
h _{FE}	DC current gain	V _{CE} = 2 V; I _C = 150 mA [1]	63	-	250	
	BCP56-10H	V _{CE} = 2 V; I _C = 150 mA [1]	63	-	160	
	BCP56-16H	V _{CE} = 2 V; I _C = 150 mA [1]	100	-	250	

[1] Pulse test: t_p ≤ 300 μs; δ = 0.02

2. Pinning information

Table 3. Pinning

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	B	base		
2	C	collector		
3	E	emitter		
4	C	collector		

3. Ordering information

Table 4. Ordering information

Type number	Package		
	Name	Description	Version
BCP56H	SC-73	plastic surface-mounted package with increased heatsink; 4 leads	SOT223
BCP56-10H			
BCP56-16H			

4. Marking

Table 5. Marking codes

Type number	Marking code
BCP56H	BCP56H
BCP56-10H	P5610H
BCP56-16H	P5616H


5. Limiting values

Table 6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).


Symbol	Parameter	Conditions	Min	Max	Unit
V_{CBO}	collector-base voltage	open emitter	-	100	V
V_{CEO}	collector-emitter voltage	open base	-	80	V
V_{EBO}	emitter-base voltage	open collector	-	7	V
I_C	collector current		-	1	A
I_{CM}	peak collector current	single pulse; $t_p \leq 1$ ms	-	2	A
I_B	base current		-	0.2	A
I_{BM}	peak base current	single pulse; $t_p \leq 1$ ms	-	0.3	A
P_{tot}	total power dissipation	$T_{amb} \leq 25$ °C	[1]	-	725 mW
			[2]	-	1.2 W
			[3]	-	1.5 W
			[4]	-	1.6 W
			[5]	-	2.2 W
T_j	junction temperature		-	+175	°C
T_{amb}	ambient temperature		-55	+175	°C
T_{stg}	storage temperature		-65	+175	°C

- [1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.
- [2] Device mounted on an FR4 PCB, single-sided copper, tin-plated; mounting pad for collector 1 cm².
- [3] Device mounted on an FR4 PCB, single-sided copper, tin-plated; mounting pad for collector 6 cm².
- [4] Device mounted on an FR4 PCB, 4-layer copper; tin-plated and standard footprint.
- [5] Device mounted on an FR4 PCB, 4-layer copper; tin-plated; mounting pad for collector 1 cm².

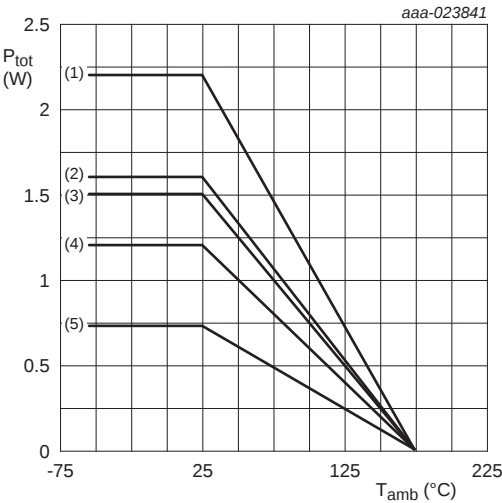

- (1) FR4 PCB, 4-layer copper, 1 cm²
- (2) FR4 PCB, 4-layer copper, standard footprint
- (3) FR4 PCB, single-sided copper, 6 cm²
- (4) FR4 PCB, single-sided copper, 1 cm²
- (5) FR4 PCB, single-sided copper, standard footprint

Fig 1. Power derating curves

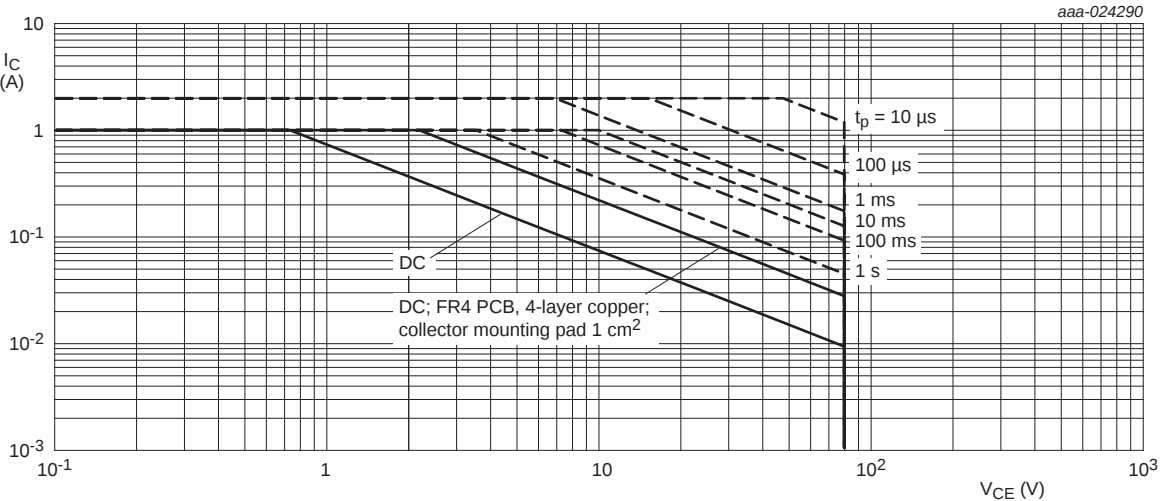

Unless otherwise specified:
 $T_{amb} = 25\text{ °C}$
Single pulse
FR4 PCB, single-sided copper; standard footprint


Fig 2. Safe operating area; junction to ambient; continuous and peak collector currents as a function of collector-emitter voltage


6. Thermal characteristics

Table 7. Thermal characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
$R_{th(j-a)}$	thermal resistance from junction to ambient	in free air	[1]	-	207	K/W
			[2]	-	125	K/W
			[3]	-	100	K/W
			[4]	-	94	K/W
			[5]	-	69	K/W
$R_{th(j-sp)}$	thermal resistance from junction to solder point		-	-	18	K/W


- [1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
- [2] Device mounted on an FR4 PCB, single-sided copper, tin-plated; mounting pad for collector 1 cm².
- [3] Device mounted on an FR4 PCB, single-sided copper, tin-plated; mounting pad for collector 6 cm².
- [4] Device mounted on an FR4 PCB, 4-layer copper; tin-plated and standard footprint.
- [5] Device mounted on an FR4 PCB, 4-layer copper; tin-plated; mounting pad for collector 1 cm².

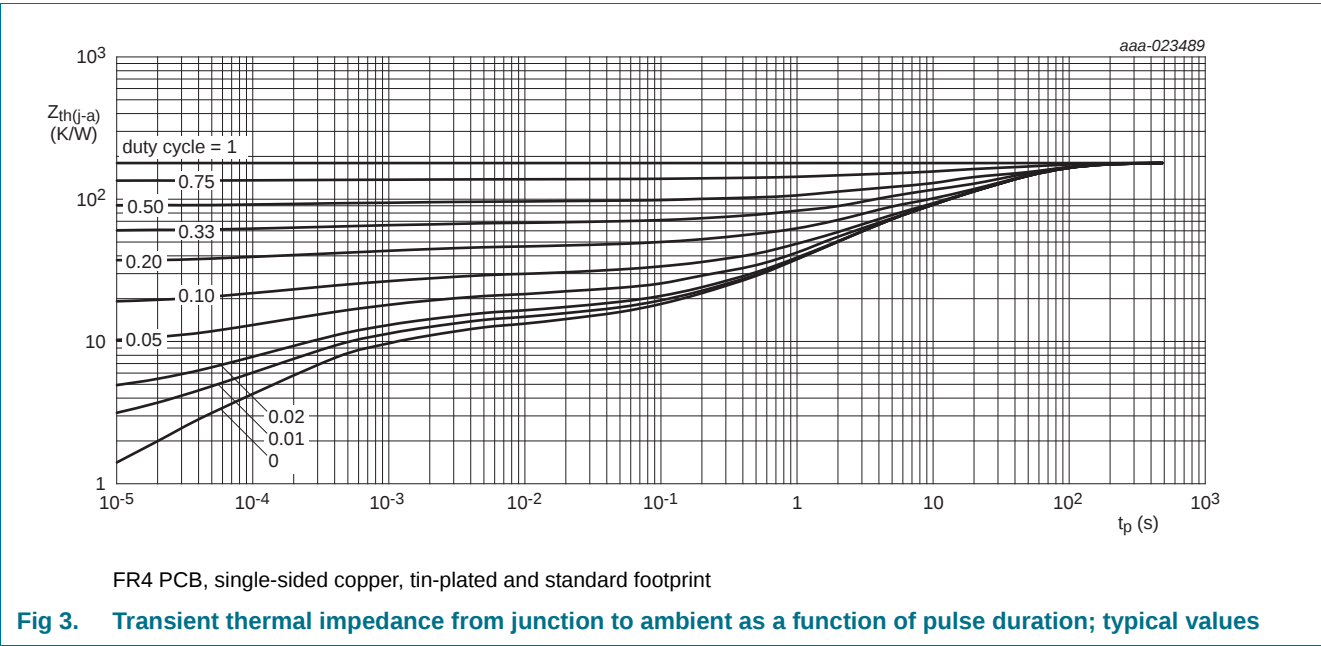

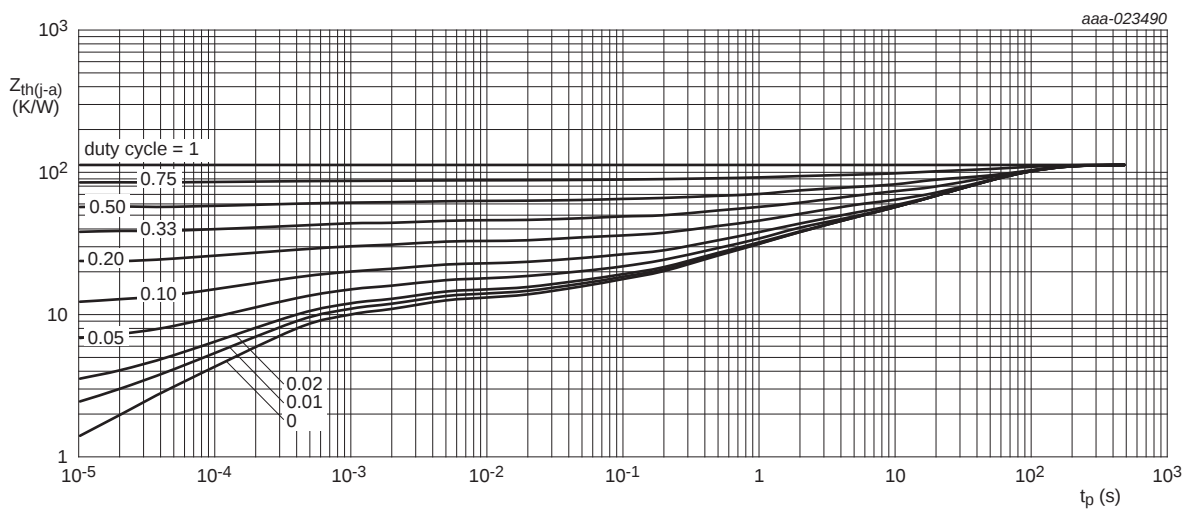


FR4 PCB, single-sided copper, tin-plated; mounting pad for collector 1 cm²

Fig 4. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

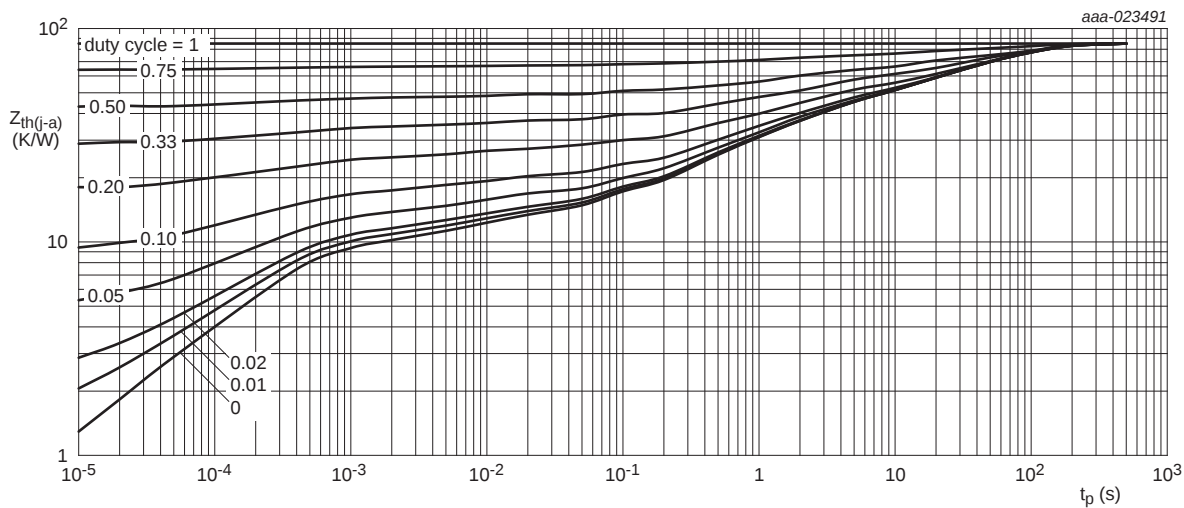


FR4 PCB, single-sided copper, tin-plated; mounting pad for collector 6 cm²

Fig 5. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

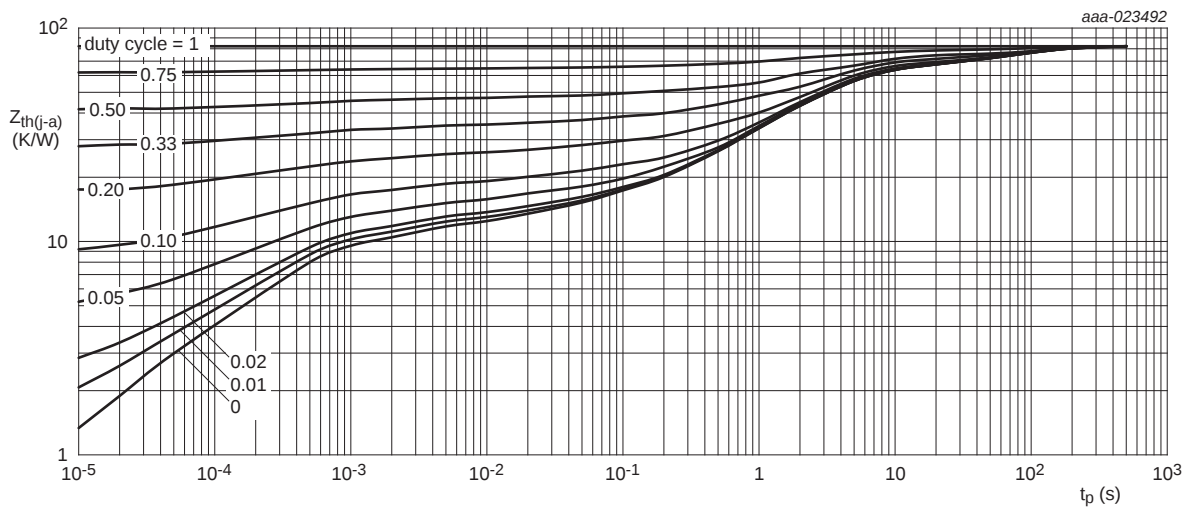

FR4 PCB, 4-layer copper, tin-plated and standard footprint.

Fig 6. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

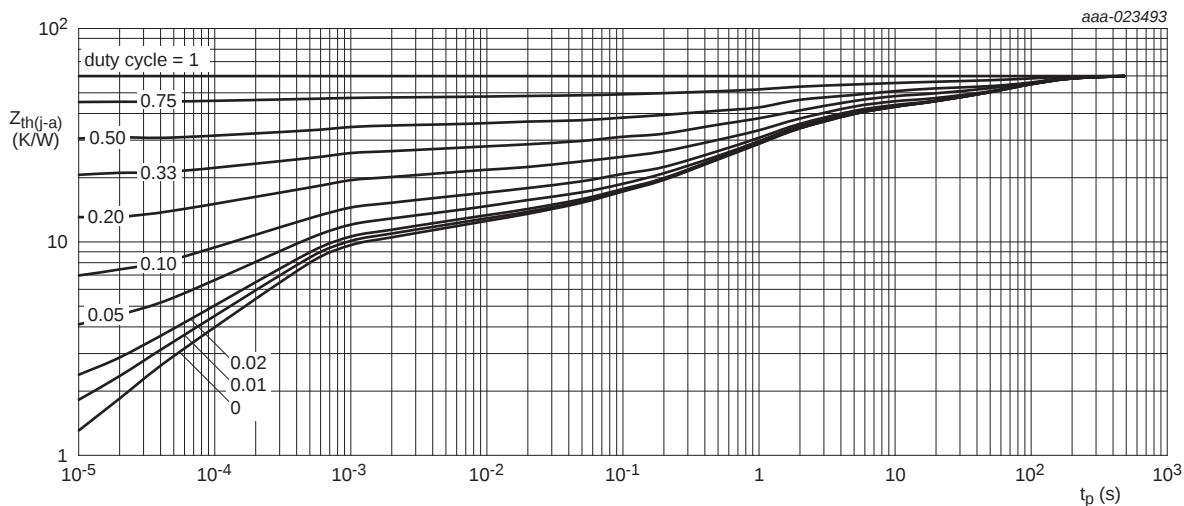

FR4 PCB, 4-layer copper, tin-plated; mounting pad for collector 1 cm²

Fig 7. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values


7. Characteristics

Table 8. Characteristics

$T_{amb} = 25\text{ °C}$ unless otherwise specified.


Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I_{CBO}	collector-base cut-off current	$V_{CB} = 30\text{ V}; I_E = 0\text{ A}$	-	-	100	nA
		$V_{CB} = 30\text{ V}; I_E = 0\text{ A}; T_j = 150\text{ °C}$	-	-	10	μA
I_{EBO}	emitter-base cut-off current	$V_{EB} = 5\text{ V}; I_C = 0\text{ A}$	-	-	100	nA
h_{FE}	DC current gain	$V_{CE} = 2\text{ V}; I_C = 5\text{ mA}$	63	-	-	
		$V_{CE} = 2\text{ V}; I_C = 150\text{ mA}$ [1]	63	-	250	
		$V_{CE} = 2\text{ V}; I_C = 500\text{ mA}$ [1]	40	-	-	
	BCP56-10T	$V_{CE} = 2\text{ V}; I_C = 150\text{ mA}$ [1]	63	-	160	
	BCP56-16T	$V_{CE} = 2\text{ V}; I_C = 150\text{ mA}$ [1]	100	-	250	
V_{CEsat}	collector-emitter saturation voltage	$I_C = 500\text{ mA}; I_B = 50\text{ mA}$ [1]	-	-	500	mV
V_{BE}	base-emitter voltage	$V_{CE} = 2\text{ V}; I_C = 500\text{ mA}$ [1]	-	-	1	V
f_T	transition frequency	$V_{CE} = 5\text{ V}; I_C = 50\text{ mA};$ $f = 100\text{ MHz}$	100	155	-	MHz
C_C	collector capacitance	$V_{CB} = 10\text{ V}; I_E = I_C = 0\text{ A};$ $f = 1\text{ MHz}$	-	4.5	-	pF

[1] Pulse test: $t_p \leq 300\text{ }\mu\text{s}$; $\delta = 0.02$

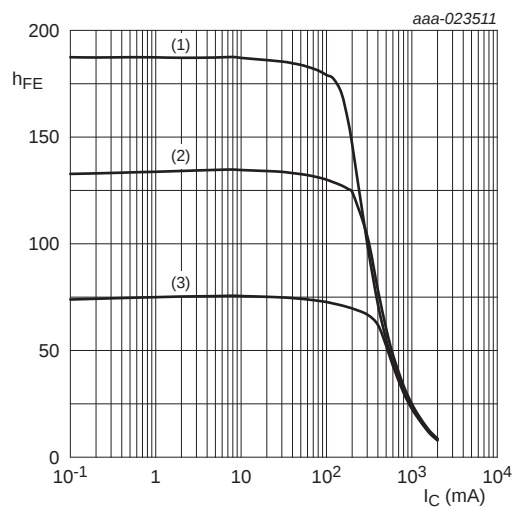


- $V_{CE} = 2\text{ V}$
(1) $T_{amb} = 100\text{ }^{\circ}\text{C}$
(2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
(3) $T_{amb} = -55\text{ }^{\circ}\text{C}$

Fig 8. DC current gain as a function of collector current; typical values

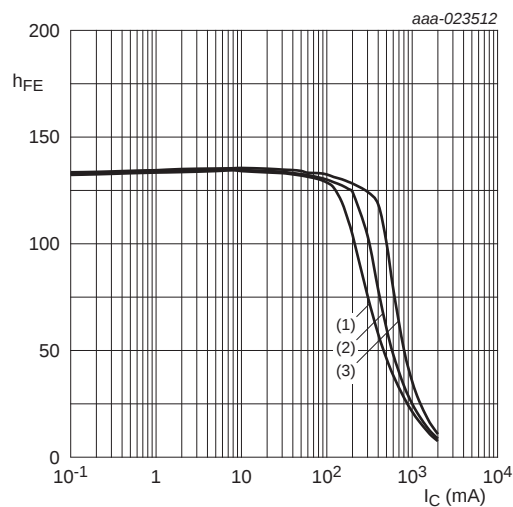


- $T_{amb} = 25\text{ }^{\circ}\text{C}$
(1) $V_{CE} = 1\text{ V}$
(2) $V_{CE} = 2\text{ V}$
(3) $V_{CE} = 5\text{ V}$

Fig 9. DC current gain as a function of collector current; typical values

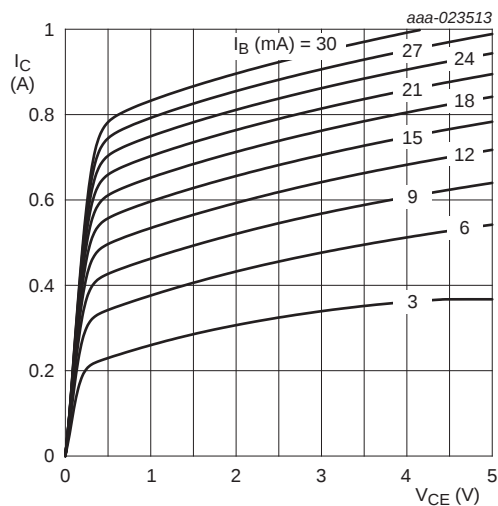


$T_{amb} = 25\text{ }^{\circ}\text{C}$

Fig 10. Collector current as a function of collector-emitter voltage; typical values

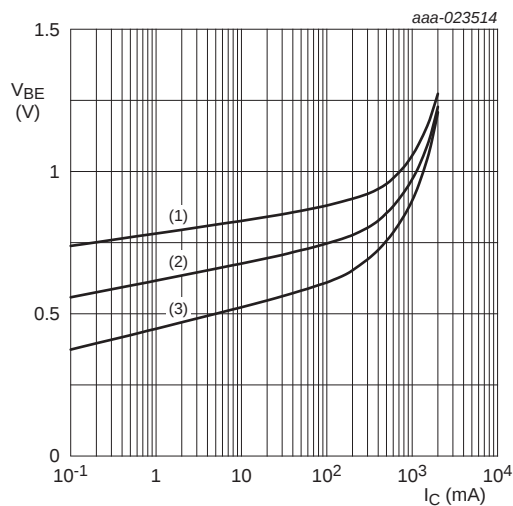


- $V_{CE} = 2\text{ V}$
(1) $T_{amb} = -55\text{ }^{\circ}\text{C}$
(2) $T_{amb} = 25\text{ }^{\circ}\text{C}$
(3) $T_{amb} = 100\text{ }^{\circ}\text{C}$

Fig 11. Base-emitter voltage as a function of collector current; typical values

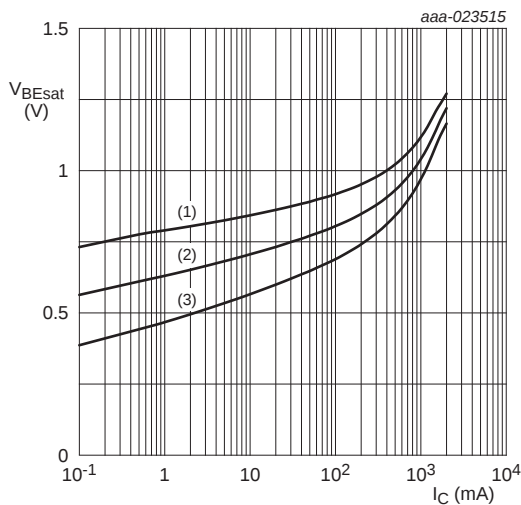


- $I_C/I_B = 10$
- (1) $T_{amb} = -55^\circ\text{C}$
 - (2) $T_{amb} = 25^\circ\text{C}$
 - (3) $T_{amb} = 100^\circ\text{C}$

Fig 12. Base-emitter saturation voltage as a function of collector current; typical values

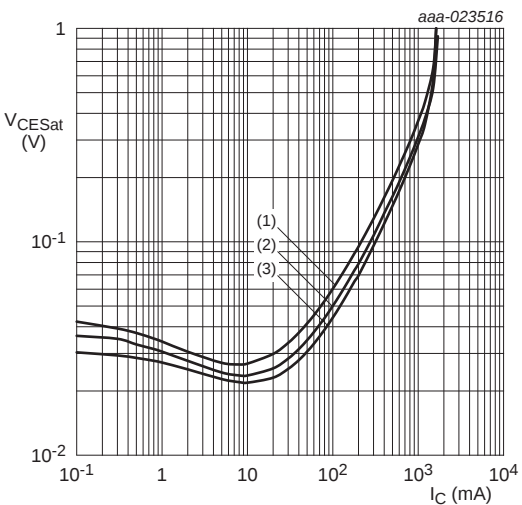


- $I_C/I_B = 10$
- (1) $T_{amb} = 100^\circ\text{C}$
 - (2) $T_{amb} = 25^\circ\text{C}$
 - (3) $T_{amb} = -55^\circ\text{C}$

Fig 13. Collector-emitter saturation voltage as a function of collector current; typical values

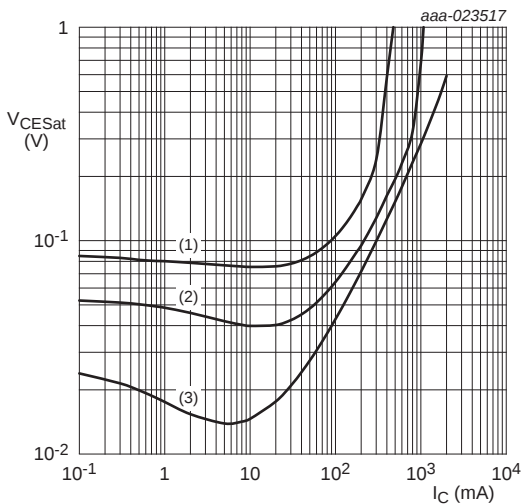

- $T_{amb} = 25^\circ\text{C}$
- (1) $I_C/I_B = 50$
 - (2) $I_C/I_B = 20$
 - (3) $I_C/I_B = 5$

Fig 14. Collector-emitter saturation voltage as a function of collector current; typical values

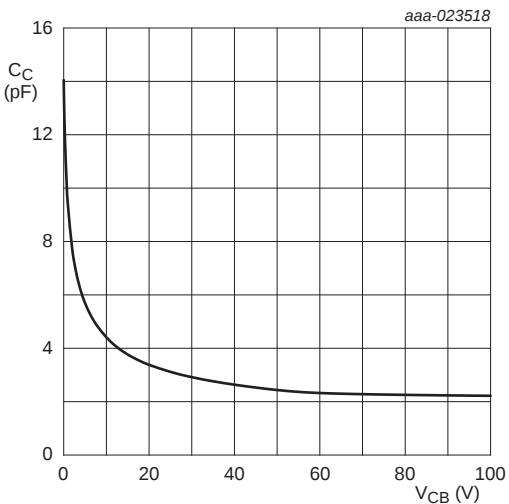

$f = 1\text{ MHz}; T_{amb} = 25^\circ\text{C}$

Fig 15. Collector capacitance as a function of collector-base voltage; typical values

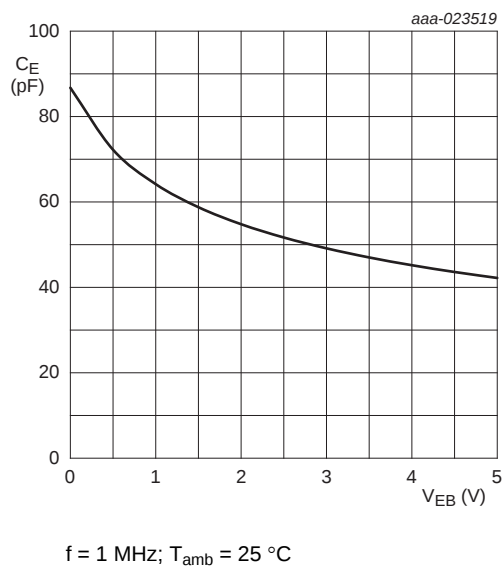


Fig 16. Emitter capacitance as a function of emitter-base voltage; typical values

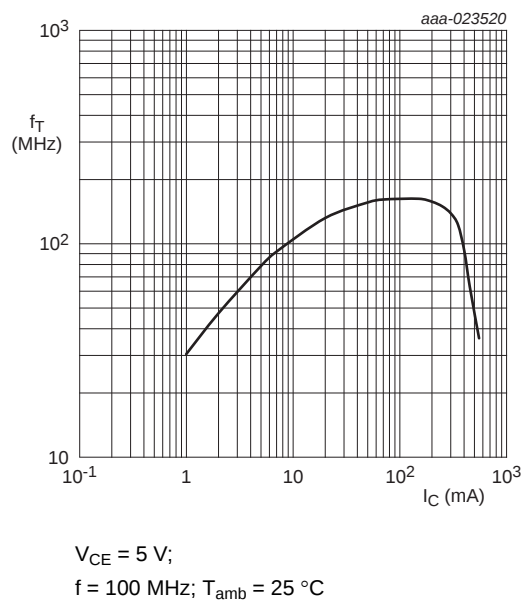


Fig 17. Transition frequency as a function of collector current; typical values

8. Test information

8.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q101 - Stress test qualification for discrete semiconductors, and is suitable for use in automotive applications.

9. Package outline


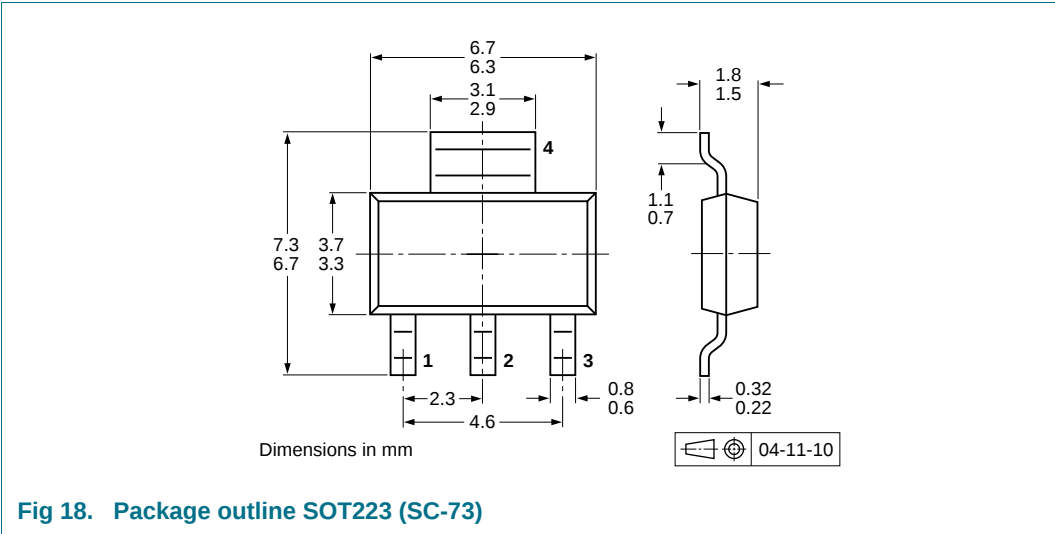


Fig 18. Package outline SOT223 (SC-73)

10. Soldering

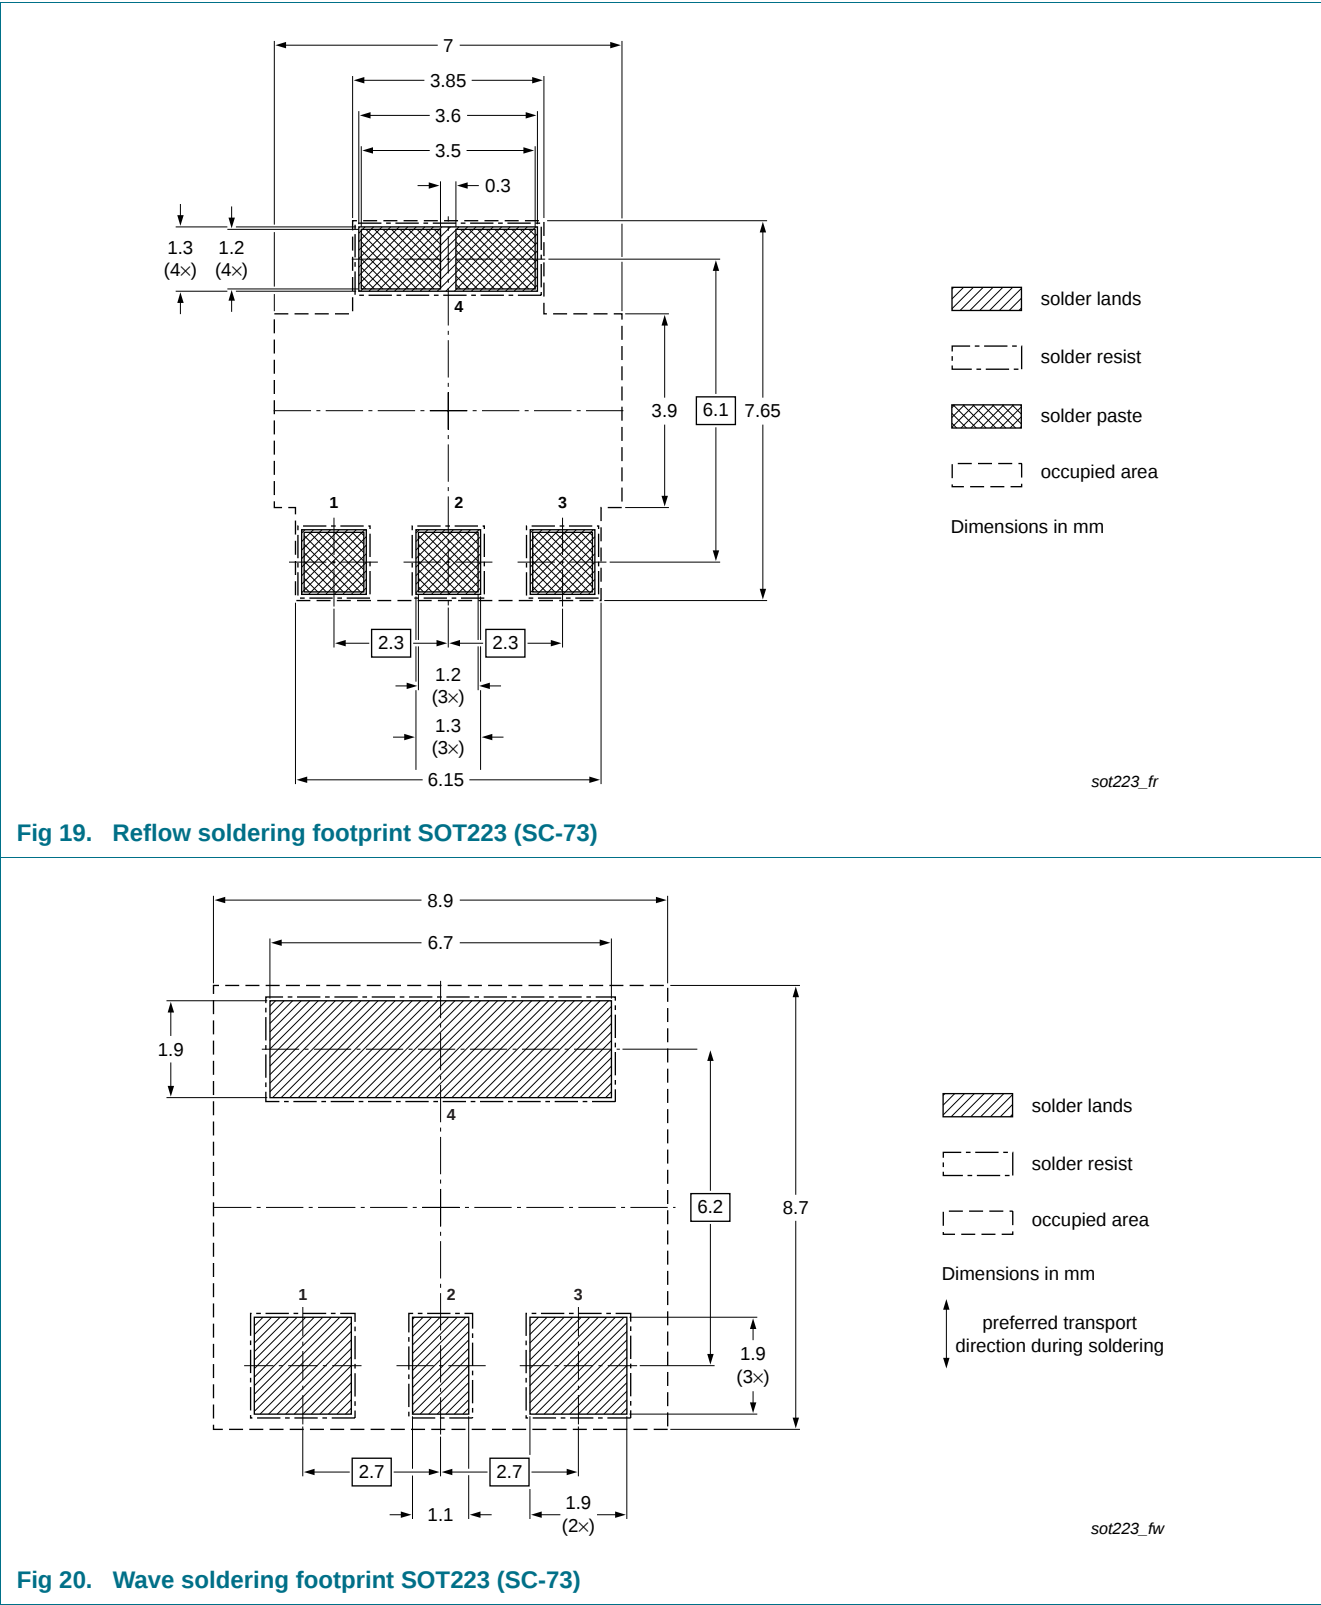

11. Revision history

Table 9. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
BCP56H_SER v.1	20161123	Product data sheet	-	-

12. Legal information

12.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nexperia.com>.

12.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

12.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

12.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

13. Contact information

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: salesaddresses@nexperia.com

14. Contents

1	Product profile	1
1.1	General description	1
1.2	Features and benefits	1
1.3	Applications	1
1.4	Quick reference data	1
2	Pinning information	2
3	Ordering information	2
4	Marking	2
5	Limiting values	3
6	Thermal characteristics	5
7	Characteristics	8
8	Test information	11
8.1	Quality information	11
9	Package outline	11
10	Soldering	12
11	Revision history	13
12	Legal information	14
12.1	Data sheet status	14
12.2	Definitions	14
12.3	Disclaimers	14
12.4	Trademarks	15
13	Contact information	15
14	Contents	16

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2018.

All rights reserved.

For more information, please visit: <http://www.nexperia.com>
For sales office addresses, please send an email to:
salesaddresses@nexperia.com

Date of release: 23 November 2016
Document identifier: BCP56H_SER

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9