



## CMOS Analog Switches

### FEATURES

- $\pm 15\text{-V}$  Input Range
- Low  $r_{DS(on)}$ :  $30\ \Omega$
- Single Supply Operation
- Pin and Function Compatible with the JFET DG180 Family

### BENEFITS

- Full Rail-to-Rail Analog Signal Range
- Minimizes Signal Error
- Low Power Dissipation

### APPLICATIONS

- Low Level Switching Circuits
- Programmable Gain Amplifiers
- Portable and Battery Powered Systems

### DESCRIPTION


The DG381B–DG390B series of monolithic CMOS analog switches was designed for applications in instrumentation, communications, and process control. This series is suited for applications requiring fast switching and nearly flat on-resistance over the entire voltage range.

switches are ideal for battery powered applications, without sacrificing switching speed. Break-before-make switching action is guaranteed, and an epitaxial layer prevents latchup. Single supply operation is allowed by connecting the V– rail to 0 V.

Designed on Vishay Siliconix' PLUS-40 CMOS process, these devices achieve low power consumption (3.5 mW typical) and excellent on/off switch performance. These

Each switch conducts equally well in both directions when on, and blocks up to the supply voltage when off. These switches are CMOS and quasi TTL logic compatible.

### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

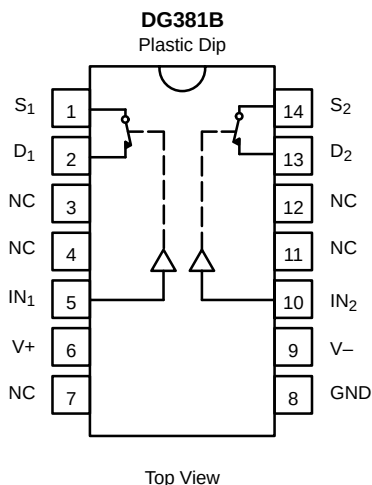


| TRUTH TABLE |        |
|-------------|--------|
| Logic       | Switch |
| 0           | ON     |
| 1           | OFF    |

Logic "0"  $\leq 0.8\text{ V}$   
Logic "1"  $\geq 4\text{ V}$

### FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

**DG384B**

Dual-In-Line

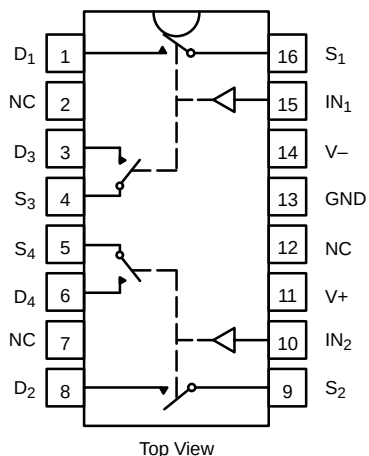


**TRUTH TABLE**

| Logic | Switch |
|-------|--------|
| 0     | OFF    |
| 1     | ON     |

Logic "0"  $\leq 0.8\text{ V}$   
Logic "1"  $\geq 4\text{ V}$

**DG387B**

Dual-In-Line

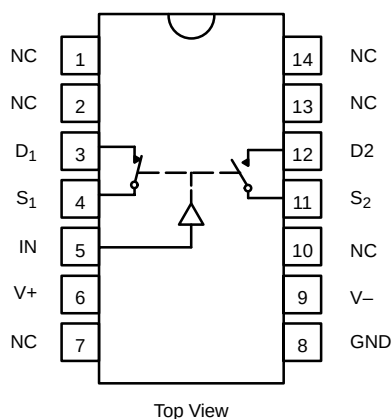


**TRUTH TABLE**

| Logic | SW <sub>1</sub> | SW <sub>2</sub> |
|-------|-----------------|-----------------|
| 0     | ON              | OFF             |
| 1     | OFF             | ON              |

Logic "0"  $\leq 0.8\text{ V}$   
Logic "1"  $\geq 4\text{ V}$

**DG390B**

Dual-In-Line

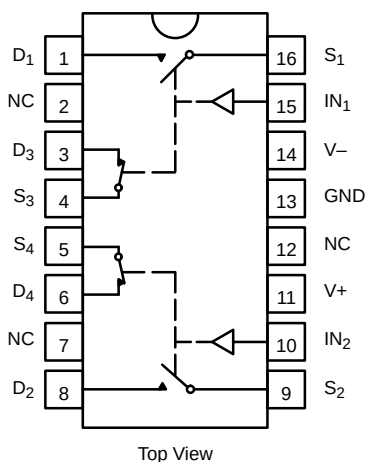

**TRUTH TABLE**

| Logic | SW <sub>1</sub> , SW <sub>2</sub> | SW <sub>3</sub> , SW <sub>4</sub> |
|-------|-----------------------------------|-----------------------------------|
| 0     | OFF                               | ON                                |
| 1     | ON                                | OFF                               |

Logic "0"  $\leq 0.8\text{ V}$   
Logic "1"  $\geq 4\text{ V}$



| ORDERING INFORMATION |                    |             |
|----------------------|--------------------|-------------|
| Temp Range           | Package            | Part Number |
| <b>DG381B</b>        |                    |             |
| –40 to 85°C          | 14-Pin Plastic DIP | DG381BDJ    |
| <b>DG384B</b>        |                    |             |
| –40 to 85°C          | 16-Pin Plastic DIP | DG384BDJ    |
| <b>DG387B</b>        |                    |             |
| –40 to 85°C          | 14-Pin Plastic DIP | DG387BDJ    |
| <b>DG390B</b>        |                    |             |
| –40 to 85°C          | 16-Pin Plastic DIP | DG390BDJ    |

## ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to V–

V+ ..... 44 V

GND ..... 25 V

Digital Inputs<sup>a</sup>, V<sub>S</sub>, V<sub>D</sub> ..... (V–) –2 V to (V+) +2V or  
30 mA, whichever occurs first

Current, Any Terminal Except S or D ..... 30 mA

Continuous Current, S or D ..... 30 mA  
(Pulsed at 1 ms, 10% duty cycle max) ..... 100 mA

Storage Temperature ..... –65 to 150°C

Power Dissipation<sup>b</sup>

14-Pin Plastic DIP<sup>d</sup> ..... 470 mW

Notes:

- Signals on S<sub>X</sub>, D<sub>X</sub>, or IN<sub>X</sub> exceeding V+ or V– will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- All leads welded or soldered to PC Board.
- Derate 11 mW/°C above 75°C
- Derate 6.5 mW/°C above 25°C

## SCHEMATIC DIAGRAM (TYPICAL CHANNEL)

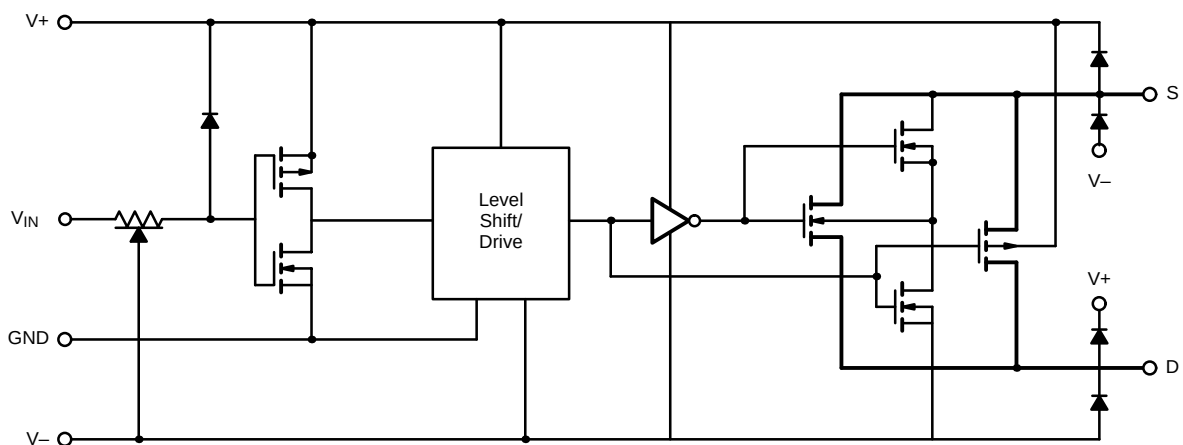


FIGURE 1.







| SPECIFICATIONS <sup>a</sup>           |                     |                                                                                                                                  |                        |                       |                  |                  |      |    |
|---------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------|------------------------|-----------------------|------------------|------------------|------|----|
| Parameter                             | Symbol              | Test Conditions Unless Specified<br>V <sub>+</sub> = 15 V, V <sub>-</sub> = -15 V<br>V <sub>IN</sub> = 0.8 V or 4 V <sup>f</sup> | Temp <sup>b</sup>      | Limits<br>-40 to 85°C |                  |                  | Unit |    |
|                                       |                     |                                                                                                                                  |                        | Min <sup>d</sup>      | Typ <sup>c</sup> | Max <sup>d</sup> |      |    |
| Analog Switch                         |                     |                                                                                                                                  |                        |                       |                  |                  |      |    |
| Analog Signal Range <sup>e</sup>      | V <sub>ANALOG</sub> |                                                                                                                                  | Full                   | -15                   |                  | 15               | V    |    |
| Drain-Source On-Resistance            | r <sub>DS(on)</sub> | V <sub>D</sub> = ±10 V, I <sub>S</sub> = -10 mA                                                                                  | Room Full              |                       | 30               | 50<br>75         | Ω    |    |
| Source Off Leakage Current            | I <sub>S(off)</sub> | V <sub>S</sub> = ±14 V, V <sub>D</sub> = ∓14 V                                                                                   | Room Hot               | -5<br>-100            | ±0.1             | 5<br>100         | nA   |    |
| Drain Off Leakage Current             | I <sub>D(off)</sub> | V <sub>S</sub> = ±14 V, V <sub>D</sub> = ∓14 V                                                                                   | Room Hot               | -5<br>-100            | ±0.1             | 5<br>100         |      |    |
| Drain On Leakage Current              | I <sub>D(on)</sub>  | V <sub>D</sub> = V <sub>S</sub> = ±14 V                                                                                          | Room Hot               | -5<br>-100            | ±0.1             | 5<br>100         |      |    |
| Digital Control                       |                     |                                                                                                                                  |                        |                       |                  |                  |      |    |
| Input Current with Input Voltage High | I <sub>INH</sub>    | V <sub>IN</sub> = 5 V                                                                                                            | Room Full              | -1                    | -0.001           |                  | μA   |    |
|                                       |                     | V <sub>IN</sub> = 15 V                                                                                                           | Room Full              |                       | 0.001            | 1                |      |    |
| Input Current with Input Voltage Low  | I <sub>INL</sub>    | V <sub>IN</sub> = 0 V                                                                                                            | Room Full              | -1                    | -0.001           |                  |      |    |
| Dynamic Characteristics               |                     |                                                                                                                                  |                        |                       |                  |                  |      |    |
| Turn-On Time                          | t <sub>ON</sub>     | See Figure 2                                                                                                                     | Room                   |                       | 150              |                  | ns   |    |
| Turn-Off Time                         | t <sub>OFF</sub>    |                                                                                                                                  | Room                   |                       | 130              |                  |      |    |
| Break-Before-Make Time                | t <sub>OPEN</sub>   | See Figure 3                                                                                                                     | Room                   |                       | 50               |                  |      |    |
| Charge Injection                      | Q                   | C <sub>L</sub> = 0.01 μF, R <sub>gen</sub> = 0 Ω V <sub>gen</sub> = 0 V                                                          |                        | Room                  |                  | 10               | pC   |    |
| Source-Off Capacitance                | C <sub>S(off)</sub> | f = 1 MHz; V <sub>S</sub> , V <sub>D</sub> = 0 V                                                                                 |                        | Room                  |                  | 14               | pF   |    |
| Drain-Off Capacitance                 | C <sub>D(off)</sub> |                                                                                                                                  |                        | Room                  |                  | 14               |      |    |
| Channel-On Capacitance                | C <sub>D(on)</sub>  |                                                                                                                                  |                        | Room                  |                  | 40               |      |    |
| Input Capacitance                     | C <sub>IN</sub>     | f = 1 MHz                                                                                                                        | V <sub>IN</sub> = 0 V  | Room                  |                  | 6                |      |    |
|                                       |                     |                                                                                                                                  | V <sub>IN</sub> = 15 V | Room                  |                  | 7                |      |    |
| Off-Isolation                         | OIRR                | V <sub>IN</sub> = 0 V, R <sub>L</sub> = 1 kΩ<br>V <sub>S</sub> = 1 V <sub>rms</sub> , f = 500 kHz                                |                        | Room                  |                  | 62               | dB   |    |
| Crosstalk (Channel-to-Channel)        | X <sub>TALK</sub>   |                                                                                                                                  |                        | Room                  |                  | 74               |      |    |
| Power Supplies                        |                     |                                                                                                                                  |                        |                       |                  |                  |      |    |
| Positive Supply Current               | I <sub>+</sub>      | V <sub>IN</sub> = 4 V (One Input)<br>(All Others = 0)                                                                            |                        | Room Full             |                  | 0.23             | 1    | mA |
| Negative Supply Current               | I <sub>-</sub>      |                                                                                                                                  |                        | Room Full             | -100             | -0.001           |      |    |
| Positive Supply Current               | I <sub>+</sub>      | V <sub>IN</sub> = 0.8 V (All Inputs)                                                                                             |                        | Room Full             |                  | 0.001            | 100  | μA |
| Negative Supply Current               | I <sub>-</sub>      |                                                                                                                                  |                        | Room Full             | -100             | -0.001           |      |    |

## Notes:







- Refer to PROCESS OPTION FLOWCHART.
- Room = 25°C, Full = as determined by the operating temperature suffix.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Guaranteed by design, not subject to production test.
- $V_{IN}$  = input voltage to perform proper function.









**TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)**

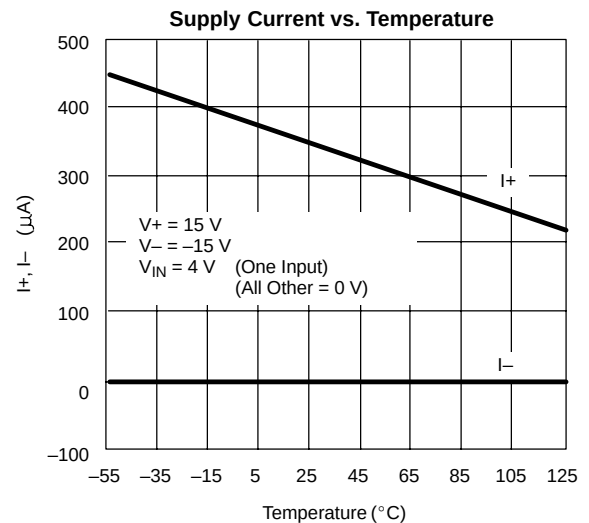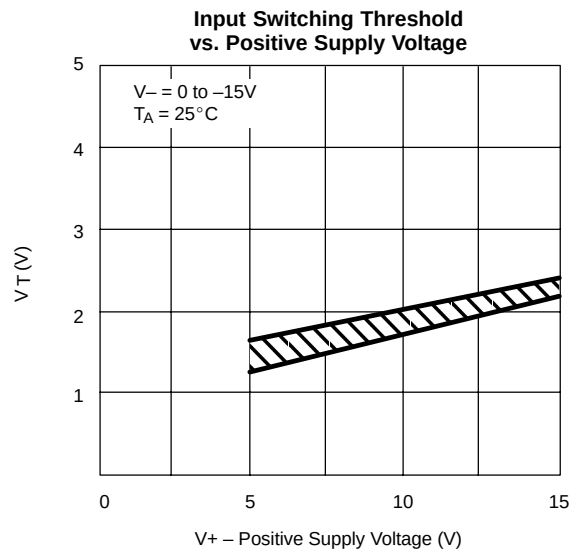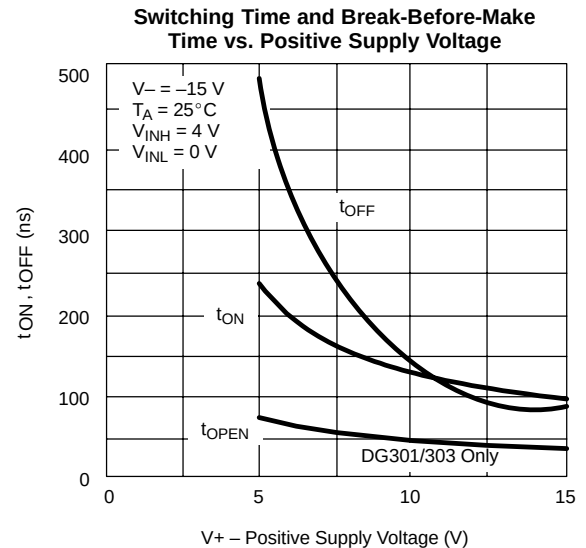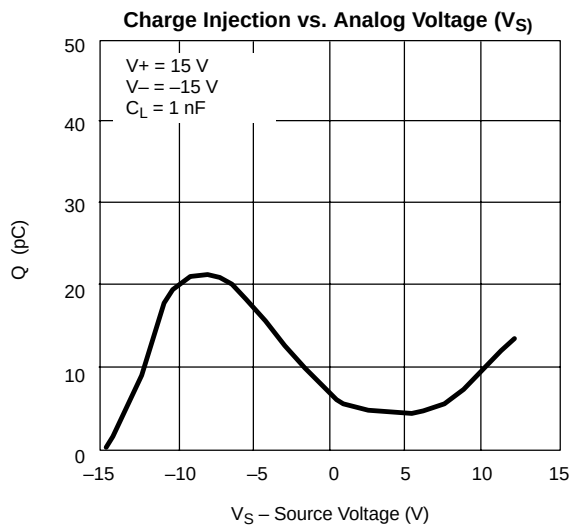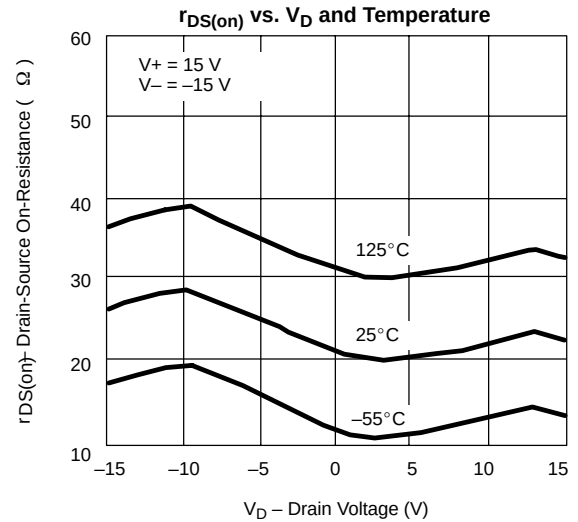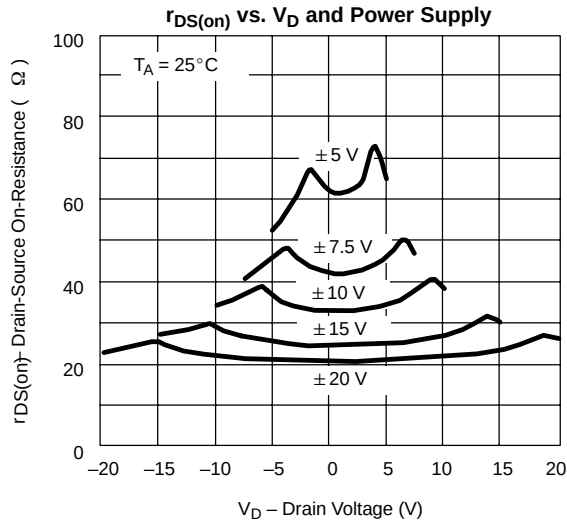

### TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

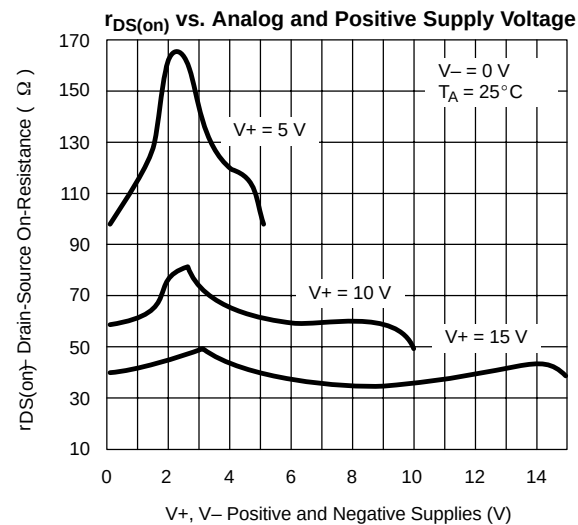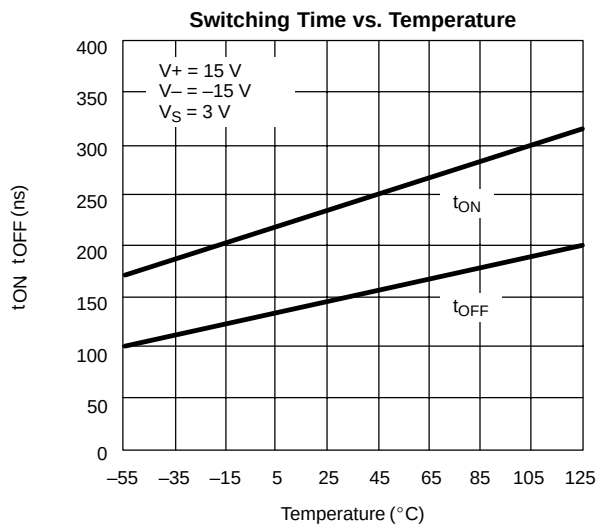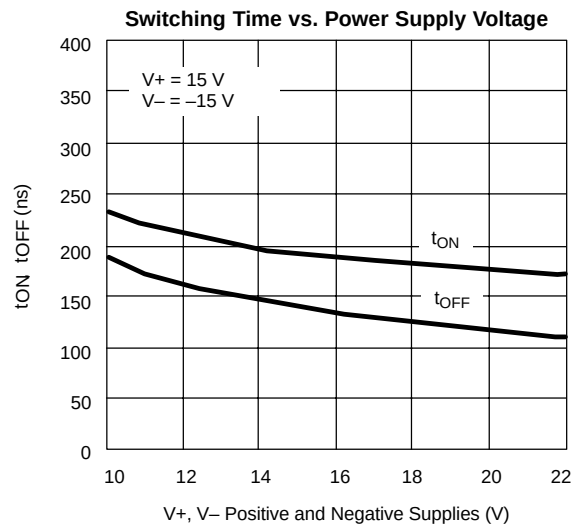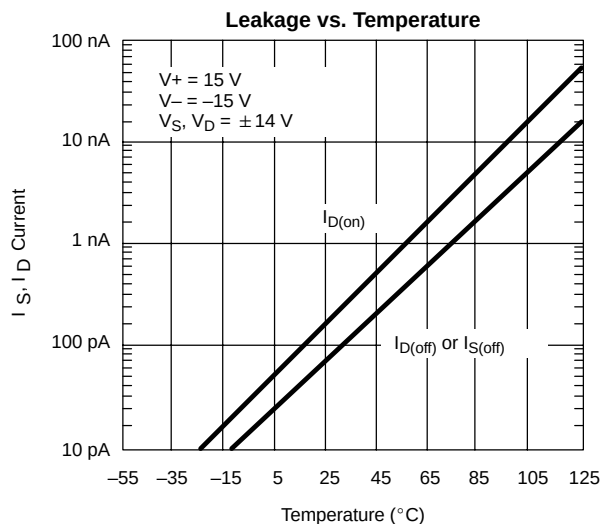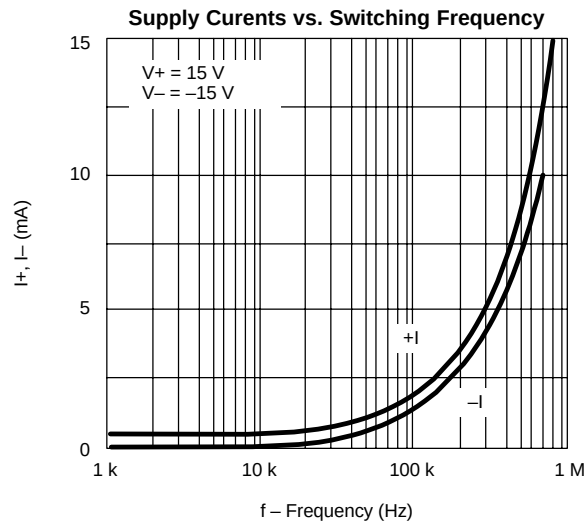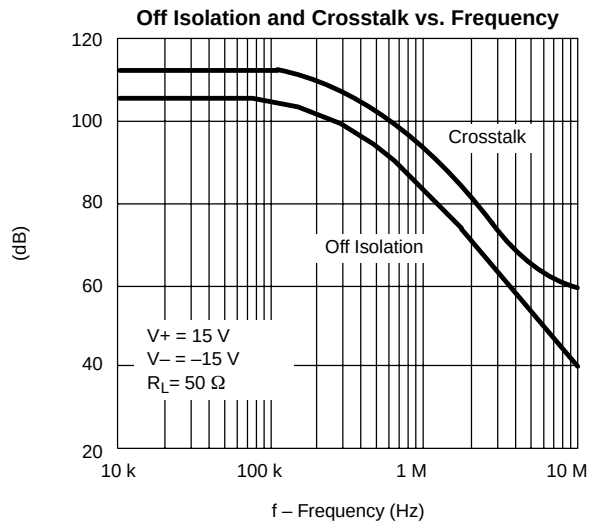

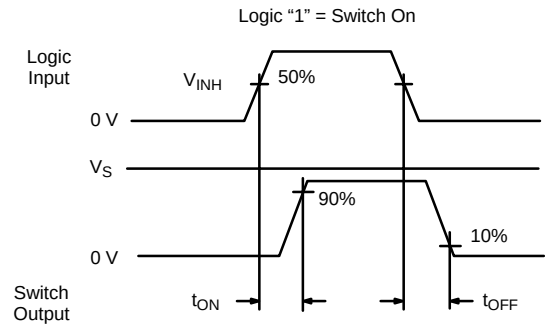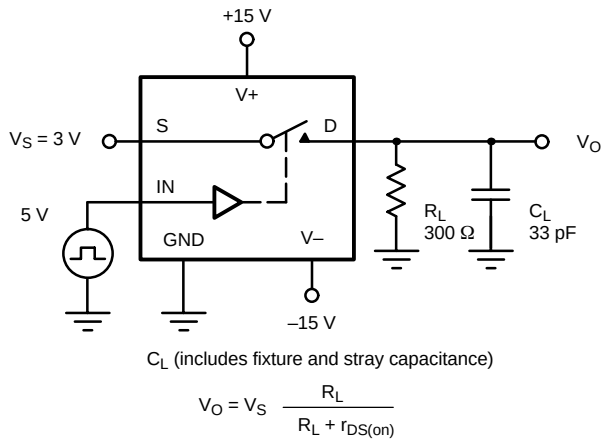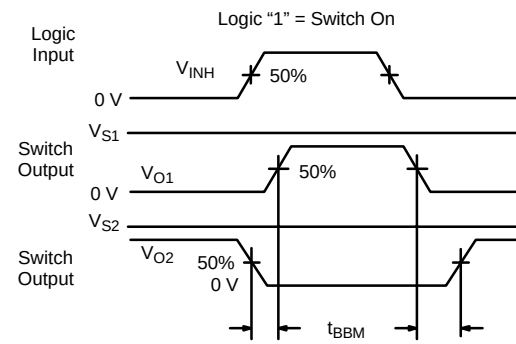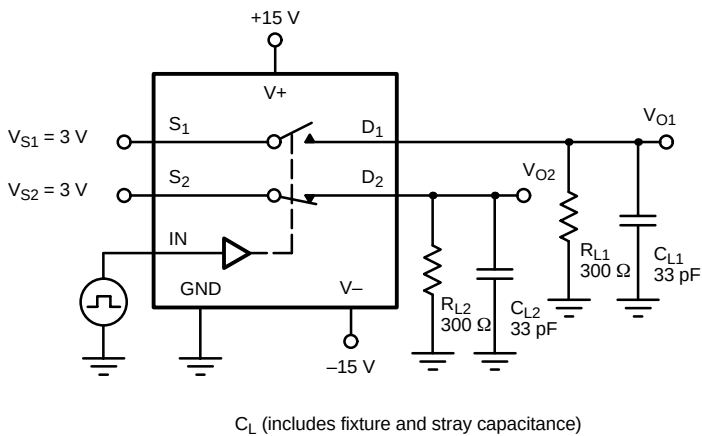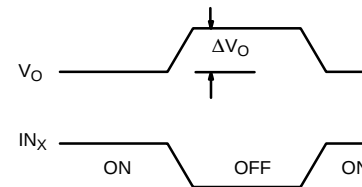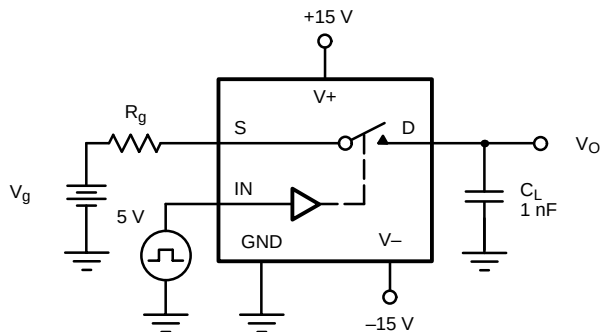**TEST CIRCUITS**

**FIGURE 2. Switching Time**

**FIGURE 3. Break-Before-Make SPDT (DG387B, DG390B)**

**FIGURE 4. Charge Injection**

### APPLICATIONS

The DG381B series of analog switches will switch positive analog signals while using a single positive supply. This allows their use in applications where only one supply is available. The trade-offs or performance given up while using single supplies are: 1) increased  $r_{DS(on)}$ , 2) slower switching speed. Typical curves for aid in designing with single supplies are supplied (see Typical Characteristics). The analog voltage should not go above or below the supply voltages which in single operation are  $V+$  and 0 V.

In the integrator of Figure 4,  $R_D$  controls the discharge rate of the capacitor so that the pulsed or continuous current ratings are not exceeded. During reset  $SW_1$  is closed and  $SW_2$  is open. Opening  $SW_2$  with  $SW_1$  also open will hold the integrator output at its present value.

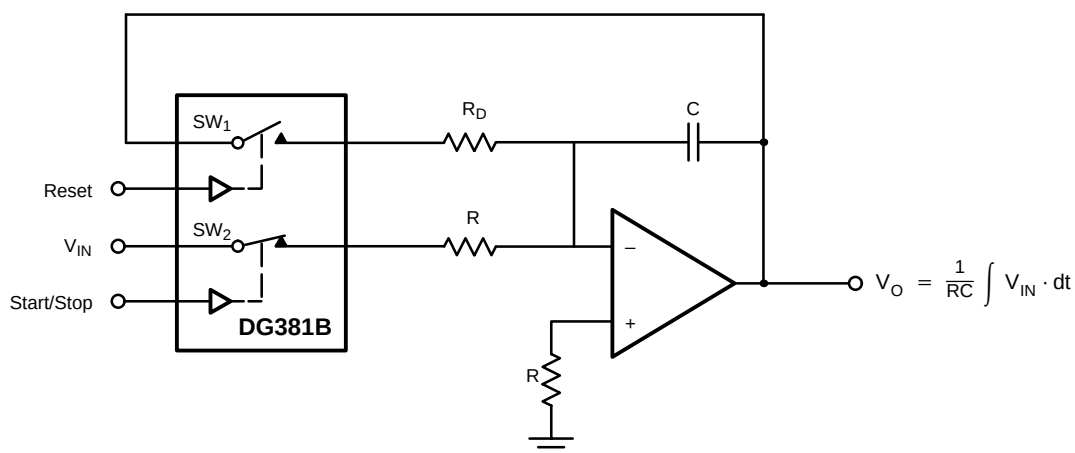


FIGURE 5. Integrator with Reset and Start/Stop





### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9