









## The D-sub Connector Series Enters a New Era with Lead-free Products.

- Determine anchor screw diameters at a glance.
- Greatly simplified anchor combinations.
- Shielded against EMI.
- EMI/RFI shielded hoods available.



### ■ Connectors

| Classification | D-sub Connectors  |   |   |  |
|----------------|---|---|---|--|
| Model          | XM3B-L  | XM2C-L  | XM2E-L  | XM2F-L   |
| Type           | Sockets with Right-angle DIP Terminals  | Plugs with Right-angle DIP Terminals  | Plugs with Straight DIP Terminals   | Sockets with Straight DIP Terminals  |
| Appearance     |  |  |  |  |

| Classification | High-density D-sub Connectors   |   |   | Anchors  |
|----------------|---|---|---|--|
| Model          | XM4K  | XM4L  | XM4L  | XM4Z   |
| Type           | Plugs with Right-angle DIP Terminals  | Sockets with Right-angle DIP Terminals  | Sockets with Straight DIP Terminals   | Anchor 2 or 3  |
| Appearance     |  |  |  |  |

### ■ Ratings and Characteristics

|                       |  |
|-----------------------|--|
| Rated current         | 3 A (at 20°C)                                    |
| Rated voltage         | 300 VAC  |
| Contact resistance    | 20 mΩ max. (at 20 mV, 100 mA max.)               |
| Insulation resistance | 1,000 MΩ min. (at 500 VDC for 1 min)             |
| Withstand voltage     | 1,000 VAC for 1 min (leakage current: 1 mA max.) |
| Insertion durability  | 100 times  |
| Operating temperature | - 25 to 105°C (with no icing at low temperature) |

### ■ Materials

|                            |  |
|----------------------------|--|
| Housing                    | Fiber-glass reinforced PBT resin (UL94V-0)/black |
| Socket contact             | Phosphor bronze                                  |
| Plug contact               | Brass  |
| Shell                      | Steel  |
| Anchors                    | Brass  |
| Lock Pin Grounding Fixture | Brass  |


# D-Sub Connectors - XM3-L/XM2-L/XM4K/XM4L

## ■ Finish


|                   |             |                                |
|-------------------|-------------|--------------------------------|
| Contact           | Mating end  | Nickel base, flash gold plated |
|                   | Terminal    | Nickel base, flash gold plated |
| Shell             |             | Nickel plated                  |
| Anchors           |             | Nickel plated                  |
| Grounding Fixture | Straight    | Nickel plated                  |
|                   | Right angle | Tin plated                     |

## ■ Ordering Information


### D-sub Sockets with Right-angle DIP Terminals

|                 |   |                                  |                                |
|-----------------|---|----------------------------------|--------------------------------|
| Appearance      |  |                                  |                                |
| Accessories     | No anchors  | Anchor 2 (XM4Z-0011) M2.6 x 0.45 | Anchor 2 (XM4Z-0013) #4-40 UNC |
| No. of contacts |   |                                  |                                |
| 9               | XM3B-0942-502L  | XM3B-0942-112L                   | XM3B-0942-132L                 |
| 15              | XM3B-1542-502L  | XM3B-1542-112L                   | XM3B-1542-132L                 |
| 25              | XM3B-2542-502L  | XM3B-2542-112L                   | XM3B-2542-132L                 |


### D-sub Plugs with Right-angle DIP Terminals

|                 |   |                                  |                                |
|-----------------|---|----------------------------------|--------------------------------|
| Appearance      |  |                                  |                                |
| Accessories     | No anchors  | Anchor 2 (XM4Z-0011) M2.6 x 0.45 | Anchor 2 (XM4Z-0013) #4-40 UNC |
| No. of contacts |   |                                  |                                |
| 9               | XM2C-0942-502L  | XM2C-0942-112L                   | XM2C-0942-132L                 |
| 15              | XM2C-1542-502L  | XM2C-1542-112L                   | XM2C-1542-132L                 |
| 25              | XM2C-2542-502L  | XM2C-2542-112L                   | XM2C-2542-132L                 |

### D-sub Plugs with Straight DIP Terminals

|                 |  |                |                                  |                                |
|-----------------|--|----------------|----------------------------------|--------------------------------|
| Appearance      |  |                |                                  |                                |
| Accessories     | Without ground pins  | No anchors     | Anchor 2 (XM4Z-1011) M2.6 x 0.45 | Anchor 2 (XM4Z-1013) #4-40 UNC |
| No. of contacts |  |                |                                  |                                |
| 9               | XM2E-0940-L  | XM2E-0940-502L | XM2E-0940-112L                   | XM2E-0940-132L                 |
| 15              | XM2E-1540-L  | XM2E-1540-502L | XM2E-1540-112L                   | XM2E-1540-132L                 |
| 25              | XM2E-2540-L  | XM2E-2540-502L | XM2E-2540-112L                   | XM2E-2540-132L                 |


### D-sub Plugs with Straight DIP Terminals

|                 |   |                |                                  |                                |
|-----------------|---|----------------|----------------------------------|--------------------------------|
| Appearance      |  |                |                                  |                                |
| Accessories     | Without ground pins   | No anchors     | Anchor 2 (XM4Z-1011) M2.6 x 0.45 | Anchor 2 (XM4Z-1013) #4-40 UNC |
| No. of contacts |   |                |                                  |                                |
| 9               | XM2E-0940-L   | XM2E-0940-502L | XM2E-0940-112L                   | XM2E-0940-132L                 |
| 15              | XM2E-1540-L   | XM2E-1540-502L | XM2E-1540-112L                   | XM2E-1540-132L                 |
| 25              | XM2E-2540-L   | XM2E-2540-502L | XM2E-2540-112L                   | XM2E-2540-132L                 |


**Note:** For other models with Anchors, contact your OMRON representative.

# D-Sub Connectors - XM3-L/XM2-L/XM4K/XM4L


## High-density D-sub Plugs with Right-angle DIP Terminals

|                 |   |               |                                  |                                |
|-----------------|---|---------------|----------------------------------|--------------------------------|
| Appearance      |  |               |                                  |                                |
|                 | Accessories   | No anchors    | Anchor 2 (XM4Z-0011) M2.6 x 0.45 | Anchor 2 (XM4Z-0013) #4-40 UNC |
| No. of contacts |   |               |                                  |                                |
| 15              | XM4K-1542-502   | XM4K-1542-112 | XM4K-1542-132                    |                                |

## High-density D-sub Sockets with Right-angle DIP Terminals







|                 |   |               |                                  |                                |
|-----------------|---|---------------|----------------------------------|--------------------------------|
| Appearance      |  |               |                                  |                                |
|                 | Accessories   | No anchors    | Anchor 2 (XM4Z-0011) M2.6 x 0.45 | Anchor 2 (XM4Z-0013) #4-40 UNC |
| No. of contacts |   |               |                                  |                                |
| 15              | XM4L-1542-502   | XM4L-1542-112 | XM4L-1542-132                    |                                |

## High-density D-sub Sockets with Right-angle DIP Terminals







|                 |   |               |                                  |                                |
|-----------------|---|---------------|----------------------------------|--------------------------------|
| Appearance      |  |               |                                  |                                |
|                 | Accessories   | No anchors    | Anchor 2 (XM4Z-0011) M2.6 x 0.45 | Anchor 2 (XM4Z-0013) #4-40 UNC |
| No. of contacts |   |               |                                  |                                |
| 15              | XM4L-1541-501   | XM4L-1541-112 | XM4L-1541-132                    |                                |

Note: For other models with Anchors, contact your OMRON representative.

## Anchor 2 (Screw Head Length: 5.8 mm)

| Type       | For right-angle DIP terminals   |   |   | For straight DIP terminals  |   |  |
|------------|---|---|---|---|---|--|
| Appearance |  |  |  |  |  |  |
| Lock screw | M2.6 x 0.45   | M3 x 0.5  | #4-40 UNC   | M2.6 x 0.45   | M3 x 0.5  | #4-40 UNC  |
| Model      | XM4Z-0021   | XM4Z-0022   | XM4Z-0023   | XM4Z-1021   | XM4Z-1022   | XM4Z-1023  |



## Anchor 3 (Screw Head Length: 4.8 mm)

| Type       | For right-angle DIP terminals   |   |   | For straight DIP terminals  |   |  |
|------------|---|---|---|---|---|--|
| Appearance |  |  |  |  |  |  |
| Lock screw | M2.6 x 0.45   | M3 x 0.5  | #4-40 UNC   | M2.6 x 0.45   | M3 x 0.5  | #4-40 UNC  |
| Model      | XM4Z-0021   | XM4Z-0022   | XM4Z-0023   | XM4Z-1021   | XM4Z-1022   | XM4Z-1023  |


## ■ Dimensions

### D-sub Sockets with Right-angle DIP Terminals

XM3B-0942-132L  
 XM3B-1542-132L  
 XM3B-2542-132L

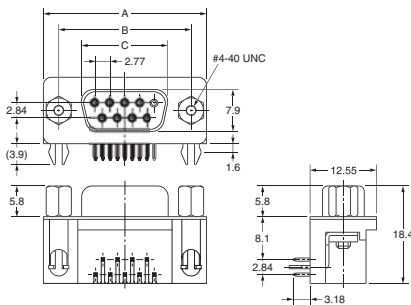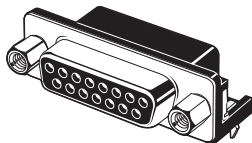



Mounting holes ( $t = 1.6$  mm, bottom view)

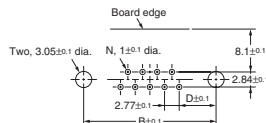


| No. of contacts (N) | A    | B     | C     | D    |
|---------------------|------|-------|-------|------|
| 9                   | 30.8 | 24.99 | 16.33 | 6.96 |
| 15                  | 39.1 | 33.32 | 24.66 | 6.96 |
| 25                  | 53.0 | 47.04 | 38.38 | 6.91 |

### D-sub Plugs with Right-angle DIP Terminals

XM2C-0942-132L  
 XM2C-1542-132L  
 XM2C-2542-132L

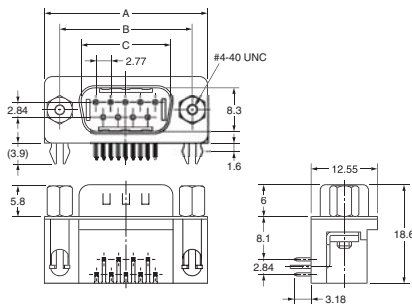



Mounting holes ( $t = 1.6$  mm, bottom view)

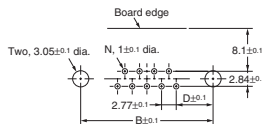

| No. of contacts (N) | A    | B     | C     | D    |
|---------------------|------|-------|-------|------|
| 9                   | 30.8 | 24.99 | 16.92 | 6.96 |
| 15                  | 39.1 | 33.32 | 25.25 | 6.96 |
| 25                  | 53.0 | 47.04 | 38.96 | 6.91 |

### D-sub Plugs with Straight DIP Terminals

XM2E-0940-132L  
 XM2E-1540-132L  
 XM2E-2540-132L

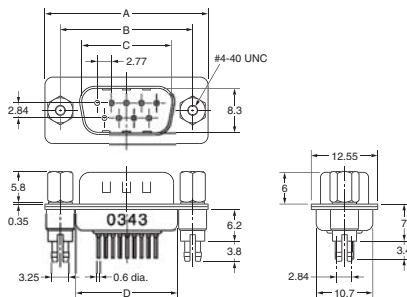

Mounting holes ( $t = 1.6$  mm, bottom view)





| No. of contacts (N) | A    | B     | C     | D     | E    |
|---------------------|------|-------|-------|-------|------|
| 9                   | 30.8 | 24.99 | 16.92 | 19.23 | 6.96 |
| 15                  | 39.1 | 33.32 | 25.25 | 27.56 | 6.96 |
| 25                  | 53.0 | 47.04 | 38.96 | 41.28 | 6.91 |


# D-Sub Connectors - XM3-L/XM2-L/XM4K/XM4L

## D-sub Sockets with Straight DIP Terminals

XM2F-0940-132L  
 XM2F-1540-132L  
 XM2F-2540-132L

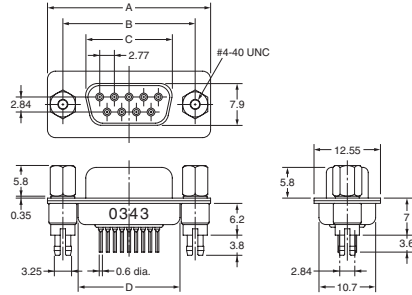



Mounting holes (t = 1.6 mm, bottom view)




| No. of contacts (N) | A    | B     | C     | D     | E    |
|---------------------|------|-------|-------|-------|------|
| 9                   | 30.8 | 24.99 | 16.33 | 19.23 | 6.96 |
| 15                  | 39.1 | 33.32 | 24.66 | 27.56 | 6.96 |
| 25                  | 53.0 | 47.04 | 38.38 | 41.28 | 6.91 |

## High-density D-sub Plugs with Right-angle DIP Terminals

XM4K-1542-132

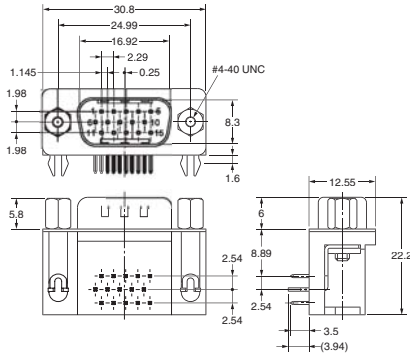



Mounting holes (t = 1.6 mm, bottom view)




## High-density D-sub Sockets with Right-angle DIP Terminals

XM4L-1542-132

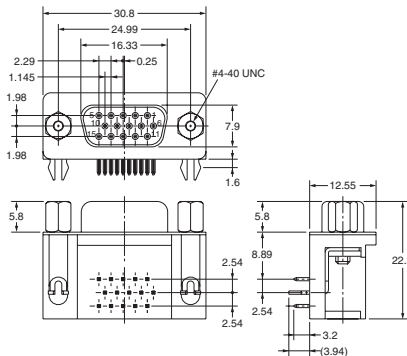



Mounting holes (t = 1.6 mm, bottom view)

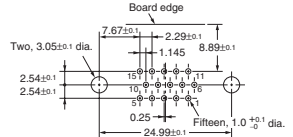




# D-Sub Connectors - XM3-L/XM2-L/XM4K/XM4L

## High-density D-sub Sockets with Straight DIP Terminals

XM4L-1541-132

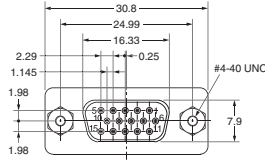



Mounting holes (t = 1.6 mm, bottom view)

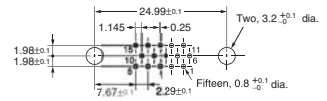

### Anchor 2

XM4Z-0011



XM4Z-0011



### Anchor 3



XM4Z-0021

XM4Z-0021





XM4Z-0012

XM4Z-0012





XM4Z-0022

XM4Z-0022





XM4Z-0013

XM4Z-0013




XM4Z-0023

XM4Z-0023



### Dimensions: Not Panel Mounted (Using Anchor 2)

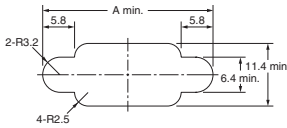


Note: 1. Two Anchors are required per Connector.

2. Applicable panel thickness is less than 1.2 mm.

| No. of contacts (N) | A    |
|---------------------|------|
| 9 (See note.)       | 31.0 |
| 15                  | 39.4 |
| 25                  | 53.3 |

Note: 1. The XM4K and XM4L use 9-contact dimensions.

### Dimensions: Panel Mounted (Using Anchor 3 or M3 Screws)

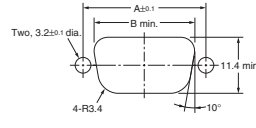

Note: 1. Two Anchors are required per Connector.

2. Applicable panel thickness is less than 1.2 mm.

| No. of contacts (N) | A     | B    |
|---------------------|-------|------|
| 9 (See note.)       | 24.99 | 20.5 |
| 15                  | 33.32 | 28.8 |
| 25                  | 47.04 | 42.5 |

Note: 1. The XM4K and XM4L use 9-contact dimensions.

## XM2S Hood Covers

### ■ Dimensions

9-contact Hoods

XM2S-0911




(M2.6 x 0.45 metric screws)

XM2S-0912

(M3 x 0.5 metric screws)

XM2S-0913

(#4-40 UNC inch screws)



15-, 25- and 37-contact Hoods

XM2S-@11




(M2.6 x 0.45 metric screws)

XM2S-@12

(M3 x 0.5 metric screws)

XM2S-@13

(#4-40 UNC inch screws)

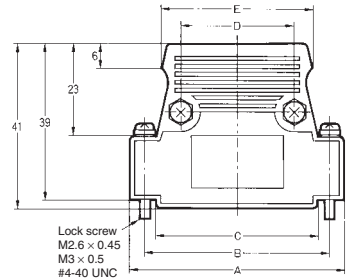

### ■ Dimensions

| No. of contacts | A    | B     | C    | D  | E  | F  |
|-----------------|------|-------|------|----|----|----|
| 15              | 40.5 | 33.32 | 26.5 | 19 | 30 | 10 |
| 25              | 54.0 | 47.04 | 40   | 29 | 38 | 11 |
| 37              | 70.5 | 63.50 | 57   | 42 | 50 | 13 |

### ■ Ordering Information

| Applicable Anchors | Lock screw | M2.6 x 0.45 metric screws | M3 x 0.5 metric screws | #4-40 UNC inch screws |
|--------------------|------------|---------------------------|------------------------|-----------------------|
|                    | Anchor 1   |                           | XM2Z-0001              | XM2Z-0002             |
| Anchor 2           |            | XM2Z-0011                 | XM2Z-0012              | XM2Z-0013             |
| Anchor 3           |            | XM2Z-0021                 | XM2Z-0022              | XM2Z-0023             |
| No. of contacts    |            |                           |                        |                       |
| 9                  |            | XM2S-0911                 | XM2S-0912              | XM2S-0913             |
| 15                 |            | XM2S-1511                 | XM2S-1512              | XM2S-1513             |
| 25                 |            | XM2S-2511                 | XM2S-2512              | XM2S-2513             |
| 37                 |            | XM2S-3711                 | XM2S-3712              | XM2S-3713             |

**Note:** Select D-sub Connectors with Anchors or Grounding Fixtures that fit the lock screw of the Hood.

### ■ Accessories (Sold Separately)

Anchor 5 (For Jackscrews and XM2S Hood)


XM2Z-0071 (M2.6 x 0.45 metric screws)

XM2Z-0072 (M3 x 0.5 metric screws)

XM2Z-0073 (#4-40 UNC inch screws)



Materials and Finish  
Brass/nickel plated



### ■ Dimensions


| Model     | A           |
|-----------|-------------|
| XM2Z-0071 | M2.6 x 0.45 |
| XM2Z-0072 | M3 x 0.5    |
| XM2Z-0073 | #4-40 UNC   |

## ■ Precautions

### Correct Use

#### • Grounding (Lock Pin Grounding Fixture)

- To ground, provide copper foil around the Connector Attachment hole on the board, assemble the connector and grounding fixture, and dip in solder as shown below.
- Insert the connector into the PCB and then simultaneously dip-solder the connector terminals and lock pin to the board.

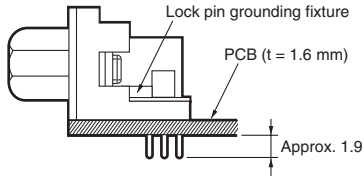

#### • Soldering

##### Automated Soldering Conditions (Jet Flow)

1. Soldering temperature:  $250 \pm 5^\circ\text{C}$
2. Continuous soldering time: Within 5's

#### • Tightening Torque of Anchor and Grounding Fixture

If the anchor is secured to the connector, be sure to tighten it to a torque of 0.49 N·m.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9