



# DisplayPort/PCIe Passive Switches

## General Description

The MAX4928A/MAX4928B high-speed passive switches route PCI Express® (PCIe) data and/or DisplayPort™ signals between two possible destinations in desktop or laptop PCs. The MAX4928A is intended to be used with the ATX form factor desktop PCs, while the MAX4928B is expected to be used in the BTX form factor.

The MAX4928A/MAX4928B are hex double-pole/double-throw (6 x DPDT) switches. The MAX4928A/MAX4928B feature a single digital control input (SEL) to switch signal paths and a latch input (LE) that holds the switches in a given state.

The MAX4928A/MAX4928B are fully specified to operate from a single +3.3V (typ) power supply. The MAX4928A/MAX4928B are available in an industry standard 5mm x 11mm, 56-pin TQFN package. Both devices operate over the -40°C to +85°C extended temperature range.

## Applications

Desktop PCs

Notebook PCs

PCI Express is a registered trademark of PCI-SIG.

DisplayPort is a trademark of Video Electronics Standards Association (VESA).

## Features

- ◆ Single +3.3V Power Supply Voltage
- ◆ Supports PCIe Gen I, Gen II, and DisplayPort Data Rates > 5Gbps
- ◆ Excellent Return Loss > 12dB at 2.5GHz
- ◆ Six Bidirectional Pairs of Switches
- ◆ All Switching in One Device
- ◆ Low 850µA (max) Supply Current
- ◆ Small 5mm x 11mm, 56-Pin TQFN Package
- ◆ Industry-Standard Pinouts


## Ordering Information

| PART         | TEMP RANGE     | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX4928AETN+ | -40°C to +85°F | 56 TQFN-EP  |
| MAX4928BETN+ | -40°C to +85°F | 56 TQFN-EP  |

+ Denotes a lead-free package/RoHS-Compliant package.  
EP = Exposed paddle.

Typical Operating Circuit appears at end of data sheet.

## Pin Configurations

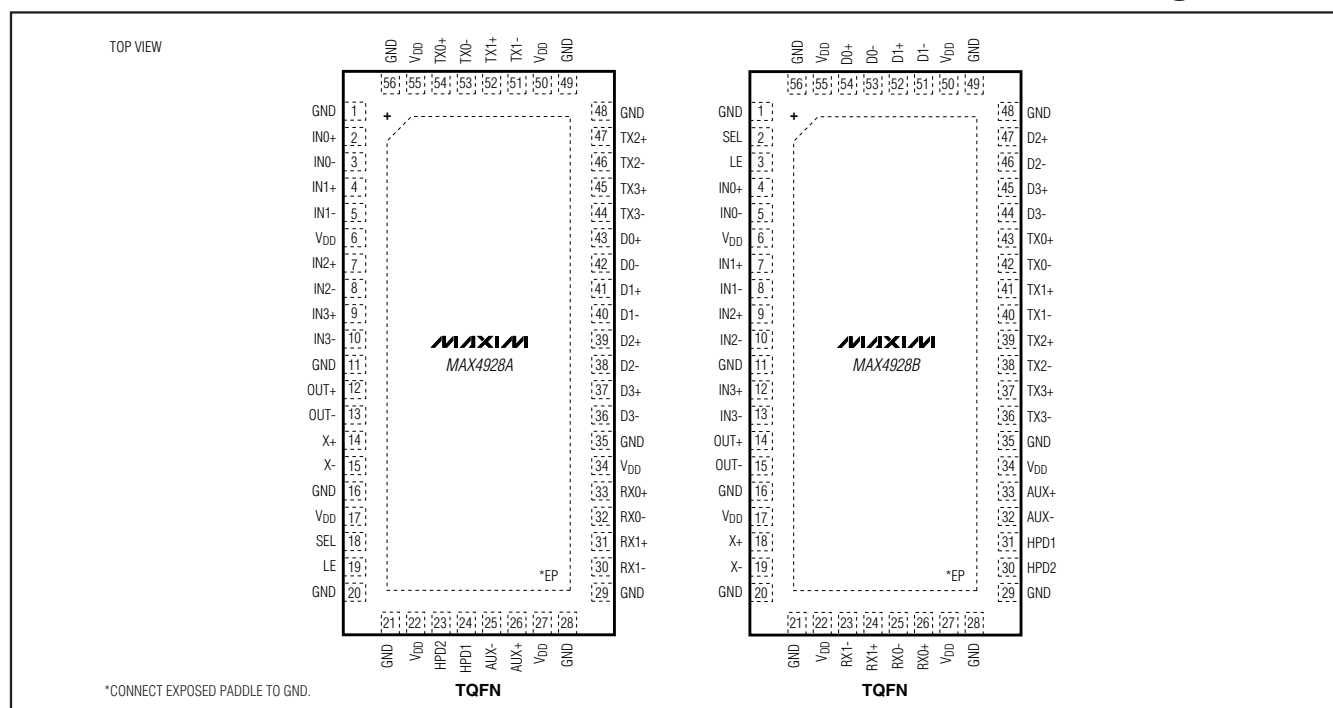

# DisplayPort/PCIe Passive Switches

## ABSOLUTE MAXIMUM RATINGS

(All voltages referenced to GND, unless otherwise noted.)

|                                                                                                                                                                                                                                                                                                                                                                                                         |                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|
| V <sub>DD</sub> .....                                                                                                                                                                                                                                                                                                                                                                                   | -0.3V to +4V                        |
| LE, SEL, IN <sub>-</sub> , X <sub>-</sub> , OUT <sub>-</sub> , D <sub>-</sub> , TX <sub>-</sub> , HPD <sub>-</sub> , RX <sub>-</sub> , AUX <sub>-</sub><br>(Note 1) .....                                                                                                                                                                                                                               | -0.3V to + (V <sub>DD</sub> + 0.3V) |
| IV <sub>IN<sub>-</sub></sub> - V <sub>TX<sub>-</sub></sub> I, IV <sub>IN<sub>-</sub></sub> - V <sub>D<sub>-</sub></sub> I, IV <sub>X<sub>-</sub></sub> - V <sub>HPD<sub>-</sub></sub> I, IV <sub>X<sub>-</sub></sub> - V <sub>RX1<sub>-</sub></sub> I,<br>IV <sub>OUT<sub>-</sub></sub> - V <sub>AUX<sub>-</sub></sub> I, IV <sub>OUT<sub>-</sub></sub> - V <sub>RX0<sub>-</sub></sub> I (Note 1) ..... | 0 to +2V                            |
| Continuous Current (IN <sub>-</sub> to D <sub>-</sub> /TX <sub>-</sub> , X <sub>-</sub> to HPD <sub>-</sub> /RX1 <sub>-</sub> ,<br>OUT <sub>-</sub> to AUX <sub>-</sub> /RX0 <sub>-</sub> ) .....                                                                                                                                                                                                       | ±70mA                               |
| Peak Current (IN <sub>-</sub> to D <sub>-</sub> /TX <sub>-</sub> , X <sub>-</sub> to HPD <sub>-</sub> /RX1 <sub>-</sub> , OUT <sub>-</sub> to<br>AUX <sub>-</sub> /RX0 <sub>-</sub> ) (pulsed at 1ms, 10% duty cycle) .....                                                                                                                                                                             | ±70mA                               |
| Continuous Current (LE, SEL) .....                                                                                                                                                                                                                                                                                                                                                                      | ±30mA                               |

Peak Current (LE, SEL)

|                                                                                                                                |                 |
|--------------------------------------------------------------------------------------------------------------------------------|-----------------|
| (pulsed at 1ms, 10% duty cycle) .....                                                                                          | ±70mA           |
| Continuous Power Dissipation (T <sub>A</sub> = +70°C) for Multilayer Board<br>56-Pin TQFN (derate 41.0mW/°C above +70°C) ..... | 3279mW          |
| Operating Temperature Range .....                                                                                              | -40°C to +85°C  |
| Junction Temperature .....                                                                                                     | +150°C          |
| Storage Temperature Range .....                                                                                                | -65°C to +150°C |
| Package Junction-to-Ambient Thermal Resistance (θ <sub>JA</sub> )<br>(Note 2) .....                                            | 24.4°C/W        |
| Package Junction-to-Case Thermal Resistance (θ <sub>JC</sub> )<br>(Note 2) .....                                               | 1.5°C/W         |
| Lead Temperature (soldering) .....                                                                                             | +300°C          |

**Note 1:** Signals on IN<sub>-</sub>, X<sub>-</sub>, OUT<sub>-</sub>, D<sub>-</sub>, TX<sub>-</sub>, HPD<sub>-</sub>, RX<sub>-</sub>, or AUX<sub>-</sub>, LE, SEL exceeding V<sub>DD</sub> or GND are clamped by internal diodes. Limit forward-diode current to maximum current rating.

**Note 2:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a 4-layer board. For detailed information on package thermal considerations, see [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

(V<sub>DD</sub> = +3.3V ±10%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at V<sub>DD</sub> = +3.3V, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 3)

| PARAMETER                                                       | SYMBOL                                                                                                                                                                                                                                                                                                                                                                                               | CONDITIONS                                                                                                                                                                                                                                                                                                | MIN  | TYP | MAX                     | UNITS |
|-----------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-----|-------------------------|-------|
| <b>ANALOG SWITCH</b>                                            |                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                           |      |     |                         |       |
| Analog Signal Range                                             | IN <sub>-</sub> , X <sub>-</sub> , OUT <sub>-</sub> ,<br>D <sub>-</sub> , TX <sub>-</sub> , HPD <sub>-</sub> ,<br>RX <sub>-</sub> , AUX <sub>-</sub>                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                           | -0.1 |     | (V <sub>DD</sub> - 1.8) | V     |
| Voltage Between IN and D/TX, X and HPD/RX1, and OUT and AUX/RX0 | IV <sub>IN<sub>-</sub></sub> - V <sub>TX<sub>-</sub></sub> I,<br>IV <sub>IN<sub>-</sub></sub> - V <sub>D<sub>-</sub></sub> I,<br>IV <sub>X<sub>-</sub></sub> - V <sub>HPD<sub>-</sub></sub> I,<br>IV <sub>X<sub>-</sub></sub> - V <sub>RX1<sub>-</sub></sub> I,<br>IV <sub>OUT<sub>-</sub></sub> - V <sub>AUX<sub>-</sub></sub> I,<br>IV <sub>OUT<sub>-</sub></sub> - V <sub>RX0<sub>-</sub></sub> I |                                                                                                                                                                                                                                                                                                           | 0    |     | 1.8                     | V     |
| On-Resistance                                                   | R <sub>ON</sub>                                                                                                                                                                                                                                                                                                                                                                                      | I <sub>IN<sub>-</sub></sub> = I <sub>X<sub>-</sub></sub> = I <sub>OUT<sub>-</sub></sub> = 15mA, V <sub>D<sub>-</sub></sub> , V <sub>TX<sub>-</sub></sub> , V <sub>HPD<sub>-</sub></sub> , V <sub>AUX<sub>-</sub></sub> , or V <sub>RX<sub>-</sub></sub> = 0V, +1.2V                                       |      | 8   |                         | Ω     |
| On-Resistance Match Between Pairs of Same Channel               | ΔR <sub>ON</sub>                                                                                                                                                                                                                                                                                                                                                                                     | V <sub>DD</sub> = +3.0V, I <sub>IN<sub>-</sub></sub> = I <sub>X<sub>-</sub></sub> = I <sub>OUT<sub>-</sub></sub> = 15mA, V <sub>D<sub>-</sub></sub> , V <sub>TX<sub>-</sub></sub> , V <sub>HPD<sub>-</sub></sub> , V <sub>AUX<sub>-</sub></sub> , or V <sub>RX<sub>-</sub></sub> = 0V (Notes 4, 5)        |      | 0.1 | 2                       | Ω     |
| On-Resistance Match Between Channels                            | ΔR <sub>ON</sub>                                                                                                                                                                                                                                                                                                                                                                                     | V <sub>DD</sub> = +3.0V, I <sub>IN<sub>-</sub></sub> = I <sub>X<sub>-</sub></sub> = I <sub>OUT<sub>-</sub></sub> = 15mA, V <sub>D<sub>-</sub></sub> , V <sub>TX<sub>-</sub></sub> , V <sub>HPD<sub>-</sub></sub> , V <sub>AUX<sub>-</sub></sub> , or V <sub>RX<sub>-</sub></sub> = 0V (Notes 4, 5)        |      | 1.5 | 4                       |       |
| On-Resistance Flatness                                          | R <sub>FLAT(ON)</sub>                                                                                                                                                                                                                                                                                                                                                                                | V <sub>DD</sub> = +3.0V, I <sub>IN<sub>-</sub></sub> = I <sub>X<sub>-</sub></sub> = I <sub>OUT<sub>-</sub></sub> = 15mA, V <sub>D<sub>-</sub></sub> , V <sub>TX<sub>-</sub></sub> , V <sub>HPD<sub>-</sub></sub> , V <sub>AUX<sub>-</sub></sub> , or V <sub>RX<sub>-</sub></sub> = 0V, +1.2V (Notes 5, 6) |      | 0.3 | 1.5                     | Ω     |

# DisplayPort/PCIe Passive Switches

MAX4928A/MAX4928B

## ELECTRICAL CHARACTERISTICS (continued)

(V<sub>DD</sub> = +3.3V ±10%, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at V<sub>DD</sub> = +3.3V, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 3)

| PARAMETER                                                                                                                                    | SYMBOL                                                                                                                                                      | CONDITIONS                                                                                                                                                                                                                                                                                                                         | MIN | TYP  | MAX | UNITS |
|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------|-----|-------|
| D <sub>-</sub> or TX <sub>-</sub> /<br>HPD <sub>-</sub> or RX1 <sub>-</sub> /<br>AUX <sub>-</sub> or RX0 <sub>-</sub> Off-Leakage<br>Current | I <sub>D-</sub> (OFF)<br>I <sub>TX-</sub> (OFF)<br>I <sub>HPD-</sub> (OFF)<br>I <sub>RX1-</sub> (OFF)<br>I <sub>AUX-</sub> (OFF)<br>I <sub>RX0-</sub> (OFF) | V <sub>DD</sub> = +3.6V, V <sub>IN-</sub> = V <sub>X-</sub> = V <sub>OUT-</sub> = 0V,<br>+1.2V; V <sub>D-</sub> or V <sub>TX-</sub> , V <sub>HPD-</sub> or V <sub>RX1-</sub> ,<br>V <sub>AUX-</sub> or V <sub>RX0-</sub> = +1.2V, 0V                                                                                               | -1  |      | +1  | μA    |
| IN <sub>-</sub> /X <sub>-</sub> /OUT <sub>-</sub> On-Leakage<br>Current                                                                      | I <sub>IN-</sub> (ON)<br>I <sub>X-</sub> (ON)<br>I <sub>OUT-</sub> (ON)                                                                                     | V <sub>DD</sub> = +3.6V, V <sub>IN-</sub> = V <sub>X-</sub> = V <sub>OUT-</sub> = 0V,<br>+1.2V; V <sub>D-</sub> or V <sub>TX-</sub> = V <sub>IN-</sub> or<br>unconnected, V <sub>HPD-</sub> or V <sub>RX1-</sub> = V <sub>X-</sub> or<br>unconnected, V <sub>AUX-</sub> or V <sub>RX0-</sub> = V <sub>OUT-</sub><br>or unconnected | -1  |      | +1  |       |
| <b>DIGITAL SIGNALS</b>                                                                                                                       |                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                    |     |      |     |       |
| SEL to Switch Turn-On Time                                                                                                                   | t <sub>ON_SEL</sub>                                                                                                                                         | V <sub>D-</sub> or V <sub>TX-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>HPD-</sub> or V <sub>RX1-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>AUX-</sub> or V <sub>RX0-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>LE = V <sub>DD</sub> , C <sub>L</sub> = 100pf (Figure 1)                                                   |     | 55   | 120 | ns    |
| SEL to Switch Turn-Off Time                                                                                                                  | t <sub>OFF_SEL</sub>                                                                                                                                        | V <sub>D-</sub> or V <sub>TX-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>HPD-</sub> or V <sub>RX1-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>AUX-</sub> or V <sub>RX0-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>LE = V <sub>DD</sub> , C <sub>L</sub> = 100pf (Figure 1)                                                   |     | 8    | 50  | ns    |
| LE Setup Time<br>SEL to LE                                                                                                                   | t <sub>SU</sub>                                                                                                                                             | V <sub>D-</sub> or V <sub>TX-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>HPD-</sub> or V <sub>RX1-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>AUX-</sub> or V <sub>RX0-</sub> = +1.0V, R <sub>L</sub> = 50Ω<br>(Figure 1)                                                                                                  |     | 2    |     | ns    |
| LE Hold Time<br>SEL to LE                                                                                                                    | t <sub>HOLD</sub>                                                                                                                                           | V <sub>D-</sub> or V <sub>TX-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>HPD-</sub> or V <sub>RX1-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>AUX-</sub> or V <sub>RX0-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>(Figure 1)                                                                                                 |     | 2    |     | ns    |
| LE Minimum Pulse-Width Low                                                                                                                   | t <sub>w</sub>                                                                                                                                              | V <sub>D-</sub> or V <sub>TX-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>HPD-</sub> or V <sub>RX1-</sub> = +1.0V, R <sub>L</sub> = 50Ω,<br>V <sub>AUX-</sub> or V <sub>RX0-</sub> = +1.0V, R <sub>L</sub> = 50Ω<br>(Figure 1)                                                                                                  | 40  |      |     | ns    |
| Differential Insertion Loss<br>(Figure 2)                                                                                                    | S <sub>DD21</sub>                                                                                                                                           | f = 2.5GHz                                                                                                                                                                                                                                                                                                                         |     | -1.5 |     | dB    |
|                                                                                                                                              |                                                                                                                                                             | f = 5.0GHz                                                                                                                                                                                                                                                                                                                         |     | -3.3 |     |       |
|                                                                                                                                              |                                                                                                                                                             | f = 7.5GHz                                                                                                                                                                                                                                                                                                                         |     | -4.9 |     |       |
| Differential Crosstalk (Figure 2)                                                                                                            | S <sub>DDCTK</sub>                                                                                                                                          | f = 2.5GHz                                                                                                                                                                                                                                                                                                                         |     | -40  |     | dB    |
|                                                                                                                                              |                                                                                                                                                             | f = 5.0GHz                                                                                                                                                                                                                                                                                                                         |     | -23  |     |       |
|                                                                                                                                              |                                                                                                                                                             | f = 7.5GHz                                                                                                                                                                                                                                                                                                                         |     | -28  |     |       |
| Differential Off-Isolation                                                                                                                   | S <sub>DD21_OFF</sub>                                                                                                                                       | f = 3.0GHz                                                                                                                                                                                                                                                                                                                         |     | -22  |     | dB    |
| Differential Return Loss (Figure 2)                                                                                                          | S <sub>DD11</sub>                                                                                                                                           | f = 2.8GHz                                                                                                                                                                                                                                                                                                                         |     | -21  |     | dB    |
|                                                                                                                                              |                                                                                                                                                             | f = 5.0GHz                                                                                                                                                                                                                                                                                                                         |     | -8   |     |       |
|                                                                                                                                              |                                                                                                                                                             | f = 7.5GHz                                                                                                                                                                                                                                                                                                                         |     | -7   |     |       |

# DisplayPort/PCIe Passive Switches

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{DD} = +3.3V \pm 10\%$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $V_{DD} = +3.3V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.) (Note 3)

| PARAMETER                    | SYMBOL     | CONDITIONS                       | MIN | TYP | MAX | UNITS   |
|------------------------------|------------|----------------------------------|-----|-----|-----|---------|
| Signal Data Rate             | BR         | $R_S = R_L = 100\Omega$ balanced |     | 10  |     | Gbps    |
| Differential -3dB Bandwidth  | DBW        | $R_S = R_L = 100\Omega$ balanced |     | 5   |     | GHz     |
| <b>LOGIC INPUT (LE, SEL)</b> |            |                                  |     |     |     |         |
| Input Logic-High             | $V_{IH}$   |                                  | 1.4 |     |     | V       |
| Input Logic-Low              | $V_{IL}$   |                                  |     |     | 0.5 | V       |
| Input Logic Hysteresis       | $V_{HYST}$ |                                  |     | 100 |     | mV      |
| Input Leakage Current        | $I_{IN}$   | $V_{IN} = 0$ or $V_{DD}$         | -1  |     | +1  | $\mu A$ |
| <b>POWER SUPPLY</b>          |            |                                  |     |     |     |         |
| Power Supply Range           | $V_{DD}$   |                                  | 3.0 |     | 3.6 | V       |
| $V_{DD}$ Supply Current      | $I_{DD}$   | $V_{IN} = 0$ or $V_{DD}$         |     |     | 850 | $\mu A$ |

**Note 3:** All units are 100% production tested at  $T_A = +85^\circ C$ . Limits over the operating temperature range are guaranteed by design and characterization and are not production tested.

**Note 4:**  $\Delta R_{ON} = R_{ON} (MAX) - R_{ON} (MIN)$ .

**Note 5:** Guaranteed by design. Not production tested.










**Note 6:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal range.

# DisplayPort/PCIe Passive Switches

## Typical Operating Characteristics

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

MAX4928A/MAX4928B

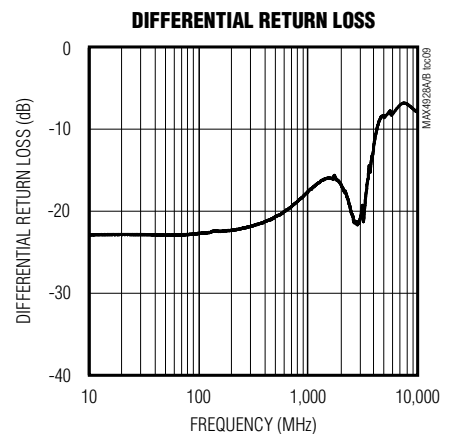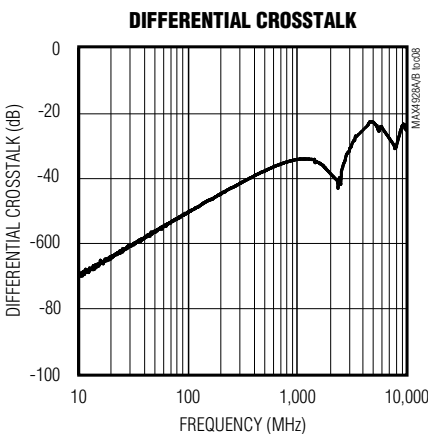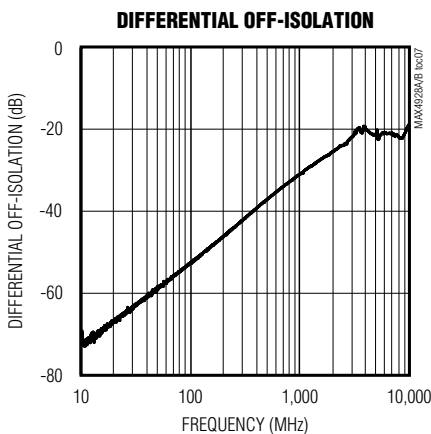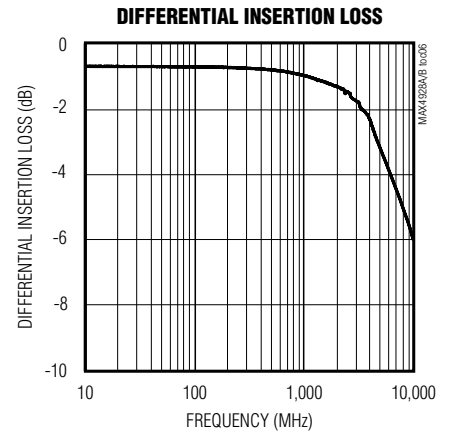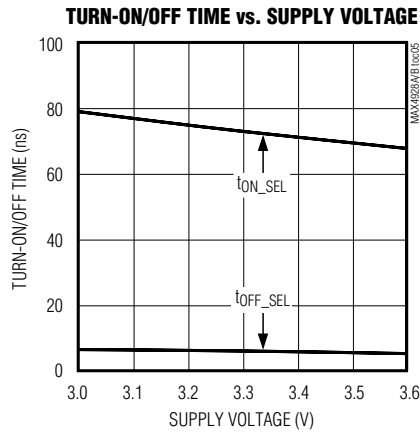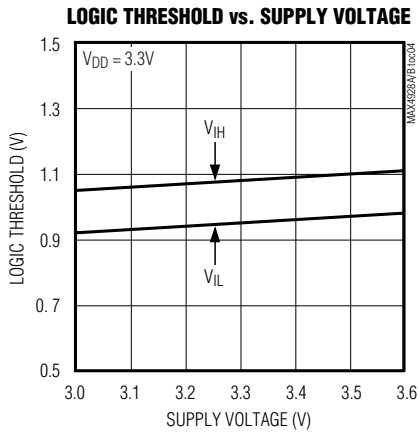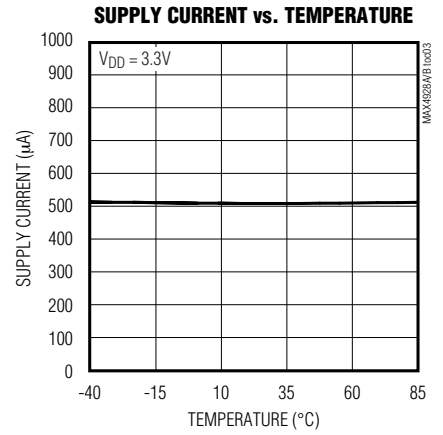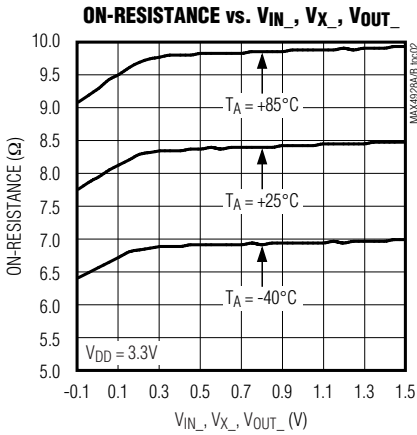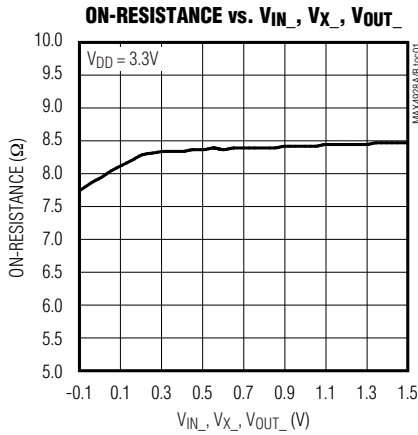

# DisplayPort/PCIe Passive Switches

## Test Circuits/Timing Diagrams


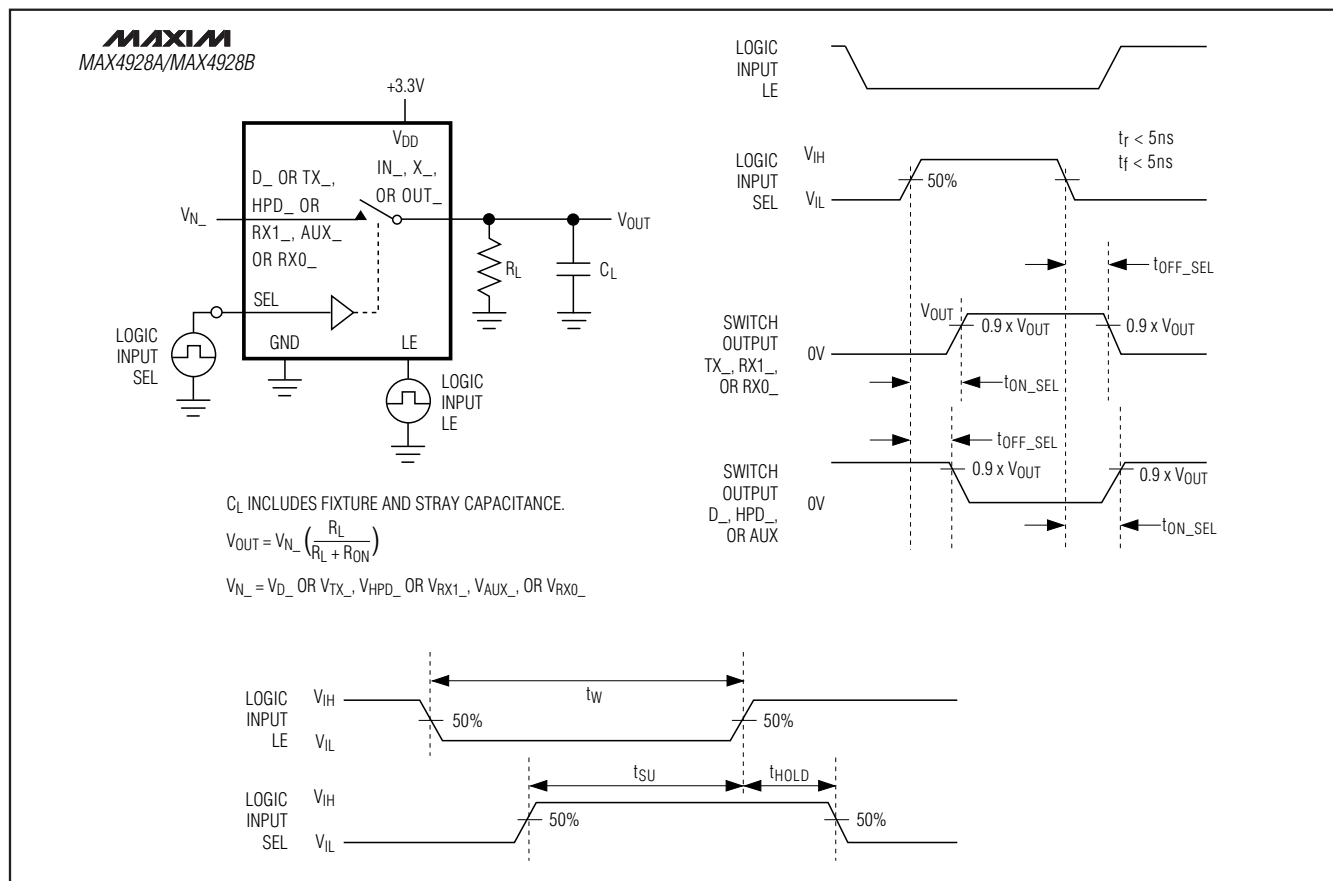


Figure 1. Switching Time

# DisplayPort/PCIe Passive Switches

## Test Circuits/Timing Diagrams (continued)

MAX4928A/MAX4928B

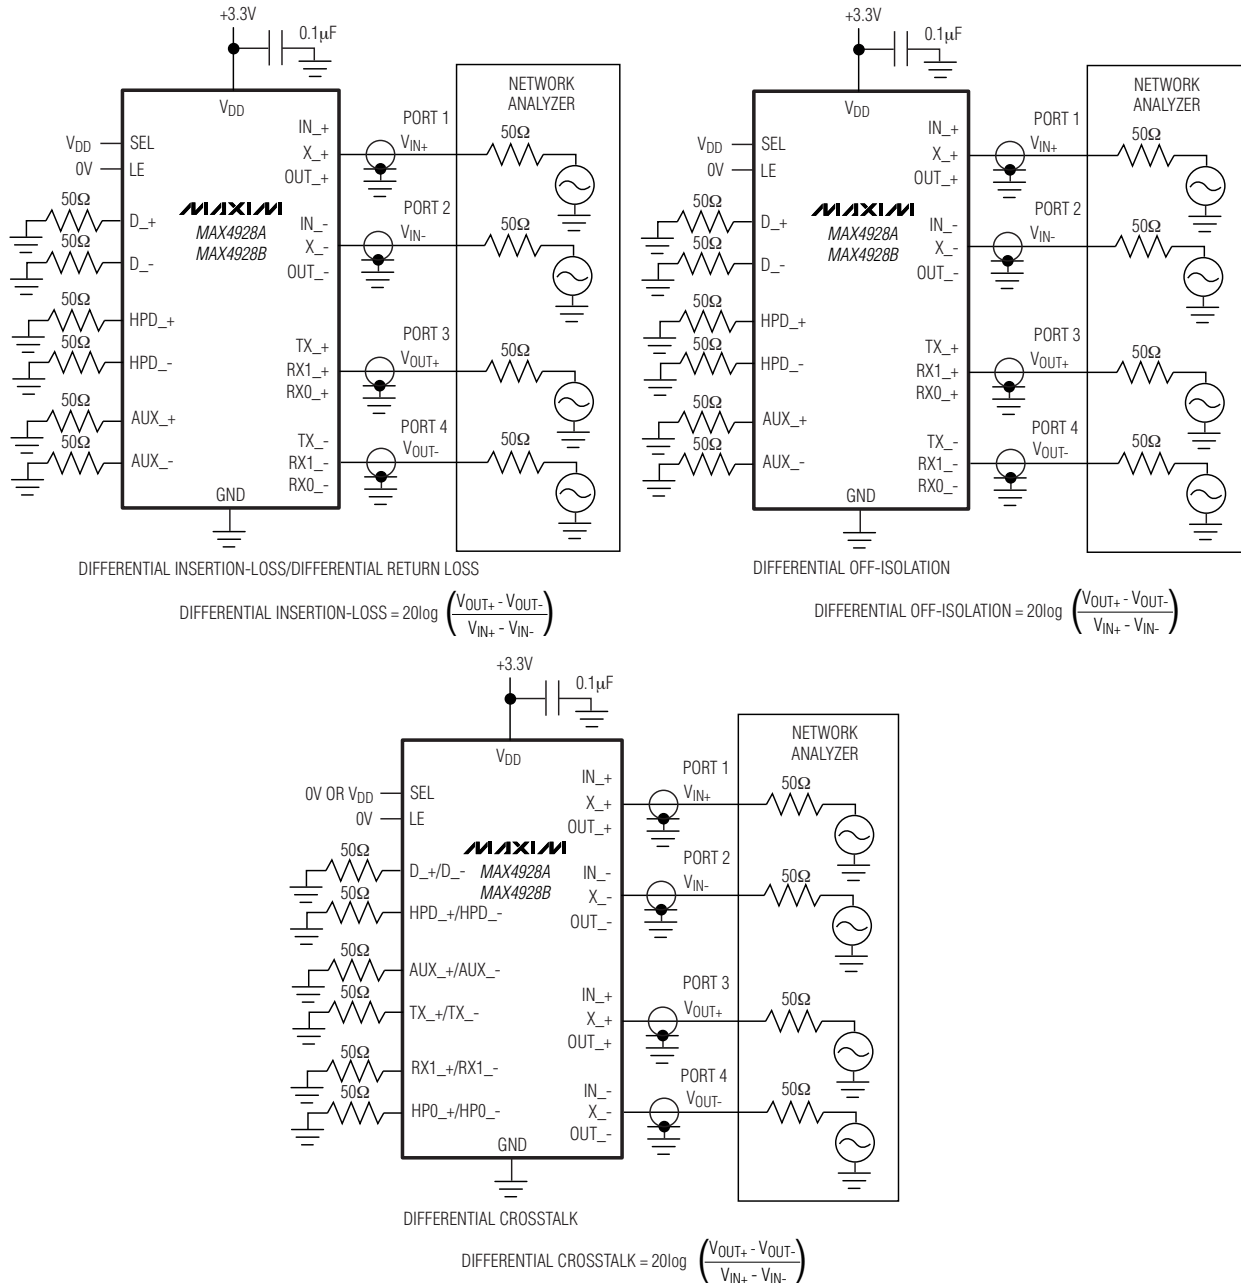

MEASUREMENTS ARE STANDARDIZED AGAINST SHORTS AT IC TERMINALS.  
 DIFFERENTIAL OFF-ISOLATION IS MEASURED BETWEEN IN<sub>+</sub> AND "OFF" D<sub>-</sub> OR TX<sub>-</sub>, X<sub>-</sub> AND "OFF" HPD<sub>-</sub> OR RX1<sub>-</sub>, OUT<sub>-</sub> AND "OFF" AUX<sub>-</sub> OR RX0<sub>-</sub> TERMINAL ON EACH SWITCH.  
 DIFFERENTIAL ON-LOSS IS MEASURED BETWEEN IN<sub>+</sub> AND "ON" D<sub>-</sub> OR TX<sub>-</sub>, X<sub>-</sub> AND "ON" HPD<sub>-</sub> OR RX1<sub>-</sub>, OUT<sub>-</sub> AND "ON" AUX<sub>-</sub> OR RX0<sub>-</sub> TERMINAL ON EACH SWITCH.  
 DIFFERENTIAL CROSSTALK IS MEASURED BETWEEN ANY TWO PAIRS.

Figure 2. Differential On-Loss, Differential Off-Isolation, and Differential Crosstalk

# DisplayPort/PCIe Passive Switches

## Pin Description

| PIN                                       |                                           | NAME            | FUNCTION                                                                                                                                                                                                                                |
|-------------------------------------------|-------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX4928A                                  | MAX4928B                                  |                 |                                                                                                                                                                                                                                         |
| 1, 11, 16, 20, 21, 28, 29, 35, 48, 49, 56 | 1, 11, 16, 20, 21, 28, 29, 35, 48, 49, 56 | GND             | Ground                                                                                                                                                                                                                                  |
| 2                                         | 4                                         | IN0+            | Analog Switch 1—Common Positive Terminal                                                                                                                                                                                                |
| 3                                         | 5                                         | IN0-            | Analog Switch 1—Common Negative Terminal                                                                                                                                                                                                |
| 4                                         | 7                                         | IN1+            | Analog Switch 2—Common Positive Terminal                                                                                                                                                                                                |
| 5                                         | 8                                         | IN1-            | Analog Switch 2—Common Negative Terminal                                                                                                                                                                                                |
| 6, 17, 22, 27, 34, 50, 55                 | 6, 17, 22, 27, 34, 50, 55                 | V <sub>DD</sub> | Positive Supply Voltage Input. Connect V <sub>DD</sub> to a +3.0V to +3.6V supply voltage. Bypass V <sub>DD</sub> to GND with a 0.1µF ceramic capacitor placed as close as possible to the device. See the <i>Board Layout</i> section. |
| 7                                         | 9                                         | IN2+            | Analog Switch 3—Common Positive Terminal                                                                                                                                                                                                |
| 8                                         | 10                                        | IN2-            | Analog Switch 3—Common Negative Terminal                                                                                                                                                                                                |
| 9                                         | 12                                        | IN3+            | Analog Switch 4—Common Positive Terminal                                                                                                                                                                                                |
| 10                                        | 13                                        | IN3-            | Analog Switch 4—Common Negative Terminal                                                                                                                                                                                                |
| 12                                        | 14                                        | OUT+            | Analog Switch 5—Common Positive Terminal                                                                                                                                                                                                |
| 13                                        | 15                                        | OUT-            | Analog Switch 5—Common Negative Terminal                                                                                                                                                                                                |
| 14                                        | 18                                        | X+              | Analog Switch 6—Common Positive Terminal                                                                                                                                                                                                |
| 15                                        | 19                                        | X-              | Analog Switch 6—Common Negative Terminal                                                                                                                                                                                                |
| 18                                        | 2                                         | SEL             | Control Signal Input                                                                                                                                                                                                                    |
| 19                                        | 3                                         | LE              | Latch Enable Input                                                                                                                                                                                                                      |
| 23                                        | 30                                        | HPD2            | Analog Switch 6—Normally Open Negative Terminal                                                                                                                                                                                         |
| 24                                        | 31                                        | HPD1            | Analog Switch 6—Normally Open Positive Terminal                                                                                                                                                                                         |
| 25                                        | 32                                        | AUX-            | Analog Switch 5—Normally Open Negative Terminal                                                                                                                                                                                         |
| 26                                        | 33                                        | AUX+            | Analog Switch 5—Normally Open Positive Terminal                                                                                                                                                                                         |
| 30                                        | 23                                        | RX1-            | Analog Switch 6—Normally Closed Negative Terminal                                                                                                                                                                                       |
| 31                                        | 24                                        | RX1+            | Analog Switch 6—Normally Closed Positive Terminal                                                                                                                                                                                       |
| 32                                        | 25                                        | RX0-            | Analog Switch 5—Normally Closed Negative Terminal                                                                                                                                                                                       |
| 33                                        | 26                                        | RX0+            | Analog Switch 5—Normally Closed Positive Terminal                                                                                                                                                                                       |
| 36                                        | 44                                        | D3-             | Analog Switch 4—Normally Open Negative Terminal                                                                                                                                                                                         |
| 37                                        | 45                                        | D3+             | Analog Switch 4—Normally Open Positive Terminal                                                                                                                                                                                         |
| 38                                        | 46                                        | D2-             | Analog Switch 3—Normally Open Negative Terminal                                                                                                                                                                                         |
| 39                                        | 47                                        | D2+             | Analog Switch 3—Normally Open Positive Terminal                                                                                                                                                                                         |
| 40                                        | 51                                        | D1-             | Analog Switch 2—Normally Open Negative Terminal                                                                                                                                                                                         |
| 41                                        | 52                                        | D1+             | Analog Switch 2—Normally Open Positive Terminal                                                                                                                                                                                         |
| 42                                        | 53                                        | D0-             | Analog Switch 1—Normally Open Negative Terminal                                                                                                                                                                                         |
| 43                                        | 54                                        | D0+             | Analog Switch 1—Normally Open Positive Terminal                                                                                                                                                                                         |
| 44                                        | 36                                        | TX3-            | Analog Switch 4—Normally Closed Negative Terminal                                                                                                                                                                                       |
| 45                                        | 37                                        | TX3+            | Analog Switch 4—Normally Closed Positive Terminal                                                                                                                                                                                       |
| 46                                        | 38                                        | TX2-            | Analog Switch 3—Normally Closed Negative Terminal                                                                                                                                                                                       |



# DisplayPort/PCIe Passive Switches

## Pin Description (continued)

| PIN      |          | NAME | FUNCTION                                                                 |
|----------|----------|------|--------------------------------------------------------------------------|
| MAX4928A | MAX4928B |      |                                                                          |
| 47       | 39       | TX2+ | Analog Switch 3—Normally Closed Positive Terminal                        |
| 51       | 40       | TX1- | Analog Switch 2—Normally Closed Negative Terminal                        |
| 52       | 41       | TX1+ | Analog Switch 2—Normally Closed Positive Terminal                        |
| 53       | 42       | TX0- | Analog Switch 1—Normally Closed Negative Terminal                        |
| 54       | 43       | TX0+ | Analog Switch 1—Normally Closed Positive Terminal                        |
| —        | —        | EP   | Exposed Pad. Connect EP to GND. Exposed pad internally connected to GND. |

### Detailed Description

The MAX4928A/MAX4928B high-speed passive switches route PCI Express (PCIe) data and/or DisplayPort signals between two possible destinations. The MAX4928A/MAX4928B are ideal for routing signals between a graphics memory controller hub (GMCH) and either a DisplayPort or PCIe connector.

The MAX4928A/MAX4928B feature a single digital control input (SEL) to switch signal paths and a latch input (LE) that holds the switches in a given state.

#### Digital Control Input (SEL)

The MAX4928A/MAX4928B provide a single digital control input (SEL) to select the signal path between the IN<sub>-</sub> and D<sub>-</sub>/TX<sub>-</sub>, X<sub>-</sub> and HPD<sub>-</sub>/RX1<sub>-</sub>, and OUT<sub>-</sub> and AUX<sub>-</sub>/RX0<sub>-</sub> channels. The truth tables for the MAX4928A/MAX4928B are depicted in the *Functional Diagrams/Truth Table*. Drive SEL rail-to-rail to minimize power consumption.

#### Latch Control Input (LE)

The MAX4928A/MAX4928B provide a single digital control input (LE) to latch the signal paths between the IN<sub>-</sub> and D<sub>-</sub>/TX<sub>-</sub>, X<sub>-</sub> and HPD<sub>-</sub>/RX1<sub>-</sub>, and OUT<sub>-</sub> and AUX<sub>-</sub>/RX0<sub>-</sub> channels. When LE is driven high, the switches are held in their previous state, regardless of the input signal to SEL. Drive LE rail-to-rail to minimize power consumption.

#### Analog Signal Levels

The MAX4928A/MAX4928B accept standard PCIe signals to a maximum of (V<sub>DD</sub> - 1.8V). Signals on the IN<sub>+</sub> channels are routed to either the D<sub>+</sub> or TX<sub>+</sub> channels, signals on the X<sub>+</sub> channel are routed to either HPD1 or RX1+ channels, and signals on the OUT<sub>+</sub> channel are routed to either AUX<sub>+</sub> or RX0+ channels. Signals on the

IN<sub>-</sub> channels are routed to either the D<sub>-</sub> or TX<sub>-</sub> channels, signals on the X<sub>-</sub> channel are routed to either HPD2 or RX1- channels, and signals on the OUT<sub>-</sub> channel are routed to either AUX<sub>-</sub> or RX0- channels. The MAX4928A/MAX4928B are bidirectional switches, allowing IN<sub>-</sub>, X<sub>-</sub>, OUT<sub>-</sub>, D<sub>-</sub>, TX<sub>-</sub>, HPD<sub>-</sub>, RX<sub>-</sub>, and AUX<sub>-</sub> to be used as either inputs or outputs.

## Applications Information

### DisplayPort/PCIe Switching

The MAX4928A/MAX4928B primary applications are aimed to switch between a GMCH and either a DisplayPort or PCIe connector. The MAX4928A/MAX4928B contain n-channel switches to permit differential signals to be selected between a PCIe Gen II socket or to a DisplayPort connector. Each device handles up to six pairs of signals. The DisplayPort signal is an AC-coupled 8b/10b encoded differential signal ranging up to 2.7 Gbps. The PCIe Gen I and Gen II signals are AC-coupled, 8b/10b encoded differential signals ranging up to 5.0Gbps.

### Board Layout

High-speed switches require proper layout and design procedures for optimum performance. Keep design-controlled impedance PCB traces as short as possible or follow impedance layouts per the PCIe specification. Ensure that power-supply bypass capacitors are placed as close as possible to the device. Multiple bypass capacitors are recommended. Connect all grounds and the exposed pad to large ground planes.

## Chip Information


PROCESS: CMOS

# DisplayPort/PCIe Passive Switches

Functional Diagram/Truth Table


| LE | SEL | IN_ TO TX_,<br>X_ TO RX1_,<br>OUT_ TO RX0_ | IN_ TO DO_,<br>X_ TO HPD_,<br>OUT_ TO AUX_ |
|----|-----|--------------------------------------------|--------------------------------------------|
| 1  | X   | NO CHANGE                                  | NO CHANGE                                  |
| 0  | 0   | ON                                         | OFF                                        |
| 0  | 1   | OFF                                        | ON                                         |

X = DON'T CARE.

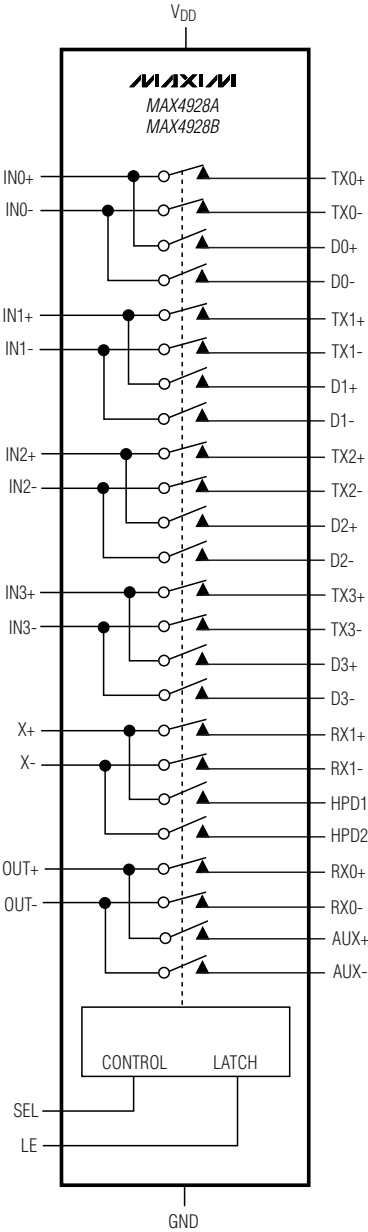

# DisplayPort/PCIe Passive Switches

## Typical Operating Circuit

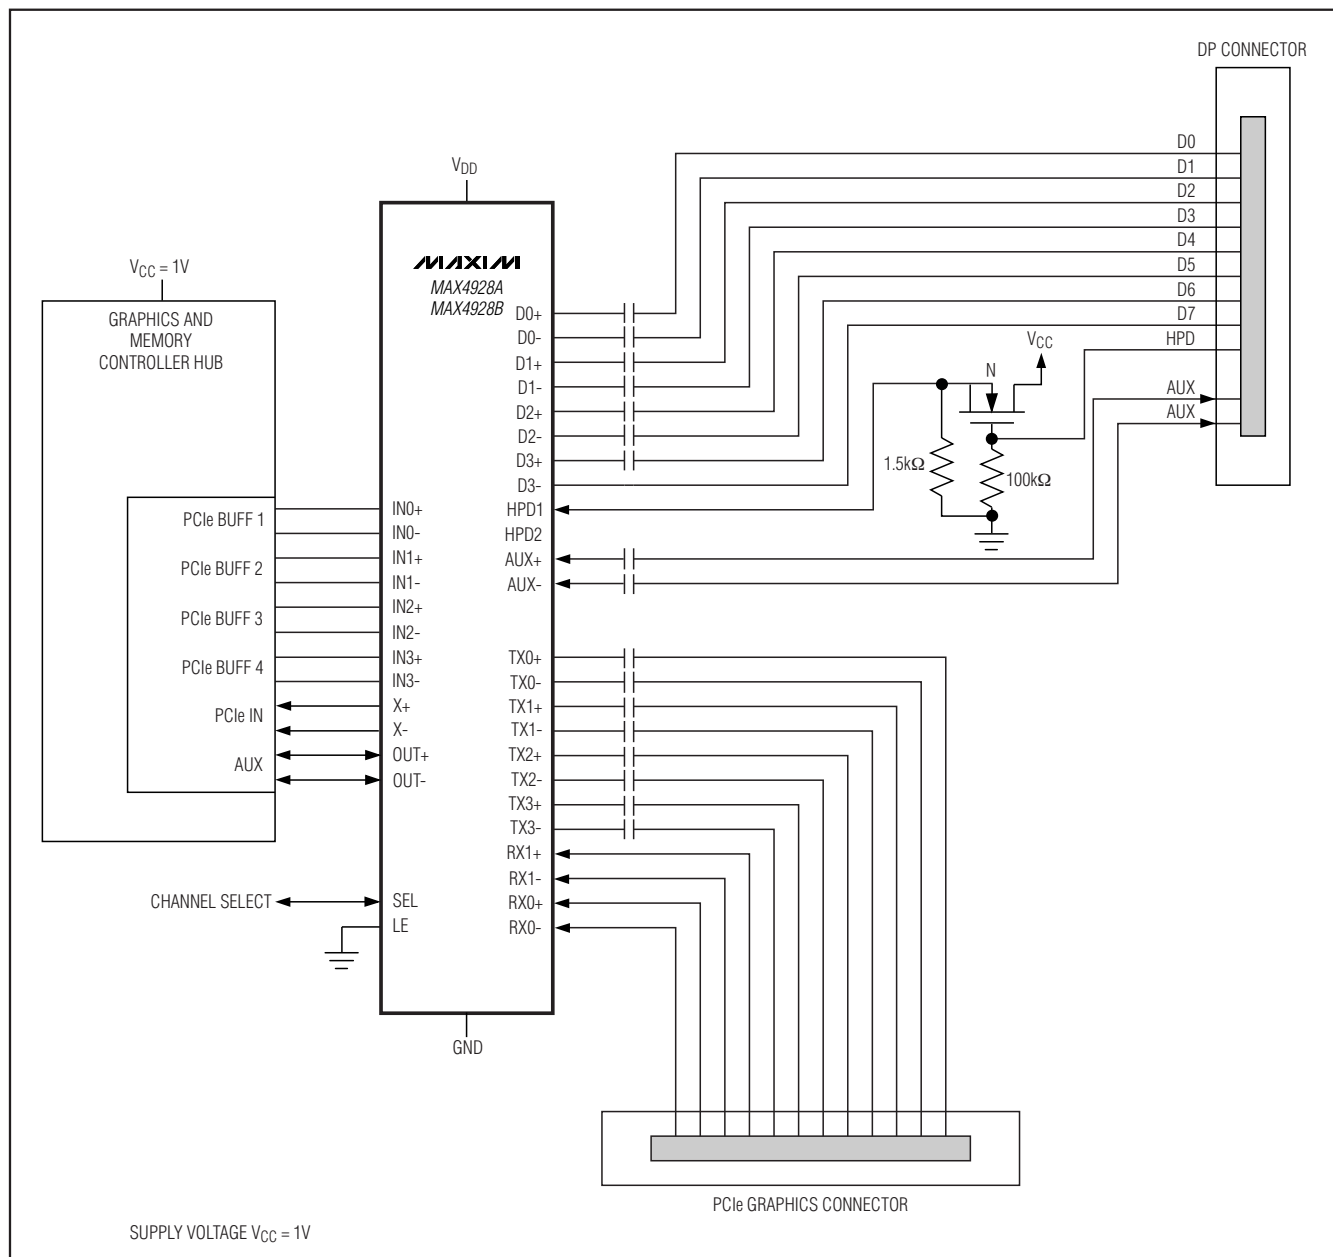

MAX4928A/MAX4928B

# DisplayPort/PCIe Passive Switches

## Package Information

For the latest package outline information and land patterns, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO.            |
|--------------|--------------|-------------------------|
| 56 TQFN-EP   | T56511-1     | <a href="#">21-0187</a> |

# DisplayPort/PCle Passive Switches

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                           | PAGES<br>CHANGED |
|--------------------|------------------|---------------------------------------|------------------|
| 0                  | 2/08             | Initial release                       | —                |
| 1                  | 8/08             | Changed functional diagram and limits | 1, 2, 11         |

MAX4928A/MAX4928B

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 \_\_\_\_\_ 13

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9