# 1. General description

Planar Maximum Efficiency General Application (MEGA) Schottky barrier rectifier with an integrated guard ring for stress protection in a DFN0603-2 (SOD972E) leadless ultra small Surface-Mounted Device (SMD) package.

#### 2. Features and benefits

- Average forward current I<sub>F(AV)</sub> ≤ 0.1 A
- Reverse voltage V<sub>R</sub> ≤ 30 V
- Low forward voltage
- Low leakage current
- Ultra small and leadless SMD package
- Package height typ. 0.25 mm

## 3. Applications

- Low voltage rectification
- High efficiency DC-to-DC conversion
- Switch mode power supply
- Low power consumption applications
- · Ultra high speed switching
- · LED backlight for mobile application

#### 4. Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
I <sub>F(AV)</sub>		$\delta$ = 0.5; f = 20 kHz; $T_{sp} \le 147$ °C; square wave		-	-	0.1	Α
V <sub>R</sub>	reverse voltage	T <sub>j</sub> = 25 °C		-	-	30	V
V <sub>F</sub>	forward voltage	$I_F = 10 \text{ mA}; T_j = 25 ^{\circ}\text{C}; \text{ pulsed}$		-	415	460	mV
I <sub>R</sub>	reverse current	V <sub>R</sub> = 10 V; T <sub>j</sub> = 25 °C; pulsed	[1]	-	0.02	0.1	μΑ
		$V_R = 30 \text{ V}; T_j = 25 \text{ °C}; \text{ pulsed}$	[1]	-	0.14	0.5	μΑ

[1] Very short pulse, to maintain a stable junction temperature.



# 5. Pinning information

#### **Table 2. Pinning information**

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	K	cathode		к <b>-</b> Д-а
2	А	anode	Transparent top view	sym001
			DFN0603-2 (SOD972E)	

# 6. Ordering information

#### **Table 3. Ordering information**

Type number	pe number Package					
	Name	Description	Version			
PMEG3001EEF		plastic, ultra small and leadless full encapsulated package; 2 terminals; 0.4 mm pitch; 0.63 mm x 0.33 mm x 0.25 mm body	SOD972E			

# 7. Marking

#### Table 4. Marking codes

Type number	Marking code
PMEG3001EEF	J

# 8. Limiting values

#### **Table 5. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
$V_R$	reverse voltage	T <sub>j</sub> = 25 °C		-	30	V
l <sub>F</sub>	forward current	$\delta$ = 1; T <sub>sp</sub> ≤ 146 °C; f = 20 kHz; square wave		-	0.14	Α
I <sub>F(AV)</sub>	average forward current	$\delta$ = 0.5; f = 20 kHz; T <sub>amb</sub> $\leq$ 131 °C; square wave		-	0.1	А
		$\delta$ = 0.5; f = 20 kHz; T <sub>sp</sub> ≤ 147 °C; square wave		-	0.1	А
I <sub>FRM</sub>	repetitive peak forward current	$t_p \le 1 \text{ ms}; \delta \le 0.25$		-	1	Α
I <sub>FSM</sub>	non-repetitive peak forward current	$t_p$ = 8.3 ms; square wave; $T_{j(init)}$ = 25 °C		-	3	Α
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C	[1]	-	370	mW
			[2]	-	570	mW
Tj	junction temperature			-	150	°C
T <sub>amb</sub>	ambient temperature			-55	150	°C
T <sub>stg</sub>	storage temperature			-55	150	°C

<sup>[1]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

#### 9. Thermal characteristics

#### **Table 6. Thermal characteristics**

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
R <sub>th(j-a)</sub>	thermal resistance from	in free air	[1] [2]	-	-	340	K/W
jı	junction to ambient		[1] [3]	-	=	220	K/W
R <sub>th(j-sp)</sub>	thermal resistance from junction to solder point		[4]	-	-	35	K/W

<sup>[1]</sup> For Schottky barrier diodes thermal runaway has to be considered, as in some applications the reverse power losses P<sub>R</sub> are a significant part of the total power losses.

<sup>[2]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for anode and cathode 1 cm<sup>2</sup> each.

<sup>[2]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.

<sup>[3]</sup> Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for anode and cathode 1 cm<sup>2</sup> each.

<sup>[4]</sup> Soldering point of anode tab.

#### 30 V, 0.1 A low VF MEGA Schottky barrier rectifier


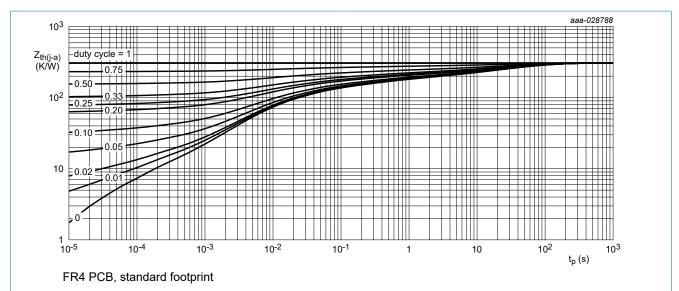


Fig. 1. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

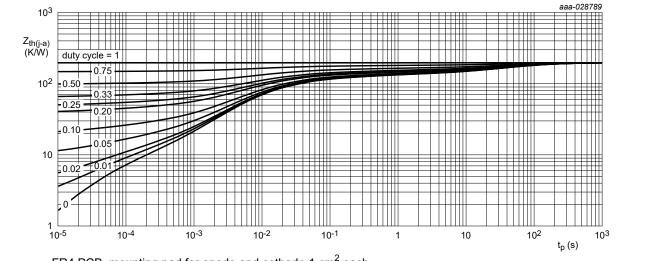

FR4 PCB, mounting pad for anode and cathode 1 cm<sup>2</sup> each


Fig. 2. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

## 10. Characteristics

**Table 7. Characteristics** 

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
V <sub>(BR)R</sub>	reverse reverse breakdown voltage	$I_R$ = 0.1 mA; pulsed; $T_j$ = 25 °C	[1]	30	-	-	V
V <sub>F</sub>	forward voltage	I <sub>F</sub> = 0.1 mA; T <sub>j</sub> = 25 °C; pulsed		-	260	-	mV
		I <sub>F</sub> = 1 mA; T <sub>j</sub> = 25 °C; pulsed		-	325	360	mV
		$I_F$ = 10 mA; $T_j$ = 25 °C; pulsed		-	415	460	mV
		I <sub>F</sub> = 100 mA; T <sub>j</sub> = 25 °C; pulsed		-	725	840	mV
I <sub>R</sub>	reverse current	V <sub>R</sub> = 10 V; T <sub>j</sub> = 25 °C; pulsed	[1]	-	0.02	0.1	μΑ
		V <sub>R</sub> = 30 V; T <sub>j</sub> = 25 °C; pulsed	[1]	-	0.14	0.5	μΑ
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 1 V; f = 1 MHz; T <sub>j</sub> = 25 °C		-	4	-	pF
		V <sub>R</sub> = 10 V; f = 1 MHz; T <sub>j</sub> = 25 °C		-	3	-	pF
t <sub>rr</sub>	reverse recovery time; step recovery	I <sub>F</sub> = 100 mA; I <sub>R</sub> = 100 mA; I <sub>R(meas)</sub> = 20 mA; T <sub>j</sub> = 25 °C		-	1.5	-	ns

[1] Very short pulse, to maintain a stable junction temperature.

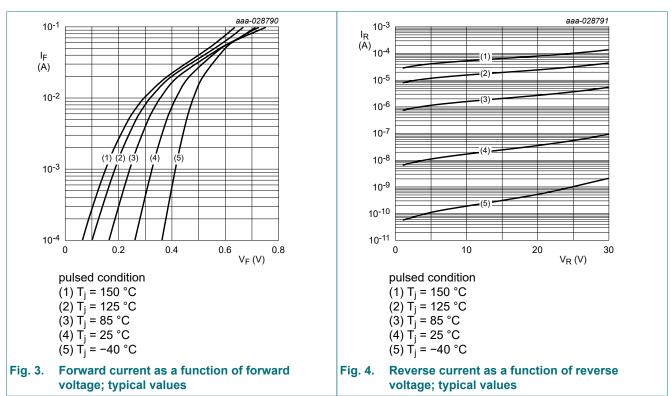

#### 30 V, 0.1 A low VF MEGA Schottky barrier rectifier






Fig. 5. Diode capacitance as a function of reverse voltage; typical values




 $T_i = 150 \, ^{\circ}C$  $(1) \delta = 0.1$  $(2) \delta = 0.2$  $(3) \delta = 0.5$  $(4) \delta = 1$ 

Average forward power dissipation as a function of average forward current; typical values



T<sub>i</sub> = 125 °C  $(1) \delta = 1$  $(2) \delta = 0.9$  $(3) \delta = 0.8$  $(4) \delta = 0.5$ 

Fig. 7. Average reverse power dissipation as a function of reverse voltage; typical values



FR4 PCB, standard footprint

T<sub>i</sub> = 150 °C  $(1) \delta = 1$ ; DC


(2)  $\delta = 0.5$ ; f = 20 kHz

(3)  $\delta = 0.2$ ; f = 20 kHz

(4)  $\delta = 0.1$ ; f = 20 kHz

Fig. 8. Average forward current as a function of ambient temperature; typical values

#### 30 V, 0.1 A low VF MEGA Schottky barrier rectifier



FR4 PCB, mounting pad for anode and cathode 1 cm² each

T<sub>i</sub> = 150 °C


 $(1) \delta = 1$ ; DC

 $(2) \delta = 0.5$ ; f = 20 kHz

(3)  $\delta = 0.2$ ; f = 20 kHz

(4)  $\delta = 0.1$ ; f = 20 kHz

Fig. 9. Average forward current as a function of ambient temperature; typical values



 $T_j = 150 \,^{\circ}\text{C}$ 

 $(1) \delta = 1; DC$ 

(2)  $\delta = 0.5$ ; f = 20 kHz

 $(3) \delta = 0.2$ ; f = 20 kHz

 $(4) \delta = 0.1$ ; f = 20 kHz

Fig. 10. Average forward current as a function of solder point temperature; typical values

## 11. Test information

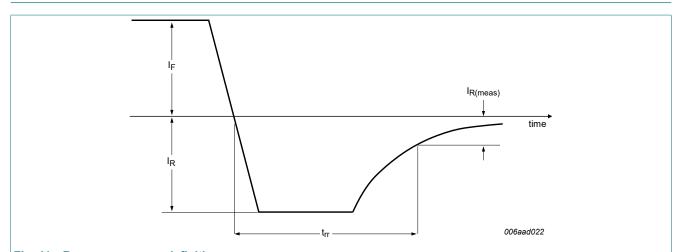


Fig. 11. Reverse recovery definition


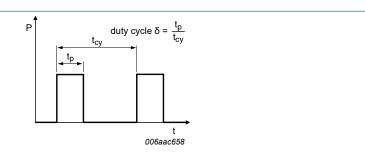


Fig. 12. Duty cycle definition

#### 30 V, 0.1 A low VF MEGA Schottky barrier rectifier


The current ratings for the typical waveforms are calculated according to the equations:  $I_{F(AV)} = I_M \times \delta$  with  $I_M$  defined as peak current,  $I_{RMS} = I_{F(AV)}$  at DC, and  $I_{RMS} = I_M \times \sqrt{\delta}$  with  $I_{RMS}$  defined as RMS current.

# 12. Package outline

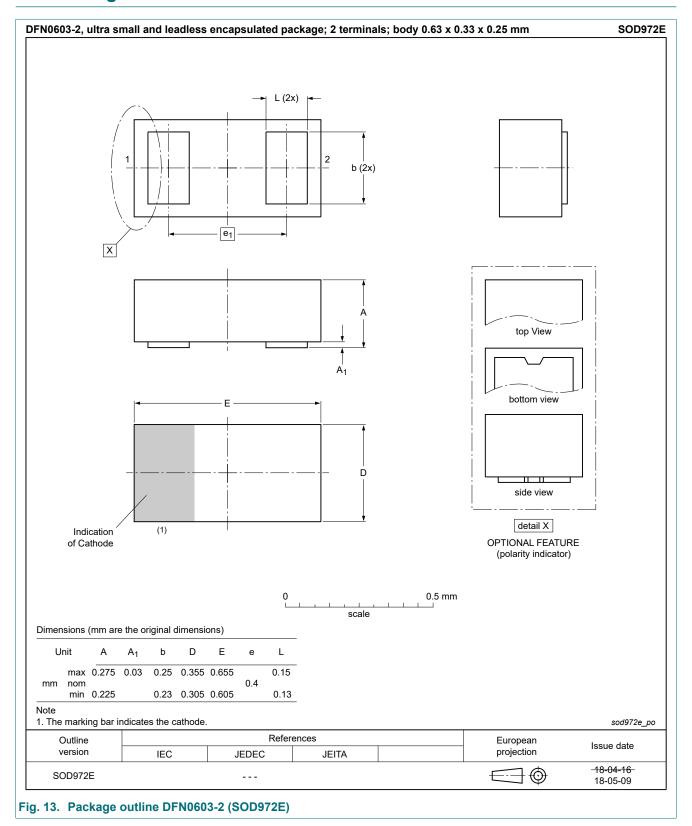

30 V, 0.1 A low VF MEGA Schottky barrier rectifier

# 13. Soldering

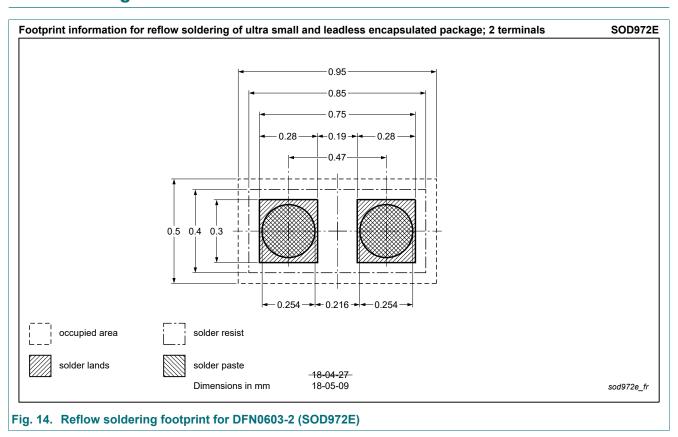

# 14. Revision history

#### **Table 8. Revision history**

rabic of revision matery				
Data sheet ID	Release date	Data sheet status	Change notice	Supersedes
PMEG3001EEF v.5	20190917	Product data sheet	-	PMEG3001EEF v.4
Modifications:	Quick reference	e data and Characteristics	s: I <sub>R</sub> : values revis	ed
PMEG3001EEF v.4	20181114	Product data sheet	-	PMEG3001EEF v.3
PMEG3001EEF v.3	20181012	Product data sheet	-	PMEG3001EEF v.2
PMEG3001EEF v.2	20181002	Product data sheet	-	PMEG3001EEF v.1
PMEG3001EEF v.1	20180716	Objective data sheet	-	-

## 15. Legal information

#### **Data sheet status**

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

#### 30 V, 0.1 A low VF MEGA Schottky barrier rectifier

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by sustained.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

# **Contents**

1.	General description	1
2.	Features and benefits	1
3.	Applications	1
4.	Quick reference data	1
5.	Pinning information	2
6.	Ordering information	2
7.	Marking	2
8.	Limiting values	3
9.	Thermal characteristics	3
10.	. Characteristics	5
11.	Test information	7
12.	Package outline	8
13.	Soldering	9
	Revision history	
	Legal information	

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 17 September 2019

<sup>©</sup> Nexperia B.V. 2019. All rights reserved

## **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

#### http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

#### Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru\_4 moschip.ru\_9