

# PXI/DAQ/DAQe-2500 Series

## 4/8-CH 12-Bit 1 MS/s Analog Output Multi-Function DAQ Cards



### Introduction

ADLINK's PXI/DAQ/DAQe-2500 series are high-speed and high-performance analog output multi-function DAQ cards able to update up to 8-CH, 12-bit analog outputs simultaneously while sustaining a 1 MS/s rate. The reference sources and the output polarities are programmable on a per channel basis. Combined with a multiplying DAC architecture, the ADLINK PXI/DAQ/DAQe-2500 series of DAQ cards can generate complex modulated analog signals.

The hardware-based arbitrary waveform generation reduces CPU loading even when all analog outputs are updating at full speed, and the lengths of waveforms are only limited by the system memory.

The PXI/DAQ/DAQe-2500 series integrates up to 8-CH, 400 kS/s, 14-bit single-ended analog inputs with programmable polarity, 24-CH programmable digital I/O lines, and a 2-CH 16-bit general-purpose timer/counter.

The PXI/DAQ/DAQe-2500 series is able to perform analog input and output functions at full speed simultaneously and multiple cards can be synchronized through the SSI (System Synchronization Interface) bus or PXI trigger bus. The auto-calibration functions adjust the gain and offset to within specified accuracies such that you do not have to adjust trimpots to calibrate the boards.

### Features

- Supports a 32-bit 3.3 V or 5 V PCI bus (DAQ-2500 series)
- PXI specification Rev 2.2 compliant (PXI-2500 series)
- x1 lane PCI Express® Interface (DAQe-2500 series)
- Hardware-based arbitrary waveform generation
- Onboard 8 k-sample D/A FIFO (PXI/DAQ/DAQe-2501)
- Onboard 16 k-sample D/A FIFO (PXI/DAQ/DAQe-2502)
- Programmable bipolar or unipolar analog output ranges on per channel basis
- Programmable internal or external reference sources on per channel basis
- 8-CH 400 kS/s 14-bit single-ended analog inputs (PXI/DAQ/DAQe-2501)
- 4-CH 400 kS/s 14-bit single-ended analog inputs (PXI/DAQ/DAQe-2502)
- Onboard 2 k-sample A/D FIFO
- Bipolar or unipolar analog input ranges
- Scatter-gather DMA for both analog inputs and outputs
- 24-CH TTL digital input/output
- 2-CH 16-bit general-purpose timer/counter
- Analog & digital triggering
- Fully auto-calibration
- Multiple cards synchronization through SSI (System Synchronization Interface) bus or PXI trigger bus

#### Operating Systems


- Windows 7/Vista/XP/2000/2003 Server
- Linux

#### Recommended Software

- AD-Logger
- VB.NET/VC.NET/VB/VC+++/BCB/Delphi
- DAQBench

#### Driver Support

- DAQPilot for LabVIEW™
- DAQ-MTLB for MATLAB®
- D2K-DASK for Windows
- D2K-DASK/X for Linux

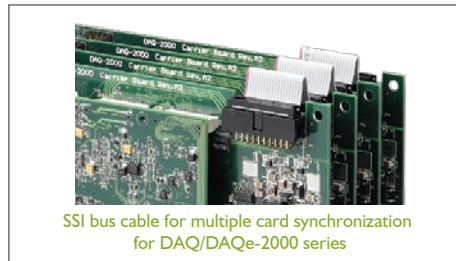

SSi bus cable for multiple card synchronization for DAQ/DAQe-2000 series



Terminal board DIN-685-01 & 68-Pin SCSI-VHDCI cable ACL-10568-1

### Terminal Boards & Cables

#### DIN-685-01

Terminal Board with One 68-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included.)

#### ACL-10568-1

68-pin SCSI-VHDCI cable (mating with AMP-787082-7), 1 M

\* For more information on mating cables, please refer to P2-61/62.

### SSi Bus Cables (for multiple cards synchronization)

#### ACL-SSi-2/3/4

SSi Bus cable for two, three, and four devices

### Pin Assignment

#### Connector CNI Pin Assignment

AO_0	1	35	AGND
AO_1	2	36	AGND
AO_2	3	37	AGND
AO_3	4	38	AGND
AOEXTREF_A/AI_0	5	39	AGND
AI_1	6	40	AGND
EXTTRIG/AI_2	7	41	AGND
AOEXTREF_B/AI_3	8	42	AGND
AO_4/AI_4	9	43	AGND
AO_5/AI_5	10	44	AGND
AO_6/AI_6	11	45	AGND
AO_7/AI_7	12	46	AGND
AO_TRIG_OUT_A	13	47	EXTWFTRG_A
AO_TRIG_OUT_B	14	48	EXTWFTRG_B
GPTC1_SRC	15	49	VCC
GPTC0_SRC	16	50	DGND
GPTC0_GATE	17	51	GPTC1_GATE
GPTC0_OUT	18	52	GPTC1_OUT
GPTC0_UPDOWN	19	53	GPTC1_UPDOWN
RESERVED	20	54	DGND
AF11	21	55	AF10
PB7	22	56	PB6
PB5	23	57	PB4
PB3	24	58	PB2
PB1	25	59	PB0
PC7	26	60	PC6
PC5	27	61	PC4
DNGD	28	62	DGND
PC3	29	63	PC2
PC1	30	64	PC0
PA7	31	65	PA6
PA5	32	66	PA4
PA3	33	67	PA2
PA1	34	68	PA0

\* Pin 9-12 are AI<4..7> for 2501; AO<4..7> for 2502

\* The external references inputs and the external analog trigger share the analog input pins 5, 7, and 8

## Ordering Information / Quick Selection Guide

Model Name	Analog Output				Analog Input				DIO	Timer/Counter
	No. of channels	Resolution	Update rate	Output range	No. of channels	Resolution	Sampling rate	Input range	No. of channels	No. of channels
PXI/DAQ/DAQe-2501	4	12 bits	1 MS/s	±10 V, 0 to 10 V	8	14 bits	400 kS/s	±10 V or 0 to 10 V	24-CH 8255 PIO	2-CH, 16-bit
PXI/DAQ/DAQe-2502	8	12 bits	1 MS/s	±10 V, 0 to 10 V	4	14 bits	400 kS/s	±10 V or 0 to 10 V	24-CH 8255 PIO	2-CH, 16-bit

## Specifications

Model Name	PXI/DAQ/DAQe-2501	PXI/DAQ/DAQe-2502
<b>Analog Output</b>		
Number of channels	4 voltage outputs	8 voltage outputs
Resolution	12 bits	
Output ranges	0-10 V, ±10 V, 0-AOEXTREF, ±AOEXTREF	
Maximum update rate	1 MS/s	
Slew rate	20 V/μs	
Settling time	3 μs to ±0.5 LSB accuracy	
Offset error	±8 mV	
Gain error	±0.04% of max. output	
Driving capacity	±5 mA	
Stability	Any passive load, up to 1500 pF	
Trigger sources	Software, external digital/analog trigger, SSI bus	
Trigger modes	Post-trigger, delay-trigger, and repeated trigger	
FIFO buffer size	8 k samples	16 k samples
Data transfers	Programmed I/O, scatter-gather DMA	
<b>Analog Input</b>		
Resolution	14 bits, no missing codes	
Number of channels	8 single-ended	4 single-ended
Maximum sampling rate	400 kS/s	
Gain	1	
Bipolar input ranges	±10 V	
Unipolar input ranges	0-10 V	
Offset error	±4 mV	
Gain error	±0.1% of FSR	
Input coupling	DC	
3dB Bandwidth (@ Bipolar ±10V)	600kHz	
Overvoltage protection	Power on: Continuous ±30 V, Power off: Continuous ±15 V	
Input impedance	1 GΩ/6 pF	
Trigger sources	Software, external digital/analog trigger, SSI bus	
Trigger modes	Post-trigger, delay-trigger, and repeated trigger	
FIFO buffer size	2 k samples	
Data transfers	Polling, scatter-gather DMA	
<b>Digital I/O</b>		
Number of channels	24-CH 8255 programmable input/output	
Compatibility	5 V/TTL	
Data transfers	Programmed I/O	
<b>Timer/Counter</b>		
Number of channels	2	
Resolution	16 bits	
Compatibility	5 V/TTL	
Base clock available	40 MHz, external clock up to 10 MHz	
<b>Auto Calibration</b>		
Onboard reference	+5 V	
Temperature drift	±2 ppm/°C	
Stability	±6 ppm/1000 Hrs	
<b>General Specifications</b>		
Dimensions	160 mm x 100 mm (not including connectors) (PXI-2500 series) 175 mm x 107 mm (not including connectors) (DAQ-2500 series) 168 mm x 107 mm (not including connectors) (DAQe-2500 series)	
Connector	68-pin VHDCI female	
Operating temperature	0 to 55°C	
Storage temperature	-20 to 70°C	
Humidity	5 to 95%, non-condensing	
Power requirements	+5 V 1.6 A typical (PXI/DAQ-2501) +3.3 V 0.78 A, +12 V 0.66 A typical (DAQe-2501)	+5 V 2.12 A typical (PXI/DAQ-2502) +3.3 V 0.89 A, +12 V 0.76 A typical (DAQe-2502)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9