




## NPN silicon Digital Transistor

- Switching circuit, inverter, interface circuit, driver circuit
- Built in resistor ( $R_1=4.7\text{ k}\Omega$ )
- BCR119S: Two internally isolated transistors with good matching in one multichip package
- BCR119S: For orientation in reel see package information below
- Pb-free (RoHS compliant) package <sup>1)</sup>
- Qualified according AEC Q101

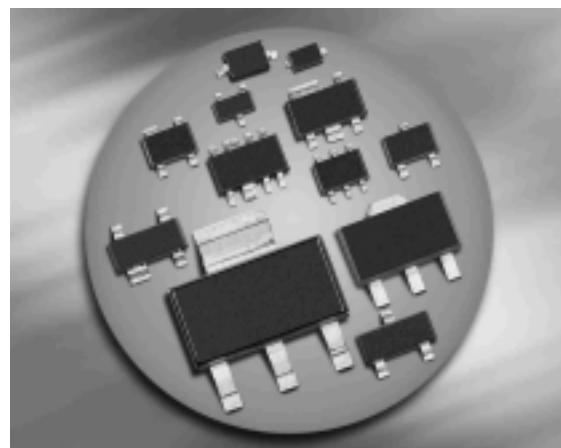

### BCR119/F/W

### BCR119S



| Type    | Marking | Pin Configuration |      |      |      |      |      | Package |
|---------|---------|-------------------|------|------|------|------|------|---------|
| BCR119  | WKs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT23   |
| BCR119F | WKs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | TSFP-3  |
| BCR119S | WKs     | 1=E1              | 2=B1 | 3=C2 | 4=E2 | 5=B2 | 6=C1 | SOT363  |
| BCR119W | WKs     | 1=B               | 2=E  | 3=C  | -    | -    | -    | SOT323  |

<sup>1)</sup>Pb-containing package may be available upon special request

**Maximum Ratings**

| Parameter                                                                                                                                                                                   | Symbol       | Value                    | Unit |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------------|------|
| Collector-emitter voltage                                                                                                                                                                   | $V_{CEO}$    | 50                       | V    |
| Collector-base voltage                                                                                                                                                                      | $V_{CBO}$    | 50                       |      |
| Input forward voltage                                                                                                                                                                       | $V_{i(fwd)}$ | 30                       |      |
| Input reverse voltage                                                                                                                                                                       | $V_{i(rev)}$ | 5                        |      |
| DC collector current                                                                                                                                                                        | $I_E$        | 100                      | mA   |
| Total power dissipation-<br>BCR119, $T_S \leq 102^\circ\text{C}$<br>BCR119F, $T_S \leq 128^\circ\text{C}$<br>BCR119S, $T_S \leq 115^\circ\text{C}$<br>BCR119W, $T_S \leq 124^\circ\text{C}$ | $P_{tot}$    | 200<br>250<br>250<br>250 | mW   |
| Junction temperature                                                                                                                                                                        | $T_j$        | 150                      |      |
| Storage temperature                                                                                                                                                                         | $T_{stg}$    | -65 ... 150              |      |

**Thermal Resistance**

| Parameter                                                                           | Symbol     | Value                                               | Unit |
|-------------------------------------------------------------------------------------|------------|-----------------------------------------------------|------|
| Junction - soldering point <sup>1)</sup><br>BCR119<br>BCR119F<br>BCR119S<br>BCR119W | $R_{thJS}$ | $\leq 240$<br>$\leq 90$<br>$\leq 140$<br>$\leq 105$ | K/W  |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance


**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                                             | Symbol                      | Values |      |      | Unit |
|-------------------------------------------------------------------------------------------------------|-----------------------------|--------|------|------|------|
|                                                                                                       |                             | min.   | typ. | max. |      |
| DC Characteristics                                                                                    |                             |        |      |      |      |
| Collector-emitter breakdown voltage<br>$I_C = 100\ \mu\text{A}$ , $I_B = 0$                           | $V_{(\text{BR})\text{CEO}}$ | 50     | -    | -    | V    |
| Collector-base breakdown voltage<br>$I_C = 10\ \mu\text{A}$ , $I_E = 0$                               | $V_{(\text{BR})\text{CBO}}$ | 50     | -    | -    |      |
| Collector-base cutoff current<br>$V_{\text{CB}} = 40\ \text{V}$ , $I_E = 0$                           | $I_{\text{CBO}}$            | -      | -    | 100  | nA   |
| Emitter-base cutoff current<br>$V_{\text{EB}} = 5\ \text{V}$ , $I_C = 0$                              | $I_{\text{EBO}}$            | -      | -    | 100  | nA   |
| DC current gain <sup>1)</sup><br>$I_C = 5\ \text{mA}$ , $V_{\text{CE}} = 5\ \text{V}$                 | $h_{\text{FE}}$             | 120    | -    | 630  | -    |
| Collector-emitter saturation voltage <sup>1)</sup><br>$I_C = 10\ \text{mA}$ , $I_B = 0.5\ \text{mA}$  | $V_{\text{CEsat}}$          | -      | -    | 0.3  | V    |
| Input off voltage<br>$I_C = 100\ \mu\text{A}$ , $V_{\text{CE}} = 5\ \text{V}$                         | $V_{\text{i(off)}}$         | 0.4    | -    | 0.8  |      |
| Input on voltage<br>$I_C = 2\ \text{mA}$ , $V_{\text{CE}} = 0.3\ \text{V}$                            | $V_{\text{i(on)}}$          | 0.5    | -    | 1.1  |      |
| Input resistor                                                                                        | $R_1$                       | 3.2    | 4.7  | 6.2  | kΩ   |
| AC Characteristics                                                                                    |                             |        |      |      |      |
| Transition frequency<br>$I_C = 10\ \text{mA}$ , $V_{\text{CE}} = 5\ \text{V}$ , $f = 100\ \text{MHz}$ | $f_{\text{T}}$              | -      | 150  | -    | MHz  |
| Collector-base capacitance<br>$V_{\text{CB}} = 10\ \text{V}$ , $f = 1\ \text{MHz}$                    | $C_{\text{cb}}$             | -      | 3    | -    | pF   |

<sup>1)</sup>Pulse test:  $t < 300\ \mu\text{s}$ ;  $D < 2\%$


### DC current gain $h_{FE} = f(I_C)$

$V_{CE} = 5V$  (common emitter configuration)

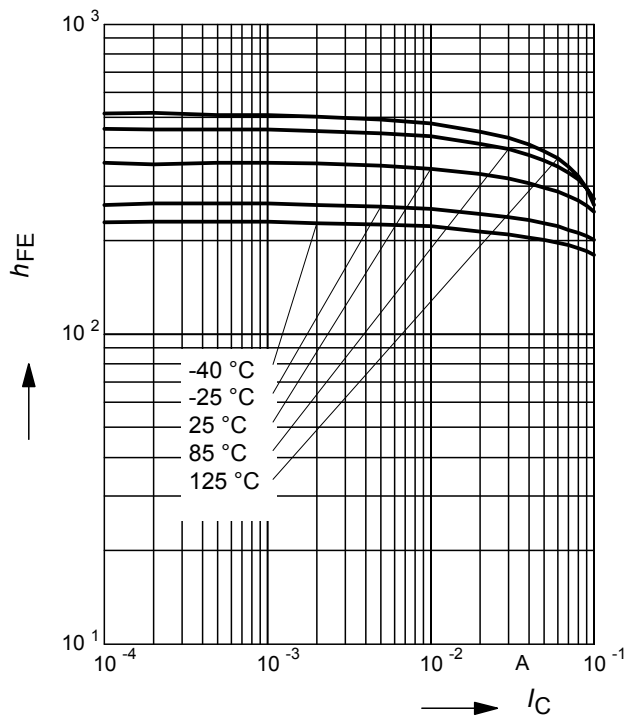


### Collector-emitter saturation voltage

$V_{CEsat} = f(I_C)$ ,  $I_C/I_B = 20$

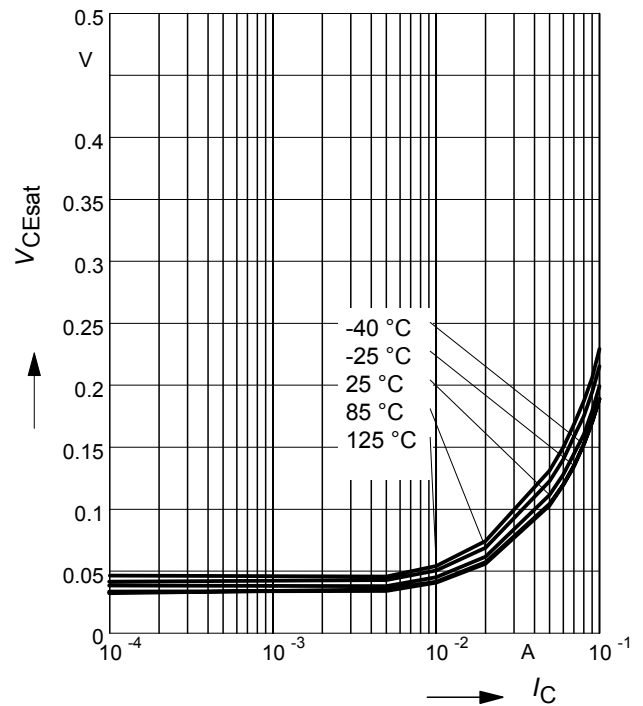


### Input on Voltage $V_{i(on)} = f(I_C)$

$V_{CE} = 0.3V$  (common emitter configuration)

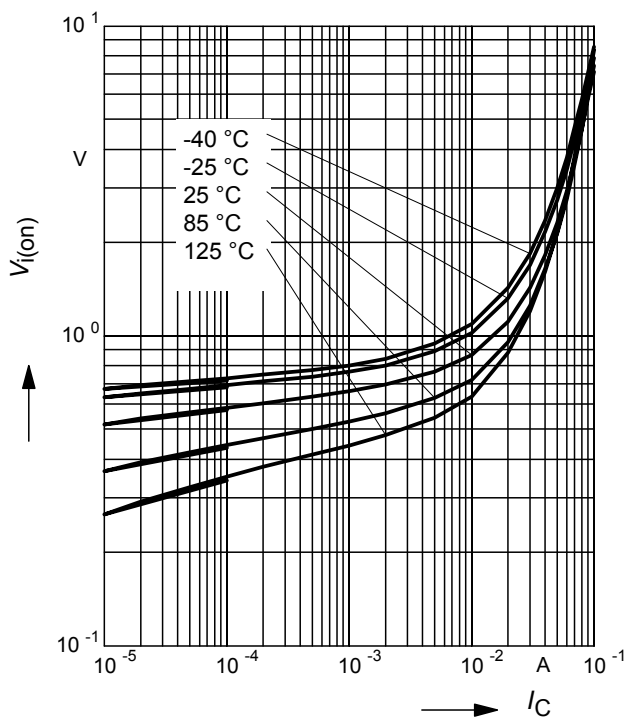

### Input off voltage $V_{i(off)} = f(I_C)$

$V_{CE} = 5V$  (common emitter configuration)

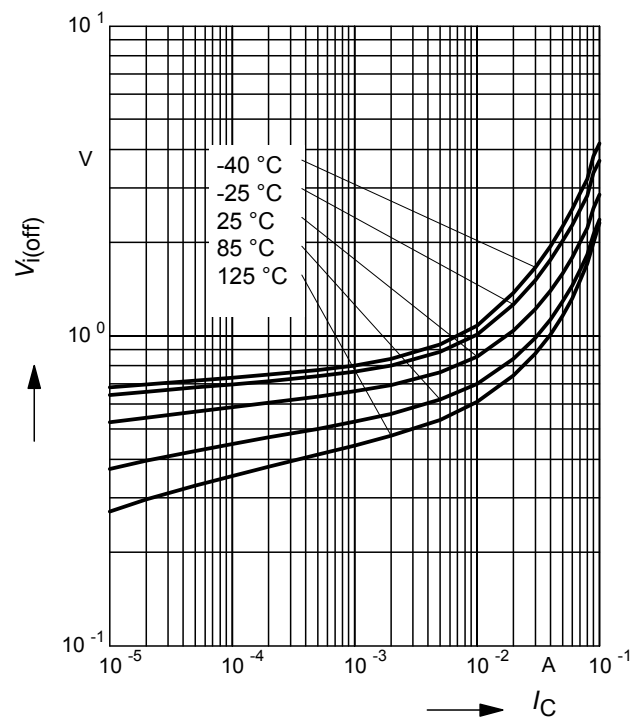

**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR119



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR119F



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR119S



**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR119W



### Permissible Pulse Load $R_{thJS} = f(t_p)$

BCR119



### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119



### Permissible Puls Load $R_{thJS} = f(t_p)$

BCR119F



### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119F



### Permissible Puls Load $R_{thJS} = f(t_p)$

BCR119S



### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119S



### Permissible Puls Load $R_{thJS} = f(t_p)$

BCR119W




### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR119W



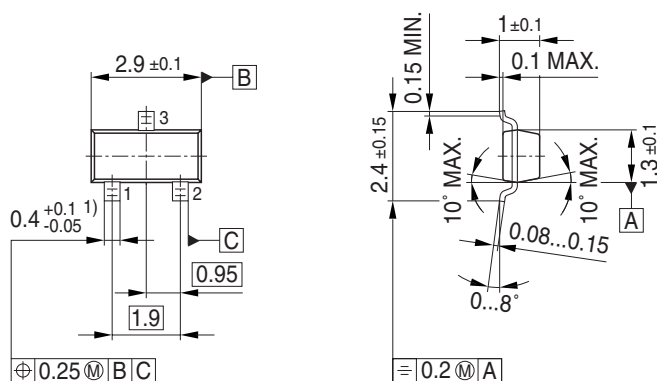

## Foot Print





Diagram illustrating the marking on the BCW66 component:

- Manufacturer:** Infineon
- Date code (YM):** 2005, June (represented by '65')
- Pin 1:** Indicated by a line pointing to the bottom-left pin.
- Type code:** BCW66


Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

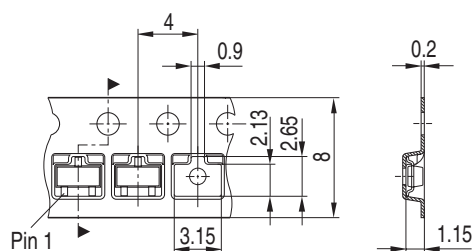


## Package Outline



## Foot Print




## Marking Layout (Example)

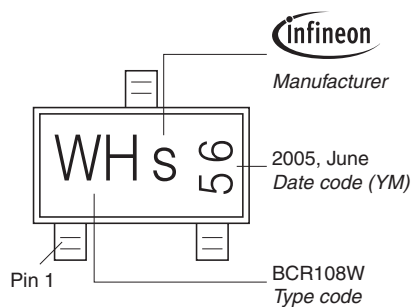


## Standard Packing


Reel  $\varnothing 180$  mm = 3.000 Pieces/Reel  
 Reel  $\varnothing 330$  mm = 10.000 Pieces/Reel

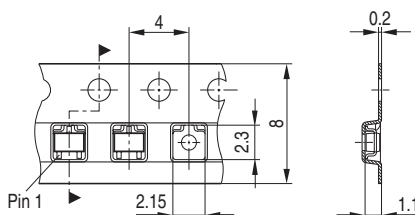

## Package Outline

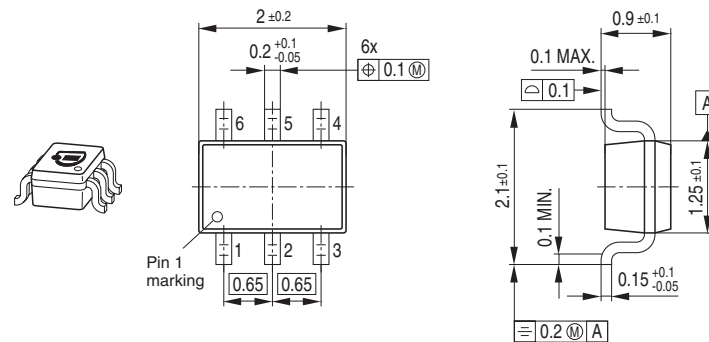


## Foot Print



## Marking Layout (Example)


Small variations in positioning of  
Date code, Type code and Manufacture are possible.

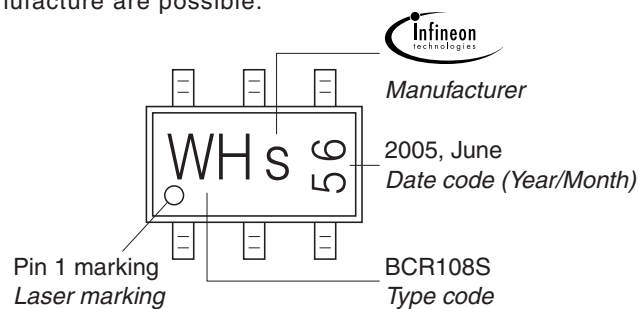

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

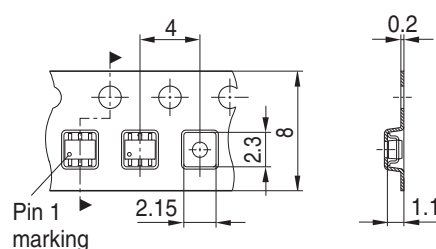

The technical drawing shows two views of the M8x10mm connector:

- Front View (Left):** Shows the overall width of 1.2 ± 0.05 mm and the distance between the mounting holes as 0.2 ± 0.05 mm. The central pin is labeled '3'. The mounting holes are labeled '1' and '2'. Dimensions from the centerline to the hole centers are 0.2 ± 0.05 mm and 0.4 ± 0.05 mm.
- Side View (Right):** Shows the profile of the connector. Key dimensions include a total height of 1.2 ± 0.05 mm, a base thickness of 0.2 ± 0.05 mm, a top flange width of 0.55 ± 0.04 mm, a bottom flange width of 0.15 ± 0.05 mm, and a maximum taper angle of 10° MAX. A dimension of 0.8 ± 0.05 mm indicates the distance from the top surface to the start of the taper.

Technical drawing of a mechanical part. The drawing shows a top view and a side view. The top view is a rectangle with a width of 0.4 and a height of 0.45. The side view is a rectangle with a width of 0.4 and a height of 1.05. The drawing is labeled with dimensions: 0.4, 0.45, 1.05, and 0.4.

Infineon  
Manufacturer

1F S

Pin 1

BCR847BF  
Type code

The technical drawing shows a mechanical component with two views:

- Top View:** A rectangular plate with a total width of 8 mm and a total length of 1.35 mm. It features three circular holes spaced 0.3 mm apart. The distance from the left edge to the first hole is 4 mm. The distance between the first and second holes is 1.2 mm, and between the second and third holes is 1.5 mm.
- Side View:** Shows the profile of the component with a thickness of 0.7 mm and a small feature at the right end with a width of 0.2 mm.

Edition 2006-02-01

Published by

Infineon Technologies AG

81726 München, Germany

© Infineon Technologies AG 2007.

All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9