

**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES**

Issue : 09-March-2010

DP3T - SPDT Coaxial Switches DC to 6 GHz, DC to 20 GHz, DC to 26.5 GHz

Radiall's PLATINUM SERIES switches are optimised to perform at a high level over an extended life span. With outstanding RF performances, and a guaranteed Insertion Loss repeatability of 0.03 dB over a life span of 10 million switching cycles. PLATINUM SERIES switches are perfect for automated test and measurement equipment, as well as signal monitoring devices.

PART NUMBER SELECTION**R 595**

RF Connectors :
 3 : SMA up to 6 GHz
 4 : SMA up to 20 GHz
 F : SMA up to 26.5 GHz

Type :
 3 : Latching
 4 : Latching + Indicators
 5 : Latching + Self Cut-Off
 6 : Latching + Self Cut-Off + Indicators

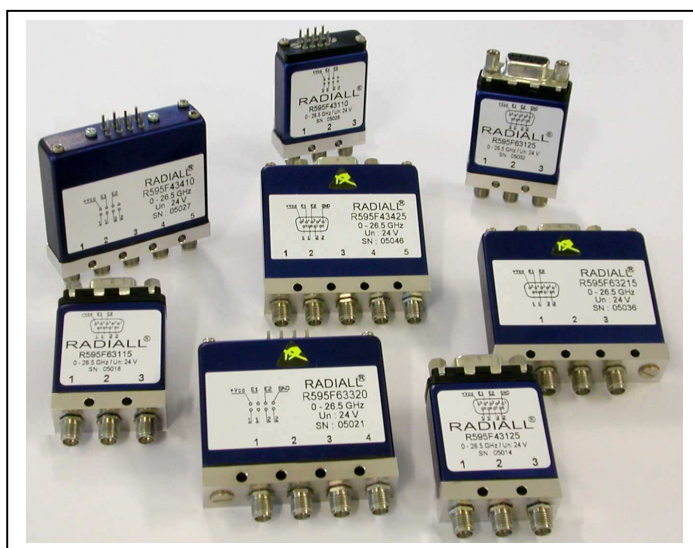
Actuator Voltage :
 3 : 24 Vdc
 7 : 15 Vdc

Documentation :
 - : Certificate Of Conformity
 C : Calibration certificate
 R : Calibration certificate + RF curves

Actuator Terminal :
 0 : Solder pins
 5 : D-Sub connector

Options :
 1 : Without option (Positive common)
 2 : Compatible TTL driver (high level)

Switch model :
 1 : Non terminated SPDT switch
 2 : Terminated SPDT switch
 3 : Terminated 4 port bypass switch
 4 : Non terminated 5 port DP3T switch

PICTURE

ISO 9001 certified

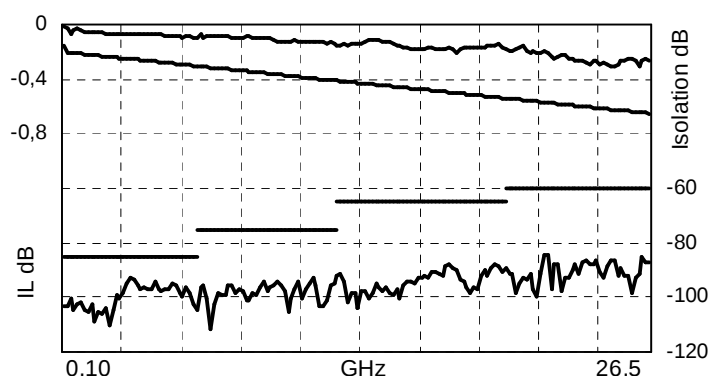
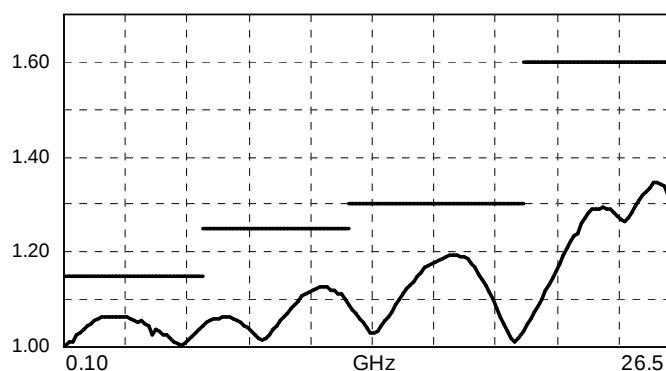
www.radiall.com

Page 1

E-Mail : switchingproducts@radiall.com

**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES***Issue : 09-March-2010***RF PERFORMANCES**

PART NUMBER	R5953-----	R5954-----	R595F-----
Frequency Range GHz	DC to 6	DC to 20	DC to 26.5
Impedance Ohms	50		
Insertion Loss dB (Maximum)	$0.20 + (0.45 / 26.5) \times \text{frequency (GHz)}$		
Isolation dB (Minimum)	85	DC to 6 GHz : 85 6 to 12.4 GHz : 75 12.4 to 20 GHz : 65	DC to 6 GHz : 85 6 to 12.4 GHz : 75 12.4 to 20 GHz : 65 20 to 26.5 GHz : 60
V.S.W.R. (Maximum)	1.15	DC to 6 GHz : 1.15 6 to 12.4 GHz : 1.25 12.4 to 18 GHz : 1.30 18 to 20 GHz : 1.60	DC to 6 GHz : 1.15 6 to 12.4 GHz : 1.25 12.4 to 18 GHz : 1.30 18 to 26.5 GHz : 1.60
Repeatability (Up to 10 million cycles measured at 25°C)	0.03 dB maximum	0.03 dB maximum	0.03 dB maximum

TYPICAL RF PERFORMANCES**Insertion Loss and Isolation****V.S.W.R.****RADIALL®**

ISO 9001 certified

www.radiall.com

Page 2

E-Mail : switchingproducts@radiall.com

**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES***Issue : 09-March-2010***ADDITIONAL SPECIFICATIONS**

Operating mode		Latching		
Nominal operating voltage (across operating temperature) Vdc			24 (20 / 32)	15 (12 / 20)
Coil resistance (+/-10%) Ohms		SPDT	350	120
		Terminated SPDT, DP3T, Bypass	175	60
Nominal operating current at 23°C mA		SPDT	68	125
		Terminated SPDT, DP3T, Bypass	140	250
Average power		RF path Cold switching : see Power Rating Chart on page 12 Hot switching : 1 Watt CW		
		Internal terminations 1 Watt average into 50 Ω		
TTL input	High Level	3 to 7 V	800 μA max at 7 V	
	Low Level	0 to 0.8 V	20 μA max at 0.8V	
Switching time (max) ms		15		
Life (min)		10 million cycles		
Connectors		SMA		
Actuator terminals		D-Sub 9 pin female Solder pins		
Weight (max) g		SPDT	< 60	
		Terminated SPDT, DP3T, Bypass	< 100	

ENVIRONMENTAL SPECIFICATIONS

Operating temperature range	°C	-25 to +75
Storage temperature range	°C	-55 to +85
Temperature cycling (MIL-STD-202F , Method 107D , Cond.A)	°C	-55 to +85 (10 cycles)
Sine vibration operating (MIL STD 202 , Method 204D , Cond.D)		10-2000 Hz, 20g
Random vibration operating		16.91g (rms) 50-2000 Hz 3min/axis
Shock operating (MIL STD 202 , Method 213B , Cond.G)		50g / 11 ms, sawtooth
Humidity operating		15 to 95% relative humidity
Humidity storage (MIL STD 202 , Method 106E , Cond.E)		65°C, 95% RH, 10 days
Altitude operating		15,000 feet (4,600 meters)
Altitude storage (MIL STD 202 , Method 105C , Cond.B)		50,000 feet (15,240 meters)

**RADIALL®**





ISO 9001 certified

www.radiall.com

 Page 3
 E-Mail : switchingproducts@radiall.com

**SWITCH MODEL 1 : NON TERMINATED SPDT SWITCH**





The non terminated SPDT switch is a single pole double throw switch. This switch is "break before make".

RF SCHEMATIC DIAGRAM**POSITION E1****POSITION E2****POSITION INDICATORS****STATE "11"****STATE "22"****Standard drive option "1" (Positive common):**

- Connect pin +Vcc to supply.
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open).
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3).

TTL drive option "2"

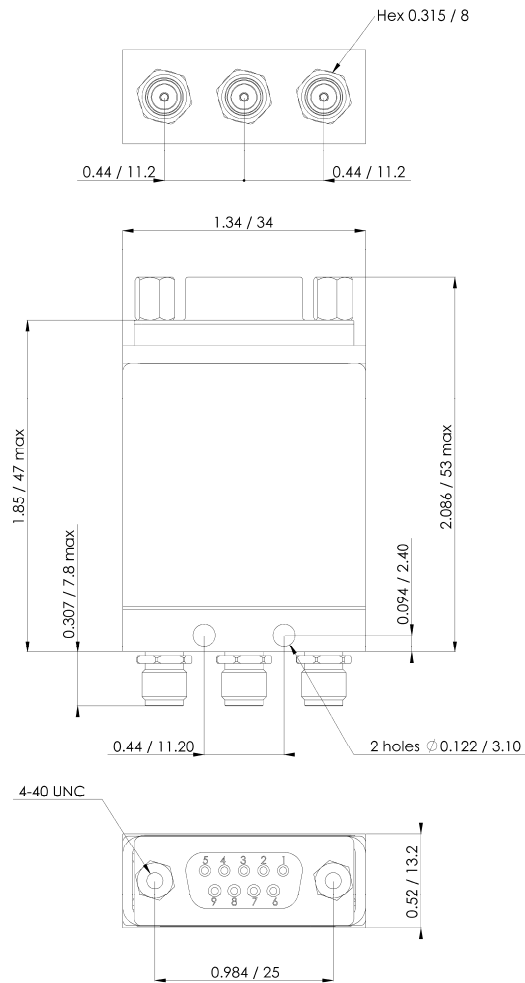
- Connect pin GND to ground.
- Connect pin +Vcc to supply
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open).
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path.
(Ex: apply TTL "High" to pin E2 to open RF path 1-2 and close RF path 2-3).

**D-Sub connector****Solder pins****D-Sub connector****Solder pins**

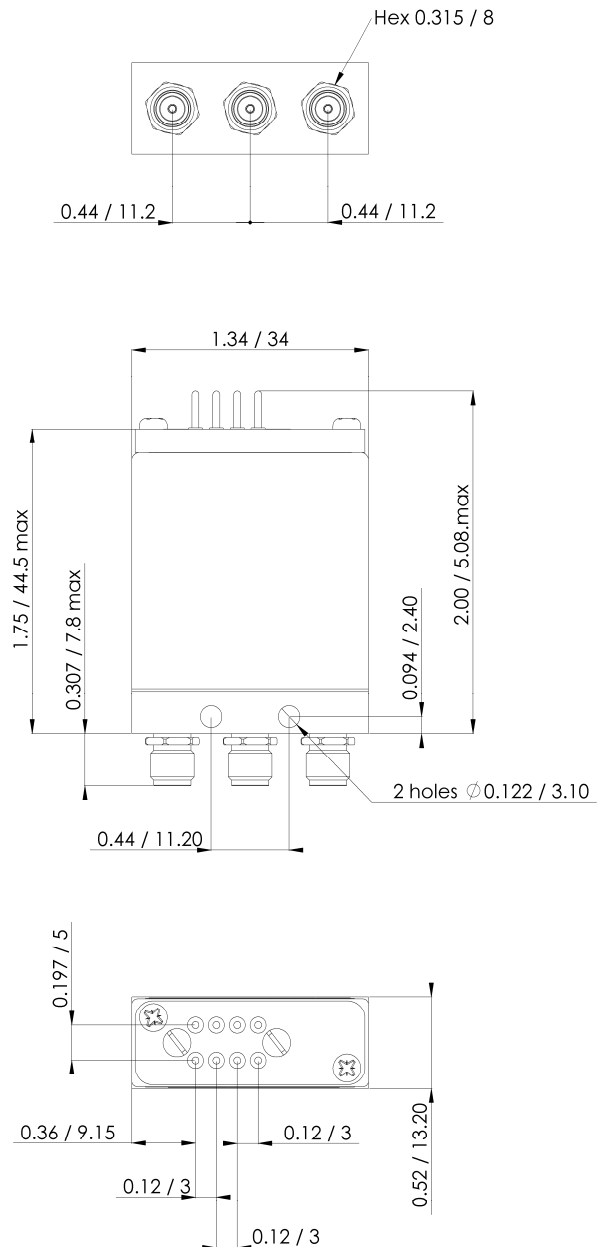
**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES****Issue : 09-March-2010**

All dimensions are in inches/millimetres.

With D-Sub connector



With solder pins





www.radiall.com

ISO 9001 certified



Page 5
E-Mail : switchingproducts@radiall.com

**SWITCH MODEL 2 : TERMINATED SPDT SWITCH**



The terminated SPDT switch is a single pole double throw switch. The unused ports are terminated into 50 ohms. This switch is "break before make".

RF SCHEMATIC DIAGRAM**POSITION E1****POSITION E2****POSITION INDICATORS****STATE "11"****STATE "22"****Standard drive option "1" (Positive common):**

- Connect pin +Vcc to supply.
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open).
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and close RF path 2-3).

**D-Sub connector****Solder pins****TTL drive option "2"**

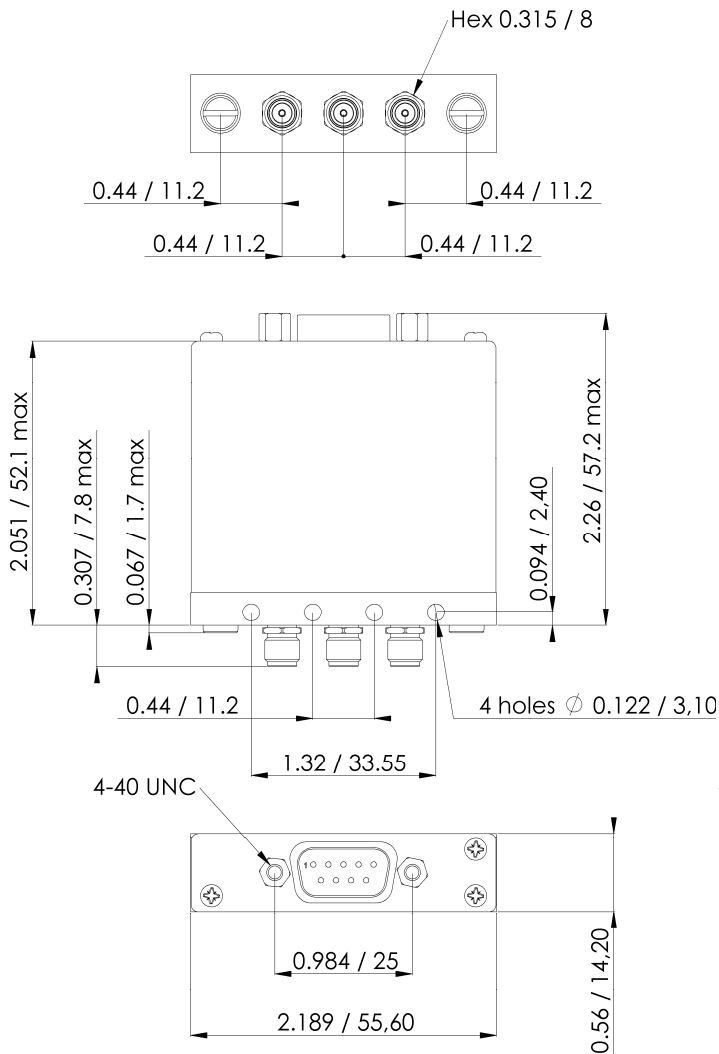
- Connect pin GND to ground.
- Connect pin +Vcc to supply
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 closed and RF path 2-3 open).
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path. (Ex: apply TTL "High" to pin E2 to open RF path 1-2 and close RF path 2-3).

**D-Sub connector****Solder pins**

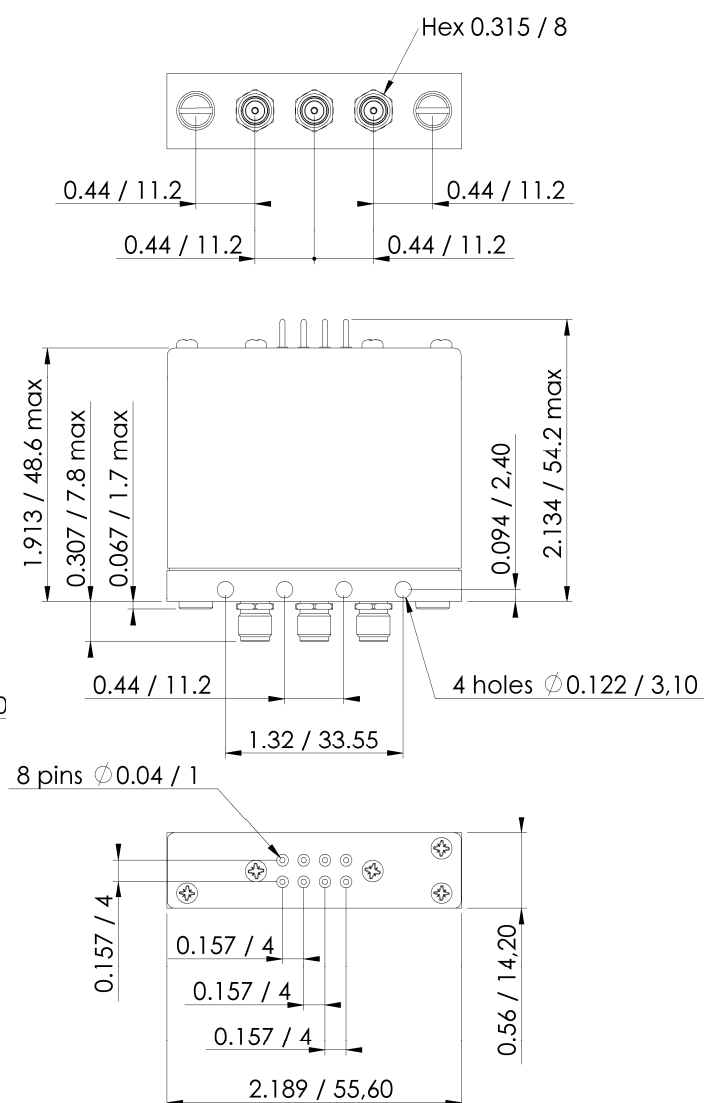
**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES***Issue : 09-March-2010*

All dimensions are in inches/millimetres.

With D-Sub connector



With solder pins





www.radiall.com

ISO 9001 certified



Page 7
E-Mail : switchingproducts@radiall.com

**SWITCH MODEL 3 : TERMINATED 4 PORT BYPASS SWITCH**



The terminated 4 port bypass switch can terminate into 50 ohms the device under test. These switches are "break before make".

RF SCHEMATIC DIAGRAM**POSITION E1****POSITION E2****POSITION INDICATORS****STATE "11"****STATE "22"****Standard drive option "1" (Positive common):**

- Connect pin +Vcc to supply.
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 1-2 and RF path 3-4 closed and RF path 2-3 open).
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 1-2 and 3-4 and close RF path 2-3).

**D-Sub connector****Solder pins****TTL drive option "2"**

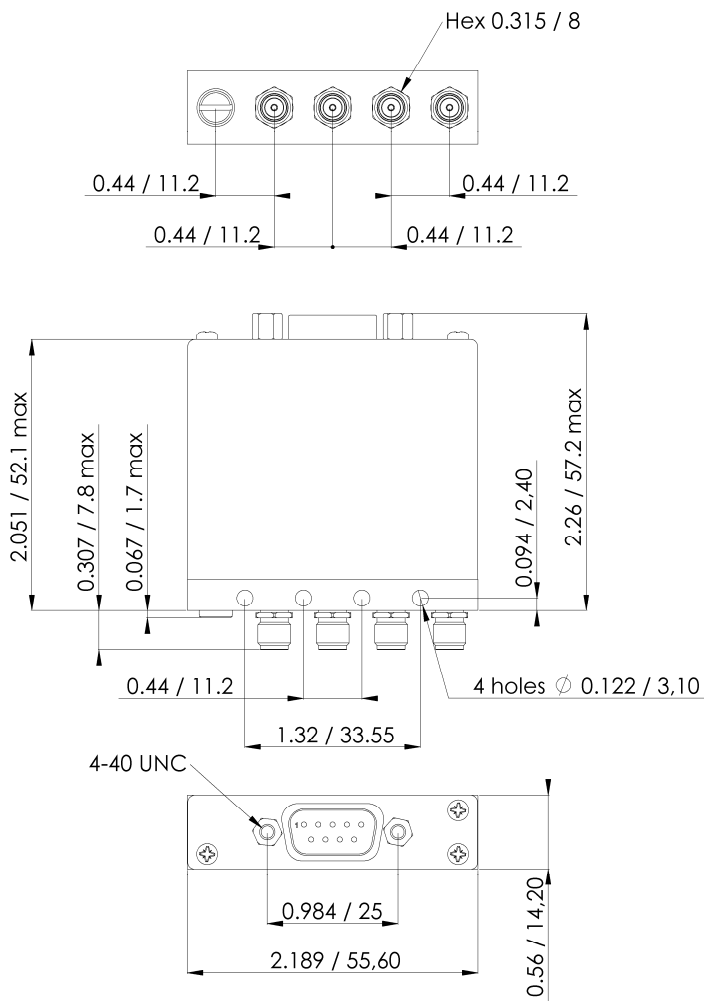
- Connect pin GND to ground.
- Connect pin +Vcc to supply.
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 1-2 and 3-4 closed and RF path 2-3 open).
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path. (Ex: apply TTL "High" to pin E2 to open RF path 1-2 and 3-4 and close RF path 2-3).

**D-Sub connector****Solder pins**

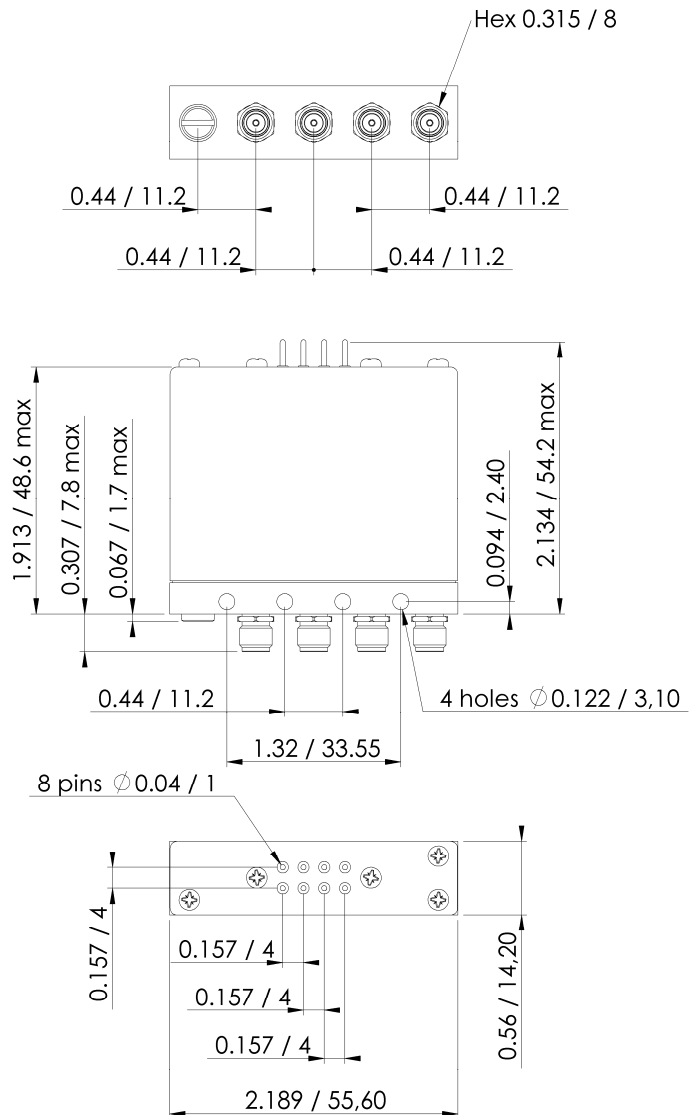
**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES****Issue : 09-March-2010**

All dimensions are in inches/millimetres.

With D-Sub connector



With solder pins





www.radiall.com

ISO 9001 certified

Page 9
E-Mail : switchingproducts@radiall.com

**SWITCH MODEL 4 : NON TERMINATED 5 PORT DP3T SWITCH**





The non terminated 5 port DP3T switch can be used as SPDT with high power terminations, as a bypass switch. In this application, the fifth port can be terminated externally with a high power termination. These switches are "break before make".

RF SCHEMATIC DIAGRAM**POSITION E1****POSITION E2****POSITION INDICATORS****STATE "11"****STATE "22"****Standard drive option "1" (Positive common):**

- Connect pin +Vcc to supply.
- Select desired RF path by applying ground to the corresponding "close" pin (Ex: ground pin E1 to switch to position E1. RF path 2-3 and RF path 4-5 closed and RF path 1-2 and RF path 3-4 open).
- To open desired path and close the new RF path, connect ground to the corresponding "close" pin (Ex: ground pin E2 to open RF path 2-3 and 4-5 and close RF path 1-2 and 3-4).

TTL drive option "2"

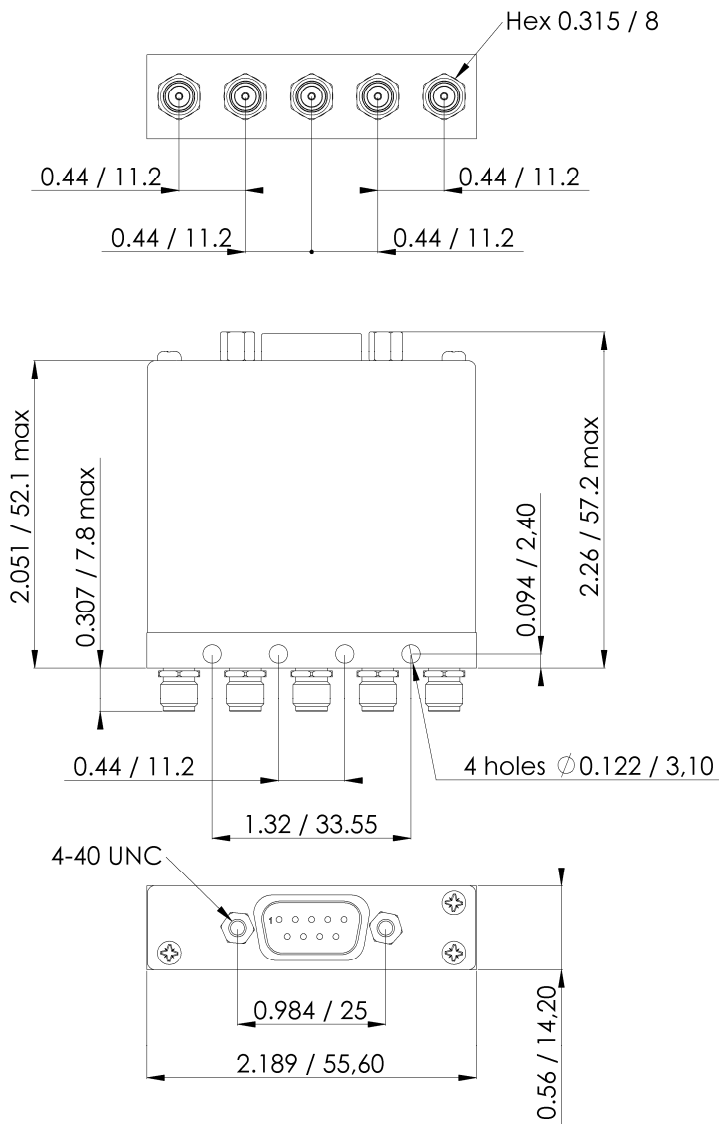
- Connect pin GND to ground.
- Connect pin +Vcc to supply.
- Select (close) desired RF path by applying TTL "High" to the corresponding "drive" pin (Ex: apply TTL "High" to pin E1 to switch to position E1. RF path 2-3 and RF path 4-5 closed and RF path 1-2 and 3-4 open).
- To open desired path and close the new RF path, apply TTL "High" to the "drive" pin which corresponds to the desired RF path.
(Ex: apply TTL "High" to pin E2 to open RF path 2-3 and 4-5 and close RF path 1-2 and 3-4).

**D-Sub connector****Solder pins****D-Sub connector****Solder pins**

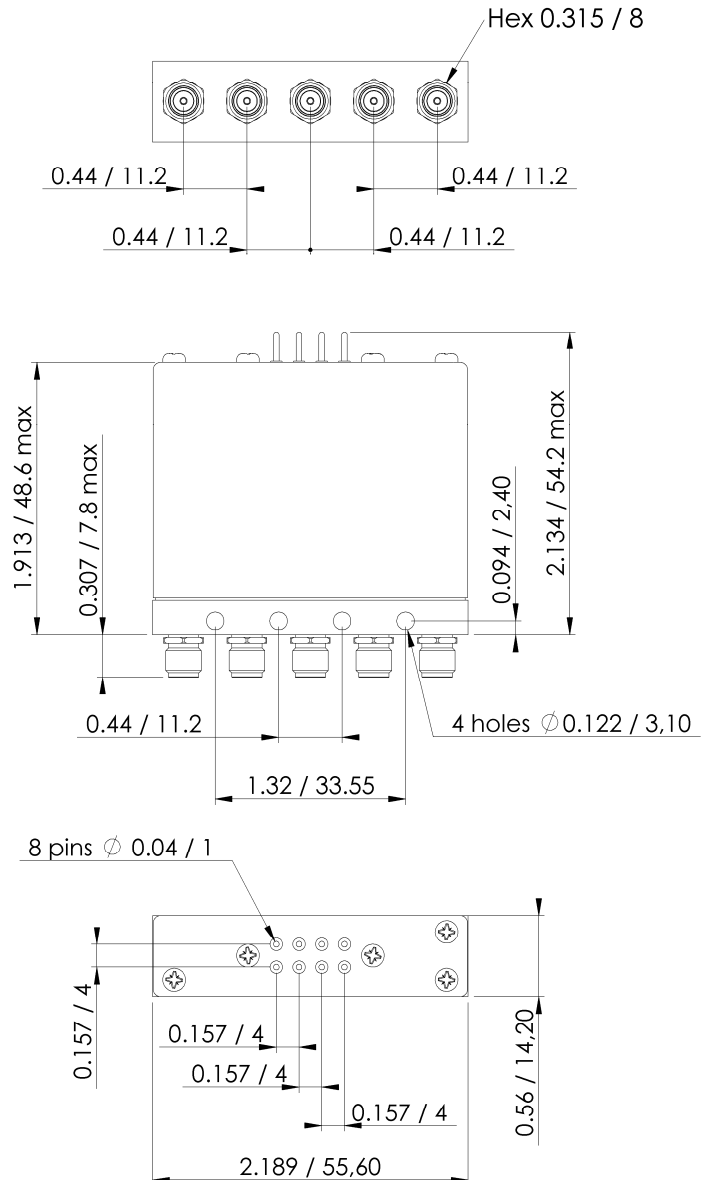
**RADIALL****TECHNICAL DATA SHEET****R 595 - - - - -****HIGH PERFORMANCE DP3T - SPDT SWITCHES***Issue : 09-March-2010*

All dimensions are in inches/millimetres.

With D-Sub connector



With solder pins



www.radiall.com

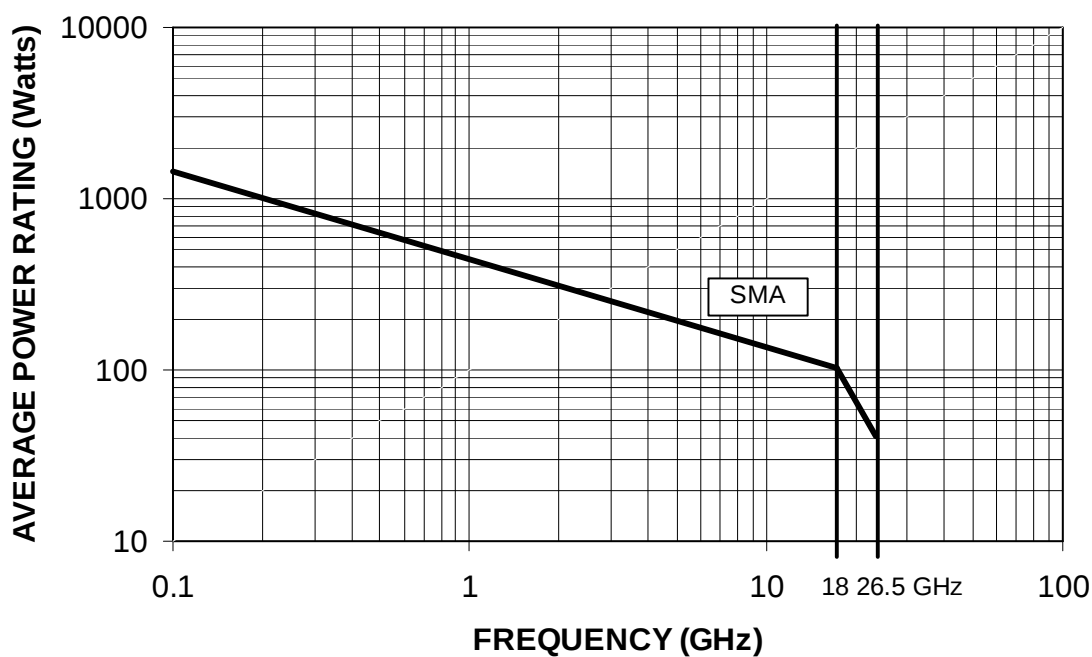
ISO 9001 certified

Page 11
E-Mail : switchingproducts@radiall.com

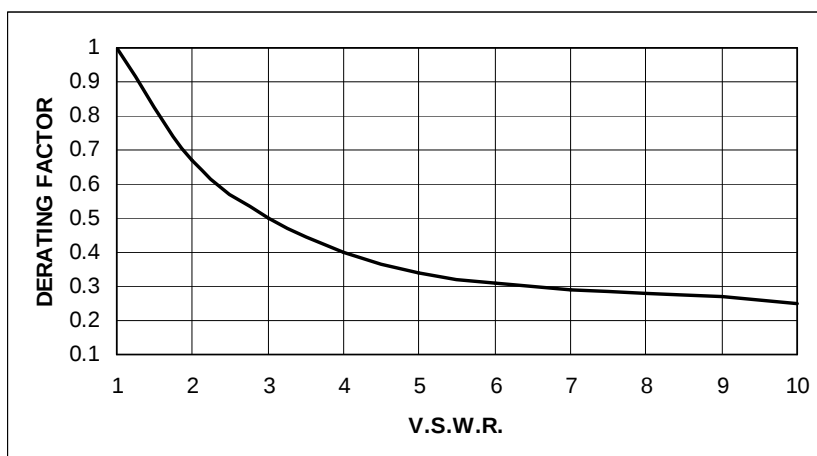
**POWER RATING CHART**

This graph is based on the following conditions :

- Ambient temperature : + 25°C
- Sea level
- V.S.W.R. : 1 and cold switching



The average power input must be reduced for load V.S.W.R. above 1.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9