

B2000RW Series

Compact 1 x 2 Inch 20W Wide Input Range DC/DC Converters



Key Features:

- 20W Output Power
- 2:1 Input Voltage Range
- 1,500 VDC Isolation
- Compact 1 x 2 Inch Case
- Single & Dual Outputs
- Optional Remote ON/OFF
- Industry Standard Pin-Out



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226

F: (781) 344-8481

E: sales@micropowerdirect.com

W: www.micropowerdirect.com



Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Start Voltage	12 VDC Input	8.6	8.8	9.0	VDC
	24 VDC Input	17.0	17.5	18.0	
	48 VDC Input	34.0	35.0	36.0	
Input Filter	π (Pi) Filter (Complies with EN55022 Class “A”)				
Reverse Polarity Input Current				2.0	A
Short Circuit Input Power				3,500	mW

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Accuracy			±0.5	±1.0	%
Output Voltage Balance	Dual Output, Balanced Loads		±0.5	±2.0	%
Line Regulation	Vin = Min to Max		±0.1	±0.3	%
Load Regulation	Iout = 10% to 100%		±0.1	±0.5	%
Ripple & Noise (20 MHz) (Note 1)			55	80	mV P - P
Ripple & Noise (20 MHz)	Over Line, Load & Temp.			100	mV P - P
Ripple & Noise (20 MHz)				10	mV rms
Output Power Protection		110		160	%
Transient Recovery Time (Note 2)	25% Load Step Change		150	300	µSec
Transient Response Deviation			±2.0	±4.0	%
Temperature Coefficient			±0.01	±0.02	%/°C
Output Short Circuit	Continuous (Autorecovery)				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	60 Seconds	1,500			VDC
Isolation Test Voltage	Flash Tested For 1 Sec	1,650			VDC
Isolation Resistance	500 VDC	1,000			MΩ
Isolation Capacitance	100 kHz, 1V		1,200	1,500	pF
Switching Frequency		290	330	360	kHz

Remote On/Off (Note 3)

Parameter	Conditions	Min.	Typ.	Max.	Units
Supply On		2.5		100.0	VDC
Supply Off		0.0		1.0	VDC
Standby Input Current			2	5	mA
Control Common	Referenced to Negative Input (pin 2)				

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	-40	+25	+50	°C
Operating Temperature Range	Case			+105	°C
Storage Temperature Range		-50		+125	°C
Cooling	Free Air Convection				
Humidity	RH, Non-condensing			95	%
RFI	Six-Side Shielded Metal Case				
Conducted EMI	EN55022 Class "A"				

Physical

Case Size	2.0 x 1.0 x 0.40 Inches (50.8 x 25.4 x 10.2 mm)				
Case Material	Metal with Non-Conductive Base				
Weight	1.06 Oz (30g)				

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 25°C, Gnd Benign	800			kHours

Absolute Maximum Ratings

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Surge (1 Sec)	12 VDC Input	-0.7		25.0	VDC
	24 VDC Input	-0.7		50.0	
	48 VDC Input	-0.7		100.0	
Lead Temperature	1.5 mm From Case For 10 Sec			260.0	°C
Internal Power Dissipation	All Models			4,500	mW

Caution: Exceeding Absolute Maximum Ratings may damage the module. These are not continuous operating ratings.

www.micropowerdirect.com

Model Number	Input				Reflected Ripple Current (mA, Typ)	Output			Over Voltage Protection (VDC)	Efficiency (%, Typ)	Capacitive Load (μF Max)	Fuse Rating Slow-Blow (mA)
	Voltage (VDC)		Current (mA)			Voltage (VDC)	Current (mA, Max)	Current (mA, Min)				
	Nominal	Range	Full-Load	No-Load								
B2001RW	12	9.0 - 18.0	1,358	30	50	3.3	4,000.0	240.0	3.9	81	470	4,000
B2002RW	12	9.0 - 18.0	1,984	30	50	5.0	4,000.0	240.0	6.8	84	470	4,000
B2003RW	12	9.0 - 18.0	1,898	30	50	12.0	1,670.0	100.0	15.0	88	470	4,000
B2004RW	12	9.0 - 18.0	1,903	30	50	15.0	1,340.0	80.0	18.0	88	470	4,000
B2005RW	12	9.0 - 18.0	1,898	30	50	±12.0	±835.0	±50.0	±15.0	88	±220	4,000
B2006RW	12	9.0 - 18.0	1,903	30	50	±15.0	±670.0	±40.0	±18.0	88	±220	4,000
B2011RW	24	18.0 - 36.0	671	17	30	3.3	4,000.0	240.0	3.9	82	470	2,000
B2012RW	24	18.0 - 36.0	980	17	30	5.0	4,000.0	240.0	6.8	85	470	2,000
B2013RW	24	18.0 - 36.0	938	17	30	12.0	1,670.0	100.0	15.0	89	470	2,000
B2014RW	24	18.0 - 36.0	941	17	30	15.0	1,340.0	80.0	18.0	89	470	2,000
B2015RW	24	18.0 - 36.0	938	17	30	±12.0	±835.0	±50.0	±15.0	89	±220	2,000
B2016RW	24	18.0 - 36.0	941	17	30	±15.0	±670.0	±40.0	±18.0	89	±220	2,000
B2021RW	48	36.0 - 75.0	335	10	20	3.3	4,000.0	240.0	3.9	82	470	1,000
B2022RW	48	36.0 - 75.0	490	10	20	5.0	4,000.0	240.0	6.8	85	470	1,000
B2023RW	48	36.0 - 75.0	469	10	20	12.0	1,670.0	100.0	15.0	89	470	1,000
B2024RW	48	36.0 - 75.0	471	10	20	15.0	1,340.0	80.0	18.0	89	470	1,000
B2025RW	48	36.0 - 75.0	469	10	20	±12.0	±835.0	±50.0	±15.0	89	±220	1,000
B2026RW	48	36.0 - 75.0	471	10	20	±15.0	±670.0	±40.0	±18.0	89	±220	1,000


For heatsink option, add suffix "H" to model number (i.e. B2003RW-H)

For Remote Control option, add suffix "R" to model number (i.e. B2003RW-R)


Notes:

- When measuring output ripple, it is recommended that an external 1.0 μF ceramic capacitor be placed from the +Vout pin to the -Vout pin for single output units and from each output to common for dual output units.
- Transient recovery is measured to within a 1% error band for a load step change of 75% to 100%.
- The maximum control current at the on/off pin (pin 6) during a logic high is 5 μA. The maximum control current to the on/off pin at logic low is -100 μA. If the on/off pin is left open, the unit operates. If it is grounded, the unit will shut off.
- Operation at no-load will not damage these units. However, they may not meet all specifications.
- Dual output units may be connected to provide a 24 VDC or 30 VDC output. To do this, connect the load across the positive (+Vout) and negative (-Vout) outputs and float the output common.
- The converter should be connected to a low ac-impedance source. An input source with a highly inductive impedance may affect the stability of the converter. In applications where the converter output loading is high and input power is supplied over long lines, it may be necessary to use a capacitor on the input to insure start-up.
In this case, it is recommended that a low ESR (ESR <1.0Ω at 100 kHz) capacitor be mounted close to the converter. For 12V input units, a 22.0 μF is recommended; for 24V & 48V units a 6.8 μF.
- It is recommended that a fuse be used on the input of a power supply for protection. See the table above for the correct rating.

Derating Curve

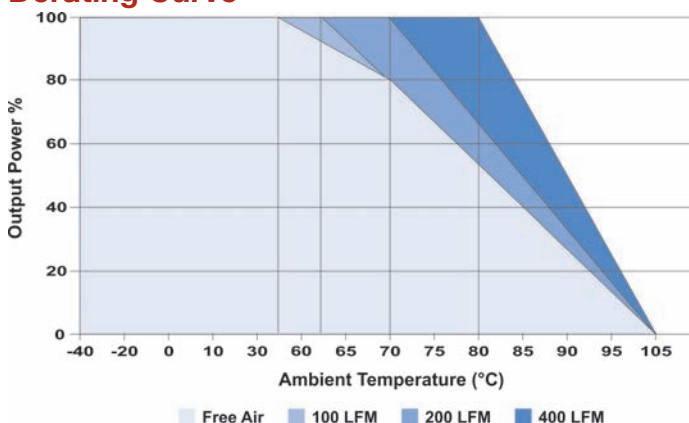


Heatsink Dimensions (Optional)

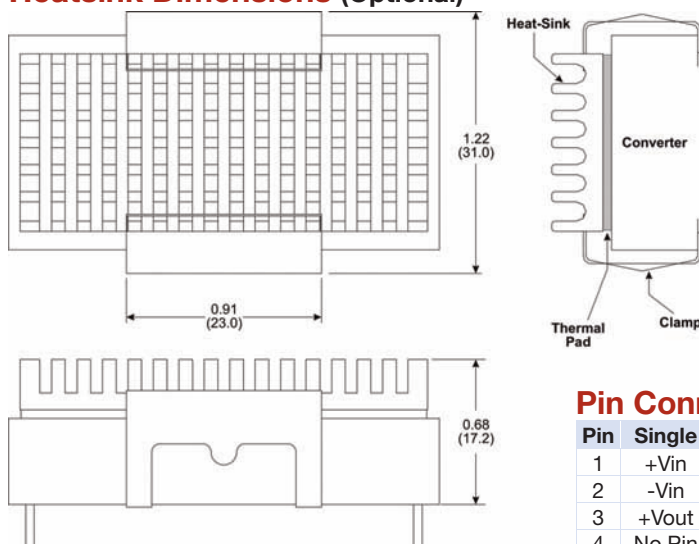

Pin Connections

Pin	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Comm.
5	-Vout	-Vout
6	ON/OFF	ON/OFF

Mechanical Dimensions

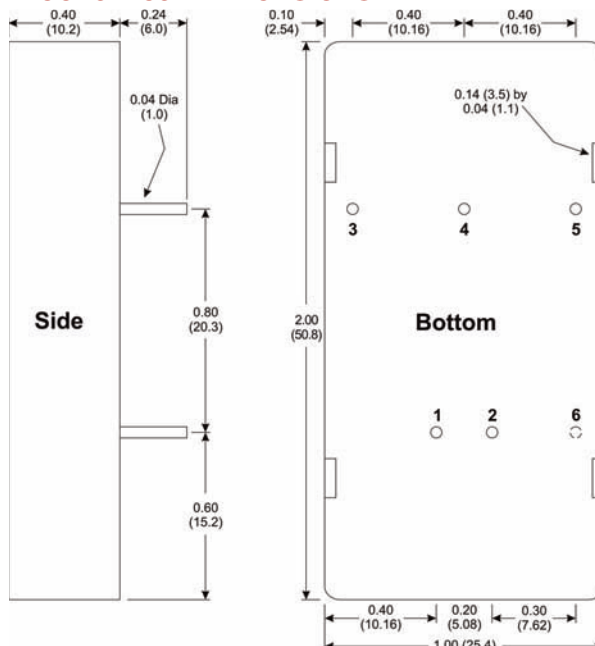

Mechanical Notes:

- All dimensions are typical in inches (mm)
- Tolerance x.xx = ±0.01 (±0.25)



MicroPower Direct
We Power Your Success - For Less!

292 Page Street Ste D Stoughton, MA 02072 • TEL: (781) 344-8226 • FAX: (781) 344-8481 • E-Mail: sales@micropowerdirect.com

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9