



BCX56 BCX56-10 BCX56-16

NPN Plastic-Encapsulate Transistors

SOT-89

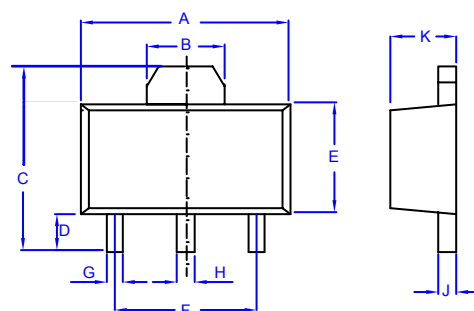

1. BASE
2. COLLECTOR
3. EMITTER

DIMENSINS					
DIM	INCHES		MM		NOTES
	MIN	MAX	MIN	MAX	
A	.173	.181	4.39	4.60	
B	.061	----	1.55	----	REF.
C	.154	.165	3.91	4.25	
D	.031	.039	0.80	1.00	
E	.092	.100	2.34	2.54	
F	.118	----	3.00	----	TYP
G	.013	.019	0.33	0.48	
H	.015	.021	0.38	0.53	
J	.015	.016	0.38	0.41	
K	.055	.063	1.40	1.60	

Features

- Halogen free available upon request by adding suffix "-HF"
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)
- Power Dissipation: $P_{CM}=0.5W$ ($T_{amb}=25^{\circ}C$)
- Collector Current: $I_{CM}=1.0A$
- Collector-Base Voltage: $V_{(BR)CBO}=100V$
- Marking : BCX56=BH, BCX56-10=BK, BCX56-16=BL
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1

Maximum Ratings

Symbol	Rating	Value	Unit
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	100	V
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	80	V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	5	V
I_C	Collector Current DC	1.0	A
P_C	Collector Power Dissipation	0.5(Note1)	W
		0.95(Note2)	
		1.35(Note3)	
T_J	Junction Temperature Range	-55 to +150	$^{\circ}C$
T_{STG}	Storage Temperature Range	-55 to +150	$^{\circ}C$

[1] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.

[2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for collector 1 cm².

[3] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for collector 6 cm².





Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
--------	-----------	-----	-----	-----	-------





OFF CHARACTERISTICS

V _{CBO}	Collector-Base Voltage (I _C =100μAdc, I _E =0)	100	---	---	Vdc
V _{CEO}	Collector-Emitter Voltage (I _C =10mAdc, I _B =0)	80	---	---	Vdc
V _{EBO}	Emitter-Base Voltage (I _E =10μAdc, I _C =0)	5.0	---	---	Vdc
I _{CBO}	Collector Cutoff Current (V _{CB} =30Vdc, I _E =0)	---	---	0.1	μAdc
I _{EBO}	Emitter Cutoff Current (V _{EB} =5.0Vdc, I _C =0)	---	---	0.1	μAdc
h _{FE(1)}	DC Current Gain (V _{CE} =2.0Vdc, I _C =150mAdc) BCX56 BCX56-10 BCX56-16	63	---	250	---
		63	---	160	
		100	---	250	
h _{FE(2)}	DC Current Gain (V _{CE} =2.0Vdc, I _C =5.0mAdc)	40	---	---	---
h _{FE(3)}	DC Current Gain (V _{CE} =2.0Vdc, I _C =500mAdc)	25	---	---	---
V _{CE(sat)}	Collector-Emitter Saturation Voltage (I _C =500mAdc, I _B =50mAdc)	---	---	0.5	Vdc
V _{BE}	Base-Emitter Voltage (I _C =500mAdc, V _{CE} =2.0Vdc)	---	---	1.0	Vdc
f _T	Transition Frequency (V _{CE} =100Vdc, I _C =50mAdc, f=100MHz)	130	---	---	MHz

Typical Characteristics

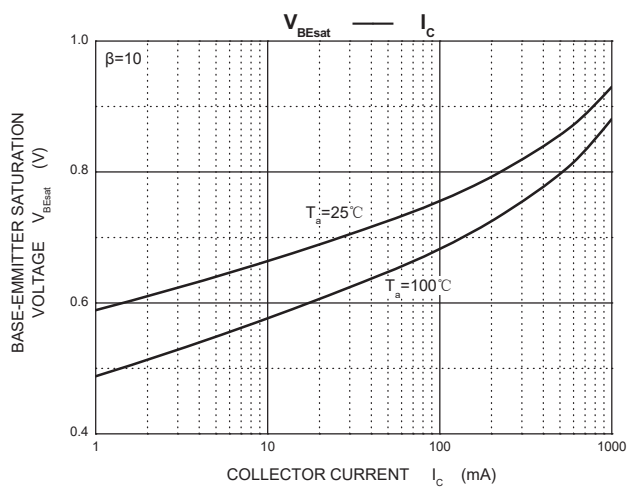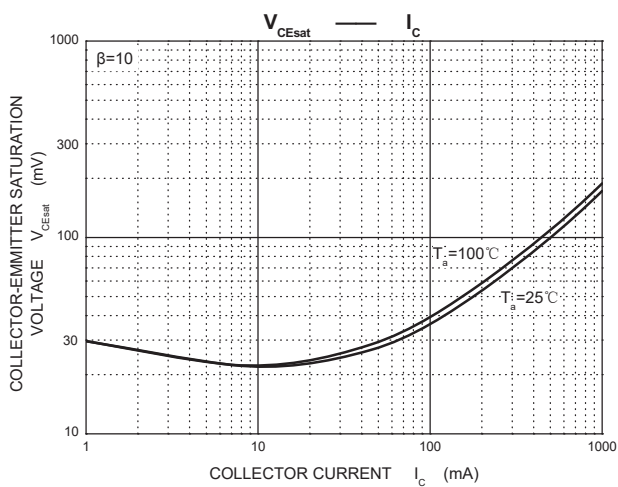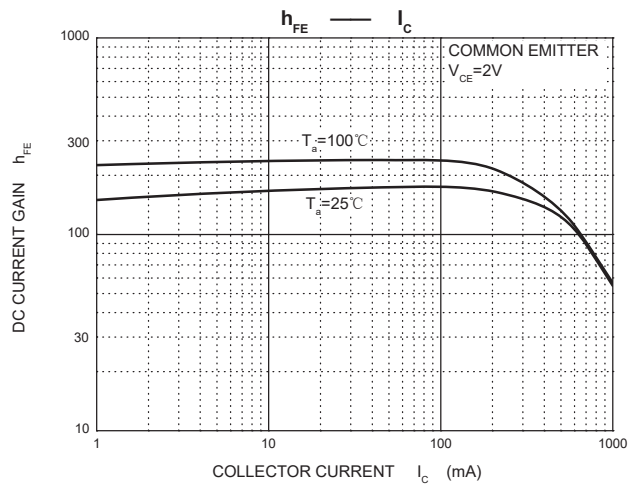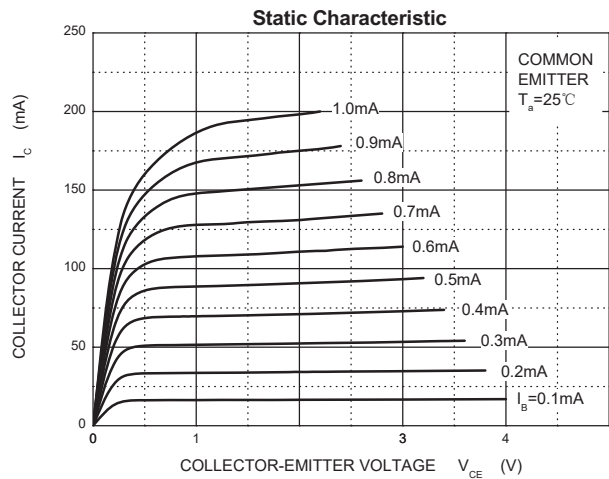

Typical Characteristics

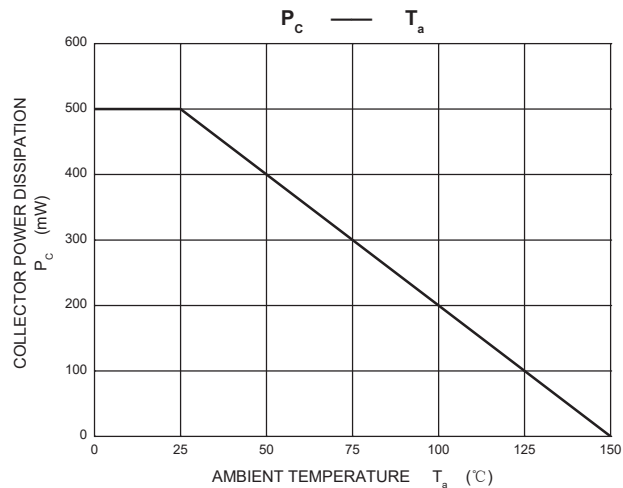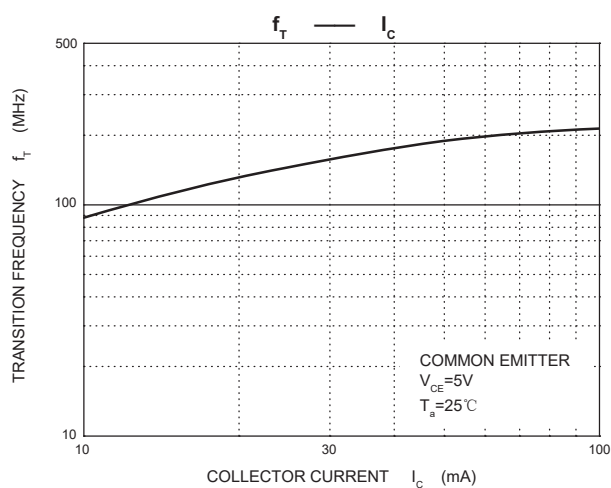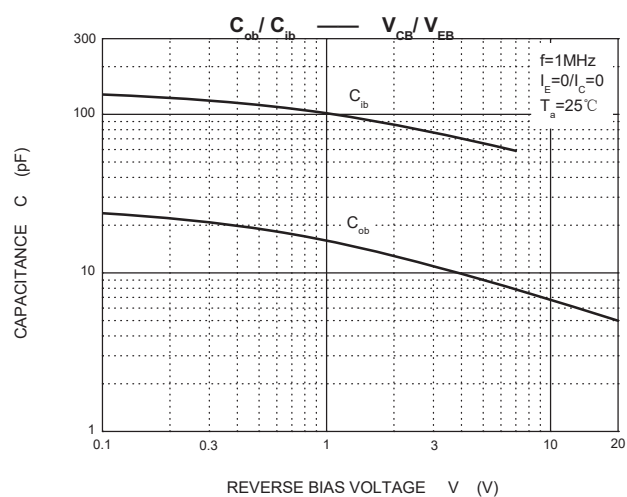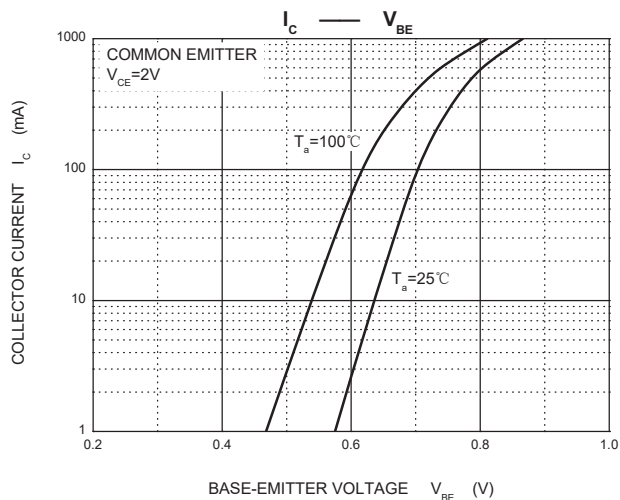

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 1Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9