

## Chip beads

## For general signal line

## MMZ series (for automotive)



AEC-Q200

## MMZ2012 type



## FEATURES

- Noise reduction solution for general signal line.
- Various frequency characteristics with 4 materials of different features for countermeasures against everything from general signals to high-speed signals.
- Operating temperature range: -55 to +125°C
- Compliant with AEC-Q200

## APPLICATION

- Various ECUs, powertrains, body controls, and car multimedia (telematics).

## PART NUMBER CONSTRUCTION

| MMZ         | 2012                                 | R             | 150                        | A                      | T               | D25           |
|-------------|--------------------------------------|---------------|----------------------------|------------------------|-----------------|---------------|
| Series name | L×W×T dimensions<br>2.0×1.25×0.85 mm | Material name | Impedance<br>(Ω) at 100MHz | Characteristic<br>type | Packaging style | Internal code |


## CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>(Ω) |      | DC resistance<br>(Ω)max. | Rated current<br>(mA)max. | Part No.                         |
|------------------------------|------|--------------------------|---------------------------|----------------------------------|
| 15                           | ±25% | 0.05                     | 1500                      | <a href="#">MMZ2012R150ATD25</a> |
| 30                           | ±25% | 0.05                     | 1500                      | <a href="#">MMZ2012R300ATD25</a> |
| 60                           | ±25% | 0.10                     | 1000                      | <a href="#">MMZ2012R600ATD25</a> |
| 120                          | ±25% | 0.12                     | 800                       | <a href="#">MMZ2012R121ATD25</a> |
| 300                          | ±25% | 0.15                     | 600                       | <a href="#">MMZ2012R301ATD25</a> |
| 600                          | ±25% | 0.20                     | 500                       | <a href="#">MMZ2012R601ATD25</a> |
| 1000                         | ±25% | 0.30                     | 500                       | <a href="#">MMZ2012R102ATD25</a> |
| 40                           | ±25% | 0.10                     | 1000                      | <a href="#">MMZ2012S400ATD25</a> |
| 80                           | ±25% | 0.10                     | 800                       | <a href="#">MMZ2012S800ATD25</a> |
| 120                          | ±25% | 0.15                     | 800                       | <a href="#">MMZ2012S121ATD25</a> |
| 180                          | ±25% | 0.15                     | 600                       | <a href="#">MMZ2012S181ATD25</a> |
| 300                          | ±25% | 0.20                     | 600                       | <a href="#">MMZ2012S301ATD25</a> |
| 600                          | ±25% | 0.30                     | 500                       | <a href="#">MMZ2012S601ATD25</a> |
| 1000                         | ±25% | 0.35                     | 500                       | <a href="#">MMZ2012S102ATD25</a> |

## Measurement equipment

| Measurement item | Product No.   | Manufacturer          |
|------------------|---------------|-----------------------|
| Impedance        | E4991A+16192A | Keysight Technologies |
| DC resistance    | Type-7556     | Yokogawa              |

\* Equivalent measurement equipment may be used.



# MMZ2012 type

## ■ CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>(Ω) |      | DC resistance<br>(Ω)max. | Rated current<br>(mA)max. | Part No.                         |
|------------------------------|------|--------------------------|---------------------------|----------------------------------|
| Tolerance                    |      |                          |                           |                                  |
| 15                           | ±25% | 0.05                     | 1500                      | <a href="#">MMZ2012Y150BTD25</a> |
| 30                           | ±25% | 0.05                     | 1500                      | <a href="#">MMZ2012Y300BTD25</a> |
| 60                           | ±25% | 0.10                     | 1000                      | <a href="#">MMZ2012Y600BTD25</a> |
| 120                          | ±25% | 0.12                     | 800                       | <a href="#">MMZ2012Y121BTD25</a> |
| 300                          | ±25% | 0.15                     | 600                       | <a href="#">MMZ2012Y301BTD25</a> |
| 600                          | ±25% | 0.20                     | 500                       | <a href="#">MMZ2012Y601BTD25</a> |
| 1000                         | ±25% | 0.30                     | 500                       | <a href="#">MMZ2012Y102BTD25</a> |
| 1500                         | ±25% | 0.40                     | 500                       | <a href="#">MMZ2012Y152BTD25</a> |
| 2000                         | ±25% | 0.50                     | 400                       | <a href="#">MMZ2012Y202BTD25</a> |
| 80                           | ±25% | 0.30                     | 500                       | <a href="#">MMZ2012D800BTD25</a> |
| 120                          | ±25% | 0.30                     | 500                       | <a href="#">MMZ2012D121BTD25</a> |
| 300                          | ±25% | 0.50                     | 400                       | <a href="#">MMZ2012D301BTD25</a> |

### Measurement equipment


| Measurement item | Product No.   | Manufacturer          |
|------------------|---------------|-----------------------|
| Impedance        | E4991A+16192A | Keysight Technologies |
| DC resistance    | Type-7556     | Yokogawa              |

\* Equivalent measurement equipment may be used.


# MMZ2012 type

## Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


**MMZ2012R series**

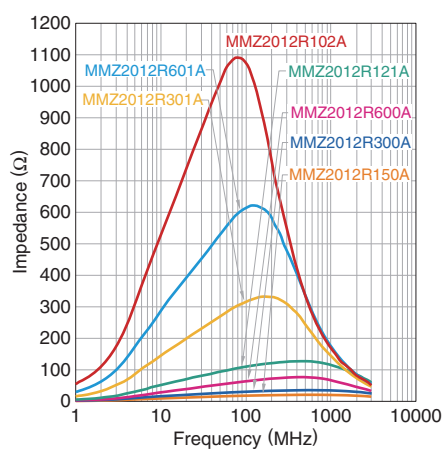


**MMZ2012S series**

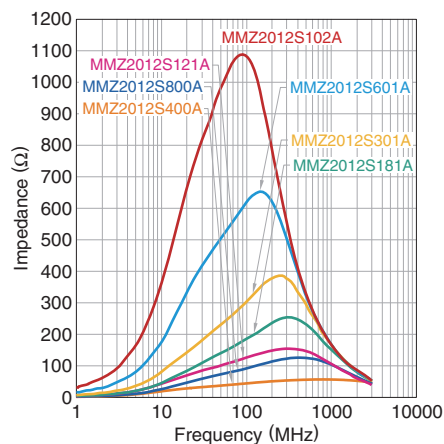

**MMZ2012Y series**

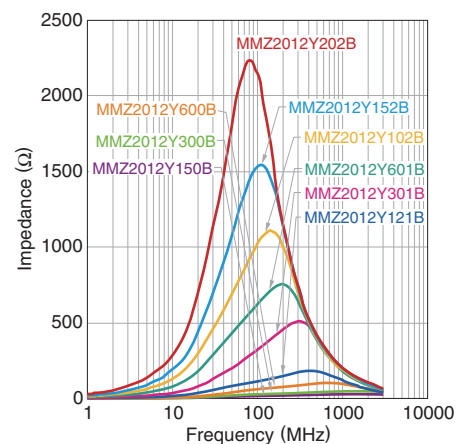


**MMZ2012D series**

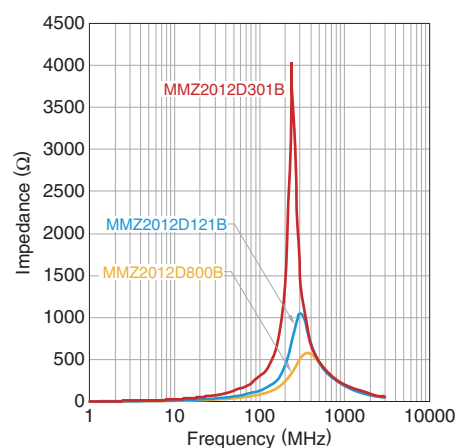


# MMZ2012 type

## Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ2012R150ATD25

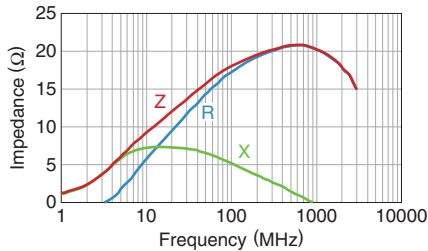


MMZ2012R300ATD25

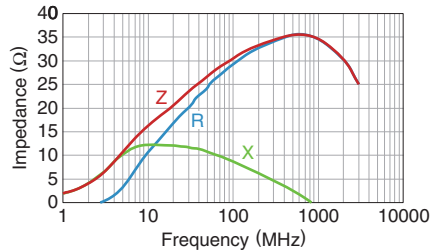


MMZ2012R600ATD25

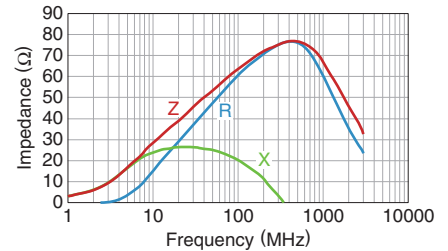


MMZ2012R121ATD25

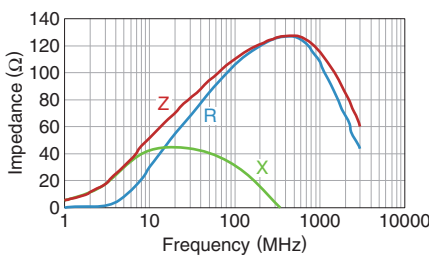


MMZ2012R301ATD25

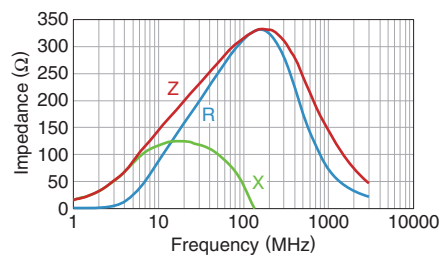


MMZ2012R601ATD25

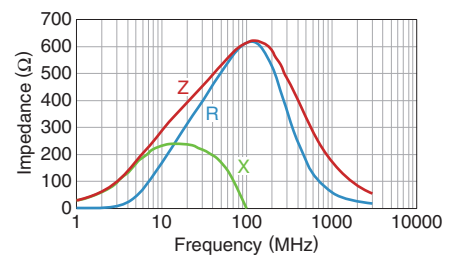


MMZ2012R102ATD25

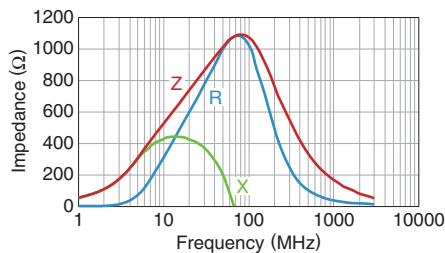


MMZ2012S400ATD25

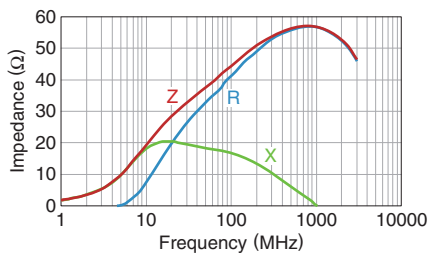


MMZ2012S800ATD25

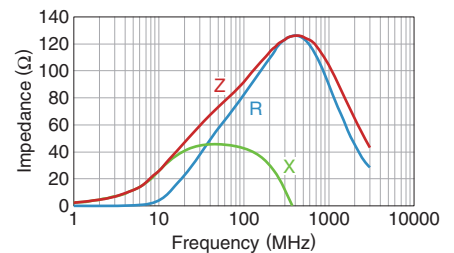


MMZ2012S121ATD25

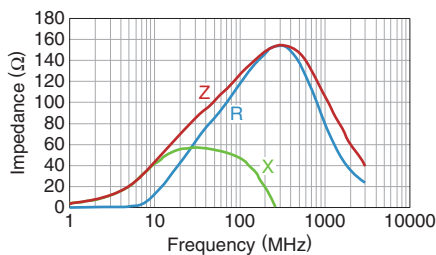


MMZ2012S181ATD25

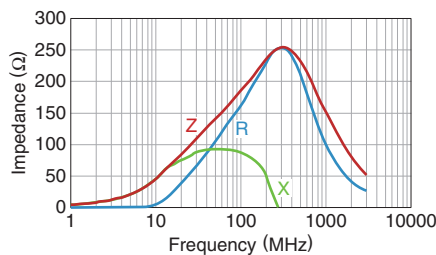


MMZ2012S301ATD25

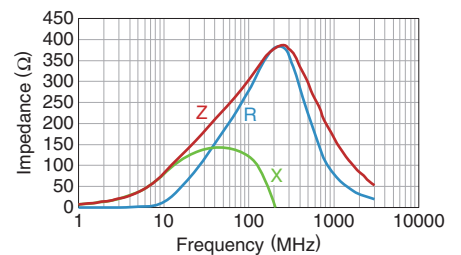


MMZ2012S601ATD25

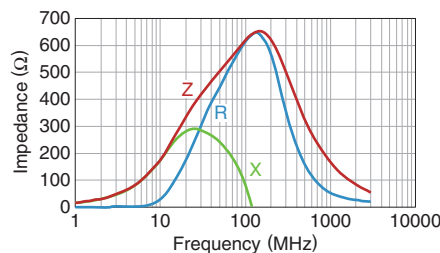

MMZ2012S102ATD25

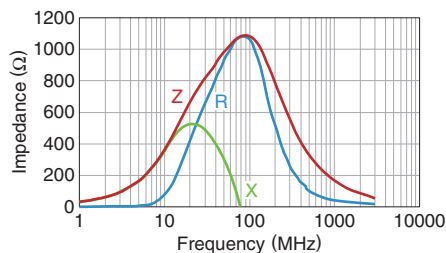


MMZ2012Y150BTD25

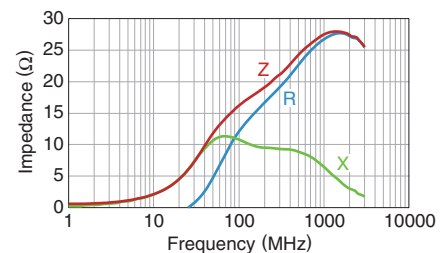


# MMZ2012 type

## Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ2012Y300BTD25

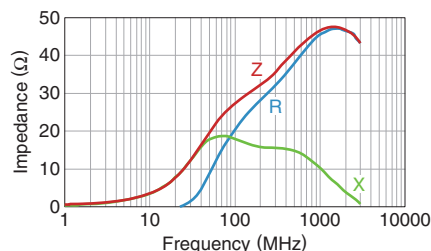


MMZ2012Y600BTD25

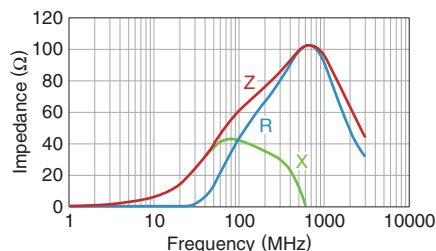


MMZ2012Y121BTD25

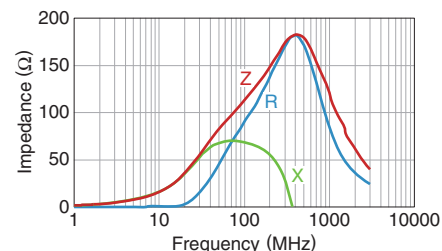


MMZ2012Y301BTD25

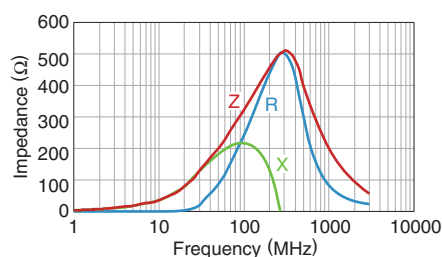


MMZ2012Y601BTD25

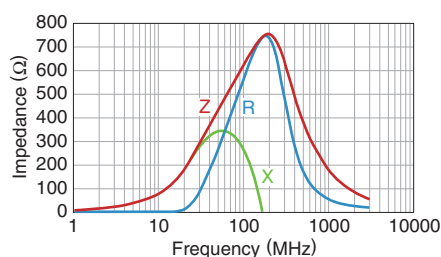


MMZ2012Y102BTD25

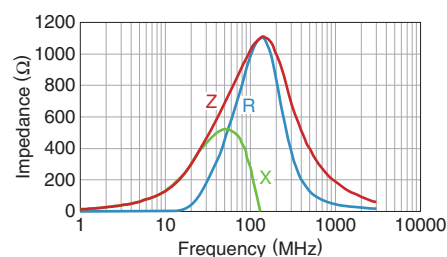


MMZ2012Y152BTD25

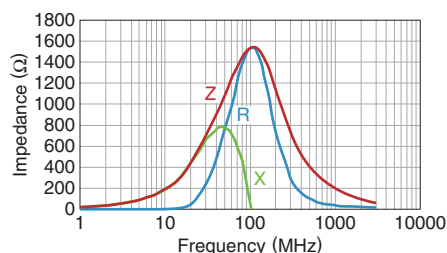


MMZ2012Y202BTD25

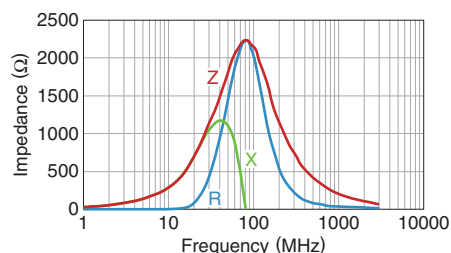


MMZ2012D800BTD25

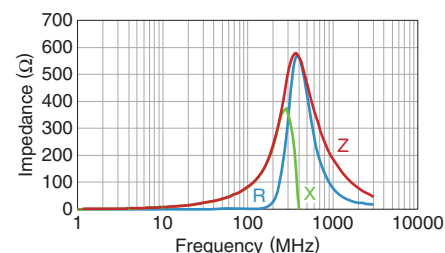

MMZ2012D121BTD25

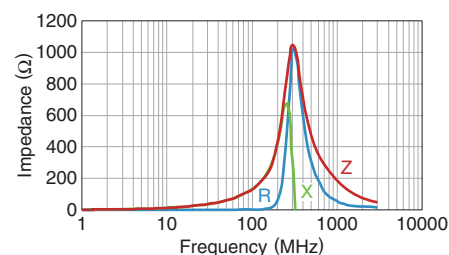


MMZ2012D301BTD25

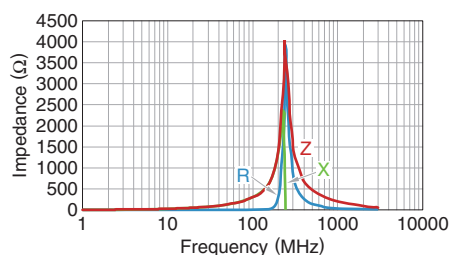

# MMZ2012 type


## SHAPE & DIMENSIONS

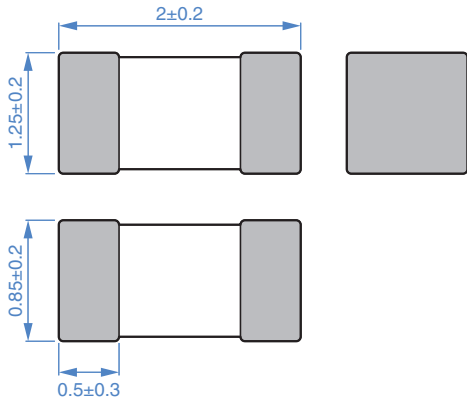

Dimensions in mm


## PACKAGING STYLE

### REEL DIMENSIONS

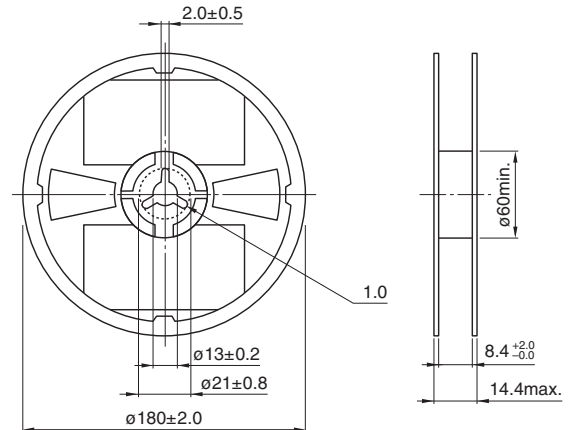


Dimensions in mm

## RECOMMENDED LAND PATTERN

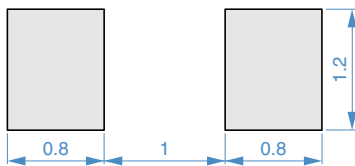


Dimensions in mm

### TAPE DIMENSIONS

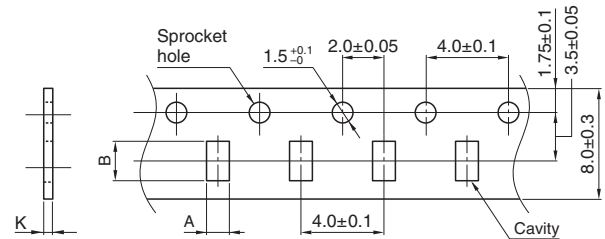


Dimensions in mm

## RECOMMENDED REFLOW PROFILE

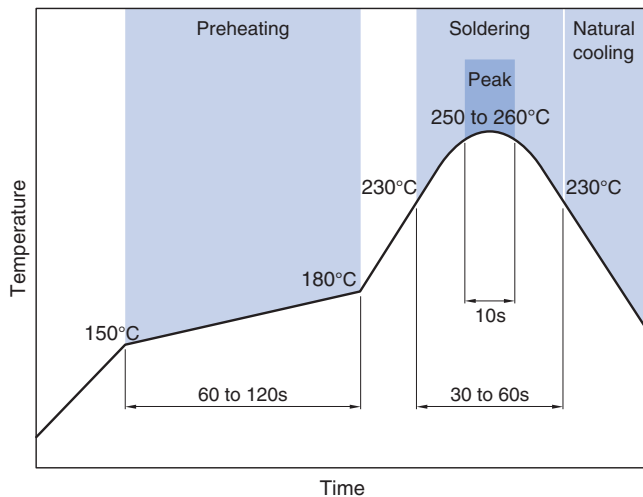

| Type    | A       | B       | K       |
|---------|---------|---------|---------|
| MMZ2012 | 1.5±0.2 | 2.3±0.2 | 1.1max. |

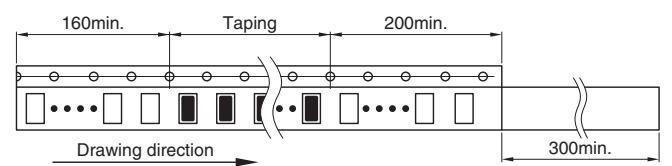

Dimensions in mm

### PACKAGE QUANTITY

| Package quantity | 4,000 pcs/reel |
|------------------|----------------|
|------------------|----------------|

## TEMPERATURE RANGE, INDIVIDUAL WEIGHT

| Operating temperature range | Storage temperature range* | Individual weight |
|-----------------------------|----------------------------|-------------------|
| -55 to +125°C               | -55 to +125°C              | 8 mg              |

\* The storage temperature range is for after the assembly.

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

#### REMINDERS

- The storage period is within 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).  
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.  
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.  
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9