

**Part Number\* Relay Description**

KD00CK	5A Solid-State Relay (SSR)
KD02CK	5A SSR with Switch Status
KD20CK	5A SSR with Short-Circuit Protection
KD22CK	5A SSR with Short-Circuit Protection and Switch Status
LD00CM	10A Solid-State Relay
LD02CM	10A SSR with Switch Status
LD20CM	10A SSR with Short-Circuit Protection
LD22CM	10A SSR with Short-Circuit Protection and Switch Status

\* The Y suffix denotes parameters tested to MIL-PRF-28750 specifications.  
The W suffix denotes parameters tested to Teledyne specifications.

**ELECTRICAL SPECIFICATIONS**

(-55°C TO +105°C UNLESS OTHERWISE NOTED)

**INPUT (CONTROL) SPECIFICATION**

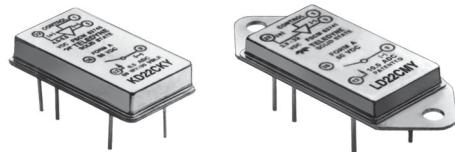
When used in 2 terminal configuration

(TTL or direct control) (See Fig. 1)	Min	Typ	Max	Units
Input Current @ $V_{BIAS} = 5$ Vdc (See Fig. 2)		15	mAdc	
Turn-Off Voltage (Guaranteed Off)		1.5	Vdc	
Turn-On Voltage (Guaranteed On)	3.8		Vdc	
Reverse Voltage Protection		-32	Vdc	
Input Supply Range (See Note 1)	3.8	32	Vdc	

**INPUT (CONTROL) SPECIFICATION**

When used in 3 terminal configuration

(CMOS or open collector TTL) (See Fig. 1)	Min	Typ	Max	Units
Control Current				
$V_{CONTROL} = 5$ Vdc		250	$\mu$ Adc	
$V_{CONTROL} = 18$ Vdc		1	mAdc	
Control Voltage Range	0	18	Vdc	
Bias Supply Voltage (See Note 1)	3.8	32	Vdc	
Bias Supply Current		16	mAdc	
Turn-Off Voltage (Guaranteed Off)	3.2		Vdc	
Turn-On Voltage (Guaranteed On)		0.3	Vdc	


**FEATURES**





- Available with short-circuit/current overload protection
- Available with switch status output
- TTL and CMOS compatible control
- Low ON resistance power FET output
- Fast switching speed
- Meets 28 Vdc system requirements of MIL-STD-704
- Optical isolation
- Low profile hermetic package
- Built and tested to the requirements of MIL-PRF-28750

**DESCRIPTION**

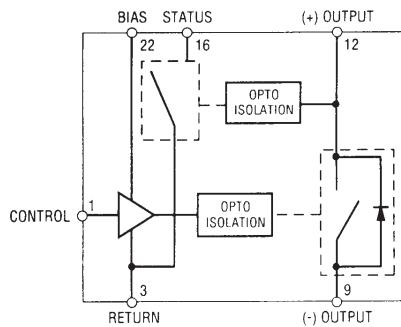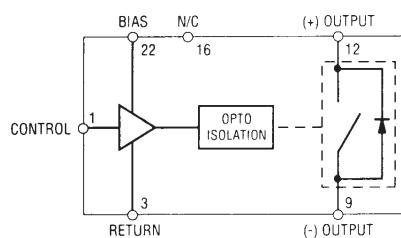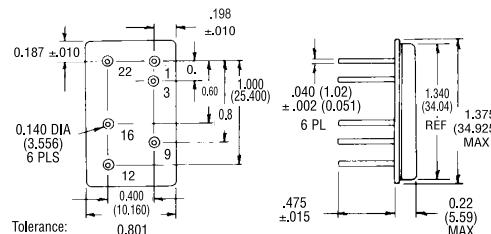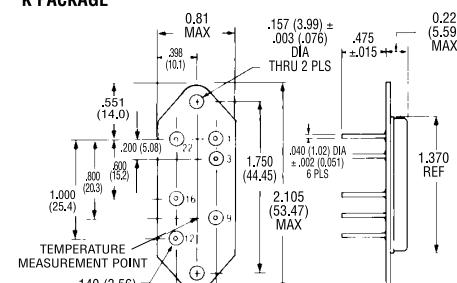The Series KD and LD solid-state relays are screened utilizing MIL-PRF-28750 test methods and are packaged in low profile hermetically sealed cases. These relays are constructed with state-of-the-art solid state techniques and feature fully floating power FET output technology. This allows the load to be connected to either output terminal and provides a low ON resistance. The input (control) and output are optically isolated to protect input logic circuits from output transients. Available options include short circuit and current overload protection, which provides complete protection for both the relay and system wiring. This feature not only provides protection should a short or overload occur while the relay is on, but will also provide protection should the relay be switched into a short. The second option is a status output line. Switch status returns the true status of the output switch and is optically isolated from the load. It provides status indication independent of the control circuit of the relay. The status line provides a logic 0 (low) when the relay output is off with load voltage and continuity present, and a logic 1 (high) when the output is on.

**OUTPUT (LOAD) SPECIFICATIONS**

(See Note 2)	Min	Typ	Max	Units
Continuous Load Current (See Fig. 3)				
KD and LD series without heat sink	5	Adc		
LD series with heat sink	10	Adc		
Leakage Current @ $V_{LOAD} = 60\text{Vdc}$				
KD00CK, KD20CK	100	$\mu\text{A}$		
LD00CM, LD20CM	100	$\mu\text{A}$		
KD02CK, KD22CK	2	mA		
LD02CM, LD22CM	2	mA		
Output Voltage Drop				
KD00CK, KD02CK	.60	Vdc		
KD20CK, KD22CK	.70	Vdc		
LD00CM, LD02CM @10A	1.2	Vdc		
LD20CM, LD22CM @10A	1.4	Vdc		
Continuous Operating Load Voltage				
	60	Vdc		
Transient Blocking Voltage @25°C				
	80	Vdc		
ON Resistance, $I_{LOAD} = 100\text{ mA}$ , $T_j = 25^\circ\text{C}$ , (See Note 3)				
KD00CK, KD02CK	.075	Ohm		
LD00CM, LD20CM	.075	Ohm		
KD20CK, KD22CK	.100	Ohm		
LD20CM, LD22CM	.100	Ohm		
Turn-On Time (See Fig. 5)				
	5	ms		
Turn-Off Time (See Fig. 5)				
	2	ms		
Electrical System Spike @25°C				
	$\pm 600$	Vpk		
Output Capacitance at 25 Vdc, 100 KHz				
	1600	pF		
Isolation (Input to Output)				
KD00CK, KD20CK	10	pF		
LD00CM, LD20CM	10	pF		
KD02CK, KD22CK	15	pF		
LD02CM, LD22CM	15	pF		
Dielectric Strength				
	1000	Vac		
Insulation Resistance @ 500 Vdc				
	$10^9$	Ohms		
Output Junction Temperature @ $I_{LOAD} = I_{max\ rated}$				
	130	°C		
Maximum Junction Temperature				
	150	°C		
Thermal Resistance Junction to Ambient ( $\theta_{JA}$ )				
	30	°C/W		
Thermal Resistance Junction to Case ( $\theta_{JC}$ )				
	7	°C/W		

**BLOCK DIAGRAM**

**WITH STATUS**

**NO STATUS**
**MECHANICAL SPECIFICATION**
**DIMENSIONS ARE SHOWN IN INCHES (MILLIMETERS)**

**K PACKAGE**

**L PACKAGE**

- Enclosure: Hermetically Sealed DIP
- Leak Rate:  $1 \times 10^{-8}\text{ CC}/\text{Sec}$  Maximum
- Material: Header: Cold Rolled Steel Nickel Plated Copper Core Grade A Nickel
- Pins Can:
- Weight: 20 grams
- Tolerance:  $XXX \pm .005$

**ENVIRONMENTAL SPECIFICATIONS**

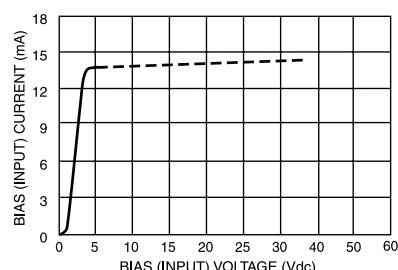
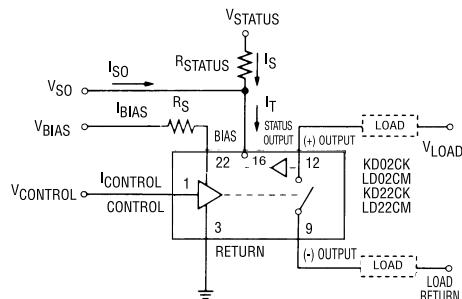
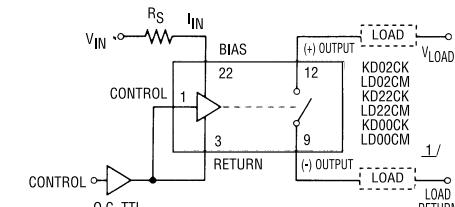
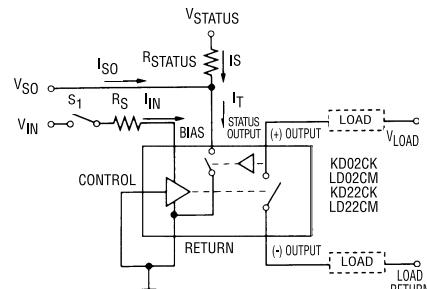
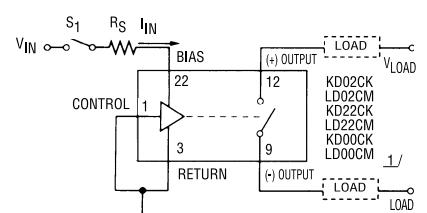
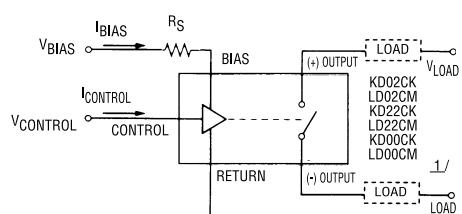
	Min	Typ	Max	Units
Temperature Range				
Operating	-55		+105	°C
Storage	-55		+125	°C
Vibration 100 g	10		3000	Hz
Constant Acceleration			5000	g
Shock 0.5 ms pulse			1500	g


**STATUS OUTPUT TRUTH TABLE**  
**(KD02CK, LD02CM, KD22CK, LD22CM)**

Control Voltage	Relay Output	State Status Output Level
High	Off	Low ( $V_{SO} \leq 0.4$ Vdc)
Low	On	High ( $V_{SO} = V_{STATUS}$ )


**STATUS OUTPUT SPECIFICATIONS**  
**(KD02CK, LD02CM, KD22CK, LD22CM)**

	Min	Typ	Max	Units
Status Supply Voltage	30			Vdc
Status Leakage Current				
@16Vdc	10			μAdc
@30Vdc	100			μAdc
Status (sink) Current ( $V_{SO} < 0.4$ Vdc)	600			μAdc
Status Turn-On Time (See Fig. 6)	3.5			ms
Status Turn-Off Time (See Fig. 6)	8.0			ms

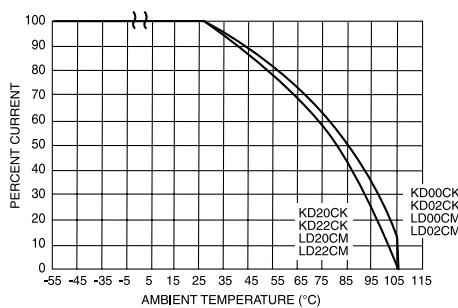
**BIAS (INPUT) CURRENT VS BIAS (INPUT) VOLTAGE**  
**FIGURE 2 (See Note 1)**

**(A) 3 TERMINAL INPUT WITH STATUS (See Note 5)**

**(B) 2 TERMINAL INPUT (OPEN COLLECTOR TTL DRIVE)**

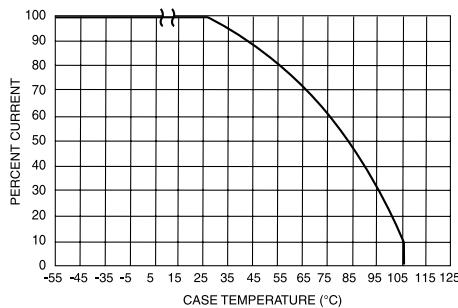**(C) 2 TERMINAL INPUT (DIRECT DRIVE) WITH STATUS**

**(D) 2 TERMINAL INPUT (DIRECT DRIVE)**

1/ KD02CK, KD22CK, LD02CM and LD22CM may be wired without the status line as shown in (B), (D) and (E) above.
**(E) 3 TERMINAL INPUT WITHOUT STATUS**
**WIRING CONFIGURATIONS**  
**FIGURE 1 (See Note 1)**




**LOAD CURRENT DERATING CURVE FOR  
KD/LD SERIES WITHOUT A HEAT SINK  
(A)**



**LOAD CURRENT DERATING CURVE FOR  
LD SERIES  
(B)**


#### THERMAL DERATING CURVES

**FIGURE 3**



**NORMALIZED ON RESISTANCE VS  
JUNCTION TEMPERATURE**

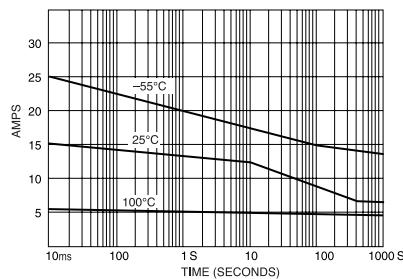
**FIGURE 4 (See Note 3)**



**OVERLOAD CURRENT VS TIME TO  
TRIP (TYPICAL)**


KD20CK, KD22CK, LD20CM, LD22CM

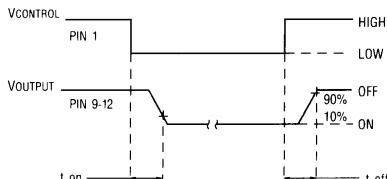**FIGURE 7**




**OUTPUT TURN-ON AND TURN-OFF  
TIMING**

**FIGURE 5**




**STATUS TURN-ON AND TURN-OFF  
TIMING**

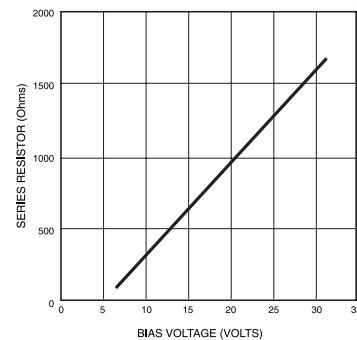**FIGURE 6**




**SERIES LIMIT BIAS RESISTOR VS  
BIAS VOLTAGE**

**FIGURE 8 (See Note 1)**



**TURN RELAY ON INTO A SHORTED LOAD**



**SHORT-CIRCUIT LOAD WITH RELAY ON**

**TYPICAL TRIP CURRENT  
CHARACTERISTICS FOR SHORT  
CIRCUIT CONDITIONS**

**FIGURE 9**

#### NOTES:

- Control input is compatible with CMOS or open collector TTL (with pull up resistor). For bias voltages above 6V, a series resistor is required. Use the standard resistor value equal to or less than the value found in Figure 8.
  - The rated input voltage is 5V for all tests unless otherwise specified.
  - To calculate the maximum ON resistance for a given junction temperature, find the normalized ON resistance factor (NR) from Figure 4. Calculate the new ON resistance as follows:
- $$R_{(ON)} = NR \cdot R_{(ON)} @ 25^\circ\text{C}$$
- (KD00CK, LD00CM, KD02CK, LD02CM)
- $$R_{(ON)} = NR(R_{(ON)} @ +25^\circ\text{C}) + .025 \text{ ohm}$$
- (KD20CK, LD20CM, KD22CK, LD22CM)
- Overload testing to the requirements of MIL-PRF-28750 is constrained to the limits imposed by the short circuit protection characteristics as defined in this specification. System series inductance for "shorted-load" mode of operation should be 50  $\mu\text{H}$ . Maximum repetition rate into a shorted load should not exceed 10 Hz.
  - A status pull up resistor is required for proper operation of the status output. Determine the current ( $I_{SO}$ ) required by the status interface. Calculate the current ( $I_S$ ) through the status resistor such that the sink current through the status output is 0.6 mA. Select the status resistor such that it does not allow more than 0.6 mA to flow through the status output.

$$R_{(STATUS)} = \frac{V_{(STATUS)} - 0.4\text{V}}{I_{SO}}$$

- Inductive loads should be diode suppressed. Input transitions should be  $\leq 1$  ms duration and the input drive should be a bounceless contact type.

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9