

LOW DROPOUT VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJM2867/68 is a 100mA output low dropout voltage regulator with ON/OFF control.

Advanced Bipolar technology achieves low noise, high ripple rejection and low quiescent current.

Small packaging, 0.1 μ F small decoupling capacitor, built-in noise bypass capacitor make the NJM2867/68 suitable for space conscious applications.

■ PACKAGE OUTLINE



NJM2867F3




NJM2867F/NJM2868F

■ FEATURES


- High Ripple Rejection 75dB typ. (f=1kHz Vo=3V Version)
- Output Noise Voltage Vno=40 μ Vrms typ.
- Output capacitor with 0.1 μ F ceramic capacitor (Vo \geq 2.8V)
- Output Current Io(max.)=100mA
- High Precision Output Vo \pm 1.0%
- Low Dropout Voltage 0.10V typ. (Io=60mA)
- ON/OFF Control (Active High)
- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Bipolar Technology
- Package Outline SC88A (NJM2867F3), SOT-23-5 (NJM2867F/NJM2868F)

■ PIN CONFIGURATION



NJM2867F/NJM2867F3


- PIN FUNCTION**
- 1.CONTROL
 - 2.GND
 - 3.NC
 - 4.V_{OUT}
 - 5.V_{IN}



NJM2868F

- PIN FUNCTION**
1. V_{IN}
 - 2.GND
 - 3.CONTROL
 - 4.NC
 - 5.V_{OUT}

■ EQUIVALENT CIRCUIT

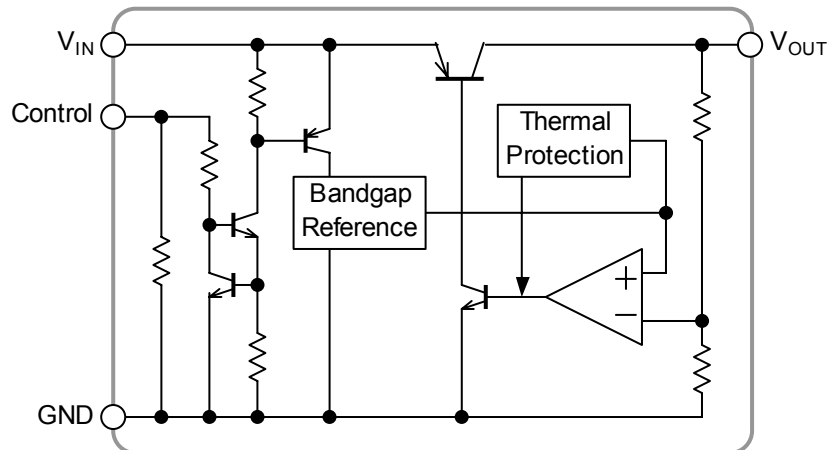

NJM2867/68

■ OUTPUT VOLTAGE RANK LIST

●NJM2867

| Device Name | V _{OUT} | Device Name | V _{OUT} | Device Name | V _{OUT} |
|----------------|------------------|----------------|------------------|-----------------|------------------|
| NJM2867F3-/F21 | 2.1V | NJM2867F3-/F29 | 2.9V | NJM2867F3-/F38 | 3.8V |
| NJM2867F3-/F24 | 2.4V | NJM2867F3-/F03 | 3.0V | NJM2867F3-/F04 | 4.0V |
| NJM2867F3-/F25 | 2.5V | NJM2867F3-/F31 | 3.1V | NJM2867F3-/F445 | 4.45V |
| NJM2867F3-/F26 | 2.6V | NJM2867F3-/F32 | 3.2V | NJM2867F3-/F05 | 5.0V |
| NJM2867F3-/F27 | 2.7V | NJM2867F3-/F33 | 3.3V | | |
| NJM2867F3-/F28 | 2.8V | NJM2867F3-/F34 | 3.4V | | |

●NJM2868

| Device Name | V _{OUT} | Device Name | V _{OUT} | Device Name | V _{OUT} |
|-------------|------------------|-------------|------------------|-------------|------------------|
| NJM2868F21 | 2.1V | NJM2868F29 | 2.9V | NJM2868F38 | 3.8V |
| NJM2868F24 | 2.4V | NJM2868F03 | 3.0V | NJM2868F04 | 4.0V |
| NJM2868F25 | 2.5V | NJM2868F31 | 3.1V | NJM2868F445 | 4.45V |
| NJM2868F26 | 2.6V | NJM2868F32 | 3.2V | NJM2868F05 | 5.0V |
| NJM2868F27 | 2.7V | NJM2868F33 | 3.3V | | |
| NJM2868F28 | 2.8V | NJM2868F34 | 3.4V | | |

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | | UNIT |
|-----------------------|-------------------|----------|---------|------|
| Input Voltage | V _{IN} | +14 | | V |
| Control Voltage | V _{CONT} | +14(*1) | | V |
| Power Dissipation | P _D | SC88A | 250(*2) | mW |
| | | SOT-23-5 | 200(*3) | |
| | | | 350(*2) | |
| Operating Temperature | Topr | -40~+85 | | °C |
| Storage Temperature | Tstg | -40~+125 | | °C |

(*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

(*2): Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*3): Device itself.

■ ELECTRICAL CHARACTERISTICS


($V_{IN}=V_O+1V$, $C_{IN}=0.1\mu F$, $C_O=0.1\mu F$ ($2.3V < V_O \leq 2.8V$: $C_O=0.22\mu F$, $V_O \leq 2.3V$: $C_O=0.47\mu F$), $T_a=25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---|------------------------------|---|-------|----------|-------|-----------------|
| Output Voltage | V_O | $I_O=30mA$ | -1.0% | - | +1.0% | V |
| Quiescent Current | I_Q | $I_O=0mA$, expect I_{CONT} | - | 120 | 180 | μA |
| Quiescent Current at Control OFF | $I_{Q(OFF)}$ | $V_{CONT}=0V$ | - | - | 100 | nA |
| Output Current | I_O | $V_O=0.3V$ | 100 | 130 | - | mA |
| Line Regulation | $\Delta V_O / \Delta V_{IN}$ | $V_{IN}=V_O+1V \sim V_O+6V$, $I_O=30mA$ | - | - | 0.10 | %/V |
| Load Regulation | $\Delta V_O / \Delta I_O$ | $I_O=0 \sim 60mA$ | - | - | 0.03 | %/mA |
| Dropout Voltage | ΔV_{L-O} | $I_O=60mA$ | - | 0.10 | 0.18 | V |
| Ripple Rejection | RR | $e_{in}=200mV_{rms}$, $f=1kHz$, $I_O=10mA$, $V_O=3V$ Version | - | 75 | - | dB |
| Average Temperature Coefficient of Output Voltage | $\Delta V_O / \Delta T_a$ | $T_a=0 \sim 85^\circ C$, $I_O=10mA$ | - | ± 50 | - | ppm/ $^\circ C$ |
| Output Noise Voltage | V_{NO} | $f=10Hz \sim 80kHz$, $I_O=10mA$, $V_O=3V$ Version | - | 40 | - | μV_{rms} |
| Control Current | I_{CONT} | $V_{CONT}=1.6V$, $I_O=0mA$ | - | - | 12 | μA |
| Control Voltage for ON-state | $V_{CONT(ON)}$ | | 1.6 | - | - | V |
| Control Voltage for OFF-state | $V_{CONT(OFF)}$ | | - | - | 0.6 | V |

The above specification is a common specification for all output voltages.

Therefore, it may be different from the individual specification for a specific output voltage.

■ TEST CIRCUIT

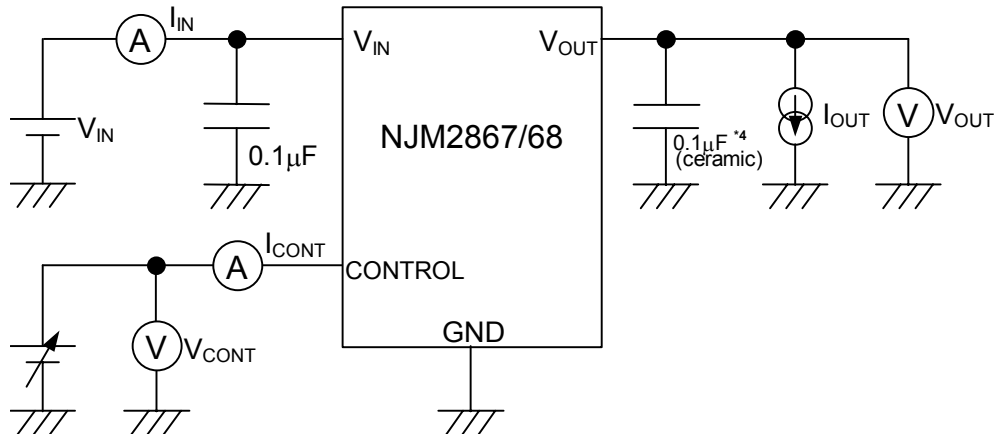


*4 2.3V < $V_O \leq 2.8V$ version: $C_O=0.22\mu F$ (ceramic)
 $V_O \leq 2.3V$ version: $0.47\mu F$ (ceramic)

NJM2867/68

■ TYPICAL APPLICATION


① In the case where ON/OFF Control is not required:

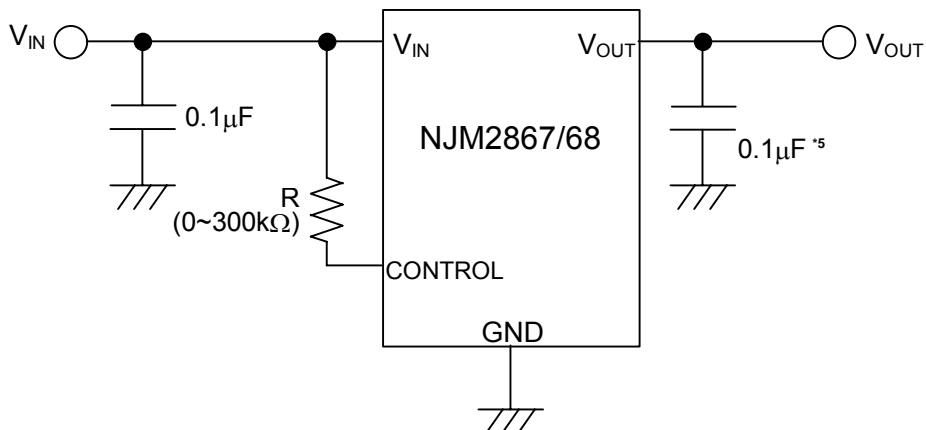

*5 2.3V < V_{O} ≤ 2.8V version: $C_o = 0.22\mu\text{F}$
 $V_{O} \leq 2.3\text{V}$ version: $0.47\mu\text{F}$

Connect control terminal to V_{IN} terminal

② In use of ON/OFF CONTROL:

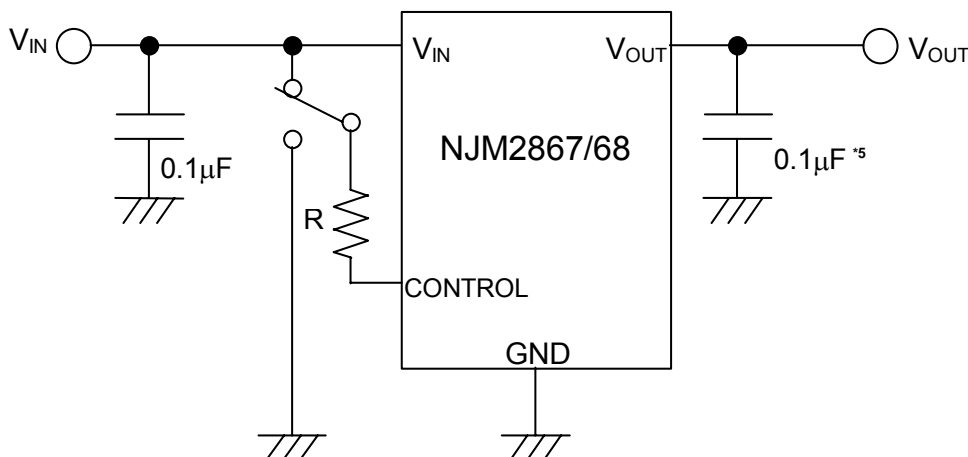

*5 2.3V < V_{O} ≤ 2.8V version: $C_o = 0.22\mu\text{F}$
 $V_{O} \leq 2.3\text{V}$ version: $0.47\mu\text{F}$

State of control terminal:



- "H" → output is enabled.
- "L" or "open" → output is disabled.

*In the case of using a resistance "R" between V_{IN} and control.

The current flow into the control terminal while the IC is ON state (I_{CONT}) can be reduced when a pull up resistance "R" is inserted between V_{IN} and the control terminal.







The minimum control voltage for ON state ($V_{CONT(ON)}$) is increased due to the voltage drop caused by I_{CONT} and the resistance "R". The I_{CONT} is temperature dependence as shown in the "Control Current vs. Temperature" characteristics. Therefore, the resistance "R" should be carefully selected to ensure the control voltage exceeds the $V_{CONT(ON)}$ over the required temperature range.

POWER DISSIPATION vs. AMBIENT TEMPERATURE





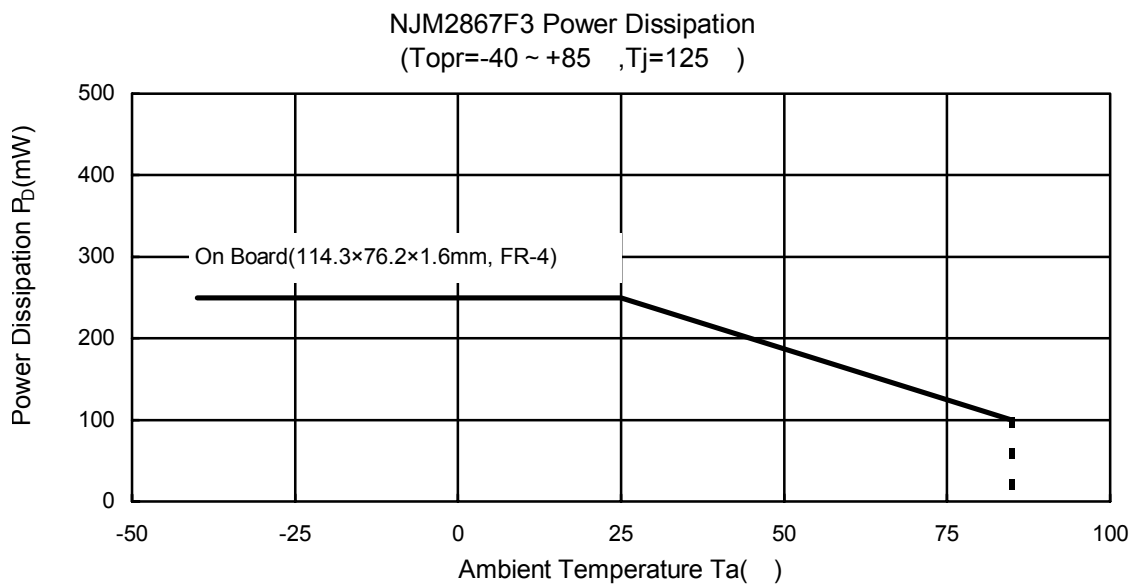
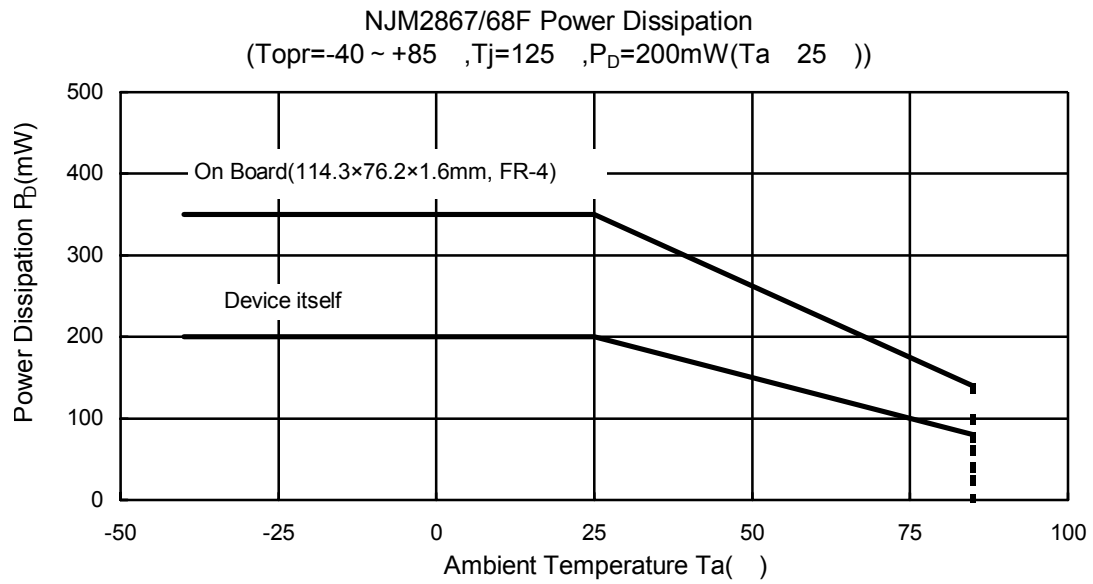


NJM2867/68

ELECTRICAL CHARACTERISTICS

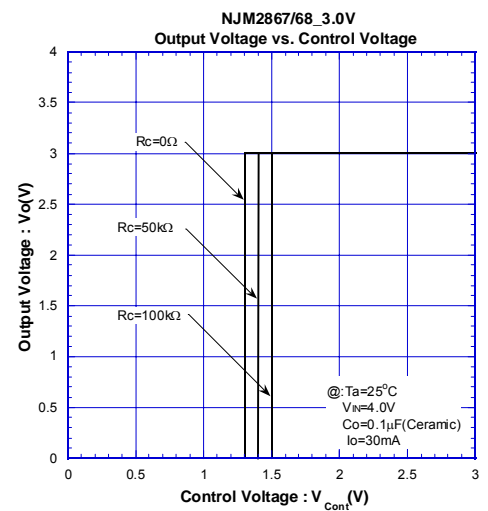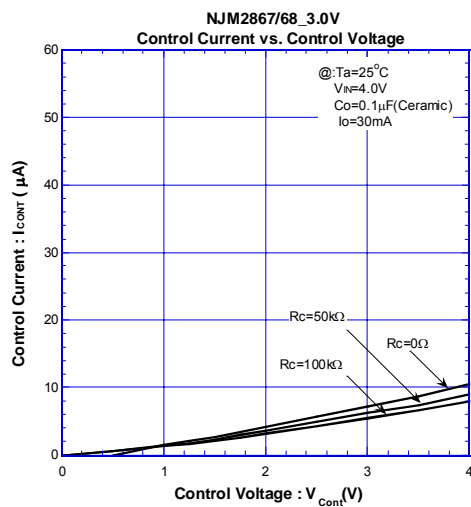
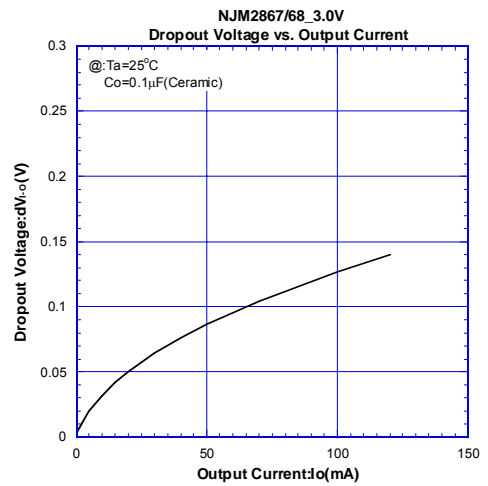
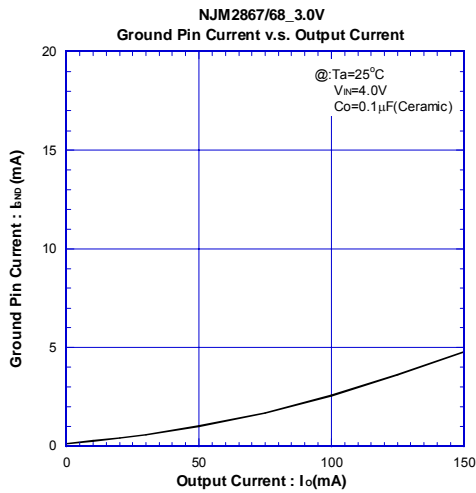
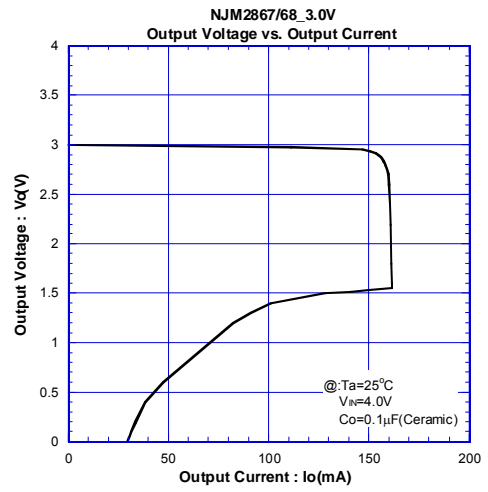
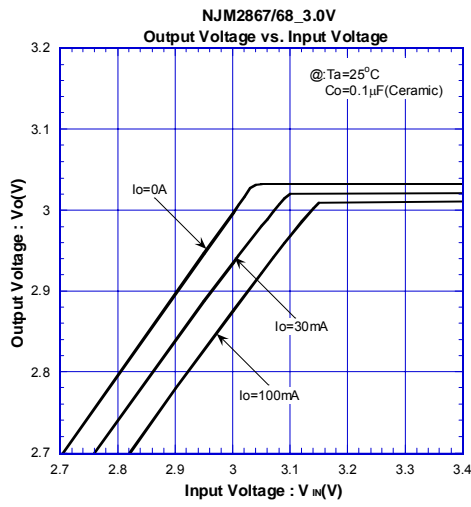


ELECTRICAL CHARACTERISTICS

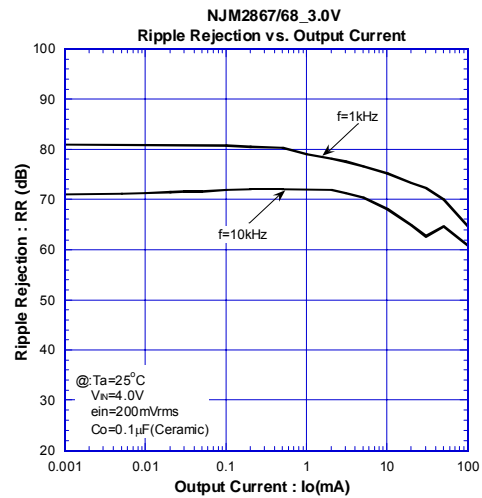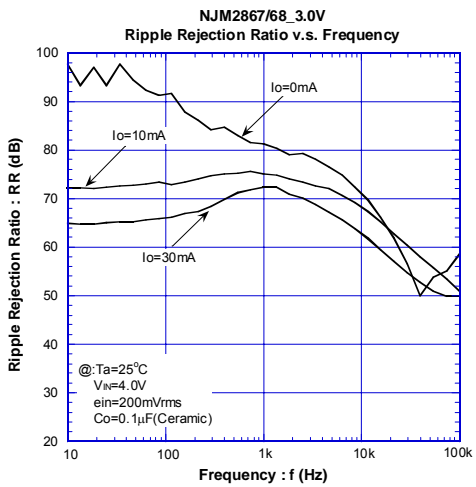
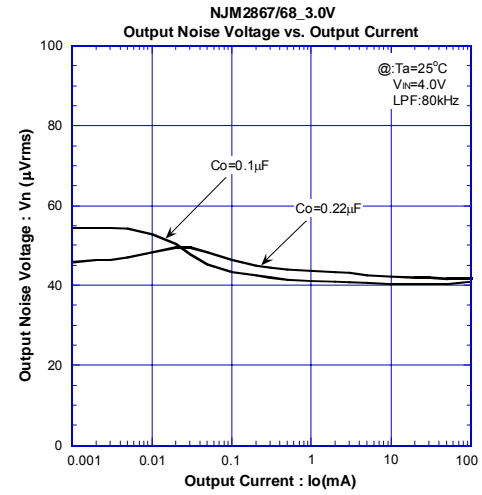
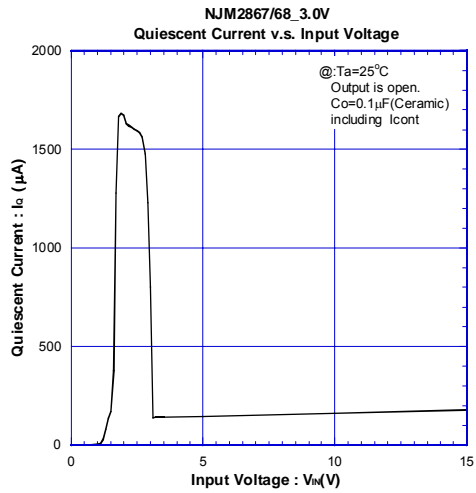
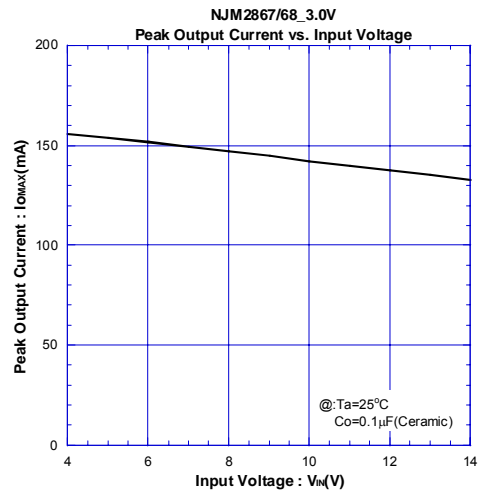
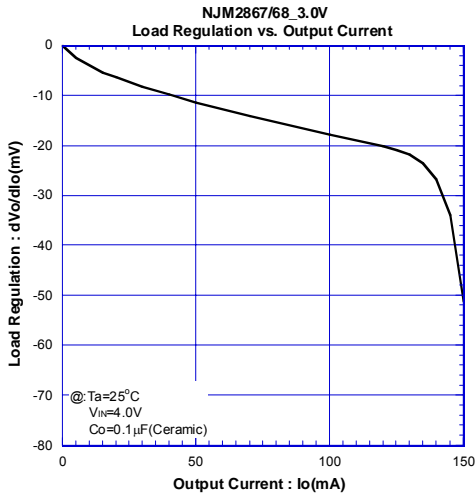


NJM2867/68

ELECTRICAL CHARACTERISTICS

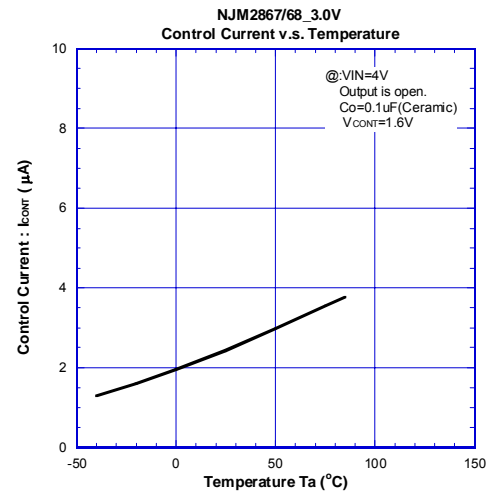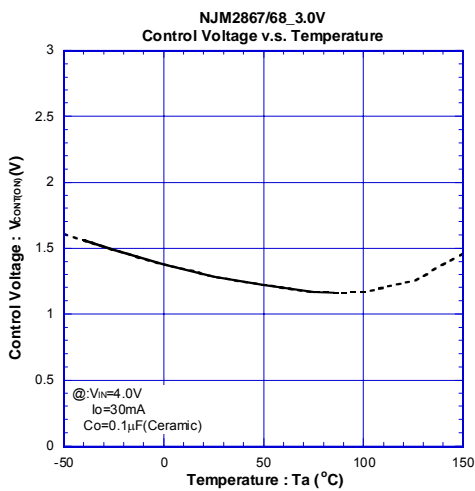
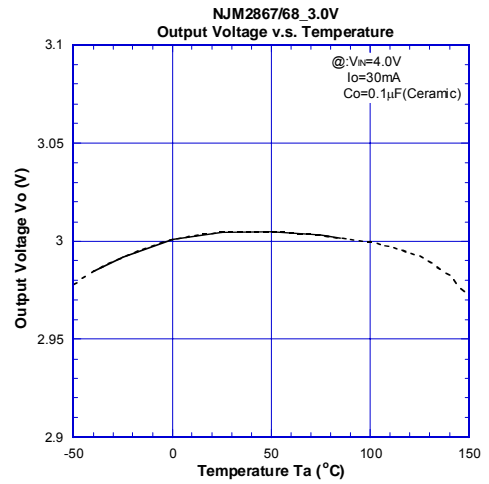
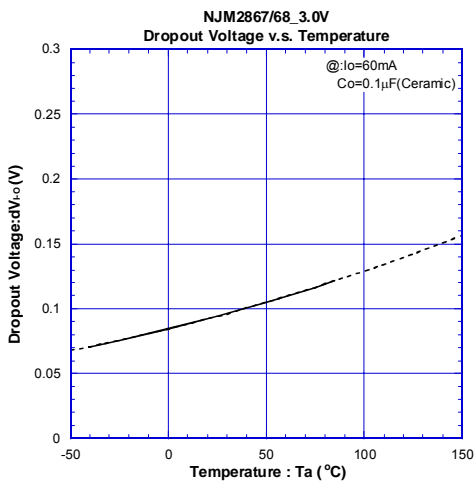
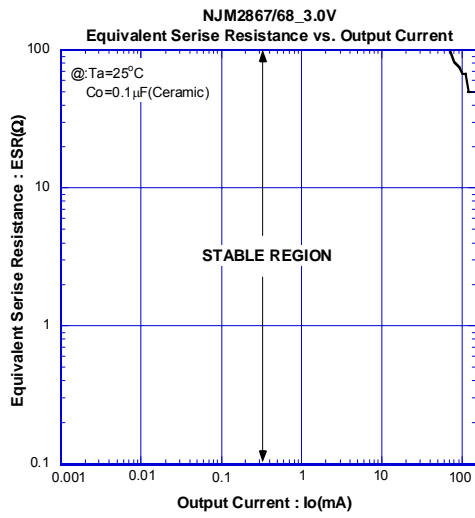


■ ELECTRICAL CHARACTERISTICS

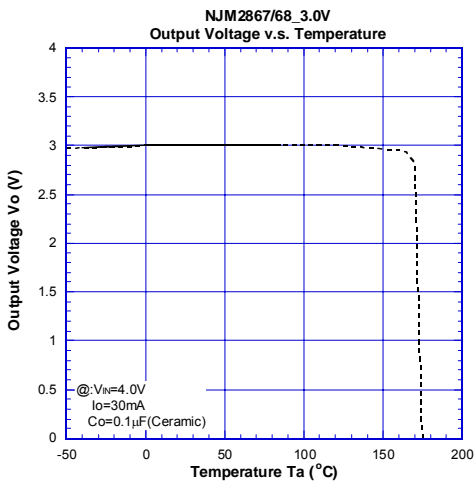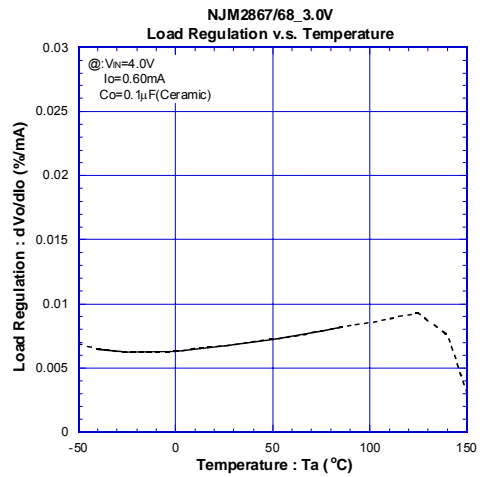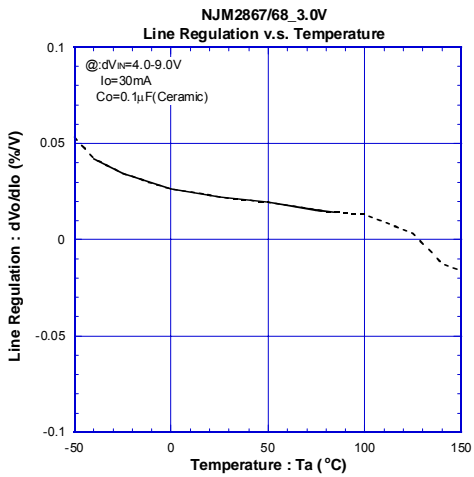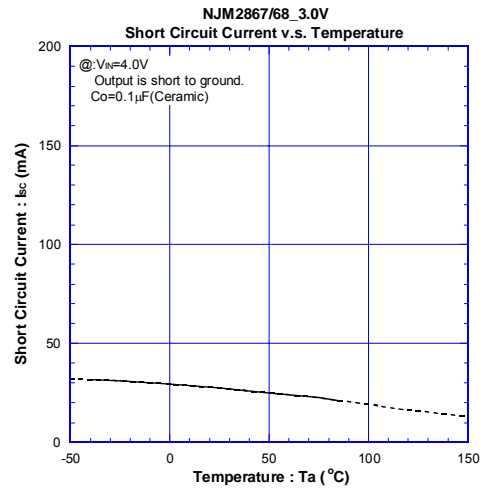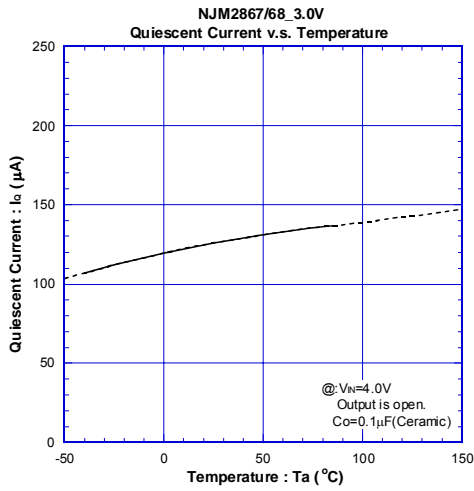

NJM2867/68

■ ELECTRICAL CHARACTERISTICS

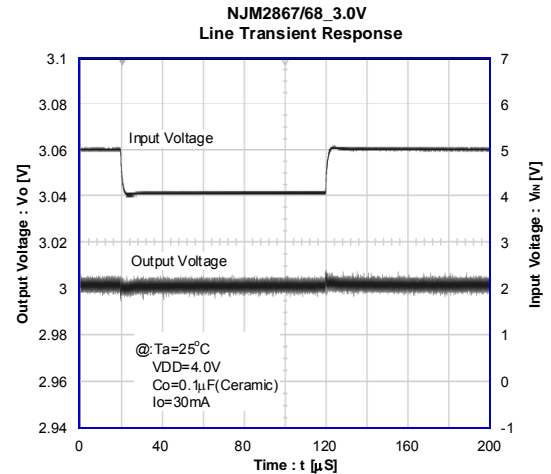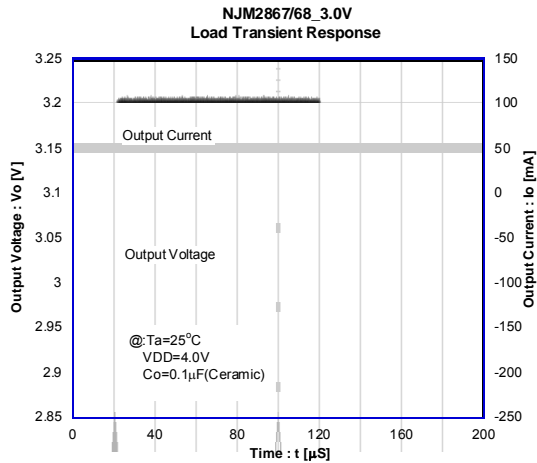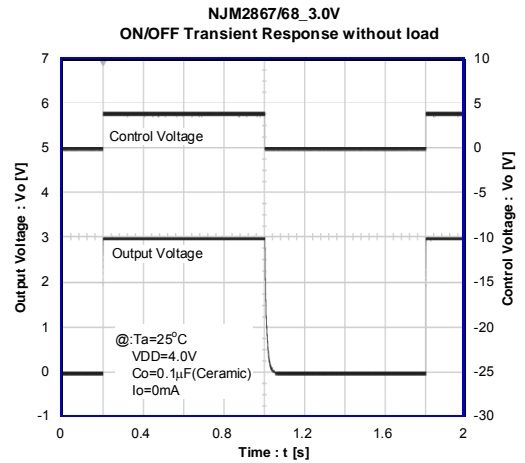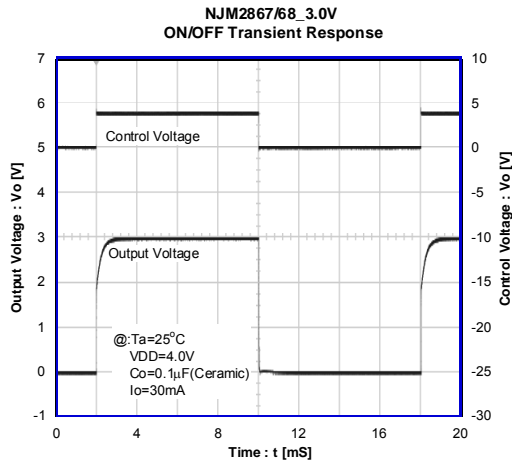

[CAUTION]
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2867F26-TE2](#) [NJM2867F3-29-TE2](#) [NJM2868F28-TE1](#) [NJM2867F3-25-TE1](#) [NJM2867F29-TE2](#) [NJM2867F25-TE2](#) [NJM2867F3-05-TE1](#) [NJM2867F3-34-TE2](#) [NJM2867F3-38-TE2](#) [NJM2868F21-TE1](#) [NJM2868F32-TE1](#) [NJM2868F33-TE1](#) [NJM2867F38-TE2](#) [NJM2868F34-TE1](#) [NJM2868F05-TE1](#) [NJM2867F3-32-TE2](#) [NJM2867F33-TE1](#) [NJM2867F33-TE2](#) [NJM2867F3-26-TE1](#) [NJM2867F34-TE2](#) [NJM2867F3-03-TE1](#) [NJM2867F24-TE1](#) [NJM2867F3-27-TE1](#) [NJM2868F03-TE1](#) [NJM2867F32-TE2](#) [NJM2867F3-33-TE1](#) [NJM2867F05-TE2](#) [NJM2867F21-TE2](#) [NJM2868F05-TE2](#) [NJM2867F3-21-TE2](#) [NJM2868F26-TE1](#) [NJM2867F31-TE2](#) [NJM2867F3-28-TE1](#) [NJM2868F31-TE1](#) [NJM2867F28-TE2](#) [NJM2867F3-24-TE2](#) [NJM2867F03-TE1](#) [NJM2868F25-TE1](#) [NJM2868F24-TE1](#) [NJM2868F38-TE1](#) [NJM2868F29-TE1](#) [NJM2867F3-31-TE2](#) [NJM2867F05-TE1](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9