

## Universal Relay Driver

### Features

- 10V to 450V Input Voltage Range
- Energy-saving Hold Current Mode
- Adjustable Microcontroller Supply
- Low Supply Current <1 mA
- Constant-current Coil Drive
- Programmable Pull-in Current, Pull-in Time and Hold Current

### Applications

- Industrial Controls
- Relay Timers
- Solenoid Drivers
- Home Automation

### General Description


The HV9901 universal relay driver provides high-efficiency driving for low-voltage relays with supply voltages as high as 450V. For example, a relay with a 5V coil can be driven directly from the rectified 120 VAC or 230 VAC line.

The IC includes two high-voltage linear regulators. The first one is for providing power to internal control circuitry. The second one has an adjustable output voltage and a 1 mA output current capability to support external circuitry, such as a microcontroller control circuit.

The pull-in current, pull-in time and hold current for the relay are individually programmable through two resistors and a capacitor. PWM switching can be synchronized with an external clock or with another HV9901 operating at a higher frequency.

The relay is operated through the enable input ENI. Logic polarity is under control of the polarity input POL. Audible noise coming from the relay can be suppressed by operating at a PWM frequency exceeding 20 kHz.

### Package Type

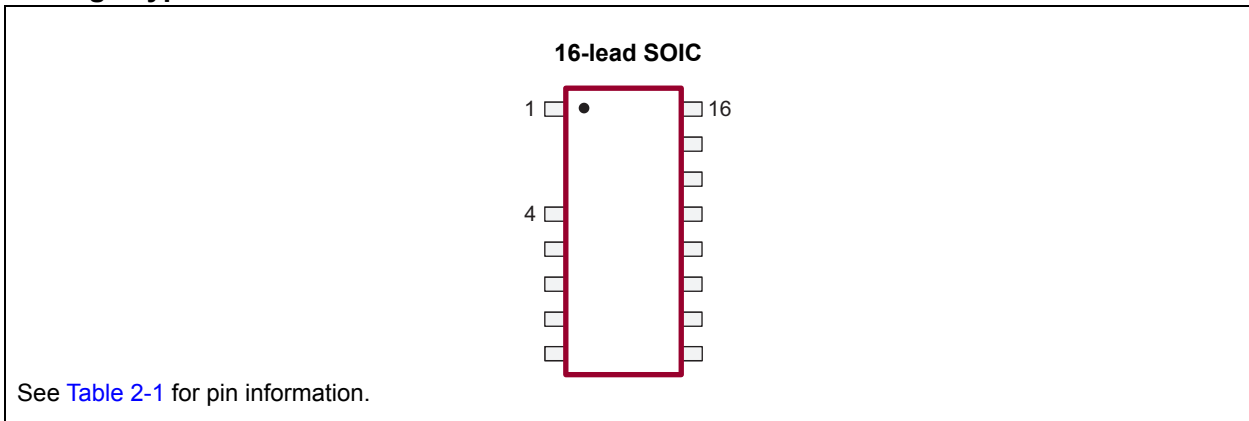


### WARNING


The HV9901 is suited for relay driving applications operating at hazardous voltage. Ensure that adequate safeguards are provided to protect the end user from electrical shock.

# HV9901

## Functional Block Diagram

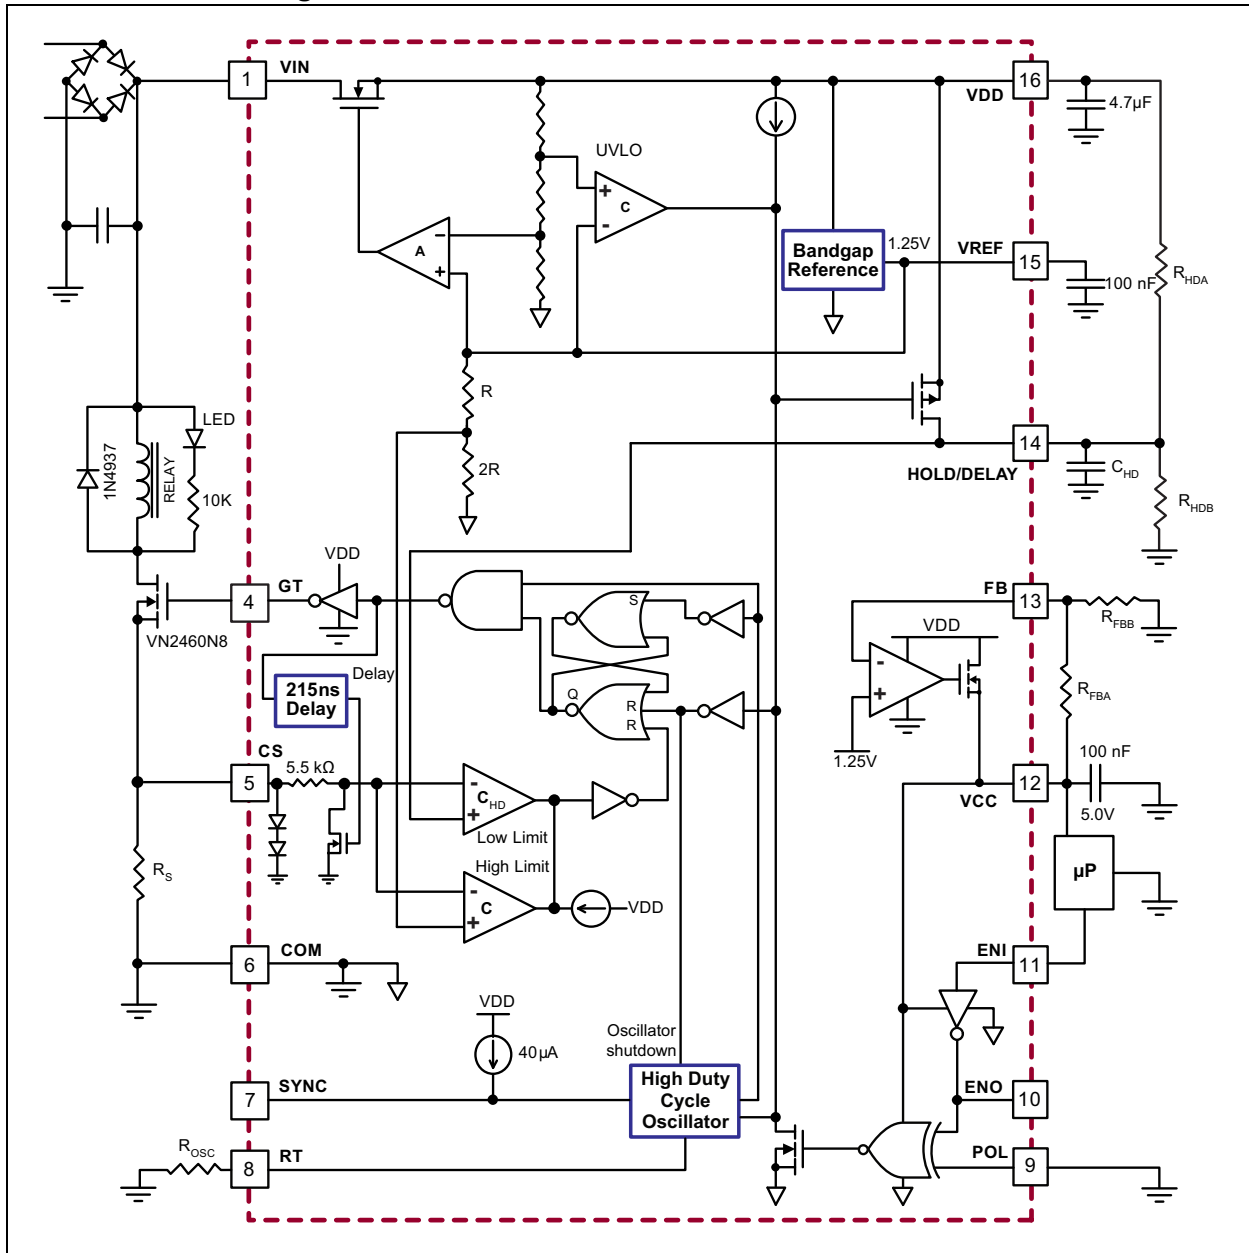

## Typical Application Circuit

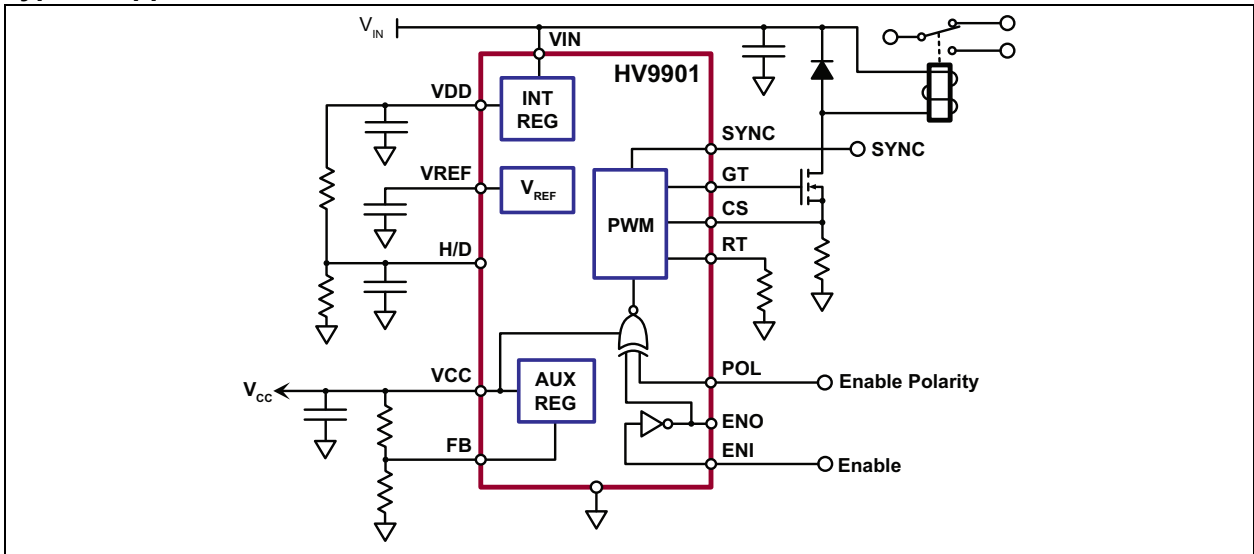

# HV9901

## 1.0 ELECTRICAL CHARACTERISTICS

### Absolute Maximum Ratings†

|   |                          |
|---|--------------------------|
| Input Voltage, $V_{IN}$ <sup>1</sup> .....                              | -0.5V to 470V            |
| Input Voltage to any other Pin <sup>1</sup> .....                       | -0.3V to $V_{DD} + 0.3V$ |
| Operating Junction Temperature Range .....                              | -40°C to +85°C           |
| Continuous Power Dissipation ( $T_A = +25^\circ C$ ) <sup>2</sup> ..... | 750 mW                   |

† **Notice:** Stresses above those listed under “Maximum Ratings” may cause permanent damage to the device. This is a stress rating only, and functional operation of the device at those or any other conditions above those indicated in the operational listings of this specification is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Note 1:** All voltages are referenced to GND.

**Note 2:** For operation above 25°C ambient, derate linearly at 7.5 mW/°C.

## ELECTRICAL CHARACTERISTICS

**Electrical Specifications:**  $T_A = 25^\circ C$  unless otherwise noted.

| Parameter                      | Symbol           | Min. | Typ.      | Max.        | Unit    | Conditions   |
|--------------------------------|------------------|------|-----------|-------------|---------|--|
| <b>HIGH-VOLTAGE REGULATOR</b>  |                  |      |           |             |         |  |
| Input Voltage                  | $V_{IN}$         | 10   | —         | 450         | V       | $I_{CC} = 0$ mA to 1 mA load   |
| Supply Current                 | $I_{IN}$         | —    | —         | 2           | mA      | No load at $V_{DD}$ ( <b>Note 1</b> )<br>load at $I_{CC} = 1$ mA,<br>$C_{GT} = 500$ pF, $f_{OSC} = 25$ kHz |
| Internal Supply Voltage        | $V_{DD}$         | 8.5  | 9         | 9.5         | V       | No load at $V_{DD}$ ( <b>Note 1</b> )<br>$C_{GT} = 500$ pF, $f_{OSC} = 25$ kHz                             |
| $V_{DD}$ UVLO, On              | $UVLO_{(ON)}$    | 7.8  | 8.2       | 8.5         | V       |  |
| $V_{DD}$ UVLO, Hysteresis      | $UVLO_{(HYST)}$  | —    | 0.5       | —           | V       |  |
| <b>ADJUSTABLE REGULATOR</b>    |                  |      |           |             |         |  |
| Regulator Output Voltage Range | $V_{CC}$         | 2    | —         | 5.5         | V       | $I_{CC} = 1$ mA load   |
| Regulator Output Current       | $I_{CC}$         | 0    | —         | 1           | mA      | No load at $V_{DD}$ ( <b>Note 1</b> )  |
| Feedback Voltage               | $V_{FB}$         | 0    | $V_{REF}$ | $V_{DD}-1V$ | V       |  |
| Input Bias Current             | $I_{FB}$         | —    | 25        | 100         | nA      | $V_{FB} = V_{REF}$   |
| <b>REFERENCE</b>               |                  |      |           |             |         |  |
| Bandgap Reference Voltage      | $V_{REF}$        | 1.2  | 1.25      | 1.3         | V       | $T_A = -40^\circ C$ to $+85^\circ C$   |
| Load Regulation                |                  | —    | —         | 7           | mV      | $0$ mA < $I_{REF}$ < $0.3$ mA  |
| Line Regulation                |                  | —    | 10        | 15          | mV      | $8.5V < V_{DD} < 9.5V$   |
| Short Circuit Current          | $I_{REF(SHORT)}$ | —    | —         | 1           | mA      |  |
| Reference Voltage Sink Current | $I_{REF(SINK)}$  | —    | —         | 20          | $\mu A$ |  |

## ELECTRICAL CHARACTERISTICS (CONTINUED)

| Electrical Specifications: $T_A = 25^\circ\text{C}$ unless otherwise noted. |                        |                     |       |                     |                       |  |
|---|------------------------|---------------------|-------|---------------------|-----------------------|--|
| Parameter   | Symbol                 | Min.                | Typ.  | Max.                | Unit                  | Conditions   |
| <b>OSCILLATOR</b>   |                        |                     |       |                     |                       |  |
| PWM Oscillator Frequency  | $f_{\text{OSC}}$       | 20                  | 25    | 35                  | kHz                   | $R_T = 1\text{ M}\Omega$   |
|   |                        | 80                  | 100   | 140                 | kHz                   | $R_T = 226\text{ k}\Omega$   |
| Temperature Coefficient   | —                      | —                   | 170   | —                   | ppm/ $^\circ\text{C}$ | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$                                 |
| Oscillator SYNC Frequency   | $f_{\text{SYNC}}$      | —                   | —     | 150                 | kHz                   |  |
| SYNC Sourcing Current   | $I_{\text{SYNC}}$      | 20                  | —     | 55                  | $\mu\text{A}$         |  |
| SYNC Sinking Current  | $I_{\text{SYNC}}$      | 1                   | —     | —                   | mA                    | $V_{\text{SYNC}} = 0.1\text{V}$  |
| SYNC Input Logic Low Voltage  | $V_{\text{SYNC}}$      | —                   | —     | 1                   | V                     |  |
| <b>PWM</b>  |                        |                     |       |                     |                       |  |
| Maximum Duty Cycle  | $D_{\text{MAX}}$       | 96.5                | —     | 99.5                | %                     | $R_T = 1\text{ M}\Omega$   |
|   |                        | 86.5                | —     | 97.5                | %                     | $R_T = 226\text{ k}\Omega$   |
| Blanking Time   | $t_{\text{BLNK}}$      | 150                 | 215   | 280                 | ns                    |  |
| <b>MOSFET DRIVER</b>  |                        |                     |       |                     |                       |  |
| Gate Drive Output High  | $V_{\text{GTH}}$       | $V_{\text{DD}}-0.3$ | —     | —                   | V                     | $I_{\text{OUT}} = 10\text{ mA}$  |
| Gate Drive Output Low   | $V_{\text{GTL}}$       | —                   | —     | 0.3                 | V                     | $I_{\text{OUT}} = -10\text{ mA}$   |
| Rise Time   | $t_{\text{R}}$         | —                   | 30    | 50                  | ns                    | $C_{\text{GT}} = 500\text{ pF}$  |
| Fall Time   | $t_{\text{F}}$         | —                   | 30    | 50                  | ns                    |  |
| <b>CURRENT SENSE</b>  |                        |                     |       |                     |                       |  |
| Current Sense Voltage, High Limit   | $V_{\text{CS(HL)}}$    | 0.775               | 0.833 | 0.891               | V                     |  |
| Current Limit Delay to GT, High Limit                                       | $t_{\text{DELAY(HL)}}$ | —                   | 200   | 250                 | ns                    | 50 mV overdrive  |
| Input Bias Current  | $I_{\text{CS}}$        | —                   | 25    | 1000                | nA                    | POL = Low, ENI = Low   |
| Low Limit Comparator Input Offset Voltage                                   | $V_{\text{OS}}$        | —                   | —     | $\pm 60$            | mV                    |  |
| Current Limit Delay to GT, Low Limit  | $t_{\text{DELAY(LL)}}$ | —                   | 200   | 250                 | ns                    | 50 mV overdrive  |
| Hold/Delay Output Voltage   | $V_{\text{HOLD/DEL}}$  | $V_{\text{DD}}-0.4$ | —     | —                   | V                     | $I_{\text{HOLD/DEL(sourcing)}} = 100\text{ }\mu\text{A}$<br>POL = Low, ENI = Low |
| Hold/Delay Input Bias Current   | $I_{\text{HOLD/DEL}}$  | —                   | 25    | 500                 | nA                    | POL = Low, ENI = Low   |
| Shutdown Delay  | $t_{\text{ENI}}$       | —                   | 50    | 100                 | ns                    | $2\text{V} < V_{\text{CC}} < 5.5\text{V}$  |
| Enable Input Voltage - High   | $V_{\text{ENI}}$       | $0.7 V_{\text{CC}}$ | —     | $V_{\text{CC}}$     | V                     |  |
| Enable Input Voltage - Low  |                        | 0                   | —     | $0.3 V_{\text{CC}}$ | V                     |  |
| Enable Input Current - High   | $I_{\text{ENI}}$       | —                   | 1     | 5                   | $\mu\text{A}$         |  |
| Enable Input Current - Low  |                        | -5                  | -1    | —                   | $\mu\text{A}$         |  |
| Polarity Voltage - High   | $V_{\text{POL}}$       | $0.7 V_{\text{CC}}$ | —     | $V_{\text{CC}}$     | V                     |  |
| Polarity Voltage - Low  |                        | 0                   | —     | $0.3 V_{\text{CC}}$ | V                     |  |
| Polarity Current - High   | $I_{\text{POL}}$       | —                   | 1     | 5                   | $\mu\text{A}$         |  |
| Polarity Current - Low  |                        | -5                  | -1    | —                   | $\mu\text{A}$         |  |
| Enable Output Voltage - High  | $V_{\text{ENO}}$       | $0.9 V_{\text{CC}}$ | —     | $V_{\text{CC}}$     | V                     |  |
| Enable Output Voltage - Low   |                        | 0                   | —     | $0.1 V_{\text{CC}}$ | V                     |  |

**Note 1:** Maximum allowable load current limited by power dissipation and operating ambient temperature

# HV9901

---

## TEMPERATURE SPECIFICATIONS

| Parameter                         | Symbol        | Min. | Typ. | Max. | Unit | Conditions |
|-----------------------------------|---------------|------|------|------|------|------------|
| <b>TEMPERATURE RANGE</b>          |               |      |      |      |      |            |
| Operating Junction Temperature    | $T_J$         | -40  | —    | 85   | °C   |            |
| <b>PACKAGE THERMAL RESISTANCE</b> |               |      |      |      |      |            |
| 16-lead SOIC                      | $\theta_{JA}$ | —    | 83   | —    | °C/W |            |

### 1.1 Truth Table

#### ENABLE OUTPUT LOGIC TRUTH TABLE

| POL  | ENI  | ENO  | Gate Drive Output   |
|------|------|------|---|
| Low  | Low  | High | $V_{GT}$ = Oscillating output, duty cycle depends on inductive load |
| Low  | High | Low  | $V_{GT}$ = Low, SYNC = High, oscillator shutdown                    |
| High | High | Low  | $V_{GT}$ = Oscillating output, duty cycle depends on inductive load |
| High | Low  | High | $V_{GT}$ = Low, SYNC = High, oscillator shutdown                    |

## 2.0 PIN DESCRIPTION

The pin details of HV9901 are listed on [Table 2-1](#). See [Package Type](#) for the location of the pins.

**TABLE 2-1: PIN TABLE**

| Pin Number | Pin Name | Description   |
|------------|----------|---|
| 1          | VIN      | Input supply  |
| 2          | —        | Pin not present   |
| 3          | —        | Pin not present   |
| 4          | GT       | Gate driver output for driving the external switching MOSFET  |
| 5          | CS       | Current sense input   |
| 6          | GND      | Ground  |
| 7          | SYNC     | Open-drain input/output for synchronizing the internal PWM oscillator to other HV9901s or to an external clock                    |
| 8          | RT       | A resistor from this pin to ground sets the PWM switching frequency.  |
| 9          | POL      | Input that determines the polarity of the ENI input. See <a href="#">Truth Table</a> .  |
| 10         | ENO      | Enable output. It is the logical inversion of the ENI signal.   |
| 11         | ENI      | Enable input. Whether ENI is active low or active high is determined by the POL input.  |
| 12         | VCC      | Output of the auxiliary regulator. Output voltage is determined by the resistive divider connected to the FB pin.                 |
| 13         | FB       | Feedback input for the auxiliary regulator.   |
| 14         | H/D      | HOLD/DELAY input. An RC network connected to this pin controls the pull-in time and the holding current. See equations on page 4. |
| 15         | VREF     | Reference voltage. Bypass locally with a 10 nF capacitor.   |
| 16         | VDD      | Output of the internal supply regulator. Bypass locally with a 10 nF capacitor.   |

## 3.0 APPLICATION INFORMATION

To calculate external component values, use the equations shown in [Equation 3-1](#) to [Equation 3-8](#) as well as [Figure 3-1](#) and [Figure 3-2](#).

### EQUATION 3-1:

$$I_{CS(HI)} = 833mV_{NOM}$$

### EQUATION 3-2:

$$V_{DD} = 9V_{NOM}$$

### EQUATION 3-3:

$$I_{PULL-IN} = \frac{V_{CS}}{R_{SENSE}}$$

### EQUATION 3-4:

$$V_{CS(LL)} = \frac{V_{DD}}{1 + \frac{R_{HDA}}{R_{HDB}}}$$

### EQUATION 3-8:

$$t_{PULL-IN} = (R_{HDA} + R_{HDB}) \cdot C_{HD} \cdot \ln\left(1 - \frac{V_{CS(HI)} - V_{DD}}{V_{CS(LL)} - V_{DD}}\right)$$

### EQUATION 3-5:

$$I_{HOLD} = \frac{V_{CS(LL)}}{R_{SENSE}}$$


### EQUATION 3-6:

$$f_{PWM} \approx 3.23kHz + \frac{21.8GHz \cdot \Omega}{R_{OSC}}$$

valid for  $f_{PWM} > 23 kHz$


### EQUATION 3-7:

$$V_{CC} = 1.25V \cdot \left(1 + \frac{R_{FBA}}{R_{FBB}}\right)$$

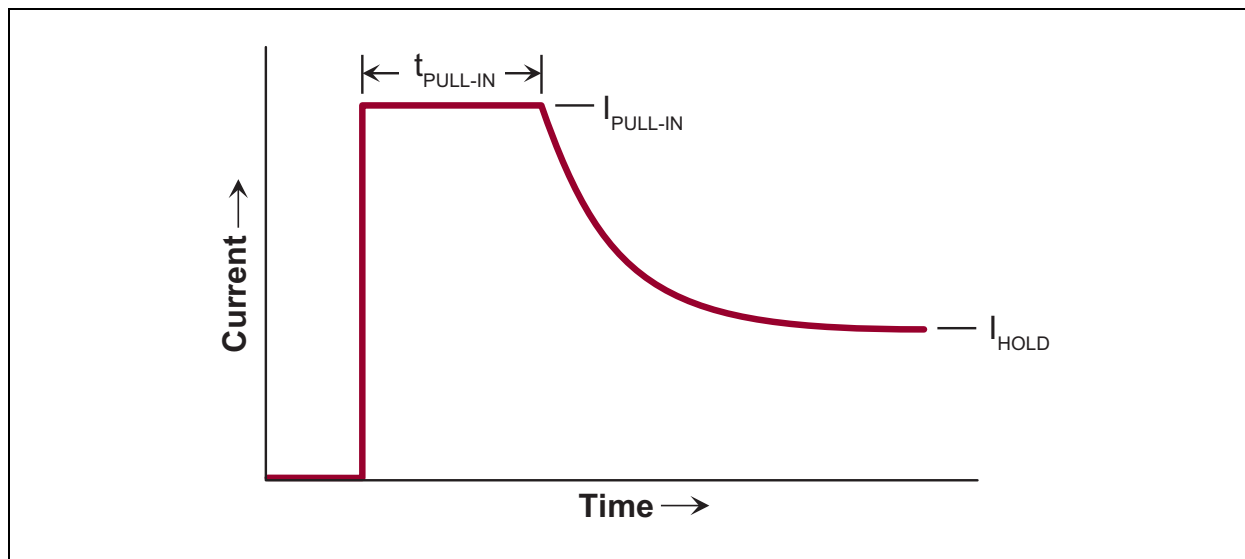

**FIGURE 3-1:** Current vs. Time.



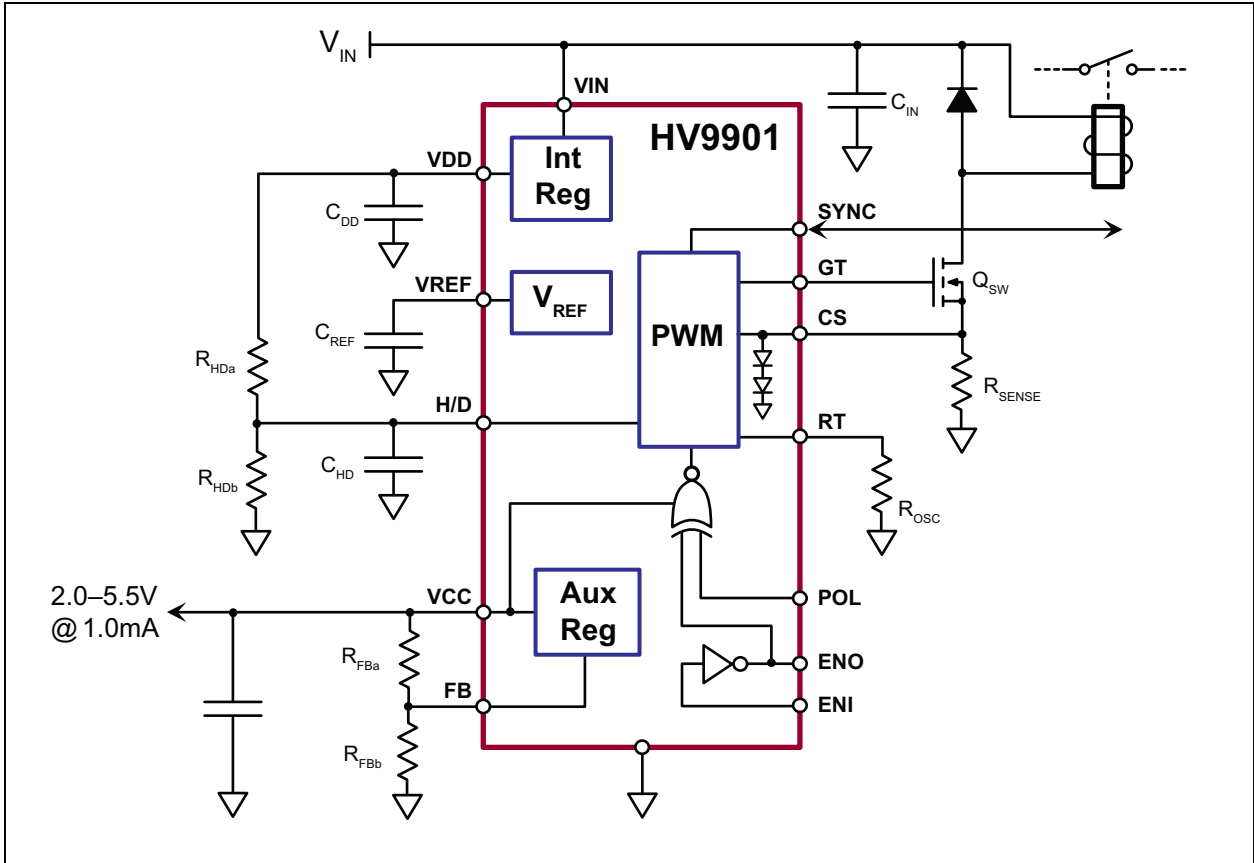


**FIGURE 3-2:** Typical Application Circuit.

# HV9901

---

## 4.0 PACKAGING INFORMATION

### 4.1 Package Marking Information

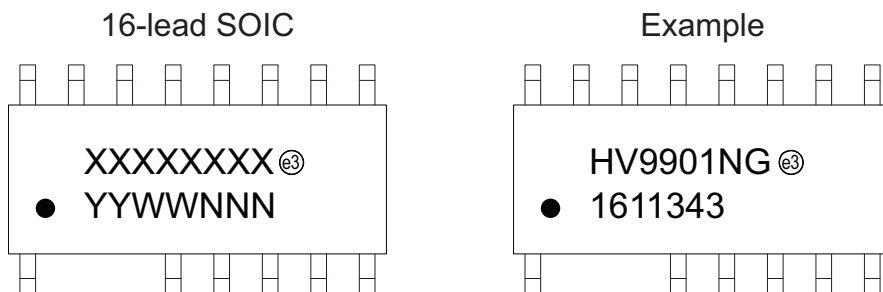


|                |        |  |
|----------------|--------|--|
| <b>Legend:</b> | XX...X | Product Code or Customer-specific information  |
|                | Y      | Year code (last digit of calendar year)  |
|                | YY     | Year code (last 2 digits of calendar year)   |
|                | WW     | Week code (week of January 1 is week '01')   |
|                | NNN    | Alphanumeric traceability code   |
|                | (e3)   | Pb-free JEDEC® designator for Matte Tin (Sn)   |
|                | *      | This package is Pb-free. The Pb-free JEDEC designator (e3) can be found on the outer packaging for this package. |

**Note:** In the event the full Microchip part number cannot be marked on one line, it will be carried over to the next line, thus limiting the number of available characters for product code or customer-specific information. Package may or not include the corporate logo.

## 16-Lead SOIC (Narrow Body) Package Outline (NG)

### Pins #2 and #3 Trimmed

9.90x3.90mm body, 1.75mm height (max), 1.27mm pitch

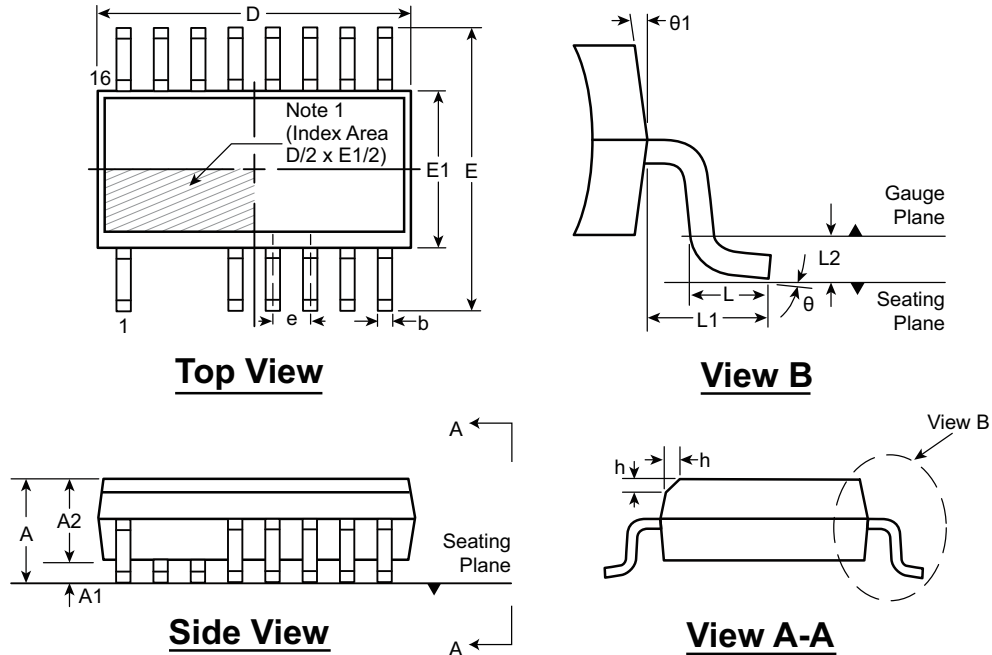

Note: For the most current package drawings, see the Microchip Packaging Specification at [www.microchip.com/packaging](http://www.microchip.com/packaging).

**Note:**

1. This chamfer feature is optional. If it is not present, then a Pin 1 identifier must be located in the index area indicated. The Pin 1 identifier can be: a molded mark/identifier; an embedded metal marker; or a printed indicator.

| Symbol         | A   | A1    | A2   | b     | D    | E      | E1    | e     | h           | L    | L1   | L2          | θ           | θ1 |    |     |
|----------------|-----|-------|------|-------|------|--------|-------|-------|-------------|------|------|-------------|-------------|----|----|-----|
| Dimension (mm) | MIN | 1.35* | 0.10 | 1.25  | 0.31 | 9.80*  | 5.80* | 3.80* | 1.27<br>BSC | 0.25 | 0.40 | 1.04<br>REF | 0.25<br>BSC | 0° | 5° |     |
|                | NOM | -     | -    | -     | -    | 9.90   | 6.00  | 3.90  |             | -    | -    |             | -           | -  | -  | -   |
|                | MAX | 1.75  | 0.25 | 1.65* | 0.51 | 10.00* | 6.20* | 4.00* |             | 0.50 | 1.27 |             | -           | -  | 8° | 15° |

JEDEC Registration MS-012, Variation AC, Issue E, Sept. 2005.

\* This dimension is not specified in the JEDEC drawing.

Drawings are not to scale.

# HV9901

---

NOTES:

## APPENDIX A: REVISION HISTORY

### Revision A (August 2016)

- Updated file to Microchip format.
- Converted Supertex Doc # DSFP-HV9901 to Microchip DS20005550A.
- Minor text changes throughout.

# HV9901

## PRODUCT IDENTIFICATION SYSTEM

To order or obtain information, e.g., on pricing or delivery, refer to the factory or the listed sales office.

| <u>PART NO.</u>  | <u>XX</u>       | - | <u>X</u>                              | - | <u>X</u>   |
|--|-----------------|---|---------------------------------------|---|------------|
| Device   | Package Options |   | Environmental                         |   | Media Type |
| Device:  | HV9901          | = | Universal Relay Driver                |   |            |
| Package:   | NG              | = | 16-lead SOIC                          |   |            |
| Environmental:   | G               | = | Lead (Pb)-free/RoHS-compliant Package |   |            |
| Media Type:  | (blank)         | = | 45/Tube for an NG Package             |   |            |
|  | M901            | = | 2600/Reel for an NG Package           |   |            |
|  | M934            | = | 2600/Reel for an NG Package           |   |            |
| Note: For media types M901 and M934, the base quantity for tape and reel was standardized to 2600/reel. Both options will result in delivery of the same number of parts/reel. |                 |   |                                       |   |            |

**Examples:**

- a) HV9901NG-G: Universal Relay Driver, 16-lead SOIC Package, 45/Tube
- b) HV9901NG-G-M901: Universal Relay Driver, 16-lead SOIC Package, 2600/Reel
- c) HV9901NG-G-M934: Universal Relay Driver, 16-lead SOIC Package, 2600/Reel

---

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as “unbreakable.”

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

*Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

**QUALITY MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
= ISO/TS 16949 =**

### Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, dsPIC, FlashFlex, flexPWR, Heldo, JukeBlox, KeeLoq, KeeLoq logo, Klear, LANCheck, LINK MD, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC32 logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, ETHERSYNCH, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and QUIET-WIRE are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KlearNet, KlearNet logo, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, RightTouch logo, REAL ICE, Ripple Blocker, Serial Quad I/O, SQL, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2016, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-0827-7



# MICROCHIP

## Worldwide Sales and Service

### AMERICAS

#### Corporate Office

2355 West Chandler Blvd.  
Chandler, AZ 85224-6199

Tel: 480-792-7200

Fax: 480-792-7277

Technical Support:

[http://www.microchip.com/  
support](http://www.microchip.com/support)

Web Address:

[www.microchip.com](http://www.microchip.com)

#### Atlanta

Duluth, GA

Tel: 678-957-9614

Fax: 678-957-1455

#### Austin, TX

Tel: 512-257-3370

#### Boston

Westborough, MA

Tel: 774-760-0087

Fax: 774-760-0088

#### Chicago

Itasca, IL

Tel: 630-285-0071

Fax: 630-285-0075

#### Cleveland

Independence, OH

Tel: 216-447-0464

Fax: 216-447-0643

#### Dallas

Addison, TX

Tel: 972-818-7423

Fax: 972-818-2924

#### Detroit

Novi, MI

Tel: 248-848-4000

#### Houston, TX

Tel: 281-894-5983

#### Indianapolis

Noblesville, IN

Tel: 317-773-8323

Fax: 317-773-5453

#### Los Angeles

Mission Viejo, CA

Tel: 949-462-9523

Fax: 949-462-9608

#### New York, NY

Tel: 631-435-6000

#### San Jose, CA

Tel: 408-735-9110

#### Canada - Toronto

Tel: 905-695-1980

Fax: 905-695-2078

### ASIA/PACIFIC

#### Asia Pacific Office

Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon

#### Hong Kong

Tel: 852-2943-5100

Fax: 852-2401-3431

#### Australia - Sydney

Tel: 61-2-9868-6733

Fax: 61-2-9868-6755

#### China - Beijing

Tel: 86-10-8569-7000

Fax: 86-10-8528-2104

#### China - Chengdu

Tel: 86-28-8665-5511

Fax: 86-28-8665-7889

#### China - Chongqing

Tel: 86-23-8980-9588

Fax: 86-23-8980-9500

#### China - Dongguan

Tel: 86-769-8702-9880

#### China - Guangzhou

Tel: 86-20-8755-8029

#### China - Hangzhou

Tel: 86-571-8792-8115

Fax: 86-571-8792-8116

#### China - Hong Kong SAR

Tel: 852-2943-5100

Fax: 852-2401-3431

#### China - Nanjing

Tel: 86-25-8473-2460

Fax: 86-25-8473-2470

#### China - Qingdao

Tel: 86-532-8502-7355

Fax: 86-532-8502-7205

#### China - Shanghai

Tel: 86-21-5407-5533

Fax: 86-21-5407-5066

#### China - Shenyang

Tel: 86-24-2334-2829

Fax: 86-24-2334-2393

#### China - Shenzhen

Tel: 86-755-8864-2200

Fax: 86-755-8203-1760

#### China - Wuhan

Tel: 86-27-5980-5300

Fax: 86-27-5980-5118

#### China - Xian

Tel: 86-29-8833-7252

Fax: 86-29-8833-7256

### ASIA/PACIFIC

#### China - Xiamen

Tel: 86-592-2388138

Fax: 86-592-2388130

#### China - Zhuhai

Tel: 86-756-3210040

Fax: 86-756-3210049

#### India - Bangalore

Tel: 91-80-3090-4444

Fax: 91-80-3090-4123

#### India - New Delhi

Tel: 91-11-4160-8631

Fax: 91-11-4160-8632

#### India - Pune

Tel: 91-20-3019-1500

#### Japan - Osaka

Tel: 81-6-6152-7160

Fax: 81-6-6152-9310

#### Japan - Tokyo

Tel: 81-3-6880-3770

Fax: 81-3-6880-3771

#### Korea - Daegu

Tel: 82-53-744-4301

Fax: 82-53-744-4302

#### Korea - Seoul

Tel: 82-2-554-7200

Fax: 82-2-558-5932 or

82-2-558-5934

#### Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857

Fax: 60-3-6201-9859

#### Malaysia - Penang

Tel: 60-4-227-8870

Fax: 60-4-227-4068

#### Philippines - Manila

Tel: 63-2-634-9065

Fax: 63-2-634-9069

#### Singapore

Tel: 65-6334-8870

Fax: 65-6334-8850

#### Taiwan - Hsin Chu

Tel: 886-3-5778-366

Fax: 886-3-5770-955

#### Taiwan - Kaohsiung

Tel: 886-7-213-7828

#### Taiwan - Taipei

Tel: 886-2-2508-8600

Fax: 886-2-2508-0102

#### Thailand - Bangkok

Tel: 66-2-694-1351

Fax: 66-2-694-1350

### EUROPE

#### Austria - Wels

Tel: 43-7242-2244-39

Fax: 43-7242-2244-393

#### Denmark - Copenhagen

Tel: 45-4450-2828

Fax: 45-4485-2829

#### France - Paris

Tel: 33-1-69-53-63-20

Fax: 33-1-69-30-90-79

#### Germany - Dusseldorf

Tel: 49-2129-3766400

#### Germany - Karlsruhe

Tel: 49-721-625370

#### Germany - Munich

Tel: 49-89-627-144-0

Fax: 49-89-627-144-44

#### Italy - Milan

Tel: 39-0331-742611

Fax: 39-0331-466781

#### Italy - Venice

Tel: 39-049-7625286

#### Netherlands - Drunen

Tel: 31-416-690399

Fax: 31-416-690340

#### Poland - Warsaw

Tel: 48-22-3325737

#### Spain - Madrid

Tel: 34-91-708-08-90

Fax: 34-91-708-08-91

#### Sweden - Stockholm

Tel: 46-8-5090-4654

#### UK - Wokingham

Tel: 44-118-921-5800

Fax: 44-118-921-5820

06/23/16



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[HV9901NG-G M901](#) [HV9901NG-G M934](#) [HV9901NG-G-M901](#)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9