

# NCP308, NCV308

## Low Quiescent Current, Programmable Delay Time, Supervisory Circuit

The NCP308 series is one of the ON Semiconductor Supervisory circuit IC families. It is optimized to monitor system voltages from 0.405 V to 5.5 V, asserting an active low open-drain  $\overline{\text{RESET}}$  output, together with Manual Reset ( $\overline{\text{MR}}$ ) Input. The part comes with both fixed and externally adjustable versions.

### Features

- Wide Supply Voltage Range 1.6 to 5.5 V
- Very Low Quiescent Current 1.6  $\mu\text{A}$
- Fixed Threshold Voltage Versions for Standard Voltage Rails Including 0.9 V, 1.2 V, 1.25 V, 1.5 V, 1.8 V, 1.9 V, 2.5 V, 2.8 V, 3.0 V, 3.3 V, 5.0 V
- Adjustable Version with Low Threshold Voltage 0.405 V (min)
- High Threshold Voltage Accuracy: 0.31% typ
- Support Manual Reset Input ( $\overline{\text{MR}}$ )
- Open-Drain  $\overline{\text{RESET}}$  Output (Push-pull Output upon Request)
- Flexible Delay Time Programmability: 1.25 ms to 10 s
- Temperature Range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Small TSOP-6 and WDFN6 2 x 2 mm, Pb-Free packages
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These are Pb-Free Devices

### Typical Applications

- DSP or Microcontroller Applications
- Notebook/Desktop Computers
- PDAs/Hand-Held Products
- Portable/Battery-Powered Products
- FPGA/ASIC Applications

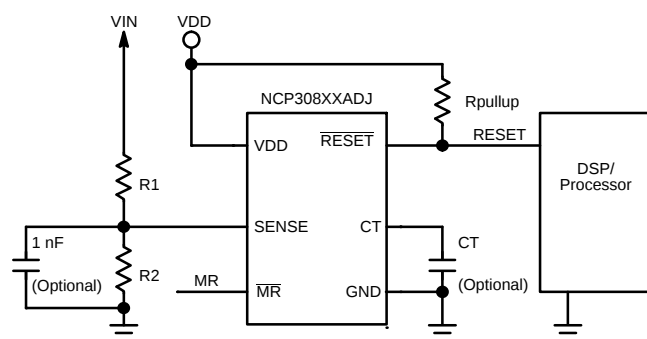


Figure 1. Typical Application Circuit for Adjustable Versions

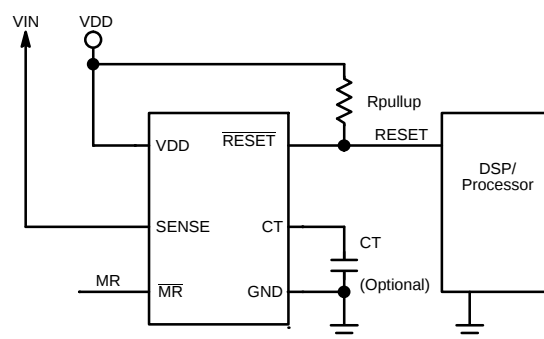


Figure 2. Typical Application Circuit for Fixed Versions




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

### MARKING DIAGRAMS



TSOP-6  
CASE 318G



WDFN6  
CASE 511BR




XXX, XX= Specific Device Code  
A = Assembly Location  
Y = Year  
W = Work Week  
M = Date Code  
▪ = Pb-Free Package

(Note: Microdot may be in either location)


### ORDERING INFORMATION

See detailed ordering and shipping information in the ordering information section on page 9 of this data sheet.

## NCP308, NCV308

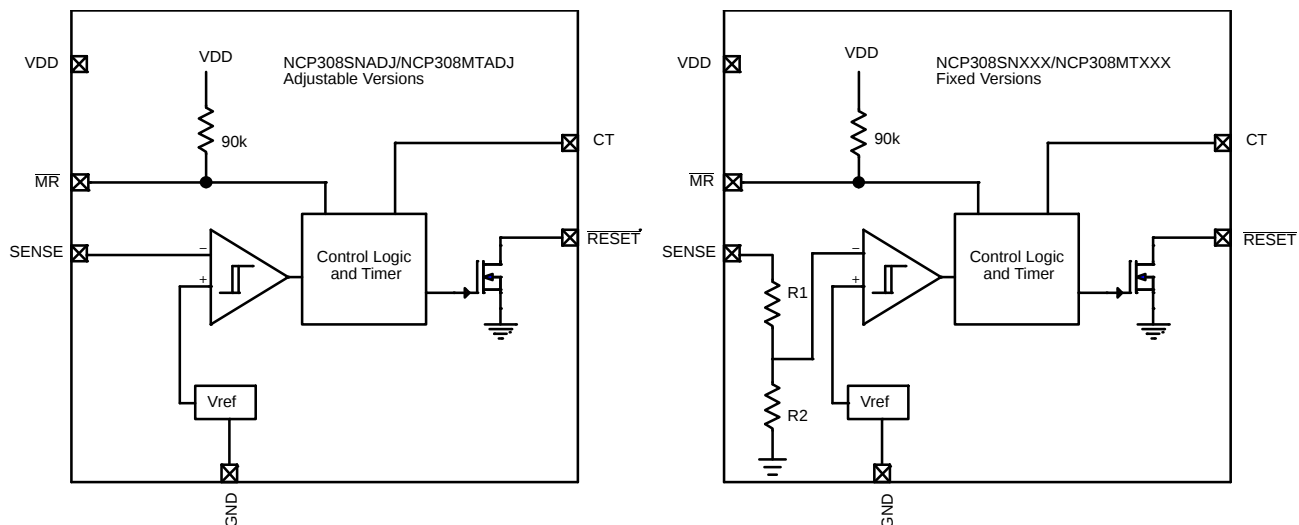

**Figure 3. Functional Block Diagrams of Adjustable and Fixed Versions**

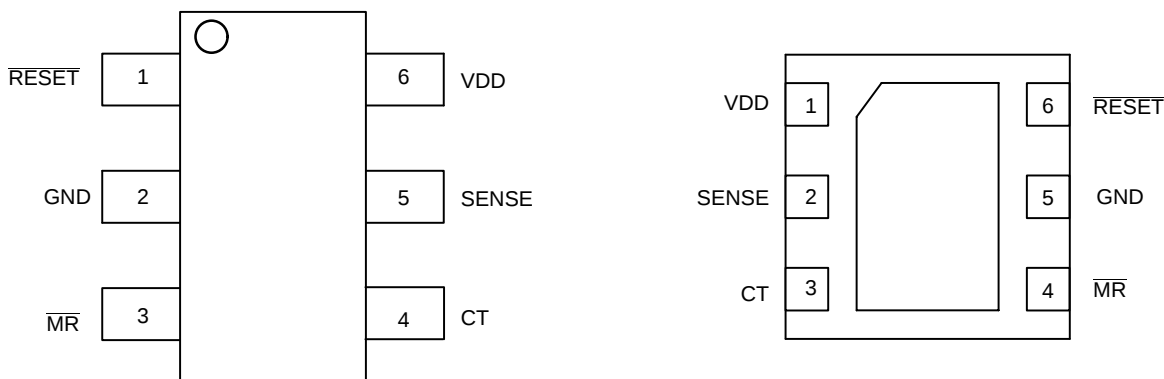

**Figure 4. Pin Connections Diagram (Top View)**

**Table 1. PIN OUT DESCRIPTION**

| Name    | Pin Number |             | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|         | TSOP-6     | WDFN6       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| VDD     | 6          | 1           | <b>Supply Voltage.</b> A 0.1uF ceramic capacitor placed close to this pin is helpful for transient and parasitic.                                                                                                                                                                                                                                                                                                                                                                                                           |
| SENSE   | 5          | 2           | <b>Sense Input,</b> this is the voltage to be monitored. If the voltage at this terminal drops below the threshold voltage $V_{IT}$ , then RESET is asserted. SENSE does not necessary monitor VDD, it can monitor any voltage lower than VDD.                                                                                                                                                                                                                                                                              |
| CT      | 4          | 3           | <b>Reset Delay Time Setting Pin.</b> Connecting this pin to VDD through a 40 kΩ to 200 kΩ resistor or leaving it open results in fixed reset delay times. Connecting this pin to a ground referenced capacitor ( $\geq 100$ pF) gives a user-programmable reset delay time. See the <i>Setting Reset Delay Time</i> section for more information.                                                                                                                                                                           |
| MR      | 3          | 4           | <b>Manual Reset input,</b> MR low asserts RESET. MR is internally tied to VDD by a 90 kΩ pull-up Resistor.                                                                                                                                                                                                                                                                                                                                                                                                                  |
| RESET   | 1          | 6           | <b>RESET Output,</b> is an Active low open drain N-Channel MOSFET output, it is driven to a low impedance state when RESET is asserted (either the SENSE input is lower than the threshold voltage ( $V_{IT}$ ) or the MR pin is set to a logic low). RESET will keep low (asserted) for the reset delay time after both SENSE is above $V_{IT}$ and MR is set to a logic high. A pull-up resistor from 10kΩ to 1MΩ should be used on this pin. See Figure 5 for behavior of RESET depends on VDD, SENSE and MR conditions. |
| GND     | 2          | 5           | <b>Ground terminal.</b> Should be connected to PCB ground reference                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| EXP PAD | –          | Exposed Pad | <b>Exposed pad,</b> under WDFN6 package, connect it to ground plane for better thermal dissipation.                                                                                                                                                                                                                                                                                                                                                                                                                         |

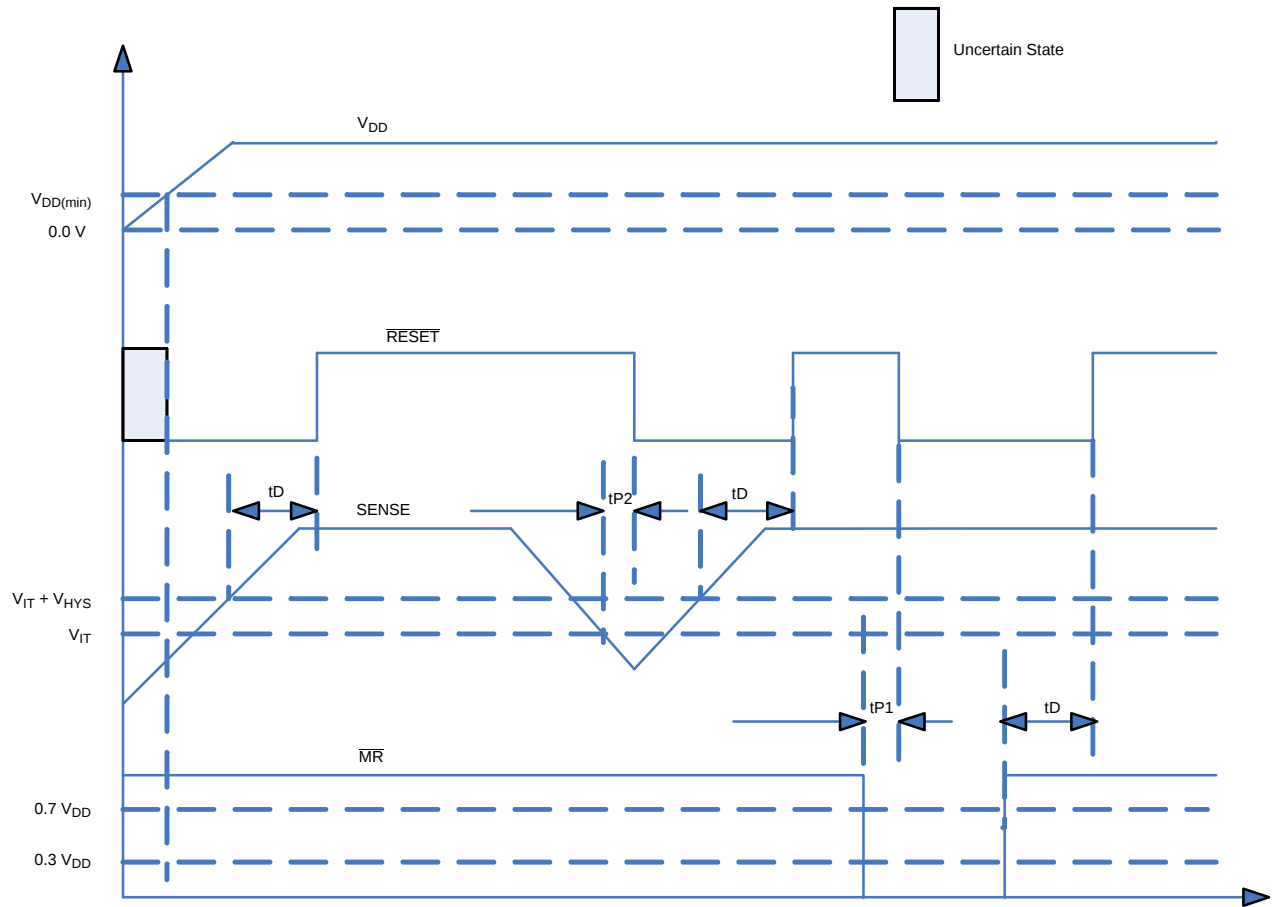


Figure 5. Timing Diagram Showing  $\overline{\text{MR}}$  and SENSE Reset Timing

Table 2. TRUTH TABLE

| $\overline{\text{MR}}$ | SENSE > $V_{\text{IT}}$ | RESET |
|------------------------|-------------------------|-------|
| L                      | N                       | L     |
| L                      | Y                       | L     |
| H                      | N                       | L     |
| H                      | Y                       | H     |

# NCP308, NCV308

**Table 3. MAXIMUM RATINGS**

| Rating                                                                           | Symbol          | Value                                 | Unit    |
|----------------------------------------------------------------------------------|-----------------|---------------------------------------|---------|
| Input voltage range, $V_{DD}$                                                    | $V_{DD}$        | -0.3 to + 6.0                         | V       |
| CT voltage range $V_{CT}$ , RESET, MR<br>Current through CT pin                  | $I_{CT}$        | -0.3 to $V_{DD} + 0.3 \leq 6.0$<br>10 | V<br>mA |
| SENSE pin voltage                                                                |                 | -0.3 to + 8.0                         | V       |
| RESET pin current                                                                |                 | 5                                     | mA      |
| Thermal Resistance Junction-to-Air<br>TSOP-6<br>WDFN6                            | $R_{\theta JA}$ | 305<br>220                            | °C/W    |
| Human Body Model (HBM) ESD Rating (Note 1)                                       | ESD HBM         | 2000                                  | V       |
| Machine Model (MM) ESD Rating (Note 1)                                           | ESD MM          | 100                                   | V       |
| Charged Device Model (CDM) ESD Rating (Note 1)                                   | ESD CDM         | 500                                   | V       |
| Latch up Current: (Note 2)<br>All pins, except digital pins<br>Digital pins (MR) | $I_{LU}$        | $\pm 100$<br>$\pm 10$                 | mA      |
| Storage Temperature Range                                                        | $T_{STG}$       | -65 to + 150                          | °C      |
| Maximum Junction Temperature                                                     | $T_J$           | -40 to +150                           | °C      |
| Moisture Sensitivity (Note 3)                                                    | MSL             | Level 1                               |         |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. This device series contains ESD protection and passes the following tests:  
Human Body Model (HBM) +/-2.0 kV per JEDEC standard: JESD22-A114  
Machine Model (MM) +/-100 V per JEDEC standard: JESD22-A115  
Charged Device Model (CDM) 500 V per JEDEC standard: JESD22-C101.
2. Latch up Current per JEDEC standard: JESD78 class II.
3. Moisture Sensitivity Level (MSL): 1 per IPC/JEDEC standard: J-STD-020A.

# NCP308, NCV308

**Table 4. ELECTRICAL CHARACTERISTICS**  $1.6\text{ V} \leq V_{DD} \leq 5.5\text{ V}$ ,  $R_{pullup} = 100\text{ k}\Omega$ ,  $C_{LRESET} = 50\text{ pF}$ , over operating temperature range ( $T_J = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ ), unless otherwise specified. Typical values are at  $T_J = +25^\circ\text{C}$ .

| Symbol        | Parameter                                               |                                                                                         | Conditions                                                            | Min          | Typ                       | Max          | Unit             |
|---------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------|--------------|---------------------------|--------------|------------------|
| $V_{DD}$      | Supply Voltage Range                                    |                                                                                         | $-40^\circ\text{C} < T_J < +125^\circ\text{C}$                        | 1.6          |                           | 5.5          | V                |
| $V_{DD(min)}$ | Minimum $V_{DD}$ Guaranteed RESET Output Valid (Note 4) |                                                                                         |                                                                       |              | 0.5                       | 0.8          | V                |
| $I_{DD}$      | Supply Current (Current into VDD pin)                   |                                                                                         | $V_{DD} = 3.3\text{V}$ , RESET not asserted<br>MR, RESET, CT open     |              | 1.6                       | 5.0          | $\mu\text{A}$    |
|               |                                                         |                                                                                         | $V_{DD} = 5.5\text{V}$ , RESET not asserted<br>MR, RESET, CT open     |              | 1.6                       | 6.0          |                  |
| $V_{OL}$      | Low-level output voltage of RESET                       |                                                                                         | $1.3\text{V} \leq V_{DD} < 1.6\text{V}$ , $I_{OL} = 0.4\text{ mA}$    |              |                           | 0.3          | V                |
|               |                                                         |                                                                                         | $1.6\text{V} \leq V_{DD} \leq 5.5\text{V}$ , $I_{OL} = 1.0\text{ mA}$ |              |                           | 0.4          |                  |
| $V_{IT\%}$    | Negative going SENSE threshold voltage accuracy         |                                                                                         |                                                                       | -1.75        | $\pm 0.75$                | +1.75        | %                |
|               |                                                         |                                                                                         | $T_J = +25^\circ\text{C}$                                             | -0.31        | -                         | 0.31         |                  |
|               |                                                         |                                                                                         | $-20^\circ\text{C} < T_J < +85^\circ\text{C}$                         | -1.0         | $\pm 0.5$                 | +1.0         |                  |
| $V_{HYS}$     | Hysteresis on $V_{IT}$                                  | $1.6\text{V} \leq V_{DD} \leq 4.2\text{V}$                                              |                                                                       |              | 1.0                       | 3.0          | % $V_{IT}$       |
|               |                                                         | $4.2\text{V} \leq V_{DD} \leq 5.5\text{V}$                                              |                                                                       |              | 1.75                      | 3.75         |                  |
| $R_{MR}$      | MR Internal pull-up resistance                          |                                                                                         |                                                                       |              | 90                        |              | $\text{k}\Omega$ |
| $I_{SENSE}$   | Input current at SENSE pin                              | NCP308XXADJ                                                                             | $V_{SENSE} = V_{IT}$                                                  |              | 10                        |              | nA               |
|               |                                                         | Fixed versions                                                                          | $V_{SENSE} = 5.5\text{ V}$                                            |              | 110                       |              |                  |
| $I_{OH}$      | RESET leakage Current                                   |                                                                                         | $V_{RESET} = 5.5\text{ V}$ , RESET not asserted                       |              |                           | 300          | nA               |
| $C_{IN}$      | Input capacitance, any pin                              | CT pin                                                                                  | $V_{IN} = 0\text{ V to } V_{DD}$                                      |              | 5                         |              | pF               |
|               |                                                         | Other pins                                                                              | $V_{IN} = 0\text{ V to } 5.5\text{ V}$                                |              | 5                         |              |                  |
| $V_{IL}$      | MR logic low input                                      |                                                                                         |                                                                       | 0            |                           | $0.3 V_{DD}$ | V                |
| $V_{IH}$      | MR logic high input                                     |                                                                                         |                                                                       | $0.7 V_{DD}$ |                           | $V_{DD}$     | V                |
| $t_w$         | Input pulse width to assert RESET                       | SENSE                                                                                   | $V_{IH} = 1.05 V_{IT}$ , $V_{IL} = 0.95 V_{IT}$                       |              | 20                        |              | $\mu\text{s}$    |
|               |                                                         | MR                                                                                      | $V_{IH} = 0.7 V_{DD}$ , $V_{IL} = 0.3 V_{DD}$                         |              | 150                       |              |                  |
| $t_D$         | Reset delay time                                        | $C_T = \text{Open}$<br>$C_T = V_{DD}$<br>$C_T = 100\text{ pF}$<br>$C_T = 180\text{ nF}$ | (Guaranteed by design and characterization)                           |              | 20<br>300<br>1.25<br>1200 |              | ms               |
| $t_{P1}$      | Propagation delay from MR                               | MR to RESET                                                                             | $V_{IH} = 0.7 V_{DD}$ , $V_{IL} = 0.3 V_{DD}$                         |              | 150                       |              | ns               |
| $t_{P2}$      | Propagation delay from SENSE                            | SENSE to RESET                                                                          | $V_{IH} = 1.05 V_{IT}$ , $V_{IL} = 0.95 V_{IT}$                       |              | 20                        |              | $\mu\text{s}$    |

4. The lowest supply voltage ( $V_{DD}$ ) at which RESET becomes active.

5. NCP308XX: XX = MT (WDFN6 package) or SN (TSOP-6 package).

TYPICAL OPERATING CHARACTERISTICS

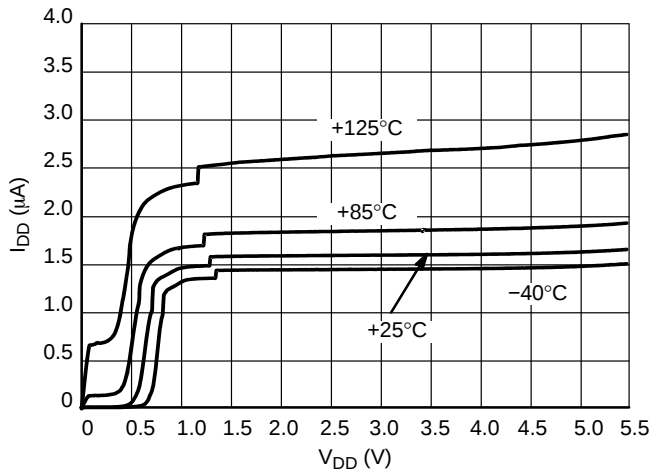


Figure 6. Supply Current vs. Input Voltage

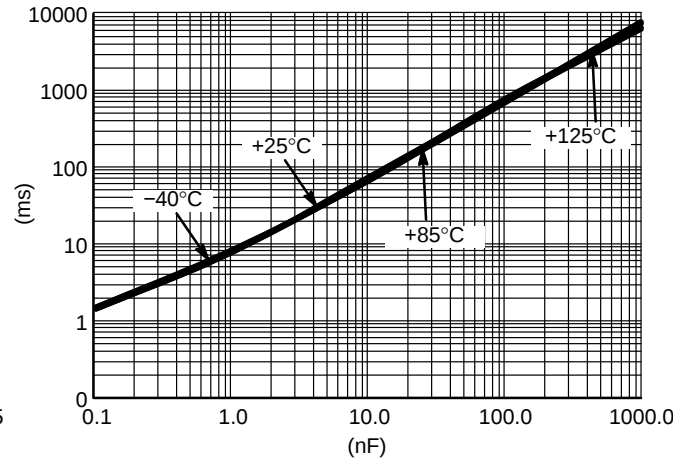


Figure 7.  $\overline{\text{RESET}}$  Timeout Period vs. CT

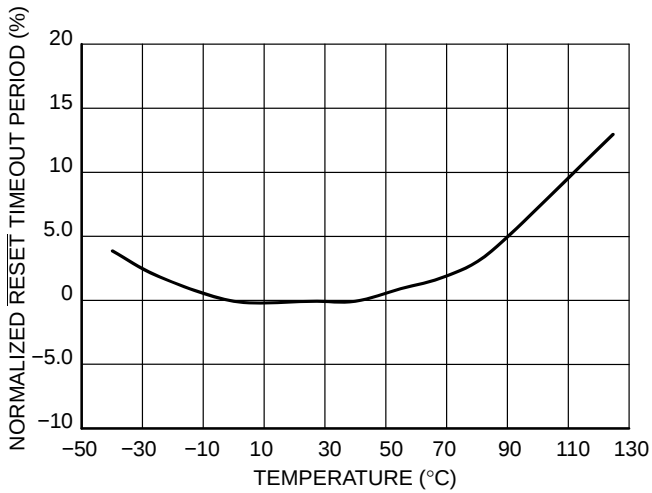


Figure 8. Normalized  $\overline{\text{RESET}}$  Timeout Period vs. Temperature

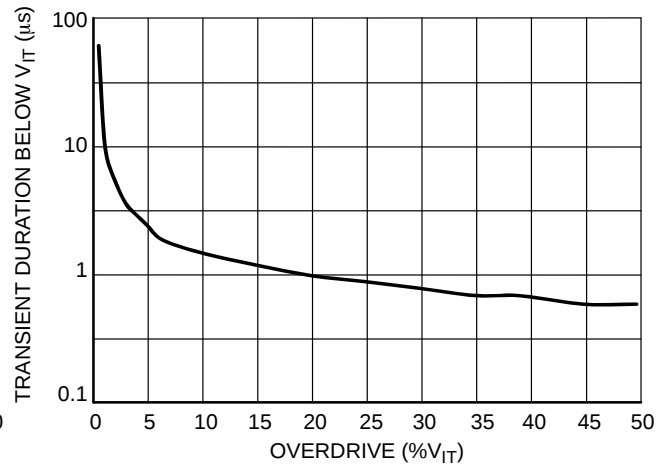


Figure 9. Maximum Transient Duration at Sense vs. Sense Threshold Overdrive Voltage

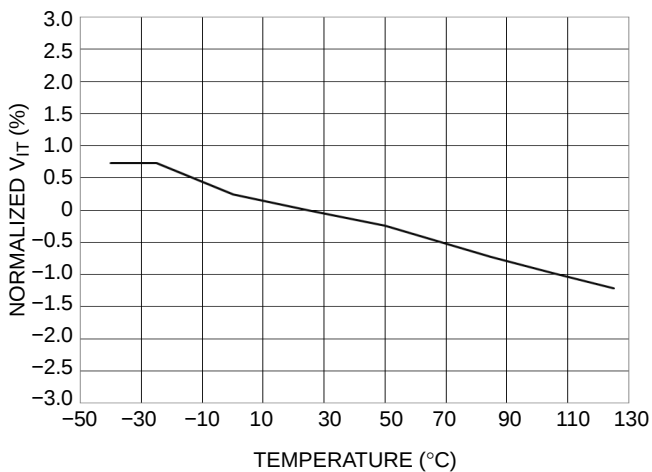


Figure 10. Normalized Sense Threshold Voltage ( $V_{IT}$ ) vs. Temperature

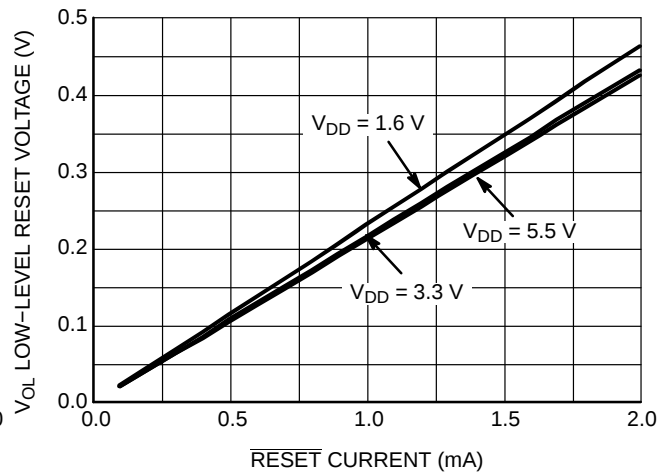


Figure 11. Low-Level  $\overline{\text{RESET}}$  Voltage vs.  $\overline{\text{RESET}}$  Current

## DETAILED DESCRIPTION

The NCP308 microprocessor supervisory product family is designed to assert a  $\overline{\text{RESET}}$  signal when either the SENSE pin voltage drops below  $V_{IT}$  or the Manual Reset input ( $\overline{\text{MR}}$ ) is driven low. The  $\overline{\text{RESET}}$  output remains asserted for a programmable delay time after both  $\overline{\text{MR}}$  and SENSE voltages return above the respective thresholds. A broad range of voltage threshold and reset delay time options are available, allowing NCP308 series to be used in a wide range of applications.

Reset threshold voltages can be factory-set from 0.82 V to 3.3 V or from 4.4 V to 5.0 V, while the NCP308XXADJ can be used for any voltage above 0.405 V using an external resistor divider.

Flexible delay time can be easily got with CT pin according to Table 5:

**Table 5. DELAY TIME SETTING TABLE**

| CT pin Configuration                                                        | Delay Time (tD)                                                                            |
|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| CT = VDD                                                                    | 300 ms (fixed)                                                                             |
| CT = Open                                                                   | 20 ms (fixed)                                                                              |
| Connecting a capacitor between pin CT and GND (Capacitor CT value > 100 pF) | 1.25 ms ~ 10 s, depends on capacitor value (Refer to the Setting Reset Delay Time Section) |

### Output

The  $\overline{\text{RESET}}$  output is typically connected to the  $\overline{\text{RESET}}$  control pin of a microprocessor. For Open-Drain output versions, a pull-up resistor must be used to hold this line high when  $\overline{\text{RESET}}$  is not asserted. The  $\overline{\text{RESET}}$  output is active once  $V_{DD}$  is over  $V_{DD}(\text{min})$ , this voltage is much lower than most microprocessors' functional voltage range.  $\overline{\text{RESET}}$  remains high as long as SENSE is above its threshold ( $V_{IT}$ ) and the Manual Reset input ( $\overline{\text{MR}}$ ) is logic high. If either SENSE falls below  $V_{IT}$  or  $\overline{\text{MR}}$  is driven low,  $\overline{\text{RESET}}$  is asserted.


Once  $\overline{\text{MR}}$  is again logic high and SENSE is above ( $V_{IT} + V_{HYS}$ ), the  $\overline{\text{RESET}}$  pin goes to a high impedance state after delay time (tD). The open-drain structure of  $\overline{\text{RESET}}$  is capable to allow the reset signal for the microprocessor to have a voltage higher than  $V_{DD}$  (up to 5.5 V). The pull-up resistor should be no smaller than 10 k $\Omega$  as a result of the finite impedance of the  $\overline{\text{RESET}}$  line.

### SENSE Input

The SENSE input should be connected to the monitored voltage directly. If the voltage on this pin drops below  $V_{IT}$ , then  $\overline{\text{RESET}}$  is asserted. The comparator has a built-in hysteresis to prevent erratic reset operation. It is good practice to put a 1 nF to 10 nF bypass capacitor on the SENSE input to reduce its sensitivity to transients and layout parasitic.

The NCP308XXADJ can be used to monitor any voltage rail down to 0.405 V by the circuit shown in Figure 12. The new  $V_{IT}'$  can be derived from resistor divider network of R1 and R2 by:

$$V_{IT}' = \left( \frac{R1}{R2} + 1 \right) \times V_{IT} \quad (\text{eq. 1})$$

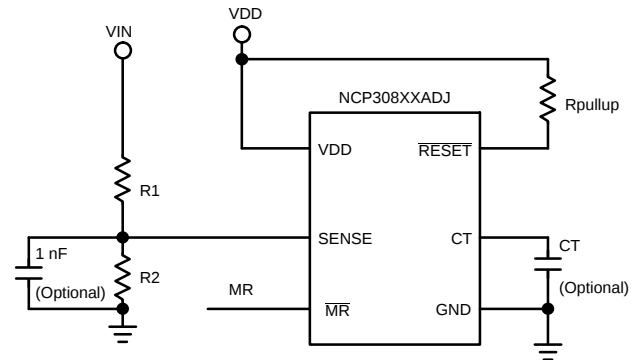


**Figure 12. Using NCP308XXADJ to Monitor a User-Defined Threshold Voltage**

### Manual Reset Input ( $\overline{\text{MR}}$ )

The Manual Reset input ( $\overline{\text{MR}}$ ) allows a processor or other logic circuits to initiate a reset. A logic low on  $\overline{\text{MR}}$  causes  $\overline{\text{RESET}}$  to assert. After  $\overline{\text{MR}}$  returns to a logic high and SENSE is above its reset threshold,  $\overline{\text{RESET}}$  is de-asserted after the delay time set by CT pin.  $\overline{\text{MR}}$  is internally tied to  $V_{DD}$  by a 90 k $\Omega$  resistor so this pin can be left unconnected if  $\overline{\text{MR}}$  will not be used.

Figure 13 shows how  $\overline{\text{MR}}$  can be used to monitor multiple system voltages (e.g. I/O supply voltage of some DSP/processors should be setup before core voltage, and DSP/processor can only start after both I/O and core voltages setup).

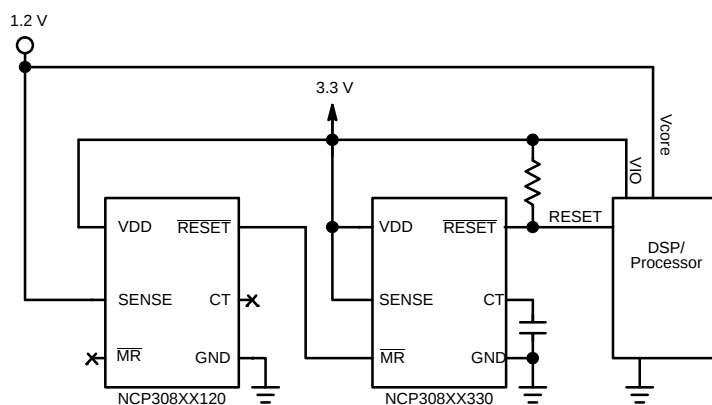


**Figure 13. Using  $\overline{\text{MR}}$  to Monitor Multiple System Voltages**


## Setting Reset Delay Time

The NCP308 has three options for setting the reset delay time as shown in Table 5. Figure 14 shows the configuration for a fixed 300 ms typical delay time by tying CT to  $\text{V}_{\text{DD}}$ ; a resistor from 40 k $\Omega$  to 200 k $\Omega$  must be used. Figure 15 shows a fixed 20 ms delay time by leaving the CT pin unconnected.


Figure 16 shows a user-defined program time between 1.25 ms and 10 s by connecting a capacitor between CT pin and ground.

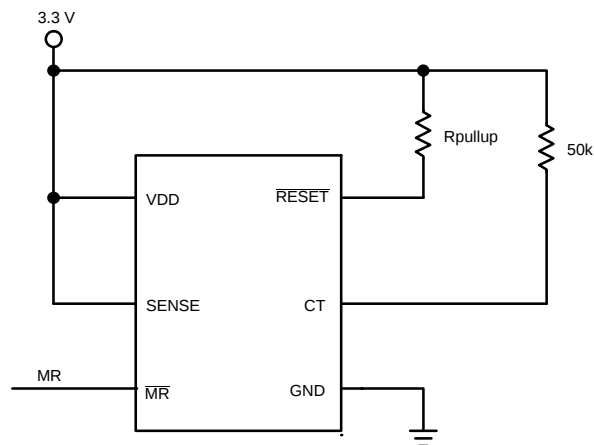

**Figure 14. Delay Time Fixed to 300 ms when CT Connected to  $\text{V}_{\text{DD}}$  by Resistor**

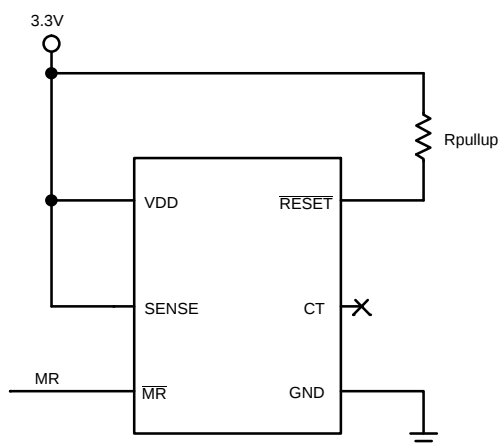

**Figure 15. Delay Time Fixed to 20 ms when CT is Open**

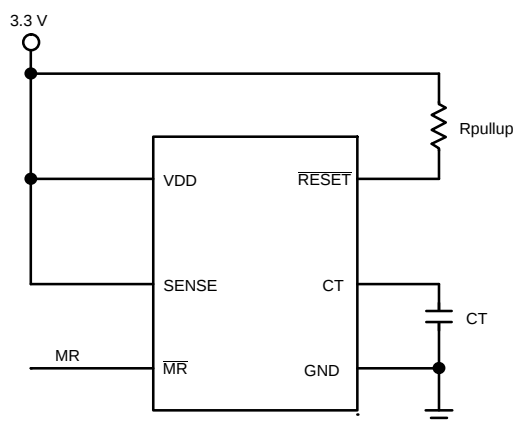

**Figure 16. Delay Time Set by Capacitor**

The capacitor CT should be  $\geq 100$  pF for NCP308 to recognize that the capacitor is present. The capacitor value for a given delay time can be calculated using the following equation:

## NCP308, NCV308

$$CT(nF) = (tD(s) - 0.5 \times 10^{-3}(s)) \times 175 \quad (\text{eq. 2})$$

Parasitic capacitances of CT pin should be considered to avoid reset delay time deviation or error.

threshold overdrive, as shown in the Maximum Transient Duration at Sense vs. Sense Threshold Overdrive Voltage graph (Figure 9) in Typical Operating Characteristics section.

### Immunity to Sense Pin Voltage Transients

NCP308 is relatively immune to short negative transients on SENSE pin. Sensitivity to transients is dependent on

### ORDERING INFORMATION

| Device          | Status (Note 6) | Threshold Voltage (V <sub>IT</sub> ) | Nominal Monitored Voltage | Marking | Package          | Shipping <sup>†</sup> |
|-----------------|-----------------|--------------------------------------|---------------------------|---------|------------------|-----------------------|
| NCP308SNADJT1G  | Active          | 0.405 V                              | Adjustable Version        | ADJ     | TSOP-6 (Pb-Free) | 3000 / Tape & Reel    |
| NCV308SNADJT1G* | Active          | 0.405 V                              |                           | VDJ     |                  |                       |
| NCP308SN090T1G  | Active          | 0.84 V                               | 0.9 V                     | 090     |                  |                       |
| NCP308SN120T1G  | Active          | 1.12 V                               | 1.2 V                     | 120     |                  |                       |
| NCP308SN125T1G  | Active          | 1.16 V                               | 1.25 V                    | 125     |                  |                       |
| NCP308SN150T1G  | Active          | 1.40 V                               | 1.5 V                     | 150     |                  |                       |
| NCP308SN180T1G  | Active          | 1.67 V                               | 1.8 V                     | 180     |                  |                       |
| NCP308SN190T1G  | Active          | 1.77 V                               | 1.9 V                     | 190     |                  |                       |
| NCP308SN250T1G  | Active          | 2.33 V                               | 2.5 V                     | 250     |                  |                       |
| NCP308SN280T1G  | Active          | 2.61 V                               | 2.8 V                     | 280     |                  |                       |
| NCP308SN300T1G  | Active          | 2.79 V                               | 3.0 V                     | 300     |                  |                       |
| NCP308SN330T1G  | Active          | 3.07 V                               | 3.3 V                     | 330     |                  |                       |
| NCV308SN330T1G* | Active          | 3.07 V                               | 3.3 V                     | 33A     |                  |                       |
| NCP308SN500T1G  | Active          | 4.65 V                               | 5.0 V                     | 500     |                  |                       |
| NCP308MTADJTBG  | Active          | 0.405 V                              | Adjustable Version        | AA      | WDFN6 (Pb-Free)  |                       |
| NCP308MT090TBG  | Active          | 0.84 V                               | 0.9 V                     | AC      |                  |                       |
| NCP308MT120TBG  | Active          | 1.12 V                               | 1.2 V                     | AD      |                  |                       |
| NCP308MT125TBG  | Active          | 1.16 V                               | 1.25 V                    | AE      |                  |                       |
| NCP308MT150TBG  | Active          | 1.40 V                               | 1.5 V                     | AF      |                  |                       |
| NCP308MT180TBG  | Active          | 1.67 V                               | 1.8 V                     | AG      |                  |                       |
| NCP308MT190TBG  | Active          | 1.77 V                               | 1.9 V                     | AH      |                  |                       |
| NCP308MT250TBG  | Active          | 2.33 V                               | 2.5 V                     | AJ      |                  |                       |
| NCP308MT280TBG  | Active          | 2.61 V                               | 2.8 V                     | AK      |                  |                       |
| NCP308MT300TBG  | Active          | 2.79 V                               | 3.0 V                     | AL      |                  |                       |
| NCP308MT330TBG  | Active          | 3.07 V                               | 3.3 V                     | AM      |                  |                       |
| NCP308MT500TBG  | Active          | 4.65 V                               | 5.0 V                     | AN      |                  |                       |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.


6. The marketing status are defined as below:

Active: Products in production and recommended for new designs;

Under Request: Device has been announced but is not in production. Samples may or may not be available.

PACKAGE DIMENSIONS

TSOP-6  
CASE 318G-02  
ISSUE U

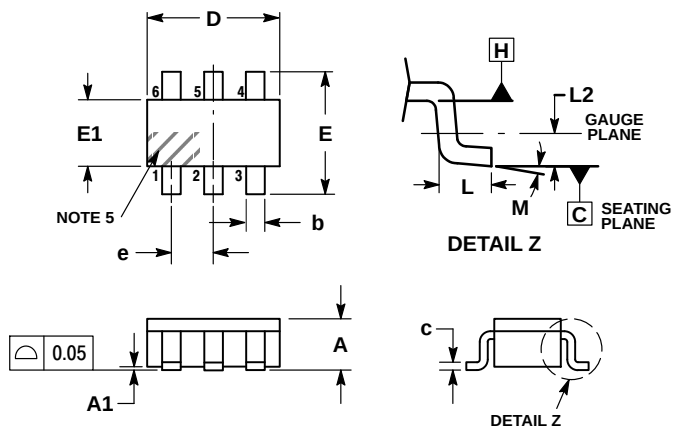


NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.15 PER SIDE. DIMENSIONS D AND E1 ARE DETERMINED AT DATUM H.
5. PIN ONE INDICATOR MUST BE LOCATED IN THE INDICATED ZONE.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN         | NOM  | MAX  |
| A   | 0.90        | 1.00 | 1.10 |
| A1  | 0.01        | 0.06 | 0.10 |
| b   | 0.25        | 0.38 | 0.50 |
| c   | 0.10        | 0.18 | 0.26 |
| D   | 2.90        | 3.00 | 3.10 |
| E   | 2.50        | 2.75 | 3.00 |
| E1  | 1.30        | 1.50 | 1.70 |
| e   | 0.85        | 0.95 | 1.05 |
| L   | 0.20        | 0.40 | 0.60 |
| L2  | 0.25 BSC    |      |      |
| M   | 0°          | —    | 10°  |

RECOMMENDED  
SOLDERING FOOTPRINT\*




DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# NCP308, NCV308


## PACKAGE DIMENSIONS

WDFN6 2x2, 0.65P  
CASE 511BR  
ISSUE O

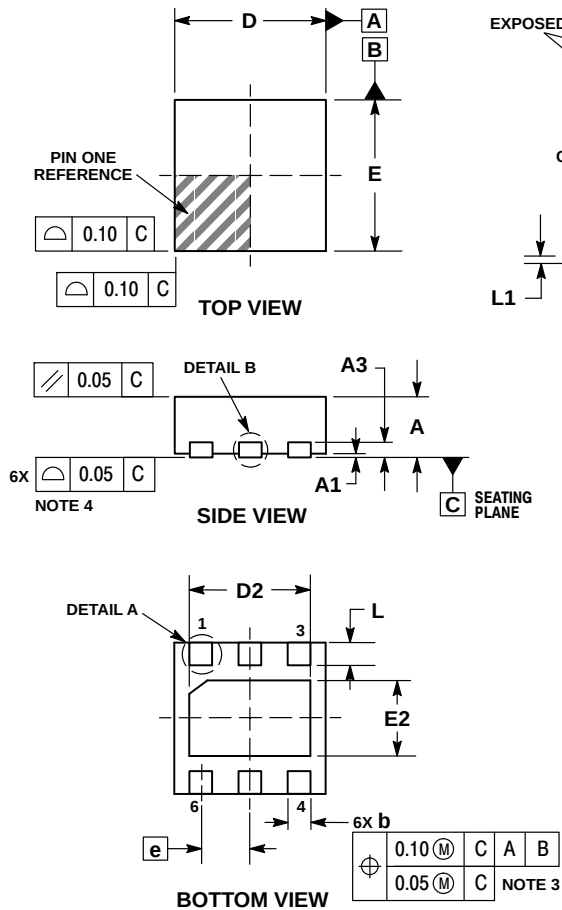

EXPOSED Cu MOLD CMPD

**DETAIL B**  
ALTERNATE CONSTRUCTIONS




**DETAIL A**  
ALTERNATE CONSTRUCTIONS

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.25 mm FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.70        | 0.80 |
| A1  | 0.00        | 0.05 |
| A3  | 0.20 REF    |      |
| b   | 0.25        | 0.35 |
| D   | 2.00 BSC    |      |
| D2  | 1.50        | 1.70 |
| E   | 2.00 BSC    |      |
| E2  | 0.90        | 1.10 |
| e   | 0.65 BSC    |      |
| L   | 0.20        | 0.40 |
| L1  | ---         | 0.15 |

### RECOMMENDED MOUNTING FOOTPRINT\*

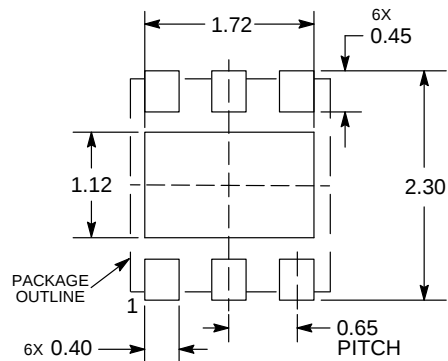

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marketing.pdf](http://www.onsemi.com/site/pdf/Patent-Marketing.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9