

# Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



**THIS PAGE INTENTIONALLY LEFT BLANK**



## GaAs SMT PHEMT LOW NOISE AMPLIFIER, 6 - 20 GHz

### Typical Applications


The HMC565LC5 is ideal for use as a LNA or driver amplifier for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios & VSAT
- Test Equipment and Sensors
- Military & Space

### Features

- Noise Figure: 2.5 dB
- Gain: 21 dB
- OIP3: 20 dBm
- Single Supply: +3V @ 53 mA
- 50 Ohm Matched Input/Output
- RoHS Compliant 5 x 5 mm Package

### Functional Diagram






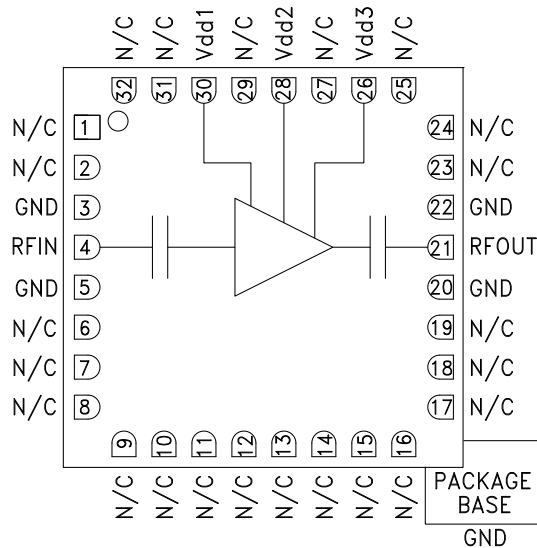


### General Description

The HMC565LC5 is a high dynamic range GaAs pHEMT MMIC Low Noise Amplifier housed in a leadless RoHS compliant 5x5mm SMT package. Operating from 6 to 20 GHz, the HMC565LC5 features 21 dB of small signal gain, 2.5 dB noise figure and IP3 of +20 dBm across the operating band. This self-biased LNA is ideal for microwave radios due to its single +3V supply operation, and DC blocked RF I/O's.

### Electrical Specifications, $T_A = +25^\circ C$ , Vdd 1, 2, 3 = +3V

| Parameter  | Min.   | Typ.  | Max.    | Min. | Typ.  | Max.  | Units  |
|--|--------|-------|---------|------|-------|-------|--------|
| Frequency Range  | 6 - 12 |       | 12 - 20 |      |       |       | GHz    |
| Gain   | 19     | 21    |         | 16   | 18.5  |       | dB     |
| Gain Variation Over Temperature                                |        | 0.025 | 0.035   |      | 0.025 | 0.035 | dB/ °C |
| Noise Figure   |        | 2.5   | 2.8     |      | 2.5   | 3     | dB     |
| Input Return Loss  |        | 15    |         |      | 12    |       | dB     |
| Output Return Loss   |        | 13    |         |      | 15    |       | dB     |
| Output Power for 1 dB Compression (P1dB)                       | 8      | 10    |         | 9    | 11    |       | dBm    |
| Saturated Output Power (P <sub>sat</sub> )                     |        | 11    |         |      | 13    |       | dBm    |
| Output Third Order Intercept (IP3)                             |        | 20    |         |      | 21    |       | dBm    |
| Total Supply Current (I <sub>dd</sub> )(V <sub>dd</sub> = +3V) |        | 53    | 75      |      | 53    | 75    | mA     |

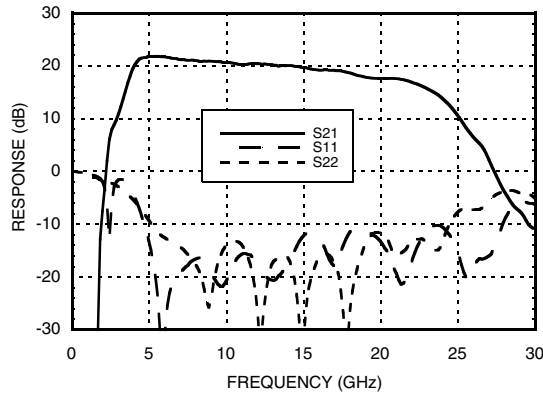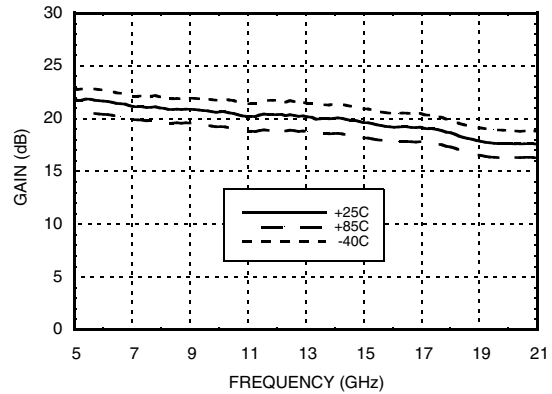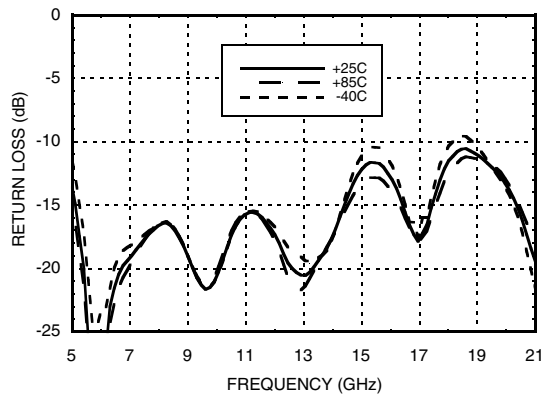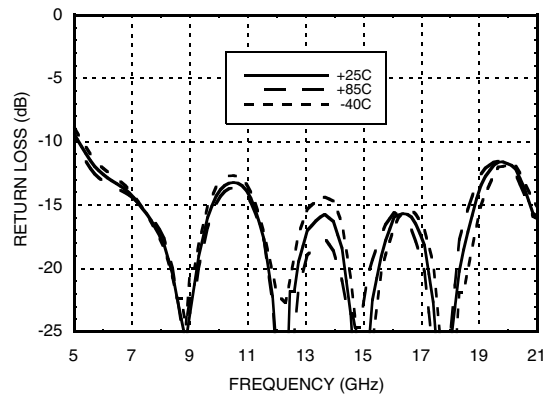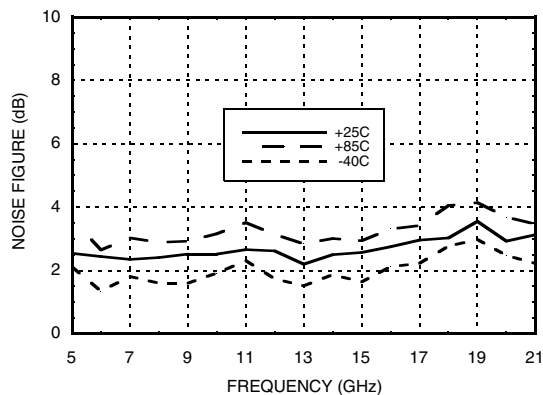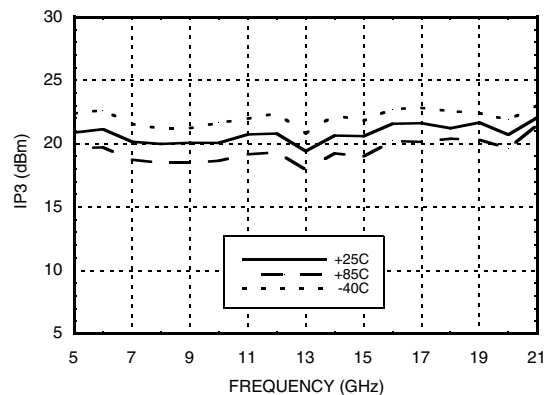
**Broadband Gain & Return Loss**

**Gain vs. Temperature**

**Input Return Loss vs. Temperature**

**Output Return Loss vs. Temperature**

**Noise Figure vs. Temperature**

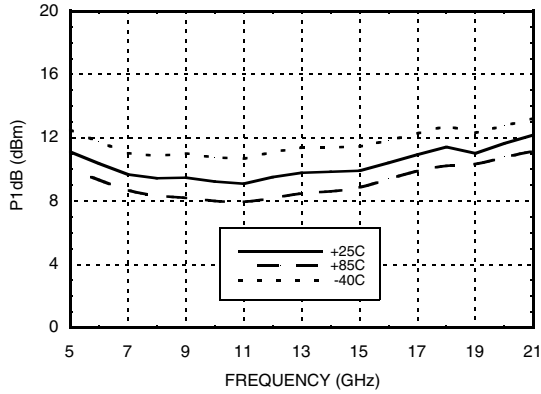**Output IP3 vs. Temperature**




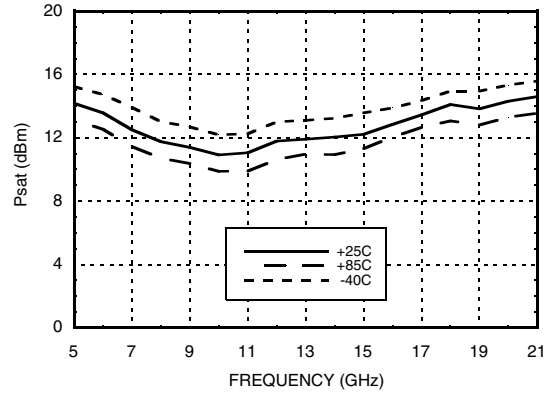
## GaAs SMT PHEMT LOW NOISE AMPLIFIER, 6 - 20 GHz

LOW NOISE AMPLIFIERS - SMT


**P1dB vs. Temperature**




**Psat vs. Temperature**




**Reverse Isolation vs. Temperature**

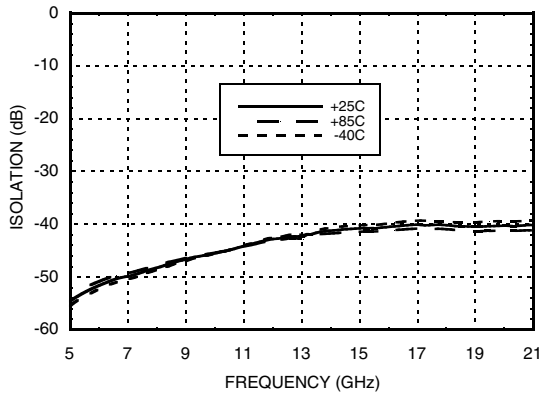

**Power Compression @ 12 GHz**

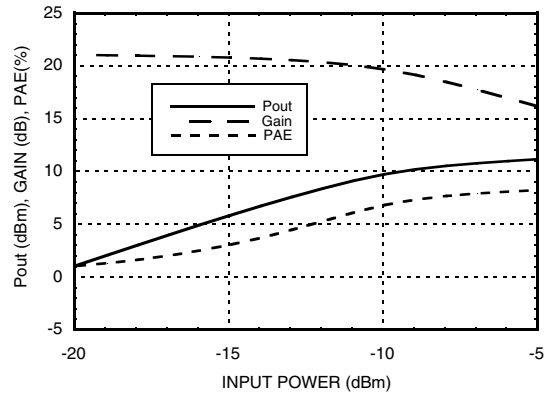

**Gain, Noise Figure & Power vs. Supply Voltage @ 12 GHz**

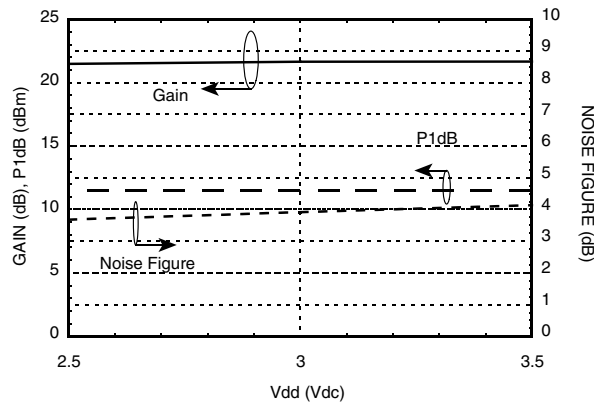

## GaAs SMT PHEMT LOW NOISE AMPLIFIER, 6 - 20 GHz

### Absolute Maximum Ratings

|   |                |
|---|----------------|
| Drain Bias Voltage (Vdd1, Vdd2, Vdd3)                                     | +3.5 Vdc       |
| RF Input Power (RFIN)(Vdd = +3.0 Vdc)                                     | 0 dBm          |
| Channel Temperature   | 175 °C         |
| Continuous P <sub>diss</sub> (T= 85 °C)<br>(derate 8.5 mW/°C above 85 °C) | 0.753 W        |
| Thermal Resistance<br>(channel to ground paddle)                          | 119.5 °C/W     |
| Storage Temperature   | -65 to +150 °C |
| Operating Temperature   | -40 to +85 °C  |
| ESD Sensitivity (HBM)   | Class 1A       |


### Typical Supply Current vs. Vdd

| Vdd (V) | I <sub>dd</sub> (mA) |
|---------|----------------------|
| +2.5    | 51                   |
| +3.0    | 53                   |
| +3.5    | 56                   |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

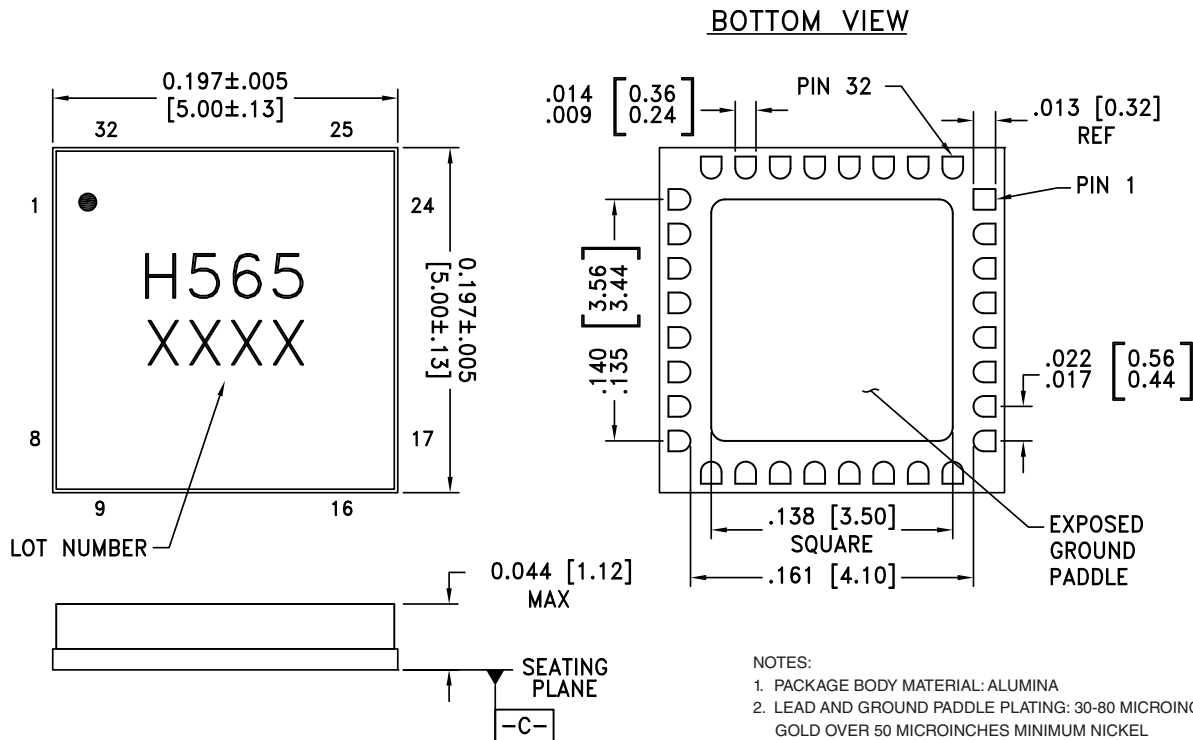

- NOTES:
1. PACKAGE BODY MATERIAL: ALUMINA
  2. LEAD AND GROUND PADDLE PLATING: 30-80 MICROINCHES GOLD OVER 50 MICROINCHES MINIMUM NICKEL
  3. DIMENSIONS ARE IN INCHES [MILLIMETERS]
  4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
  5. PACKAGE WARP SHALL NOT EXCEED 0.05mm DATUM
  6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND

### Package Information

| Part Number | Package Body Material | Lead Finish      | MSL Rating          | Package Marking <sup>[2]</sup> |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC565LC5   | Alumina, White        | Gold over Nickel | MSL3 <sup>[1]</sup> | H565<br>XXXX                   |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX




## GaAs SMT PHEMT LOW NOISE AMPLIFIER, 6 - 20 GHz

### Pin Descriptions


| Pin Number                            | Function   | Description   | Interface Schematic |
|---------------------------------------|------------|---|---------------------|
| 1, 2, 6 - 19, 23 - 25, 27, 29, 31, 32 | N/C        | This pin may be connected to RF/DC ground. Performance will not be affected.                          |                     |
| 3, 5, 20, 22                          | GND        | These pins and package bottom must be connected to RF/DC ground.                                      |                     |
| 4                                     | RFIN       | This pin is AC coupled and matched to 50 Ohms.  |                     |
| 21                                    | RFOUT      | This pin is AC coupled and matched to 50 Ohms.  |                     |
| 30, 28, 26                            | Vdd1, 2, 3 | Power Supply Voltage for the amplifier. External bypass capacitors of 100 pF and 2.2 μF are required. |                     |

### Application Circuit

| Component  | Value  |
|------------|--------|
| C1, C2, C3 | 100 pF |
| C4, C5, C6 | 2.2 μF |

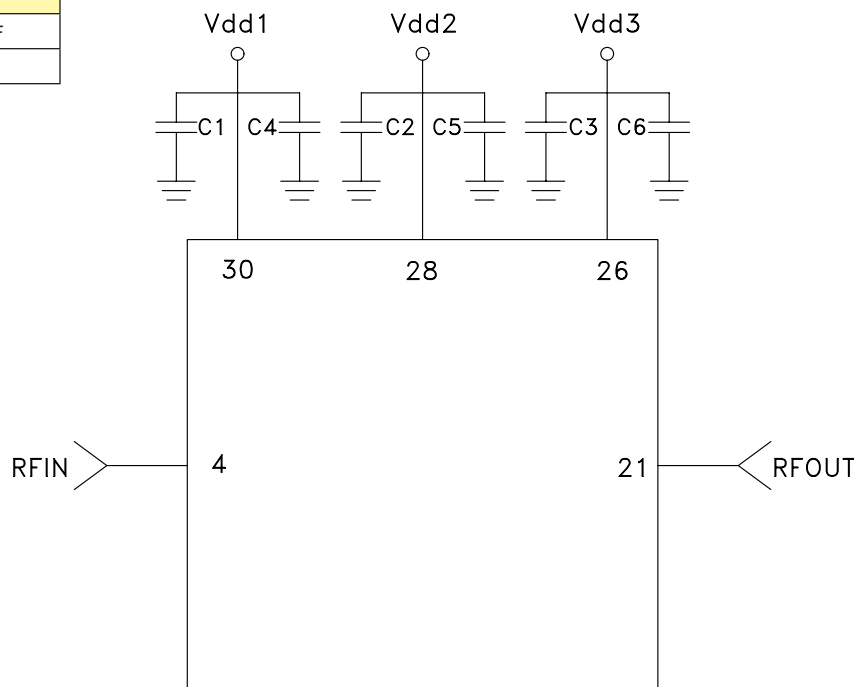

### Evaluation PCB

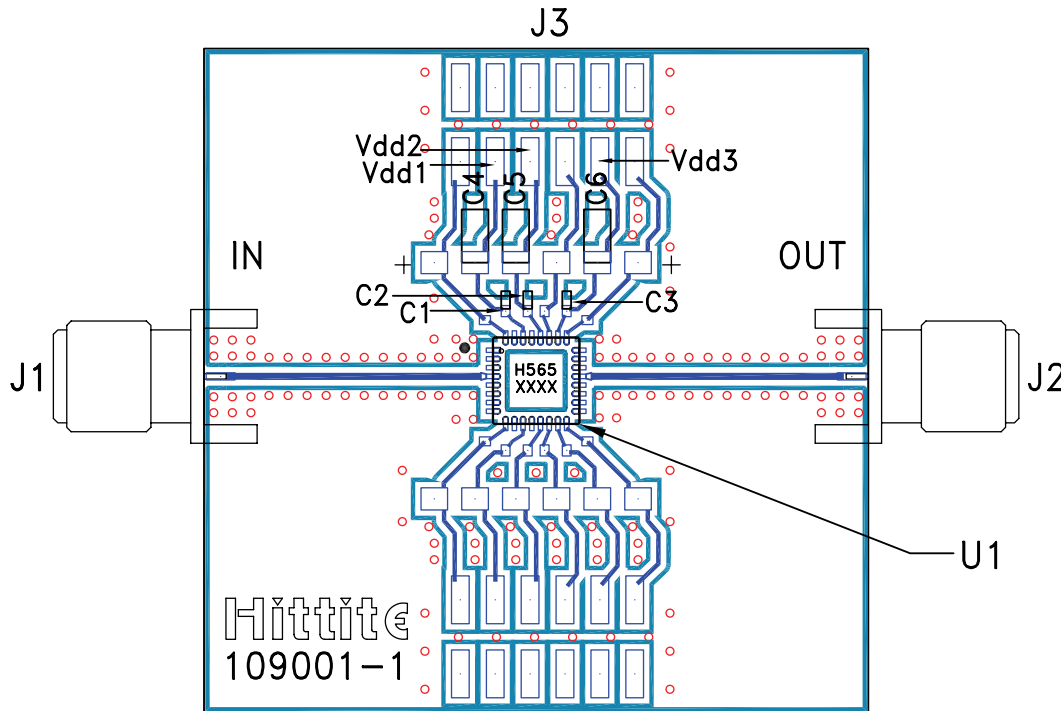

### List of Materials for Evaluation PCB 110431 [1]

| Item    | Description                 |
|---------|-----------------------------|
| J1 - J2 | PCB Mount K Connector       |
| J3      | 2 mm DC Header              |
| C1 - C3 | 100 pF Capacitor, 0402 Pkg. |
| C4 - C6 | 2.2 μF Capacitor, Tantalum  |
| U1      | HMC565LC5 Amplifier         |
| PCB [2] | 109001 Evaluation PCB       |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9