



## GaAs InGaP HBT MMIC POWER AMPLIFIER, 0.8 - 1.0 GHz

### Typical Applications


The HMC450QS16G / HMC450QS16GE is ideal for power and driver amplifier applications:

- GSM, GPRS, & Edge
- CDMA & WCDMA
- Base Stations & Repeaters

### Features

- Gain: 26 dB
- 32% PAE @ 28.5 dBm Output Power
- +40 dBm Output IP3
- Integrated Power Control (Vpd)
- Included in the HMC-DK002 Designer's Kit

### Functional Diagram

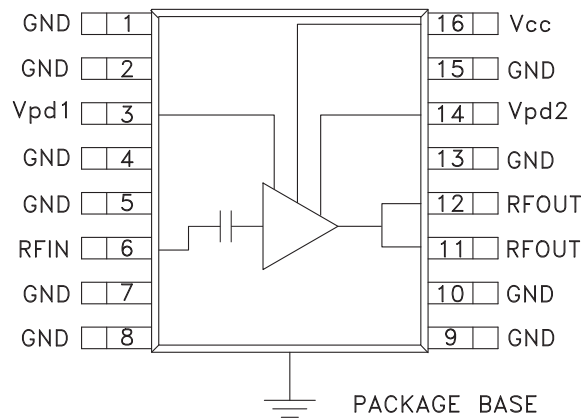

### General Description

The HMC450QS16G & HMC450QS16GE are high efficiency GaAs InGaP HBT Medium Power MMIC amplifiers operating between 800 and 1000 MHz. The amplifier is packaged in a low cost, surface mount 16 lead package and offers the same pinout and functionality as the higher band HMC413QS16G 1.6-2.3 GHz PA. With a minimum of external components, the amplifier provides 26 dB of gain, +40 dBm OIP3 and +28.5 dBm of saturated power from a +5V supply voltage. The integrated power control (Vpd) can be used for full power down or RF output power/current control. The combination of high gain and high output IP3 make the HMC450QS16G & HMC450QS16GE ideal linear drivers for Cellular, PCS & 3G applications.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , $V_s = +5\text{V}$ , $V_{pd} = +4\text{V}$ [1]

Parameter	Min.	Typ.	Max.	Units
Frequency Range	0.8 - 1.0			GHz
Gain	23	26		dB
Gain Variation Over Temperature		0.015	0.025	dB/°C
Input Return Loss		17		dB
Output Return Loss		13		dB
Output Power for 1 dB Compression (P1dB)	23	26		dBm
Saturated Output Power (Psat)		28.5		dBm
Output Third Order Intercept (IP3) [2]	37	40		dBm
Noise Figure		8		dB
Supply Current (Icq)		310		mA
Control Current (Ipd)		12		mA
Switching Speed	tON, tOFF	10		ns


[1] Specifications and data reflect HMC450QS16G measured using the application circuit found herein. Contact the HMC Applications Group for assistance in optimizing performance for your application.

[2] Two-tone output power of +15 dBm per tone, 1 MHz spacing.




**GaAs InGaP HBT MMIC  
POWER AMPLIFIER, 0.8 - 1.0 GHz**


**Broadband Gain & Return Loss**

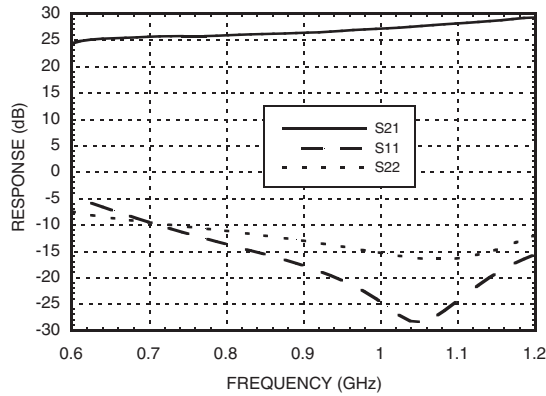


**Gain vs. Temperature**

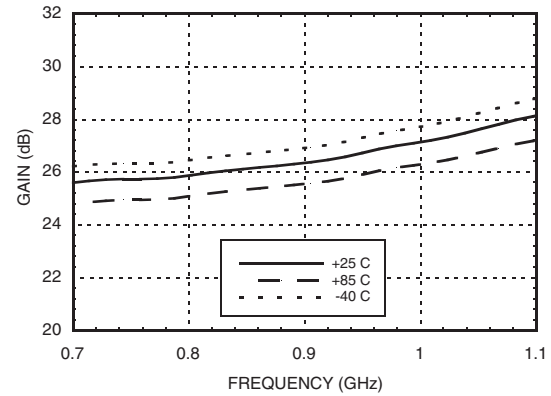


**Input Return Loss vs. Temperature**

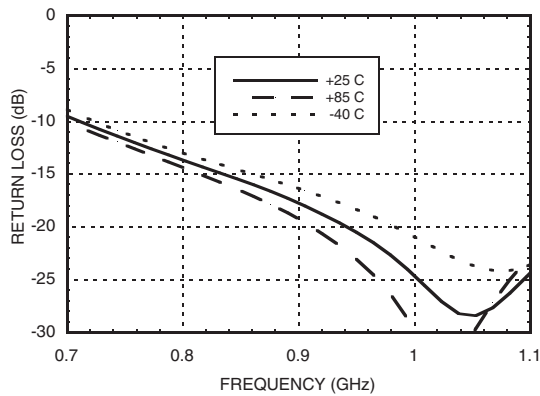


**Output Return Loss vs. Temperature**

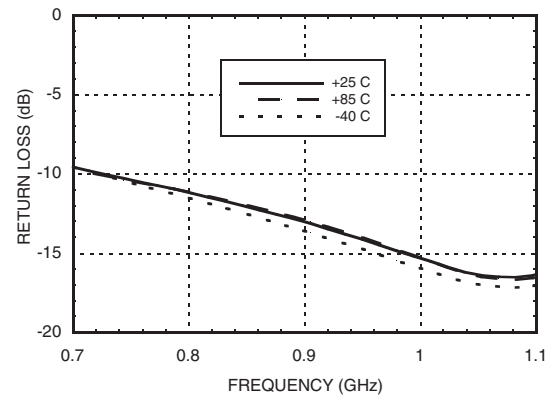

**Reverse Isolation vs. Temperature**

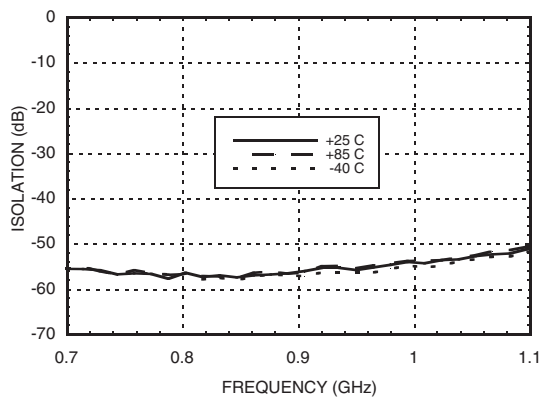

**Power Down Isolation vs. Temperature**

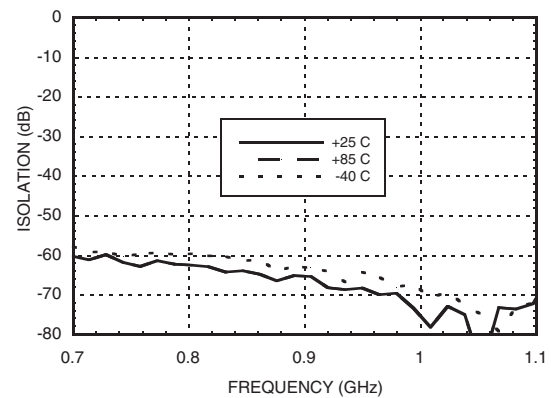


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**GaAs InGaP HBT MMIC  
POWER AMPLIFIER, 0.8 - 1.0 GHz**


**P1dB vs. Temperature**

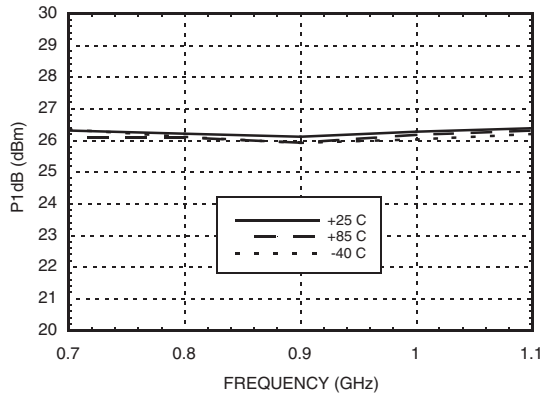


**Psat vs. Temperature**

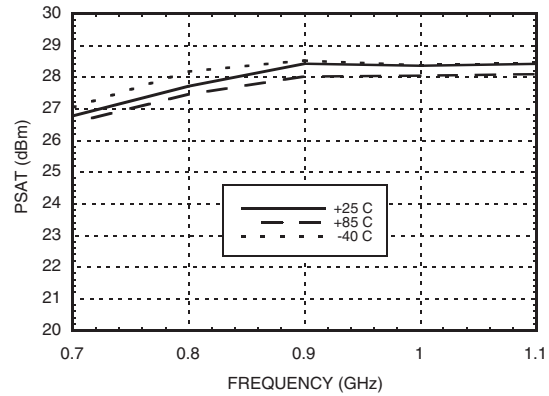


**Output IP3 vs. Temperature**

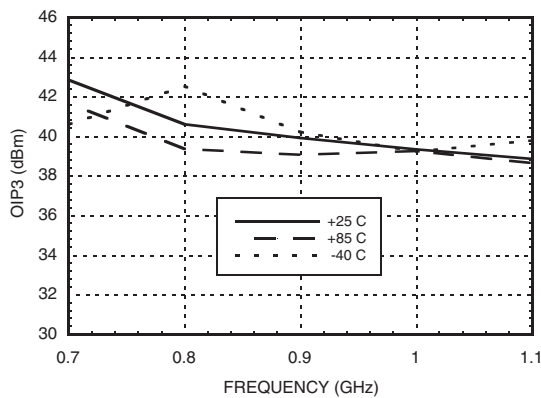


**Noise Figure vs. Temperature**

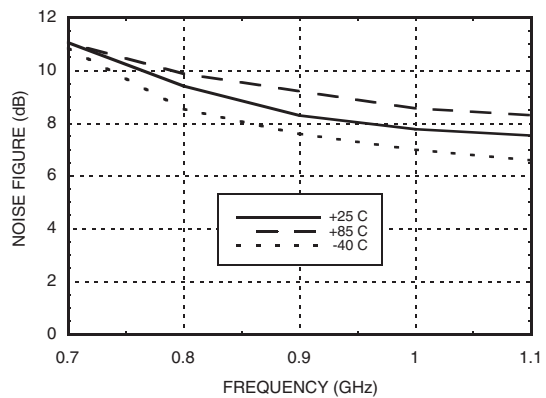

**Gain and Power vs. Supply Voltage @ 900 MHz, Vpd= 4V**

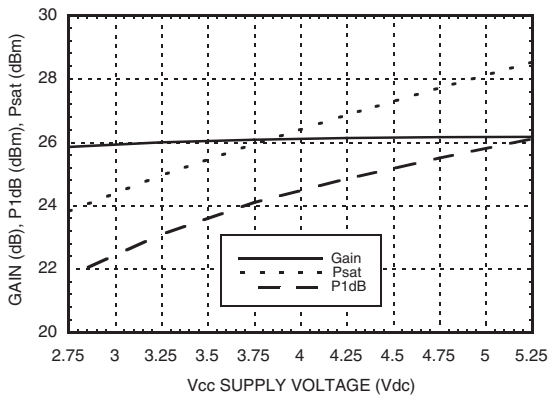

**Gain, Power, OIP3 and Supply Current vs. Power Down Voltage @ 900 MHz**

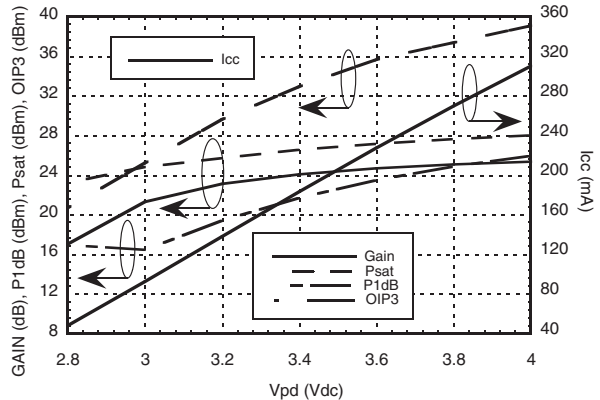


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D




**GaAs InGaP HBT MMIC  
POWER AMPLIFIER, 0.8 - 1.0 GHz**


**Power Compression @ 900 MHz**

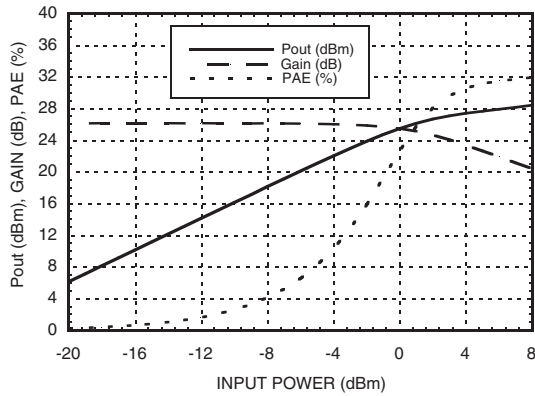

**ACPR vs. Supply Voltage @ 900 MHz  
CDMA IS95, 9 Channels Forward**

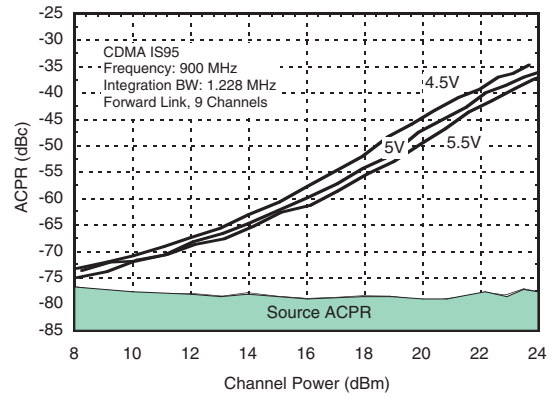

**Power Dissipation @ 900 MHz**

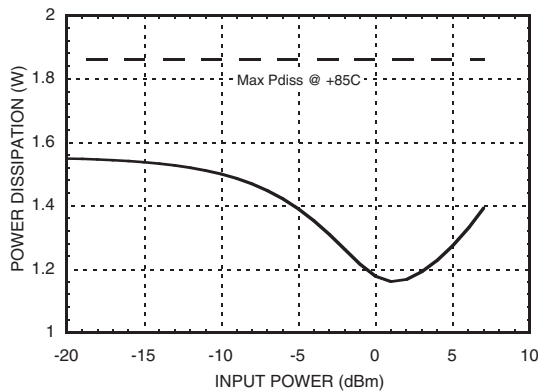

**11**

**LINEAR & POWER AMPLIFIERS - SMT**

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D



## GaAs InGaP HBT MMIC POWER AMPLIFIER, 0.8 - 1.0 GHz

### Absolute Maximum Ratings

Collector Bias Voltage (Vcc)	+5.5 Vdc
Control Voltage (Vpd1, Vpd2)	+5Vdc
RF Input Power (RFIN)(Vs = +5Vdc, VPD = +4.0 Vdc)	+10 dBm
Junction Temperature	150 °C
Continuous P <sub>diss</sub> (T = 85 °C) (derate 28 mW/°C above 85 °C)	1.86 W
Thermal Resistance (junction to ground paddle)	35 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C

### Typical Supply Current vs. Supply Voltage


V <sub>s</sub> (V)	I <sub>cq</sub> (mA)
4.75	300
5.0	310
5.25	325

Note: Amplifier will operate over full voltage range shown above



**ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS**

### Outline Drawing

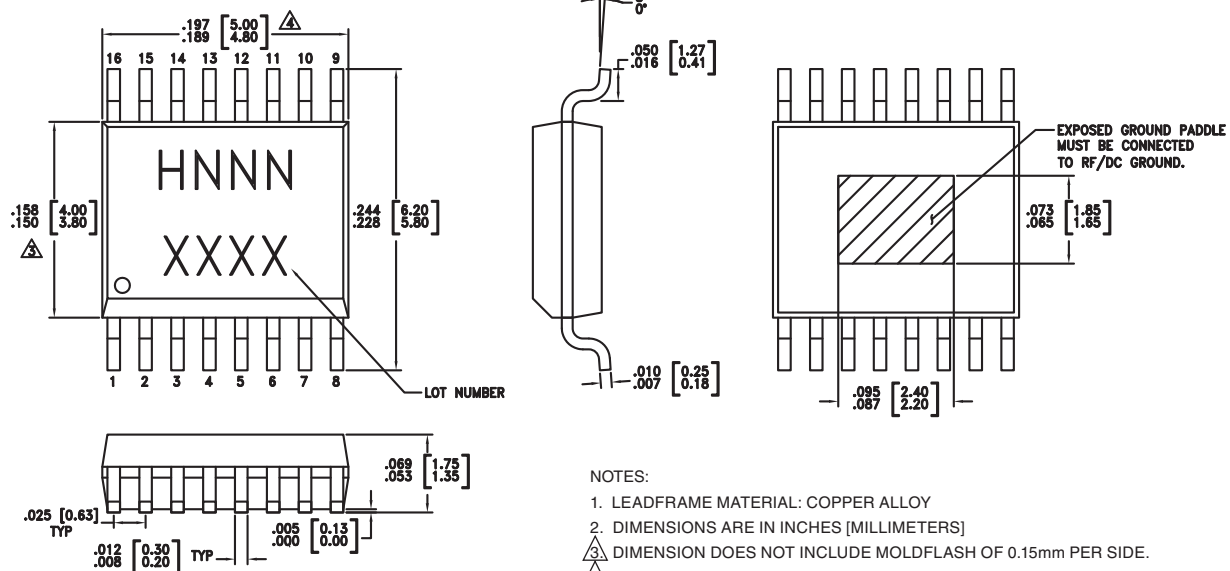

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[3]</sup>
HMC450QS16G	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 <sup>[1]</sup>	H450 XXXX
HMC450QS16GE	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 <sup>[2]</sup>	H450 XXXX

[1] Max peak reflow temperature of 235 °C






[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX



## GaAs InGaP HBT MMIC POWER AMPLIFIER, 0.8 - 1.0 GHz


### Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1, 2, 4, 5, 7, 8, 9, 10, 13, 15	GND	Ground: Backside of package has exposed metal ground slug that must be connected to ground thru a short path. Vias under the device are required.	
3, 14	Vpd1, Vpd2	Power Control Pin. For maximum power, this pin should be connected to 4.0V. For 5V operation, a dropping resistor is required. A higher voltage is not recommended. For lower idle current, this voltage can be reduced.	
6	RFIN	This pin is AC coupled and matched to 50 Ohms from 0.8 to 1.0 GHz.	
11, 12	RFOUT	RF output and bias for the output stage.	
16	Vcc	Power supply voltage for the first amplifier stage. An external bypass capacitor of 330 pF is required as shown in the application schematic.	



**GaAs InGaP HBT MMIC  
POWER AMPLIFIER, 0.8 - 1.0 GHz**

**Application Circuit**

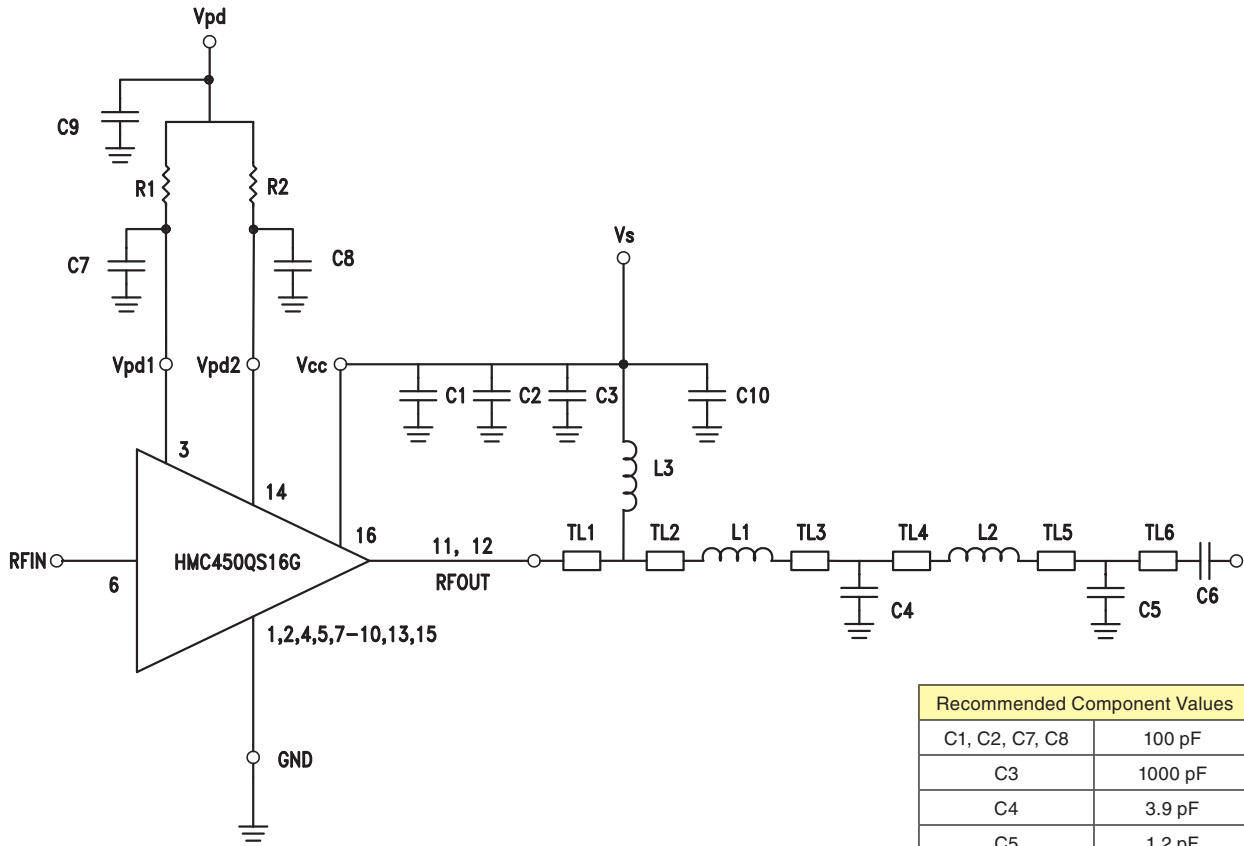


Recommended Component Values	
C1, C2, C7, C8	100 pF
C3	1000 pF
C4	3.9 pF
C5	1.2 pF
C6	27 pF
C9, C10	2.2 μF
L1	1.9 nH
L2	1.0 nH
L3	56 nH
R1, R2	50 Ohms

		TL1	TL2	TL3	TL4	TL5	TL6
	Impedance	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm	50 Ohm
Physical	Length	0.08"	0.05"	0.02"	0.02"	0.02"	0.02"
Electrical	Length	4'	2.5'	1.02'	1.02'	1.02'	1.02'

PCB Material: 10 mil Rogers 4350 Er = 3.48



## Evaluation PCB

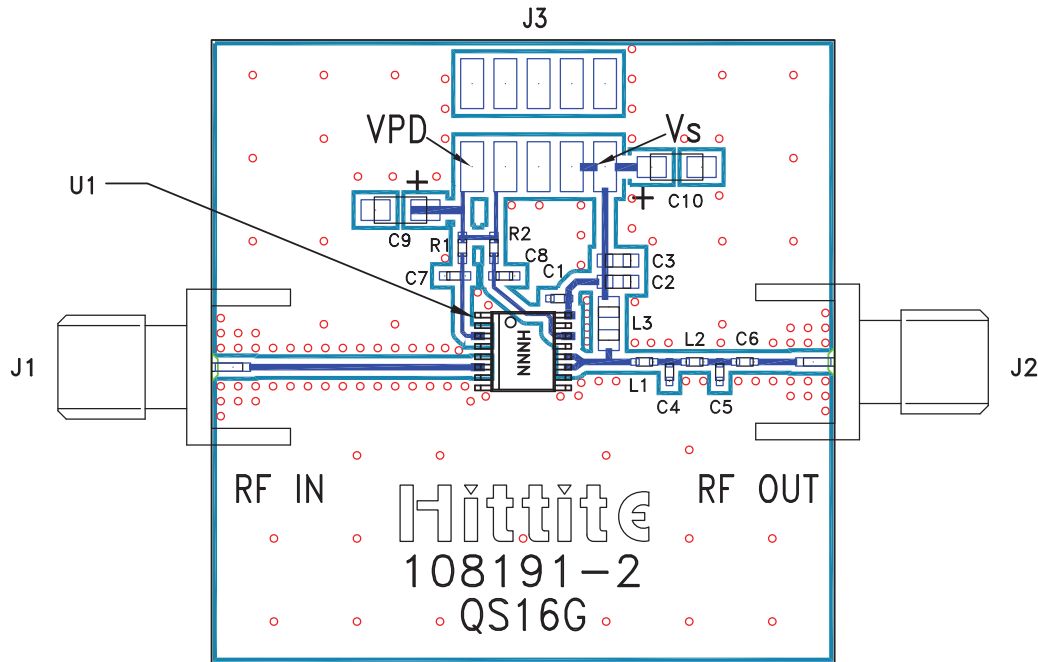

### List of Materials for Evaluation PCB 108349 [1]

Item	Description
J1 - J2	PCB Mount SMA Connector
J3	2 mm DC Header
C1, C7, C8	100 pF Capacitor, 0402 Pkg.
C2	100 pF Capacitor, 0603 Pkg.
C3	1000 pF Capacitor, 0603 Pkg.
C4	3.9 pF Capacitor, 0402 Pkg.
C5	1.2 pF Capacitor, 0402 Pkg.
C6	27 pF Capacitor, 0402 Pkg.
C9, C10	2.2 uF Capacitor, Tantalum
L1	1.9 nH Inductor 0402 Pkg.
L2	1.0 nH Inductor, 0402 Pkg.
L3	56nH Inductor, 0805 Pkg.
R1, R2	50 Ohms Resistor, 0402 Pkg.
U1	HMC450QS16G / HMC450QS16GE Power Amp.
PCB [2]	108191 Evaluation PCB, 10 mils

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.



## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9