

# G3VM-61HR1

MOS FET Relays

**Higher power, 3.3-A switching  
with a 60-V load voltage,  
SOP package. Low 30-mΩ  
ON Resistance.**



- Continuous load current of 3.3 A. (Connection C: 6.6 A)



Note: The actual product is marked differently from the image shown here.

RoHS compliant

## ■ Application Examples

- Communication equipment
- Test & Measurement equipment
- Data loggers
- Industrial equipment

## ■ Terminal Arrangement/Internal Connections

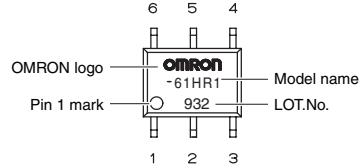

Note: The actual product is marked differently from the image shown here.

## ■ List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP6	1a (SPST-NO)	Surface-mounting Terminals	60 V	G3VM-61HR1	75	-
				G3VM-61HR1 (TR05)	-	500


\* The AC peak and DC value are given for the load voltage.

## ■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	I <sub>F</sub>	30	mA	
	LED forward current reduction rate	ΔI <sub>F</sub> /°C	-0.3	mA/°C	Ta ≥ 25°C
Output	LED reverse voltage	V <sub>R</sub>	5	V	
	Connection temperature	T <sub>J</sub>	125	°C	
Output	Load voltage (AC peak/DC)	V <sub>OFF</sub>	60	V	
	Continuous load current	I <sub>O</sub>	3.3 3.3 6.6	A	Connection A: AC peak/DC Connection B and C: DC
Output	ON current reduction rate	ΔI <sub>O</sub> /°C	-33 -33 -66	mA/°C	Ta ≥ 25°C
	Pulse ON current	I <sub>OP</sub>	10	A	t = 100 ms, Duty = 1/10
Output	Connection temperature	T <sub>J</sub>	125	°C	
	Dielectric strength between I/O (See note 1.)	V <sub>i-o</sub>	1500	Vrms	AC for 1 min
Ambient operating temperature		T <sub>a</sub>	-40 to +85	°C	With no icing or condensation
Ambient storage temperature		T <sub>stg</sub>	-55 to +125	°C	With no icing or condensation
Soldering temperature		-	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


### Connection Diagram

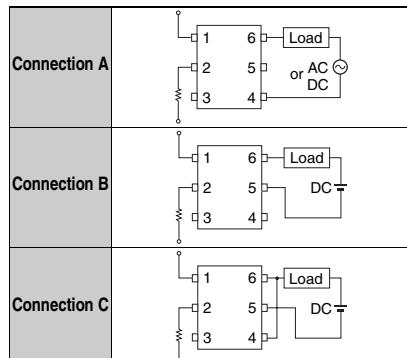

## ■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V <sub>F</sub>	1.18	1.33	1.48	V	I <sub>F</sub> = 10 mA
	Reverse current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> = 5 V
Output	Capacity between terminals	C <sub>T</sub>	-	70	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I <sub>FT</sub>	-	0.2	3	mA	I <sub>O</sub> = 2 A
Output	Turn-OFF LED forward current	I <sub>FC</sub>	0.1	-	-	mA	I <sub>OFF</sub> = 10 μA
	Maximum resistance with output ON	R <sub>ON</sub>	-	30	60	mΩ	I <sub>F</sub> = 5 mA, I <sub>O</sub> = 2 A, t < 1 s
Output	Connection A		-	15	-	mΩ	I <sub>F</sub> = 5 mA, I <sub>O</sub> = 2 A, t < 1 s
	Connection B		-	8	-	mΩ	I <sub>F</sub> = 5 mA, I <sub>O</sub> = 4 A, t < 1 s
Output	Current leakage when the relay is open	I <sub>LEAK</sub>	-	-	20	nA	V <sub>OFF</sub> = 60 V
	Capacity between terminals	C <sub>off</sub>	-	700	1500	pF	V = 0, f = 1 MHz
Capacity between I/O terminals		C <sub>i-o</sub>	-	0.8	-	pF	f = 1 MHz, Vs = 0 V
Insulation resistance between I/O terminals		R <sub>i-o</sub>	1000	10 <sup>8</sup>	-	MΩ	V <sub>i-o</sub> = 500 VDC, RoH ≤ 60 %
Turn-ON time		t <sub>ON</sub>	-	0.6	5	ms	I <sub>F</sub> = 5 mA, R <sub>L</sub> = 200 Ω, V <sub>DD</sub> = 20 V (See note 2.)
Turn-OFF time		t <sub>OFF</sub>	-	0.2	1	ms	

Note: 2. Turn-ON and Turn-OFF Times

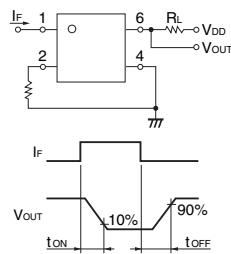


### ■ Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics. Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V <sub>DD</sub>	-	-	48	V
Operating LED forward current	I <sub>F</sub>	5	10	25	mA
Continuous load current (AC peak/DC)	I <sub>O</sub>	-	-	3.3	A
Ambient operating temperature	T <sub>a</sub>	-20	-	65	°C

### ■ Engineering Data


**LED forward current vs.  
Ambient temperature**

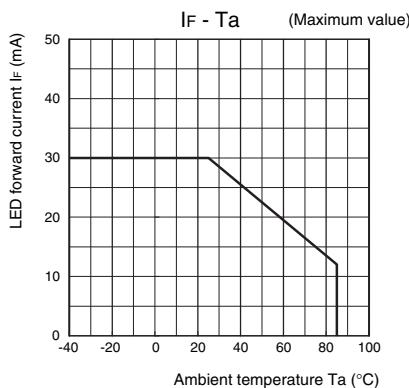


**Continuous load current vs.  
Ambient temperature**

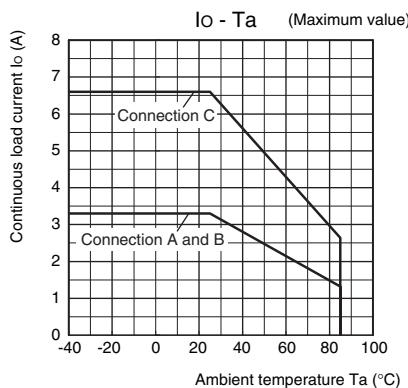


**LED forward current vs.  
LED forward voltage**

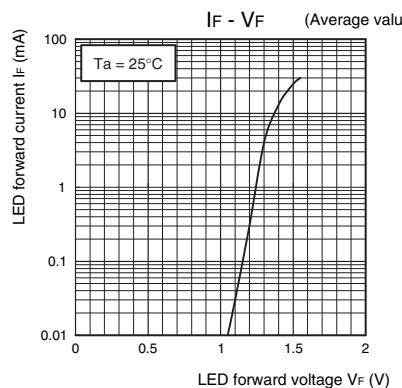


**Continuous load current vs.  
On-state voltage**

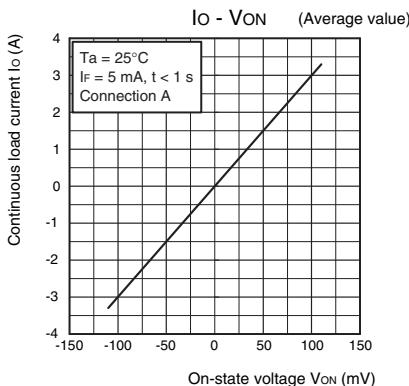


**On-state resistance vs.  
Ambient temperature**

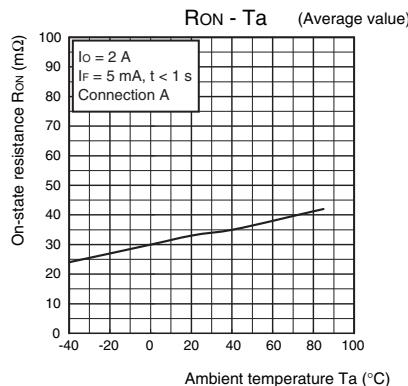


**Trigger LED forward current vs.  
Ambient temperature**

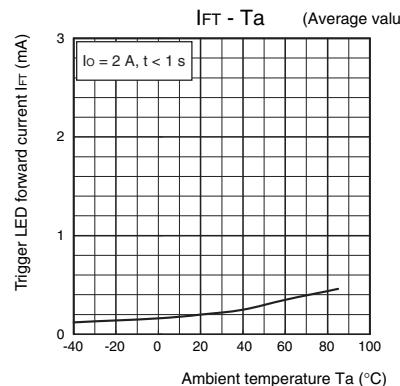


**Turn ON, Turn OFF time vs.  
LED forward current**

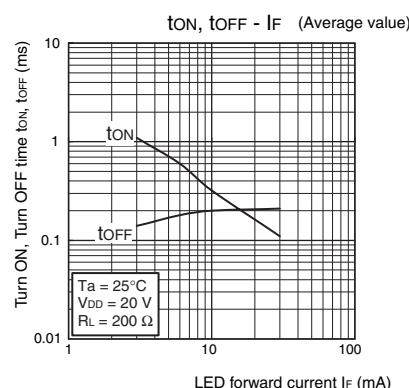

**Turn ON, Turn OFF time vs.  
Ambient temperature**

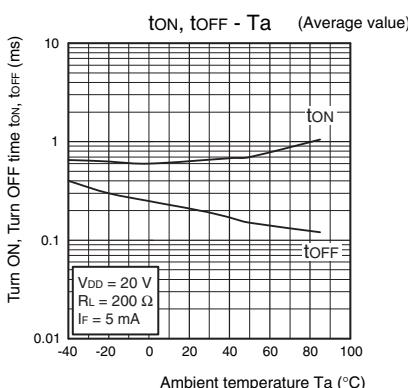

**Current leakage vs.  
Ambient temperature**

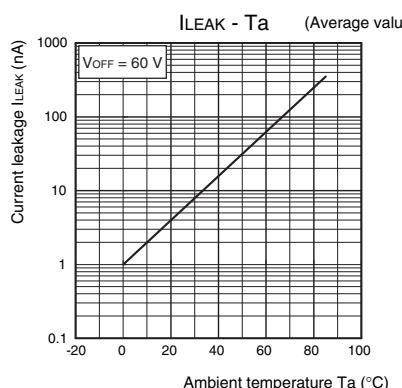

### ■ Safety Precautions

- Refer to "Common Precautions" for all G3VM models.


# Appearance/Dimensions

SOP6 type

## ■ Appearance

### SOP (Small Outline Package)


SOP6

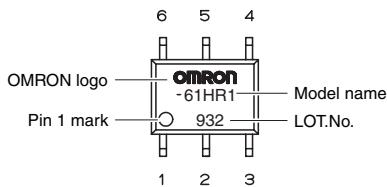

Note: The actual product is marked differently from the image shown here.



## ■ Dimensions

(Unit: mm)




### Surface-mounting Terminals

Weight: 0.13 g

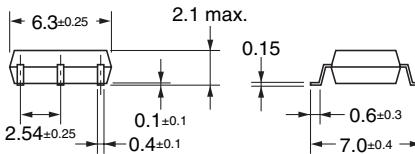

### Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

**OMRON Corporation**

Electronic and Mechanical Components Company

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

Cat. No. K280-E1-01  
1015(1015)(O)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron](#):

[G3VM-61HR1](#) [G3VM-61HR1\(TR05\)](#)

**Данный компонент на территории Российской Федерации****Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru  
moschip.ru\_4

moschip.ru\_6  
moschip.ru\_9